

### Notice regarding specifications

I.U. = Indoor Unit O.U. = Outdoor Unit Qu = Quiet \* = Not decided yet


- Specifications and design are subject to change without notice for future improvement.
- For further details, check with our authorized dealers.
- Cooling and heating capacities are based on the following conditions:

|         |  |         |  |
|---------|--|---------|--|
| Cooling | Indoor temp. : 27°C DB/19°C WB<br>Outdoor temp.: 35°C DB/24°C WB | Heating | Indoor temp. : 20°C DB<br>Outdoor temp.: 7°C DB/6°C WB |
|---------|--|---------|--|

- Performance tests are conducted in accordance with EN14511.
- Seasonal efficiency tests are conducted in accordance with EN14825.
- Sound power tests are conducted in accordance with EN12102.




Fujitsu General (Thailand) Co., Ltd.



ISO 9001 Certification number: 01 100 075229  
ISO 14001 Certification number: 01 104 9245

Fujitsu General (Shanghai) Co., Ltd.



ISO 9001 Certification number: 01 100 79269  
ISO 14001 Certification number: CNBJ312244-UK

Fujitsu General Central Air-conditioner (Wuxi) Co., Ltd.



ISO 9001 Certification number: 15917Q20073R5M  
ISO 14001 Certification number: 15918E20021R5M

- The products and equipment listed in this catalog contain fluorinated greenhouse gases.
- "AIRSTAGE" is a worldwide trademark of Fujitsu General Limited, and a registered trademark in Japan and other countries and regions.
- iPhone and iPod touch are trademarks of Apple Inc., registered in the United States and other countries.
- "Microsoft," "Windows," and "DirectX" are trademarks of Microsoft Corporation in the United States and other countries.
- "Intesis" is a registered trademark of HMS Industrial Networks in the European Union and is trademarked in the rest of the world.
- "BACnet" is a trademark and registered trademark of the American Society of Heating, Refrigerating and Air-Conditioning Engineers, Inc.
- "MODBUS" is a registered trademark of Schneider Electric.
- "LONWORKS" and "Echelon" are trademarks of Echelon Corporation registered in the United States and other countries.
- "Adobe" and "Acrobat Reader" are either registered trademarks or trademarks of Adobe in the United States and/or other countries.
- "Android" is a trademark of Google LLC.
- Other company and product names mentioned in this document may be the registered trademarks, trademarks or trade names of their respective owners.
- "PCLair" is a worldwide trademark of Fujitsu General Limited.
- "Bluetooth" is a registered trademark of Bluetooth SIG, inc.

Distributed by:



FUJITSU

PRODUCT CATALOGUE 2024 AIR CONDITIONERS LINEUP

FUJITSU GENERAL LIMITED

FUJITSU GENERAL LIMITED

3-3-17, Suenaga, Takatsu-ku, Kawasaki, Kanagawa, 213-8502, Japan  
www.fujitsu-general.com



Copyright © 2008-2024 Fujitsu General Limited. All rights reserved. 3EF038-2405E

# PRODUCT CATALOGUE 2024

## AIR CONDITIONERS LINEUP

FUJITSU GENERAL LIMITED

OUR MESSAGE

SOLUTIONS

SPLIT

MULTI-SPLIT

VRF

VENTILATION

CONTROL SYSTEM & OPTIONAL PARTS

AIR TO WATER

SUPPORT

# The FUJITSU GENERAL Way

## Our mission

# Living together for our future

Through innovation and technology, we deliver a brighter future with peace of mind to our customers and societies around the world.

## Our philosophy

### Act spontaneously

We embrace new challenges by investing in ourselves for personal growth, and through continuous creativity with a spontaneous attitude.

### Develop our team

We respect and value our people, and optimize their abilities through fostering culture and diversity, and utilizing a collaborative effort focused on communication.

### Value integrity

To achieve our goals, we always act with integrity and shared ethics.

## CONTENTS

### 004 OUR MESSAGE

- 006 Sustainable
- 008 Cleanliness
- 010 Future
- 012 Comfort
- 014 Control
- 016 Design
- 018 History
- 020 Worldwide locations
- 022 Global business activities
- 024 Project references
- 026 Global development & Production bases
- 028 High-quality development & Production Facilities
- 030 2024 New Products

### 034 SOLUTIONS

- 036 For Light Commercial Use
- 044 For Commercial Use
- 046 For Apartments & Houses

#### PRODUCT LINEUP

### SPLIT & MULTI-SPLIT

### VRF

### VENTILATION

### CONTROL SYSTEM & OPTIONAL PARTS

### AIR TO WATER

### SUPPORT

- Sp-002 VRF Support
- Sp-004 HVAC System design Support Tool
- Sp-006 Air To Water Support Tool
- Sp-008 Quick Service & Maintenance
- Sp-010 AIRSTAGE Service Monitor Tool
- Sp-012 Service Tool
- Sp-013 Web monitoring tool

# OUR MESSAGE



for Sustainable



for Cleanliness



for Future

Innovation  
and  
Globalization



for Comfort



for Control



for Design

We create comfortable lives for people around the world with "made-in-Japan quality" and innovative manufacturing.



History



Worldwide locations



Global business activities



Project references



Global development & Production bases



High-quality development & Production facilities



# Sustainable




## Sustainable management

We see the challenge of expanding our business by contributing to the realization of a sustainable society as a core element of our growth strategy, and we are working on "sustainable management," based on the three pillars of "harmonious coexistence with our planet," "social contribution," and "care for employees."

## Basic policy on sustainable management

The sustainable development goals (SDGs) of the UN will drive business creation in the coming years. The key principle of the SDGs, "Leave no one behind," is synonymous with our own corporate philosophy of "Living together for our future." The promotion of sustainable management is carried out from a medium- to long-term perspective, with a promise to shape a sustainable society for the children and society of the future. We will pursue business growth by accelerating this transformation.

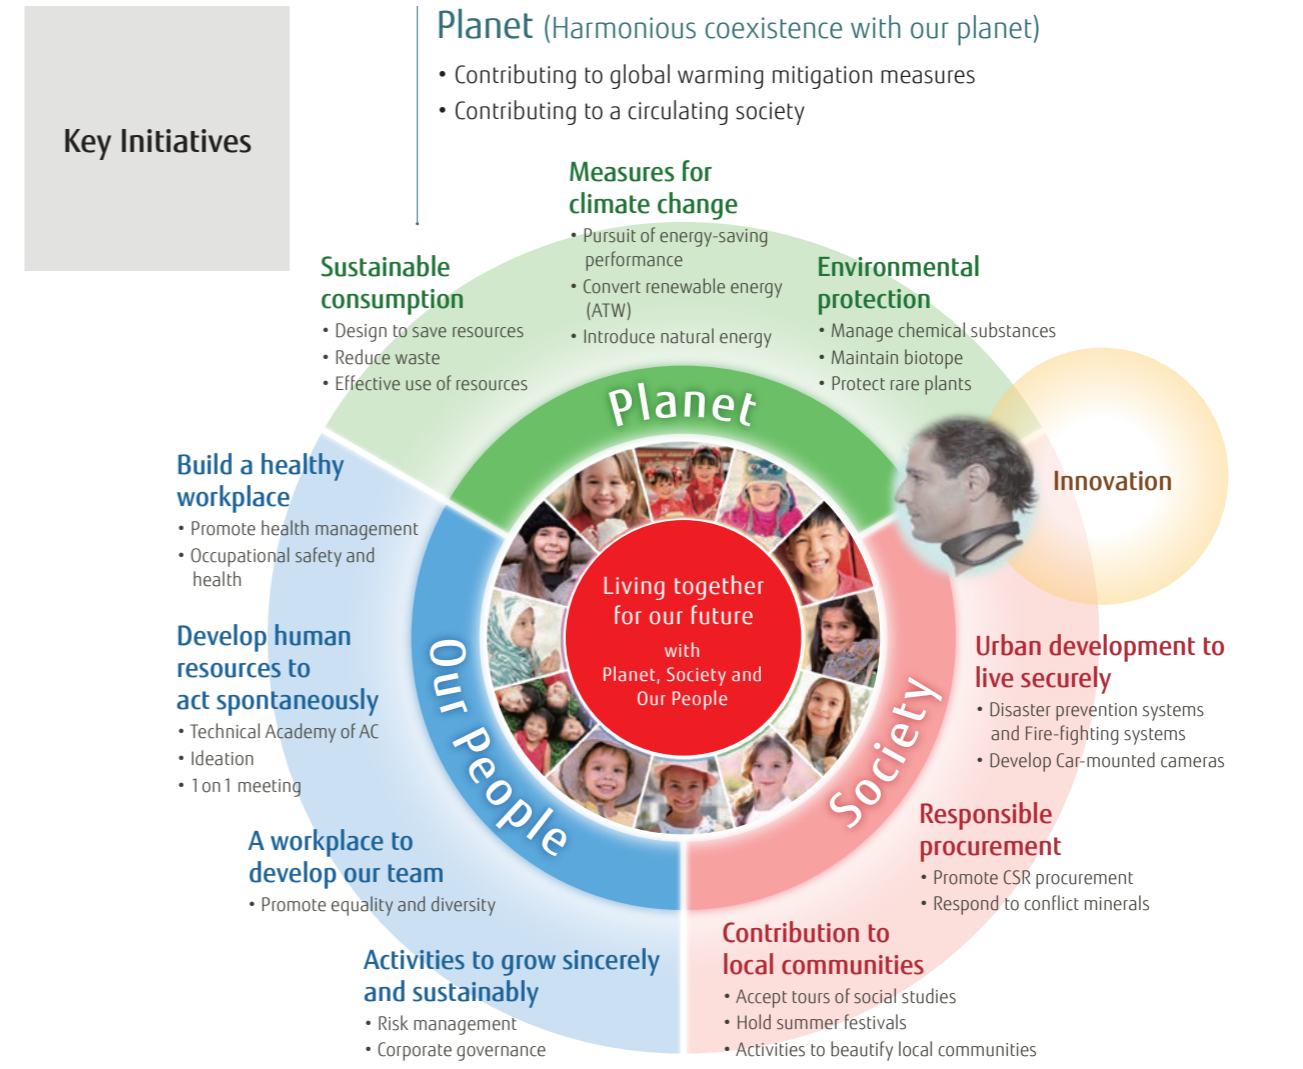

**Our People (Care for employees)**

- Strategic implementation of health and productivity management
- Creating flexible work styles under COVID-19
- Enhancing human resource development

**Society (Social contribution)**

Fostering innovation to address social issues (Providing a healthy, clean, and safe society and environment)



# Cleanliness



## Think about air quality



Fresh air is essential for comfortable air conditioning. Fujitsu General offers a wide range of air conditioning products with air purification functions, such as ventilation systems equipped with high-performance filters and heat exchangers.

### Collecting dust particles to clean the air



#### Silver Ion Filter

The Silver ion filter helps to keep indoor air free from viruses, bacteria and molds. Notice: Not a result of experiments in an actual use environment. Silver ion filter inhibits activity or growth of microorganism, but do not prevent infection.

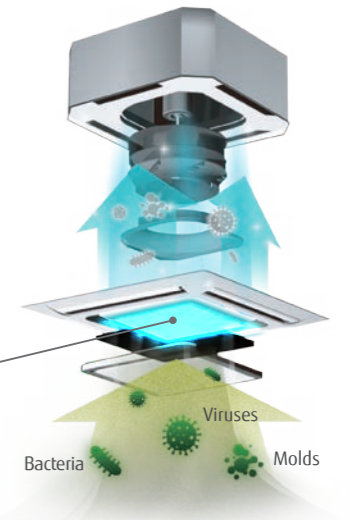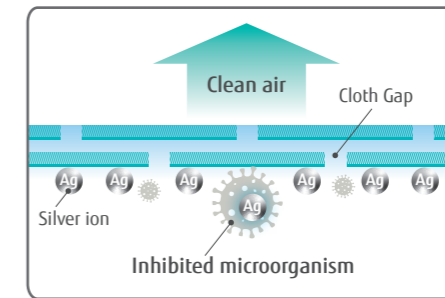


### Different filters are used on each side



#### Ion Deodorization Filter

Deodorizes the air by decomposing absorbed odors using the oxidizing and odor-reducing effects of ions generated by ultra-fine particle ceramic.

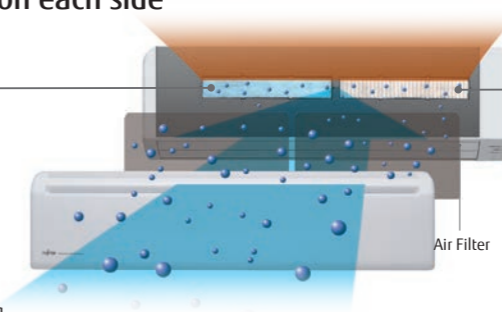

#### Apple-catechin Filter

The Apple-catechin filter uses static electricity to remove fine particles and dust from the air.

### Ventilation with adequate airflow with reduced temperature changes

#### Heat Exchange Ventilation

When a room is cooled or heated, the exhausted cooling or heating energy is recovered by heat exchange ventilation.



Adopts a high-efficiency counterflow heat exchange element





# Future



## The green refrigerant


Throughout our research and development process, we are constantly striving to create products that we can be proud of in the future. The technologies we have cultivated through these efforts are incorporated into our environmentally friendly products, and are recognized in the European market, which has extremely strict environmental regulations.

### R32 refrigerant with reduced global warming potential

- **Zero** Ozone Depletion Potential (ODP<sup>\*1</sup>)
- High environmental properties
- High performance
- Economically efficient


\*1 **ODP (Ozone Depleting Potential)**: a relative value that indicates the impact per unit weight of ozone-depleting substances released into the atmosphere when CFC-11 (trichlorofluoromethane, CCl3F) is fixed at 1.0

\*2 **GWP (Global Warming Potential)**: a measurement that indicates how much other greenhouse gases are capable of warming the Earth based on carbon dioxide. This is the integrated value of radiant energy given to the Earth (i.e., the estimated impact on global warming) expressed as a ratio to CO<sub>2</sub>.

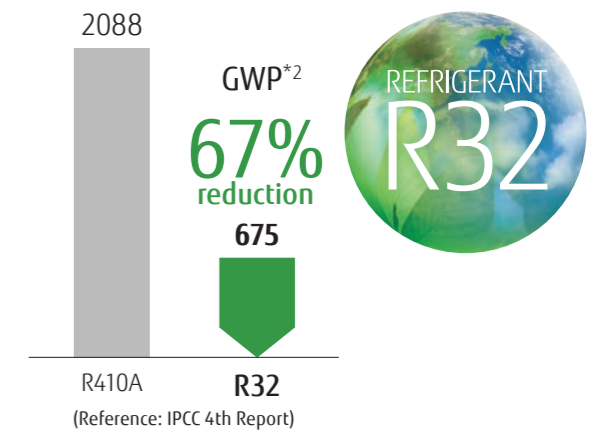


### Low GWP to a wide range of projects

We are continuously working to develop products that use R32 refrigerant and have R32 products in all product categories in our lineup (Split, Multi-Split, VRF, and ATW). This allows us to realize environmentally and regulatory friendly system designs for a wide range of projects from residential to light commercial.

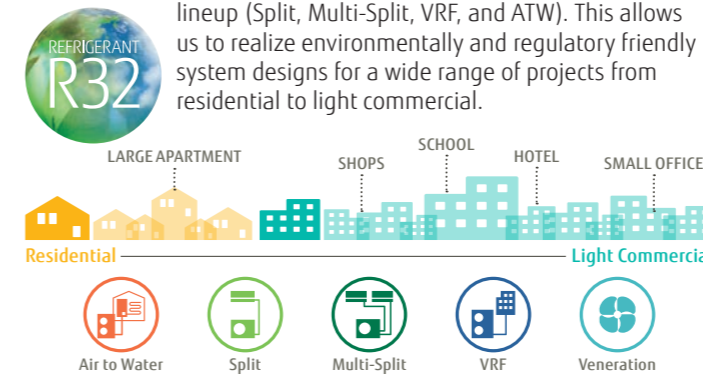

### New energy labelling requirement 626/2011/EU

Our air conditioners have reached the "Class A+++" ranking, the highest energy efficiency level that is now shown on energy labels in Europe.

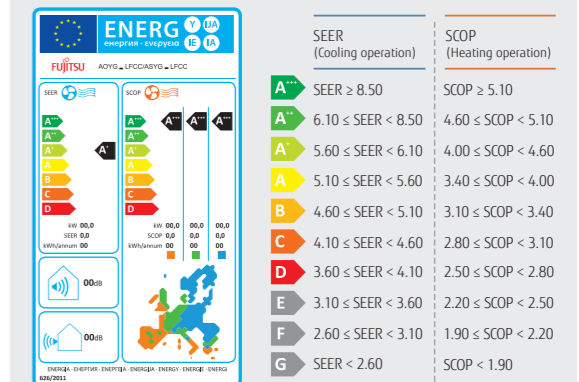

### Fujitsu General's Environmental Vision

#### Medium-Term Environmental Plan: Target and Measure

|   | Target   | Measure  |
|---|--|--|
| Reduction of Our Own Environmental Impact Achieve | <p><b>Achieve carbon neutrality by FY2025</b></p> <p>[Old Target]</p> <p>Greenhouse gas emissions from our Group's business activities: Completely eliminate by FY2030</p> | <ol style="list-style-type: none"> <li>1. Renewable energy conversion: Existing plants (by FY2023)</li> <li>2. Renewable energy conversion: All Group companies (by FY2025) → <b>Achieved 1 and 2 ahead of schedule (April 2022)</b></li> <li>3. Shift to use of renewable energy for all other energy used (by FY2025)</li> </ol> |
| Through Our Supply Network                        | Reduction of 30% for total greenhouse gas emissions through our supply Network by FY2035 (vs. FY2018)  | <ul style="list-style-type: none"> <li>• Promotion of green electricity use by our suppliers</li> <li>• Reduction of material consumption and product weight</li> </ul>  |
| For our Customers and Society                     | Reduce greenhouse gas emissions from the use of our products. Reduction of 30% by FY2030 (vs. FY2013)  | <ul style="list-style-type: none"> <li>• Replace constant-speed A/C with inverter A/C (India and Middle East)</li> <li>• Enhance energy efficiency</li> </ul>  |



# Comfort

## Comfortable airflow design

Pursuing the potential of air conditioners and true comfort, Fujitsu General has developed and commercialized numerous world-first technologies, and these concepts are reflected in the design of our products.




### Cassette type 3D flow Series

3 individually controlled air outlet ports

The Comfortable airflow setting enables the right and left air outlet ports as well as the wide center port to work together to provide a comfortable room environment.

\*1: Announced 2018. In room air conditioner for the home (Our company's investigation)

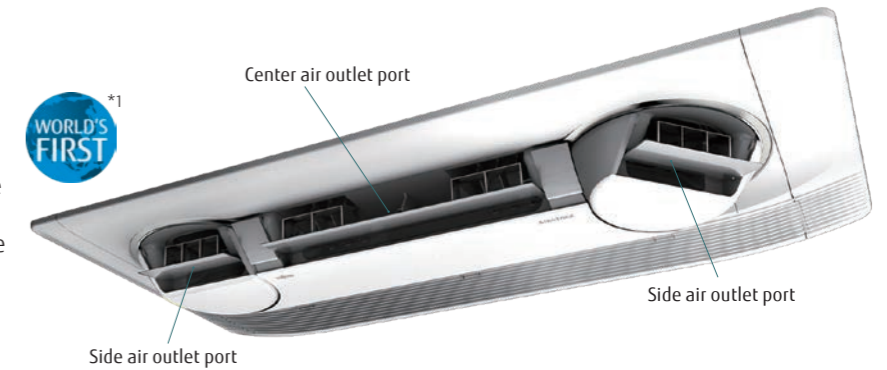

### Cassette type One-way flow Series


Wide airflow range created by triangle design and large flap

A large flap with a wide range of movements, equipped with louvers arranged triangularly, sends air into every corner of the room.

### Cassette type Circular flow Series

Unique circular flow design

This Series realizes a Circular Flow to blow a large airflow in a 360° direction by using a high-performance DC fan motor, turbo fan, and a unique seamless airflow louver design.



### Auto louver grille kit for Mini duct and Slim duct

Flexible Control

The optional clean-looking flat Auto louver grille kit blends into any interior and provides a comfortable airflow.





# Control

## Operation from anywhere

Using the Internet of Things (IoT), Fujitsu General is actively providing services that allow users to control their air conditioners from their smartphones. We are also expanding our open co-creation activities with external partners to deepen the development of new functions and services using IoT and artificial intelligence (AI) to develop safe and convenient air conditioners.



User-friendly screen display enables easy operation.


With the WLAN adapter and the AIRSTAGE Mobile app, you can control the heating and cooling of your home anytime, anywhere.



Voice control via smart speaker  
Connecting with a smart speaker allows the user to operate the air conditioner and check its operation status just by talking to it.

### Software application for WLAN Adapter

"AIRSTAGE Mobile" is a software application that allows users to control Fujitsu General air conditioners from anywhere with a mobile device while out or on the move.

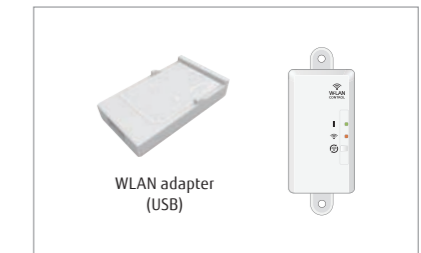

+  
**AIRSTAGE Mobile**

Download Free



### Compact wired remote controller

Large screen and simple display

- Large screen, yet compact in size
- Large, easy-to-read letters are used.
- The controls are simple and easy to understand.




### Central remote controller for VRF system

The central remote controller uses a touch panel screen to display multiple menus on the top screen. Just touch the menu you want to operate, and the necessary window will pop up, and allow intuitive operation.

### Remote monitoring and operation

The central remote controller enables monitoring and control of a tenant's air conditioner anytime, anywhere.

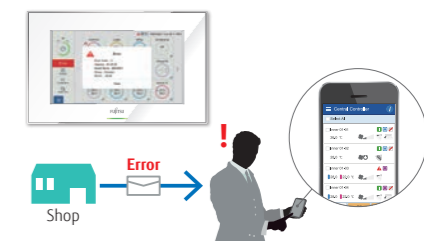





# Design

## Harmonizes with the installation space


Fujitsu General offers a wide range of products for the European market, including models with unique textural designs, award-winning models that integrate with room interiors, and Cassette type models with different designs that match office spaces. We also have a lineup of models with elegant designs, such as the Ceiling type models with its beautiful curved surface.



### Light Elegant Design

New Ceiling type design

The light, elegant and three-dimensional expression achieved by the curved surface gives a sense of comfort and well-being.

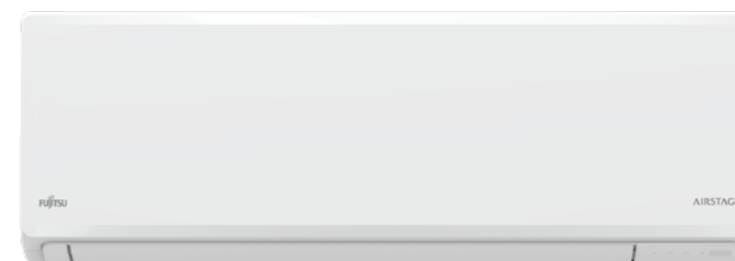

NEW KN Series KL Series

### New "Elegant & Smart" Square Design

New Wall-mounted type design

Smart design with ridges and subtle shade  
\*Image is KN Series

NEW

### Sleek and Stylish Design

New designed wired remote controller

When not in use, the controller is a part of the interior decor. This is achieved by using mirrors, glass, and clear panel, and it appears to be on with the wall.



NEW

### Stylish design

New outdoor unit for Air to Water **Future Release**

A design that offers a sophisticated style that is quiet and blends in with the outdoor landscape.





# History

Yaou Shoten Ltd. established in 1936

## Overseas air conditioning business since 1971

Starts air conditioning business in Japan in 1960

**1971** Air conditioner exports to the Middle East.

**1977** "Super Power, Super Quiet" Series released

**1982** Window type 3 Super Series released

**AL/AX Series**



**1985** Large wall-mounted type and multi-split air conditioner released.

**\*1,\*2 1991** World's first air conditioner equipped with lambda-shaped heat exchanger

**1994** World's first air conditioner with power diffuser

1950 ~

## Manufacturing Company Establishment

**1955** Head Office established in Kawasaki

**1964** Electronic components factory in Ichinoseki



Fujitsu General (UK) Co., Ltd. (UK)




Fujitsu General (EURO) GmbH

1970 ~

**2001** AIRSTAGE Series released VRF air conditioners for large buildings



**\*3 2002** Air conditioner with the world's first automatic self-cleaning filter system

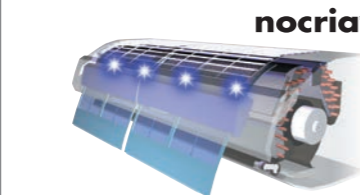

1970 ~

**1977** Air conditioner manufacturing company in Hamamatsu (now Hamamatsu business office)

**1991** Air conditioner manufacturing company in Thailand

**1994** Air conditioner manufacturing company in Shanghai, China

**1998** Air conditioner motor manufacturing company in Thailand

## Sales & service maintenance company established

**1976** North America sales company

**1977** Europe sales company (UK)

**1978** Australia sales company and Europe sales company (Germany)

**1980** Brazil sales company

**1997** Asia sales company (Singapore)

**1998** Middle East sales company (UAE) and New Zealand sales company

2000 ~

**2004** Standalone Compact VRF AIRSTAGE J Series released



**2006** VRF Heat Pump type Maximum 42 HP AIRSTAGE V Series released



**2009** VRF Heat Pump Modular type Maximum 48 HP AIRSTAGE V-II Series released



2000 ~

**2006** VRF air conditioner manufacturing, sale, and service company in China

**2007** Air Conditioner Technology Building becomes operational on the premises of the Kawasaki Headquarters. Air conditioner R&D Center in Kawasaki

**2009** Compressor Factory begins operation in Thailand

## Sales & service maintenance company established

**2000** Air conditioner manufacturing and sale technical partnership in India

**2002** Taiwan sales company

**2006** China sales company

**For Light commercial use**

**2011** Compact 2 Fan type VRF AIRSTAGE J-II Series released

**2014** Compact 1 Fan type VRF AIRSTAGE J-IIS Series released

**2016** Compact 2 Fan type VRF AIRSTAGE J-III Series released

**2017-19** Compact VRF AIRSTAGE J-IIIIL Series for light commercial use released

**2020** Compact & lightweight outdoor unit AIRSTAGE J-IVL, J-IV, J-IVS Series released



**2019** New cassette style released 3D Flow Cassette

**For Commercial use**

**2012** VRF AIRSTAGE VR-II Series released

**2014-15** VRF AIRSTAGE VR-III Series released

**2020** Heat Recovery Modular type VRF AIRSTAGE VR-IV Series & AIRSTAGE Air handling unit released



**VRF V-IV**

**2022** Energy-saving operation model VRF V-IV Series released

**For Residential use**

**2011** Hi-spec Design model LT Series & LU Series released

**2017** Flagship Wall-mounted type "nocría X" released

**2017-19** Added to this lineup recently are the environment-friendly R32 refrigerant models. (Split & Multi-split type)

**2022** Harmonizes beautifully design model KE Series released



2010 ~

**2012** Joint venture in Thailand to manufacture compressors

**2016** Commercial use air conditioner R&D Center in Thailand

**2019** New building constructed at Kawasaki Head Office to strengthen development capabilities



**2020** Building IoT -based manufacturing in Thailand



**2023 FGAI R&D New Office:** FGAI Research & Development office moved to the new office in New jersey, USA



2024 What's New

**For Commercial use**  
**VRF J-VS**

**2024** New VRF products with R32 refrigerant released




**For Light commercial use**

**For Residential use**


**R32** Split & Multi-split New Wall-mounted type & Duct type with high-energy saving released



**Cooling-enhanced type** High-efficiency operation even at high outdoor temperatures




**Wired Remote Controller** Simple and stylish design that harmonizes with the installation space



**2016** THE AIRSTAGE on Broadway in New York



**2023 Communication Lounge EURO:** New lounge in Dusseldorf, Germany

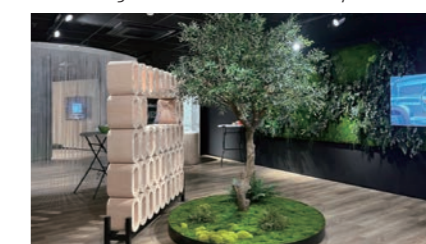

\*1: Announced 1991. In room air conditioner for the home (Our company's investigation) \*2: Announced 1994. In the category of room air conditioners for the home (Our company's investigation). \*3: Announced 2002. In the category of room air conditioners for the home (Our company's investigation).

\*4: Announced 2018. In room air conditioner for the commercial (Our company's investigation) \*5: Announced 2012. In room air conditioner for the home (Our company's investigation)



# Worldwide locations


Under a system of five bases in Europe, the Middle East, Asia and Oceania, North and South America, and Japan, the company promotes Globalization from a worldwide perspective while emphasizing the actual conditions in each region.




JAPAN Head Office



Technology research building (Japan)

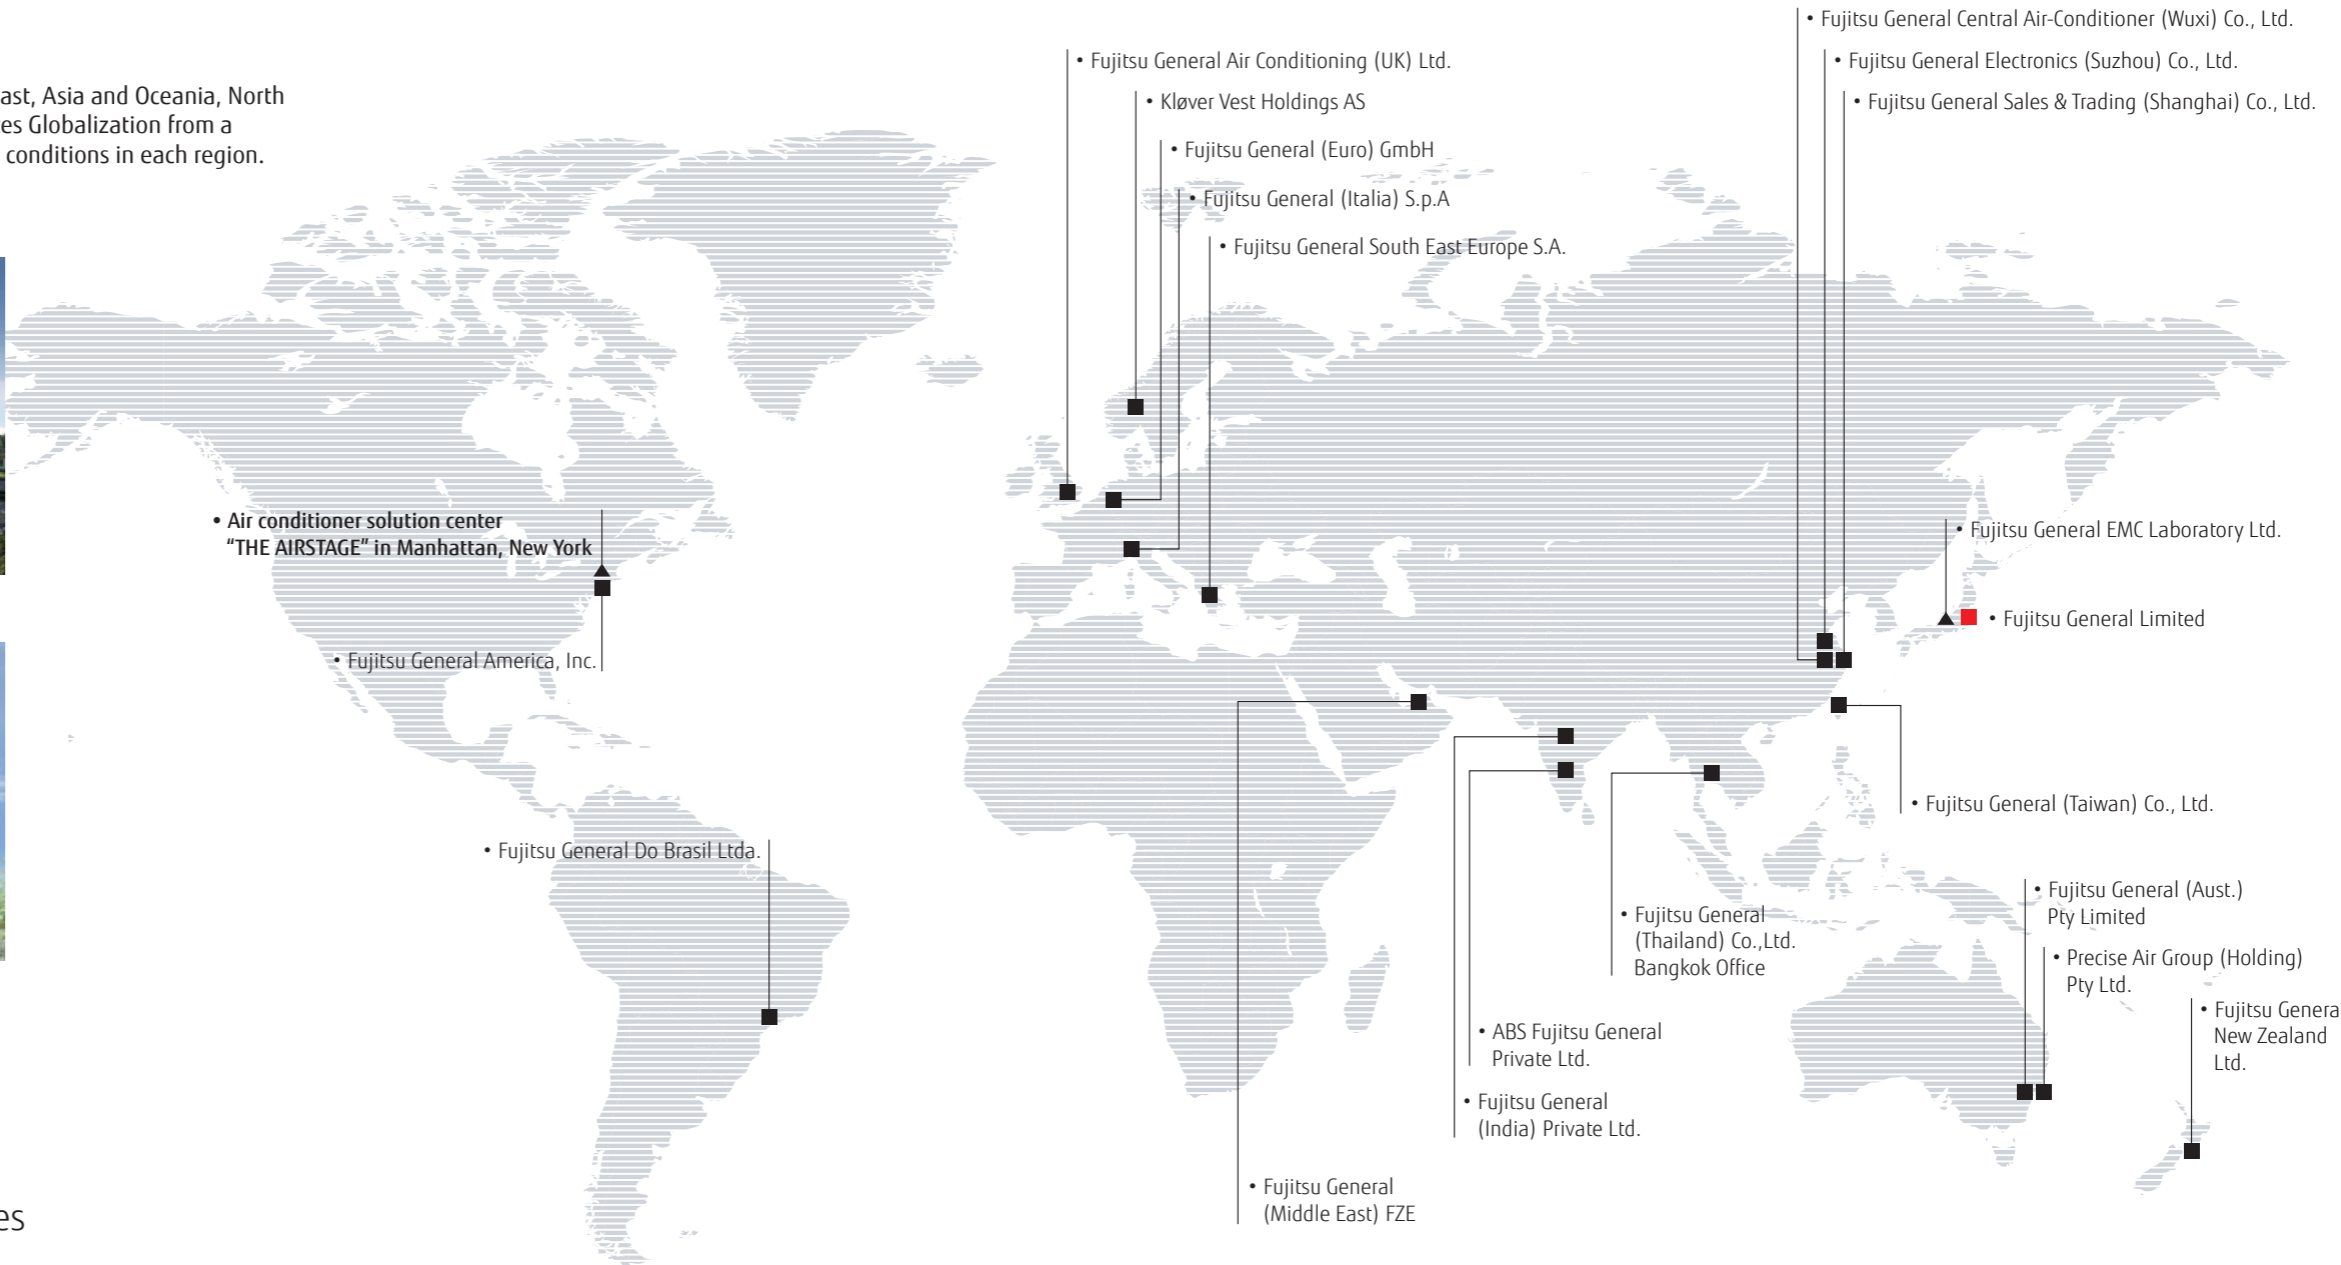

## 18 Overseas Sales Companies

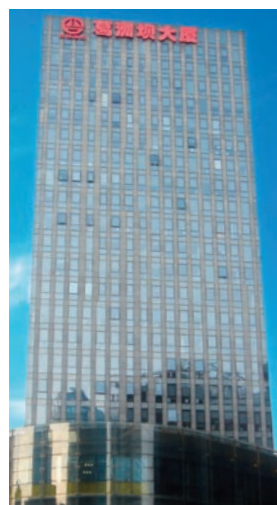


Fujitsu General Sales & Trading (Shanghai) Co., Ltd.



Fujitsu General (EURO) GmbH Co., Ltd. (Taiwan)



Fujitsu General (Thailand) Co.,Ltd. Bangkok Office (Thailand)



Fujitsu General Electronics (Suzhou) Co., Ltd.



Fujitsu General South East Europe S.A. (Greece)



Fujitsu General (UK) Ltd. (U.K.)



Fujitsu General (Italia) S.p.A (Italy)



Fujitsu General (India) Private Ltd. (India)



Fujitsu General Do Brasil Ltda. (Brasil)



Fujitsu General (Aust.) Pty Ltd. (Australia)



Precise Air Group (Holding) Pty Ltd. (Australia)




Fujitsu General New Zealand Ltd. (New Zealand)



Fujitsu General (Middle East) FZE (U.A.E.)



ABS Fujitsu General Private Ltd. (India)



Fujitsu General (India) Private Ltd. (India)



Fujitsu General America, Inc. (U.S.A.)



Kløver Vest Holdings AS (Norway)




FUJITSU GENERAL SOLUTION CENTER "THE AIRSTAGE" (U.S.A.)



# Global business activities

We have been recognized for our activities in advertising, human resource development and customer service, as well as for our community-based social contribution activities in each region, winning numerous awards and achieving a high level of customer satisfaction.

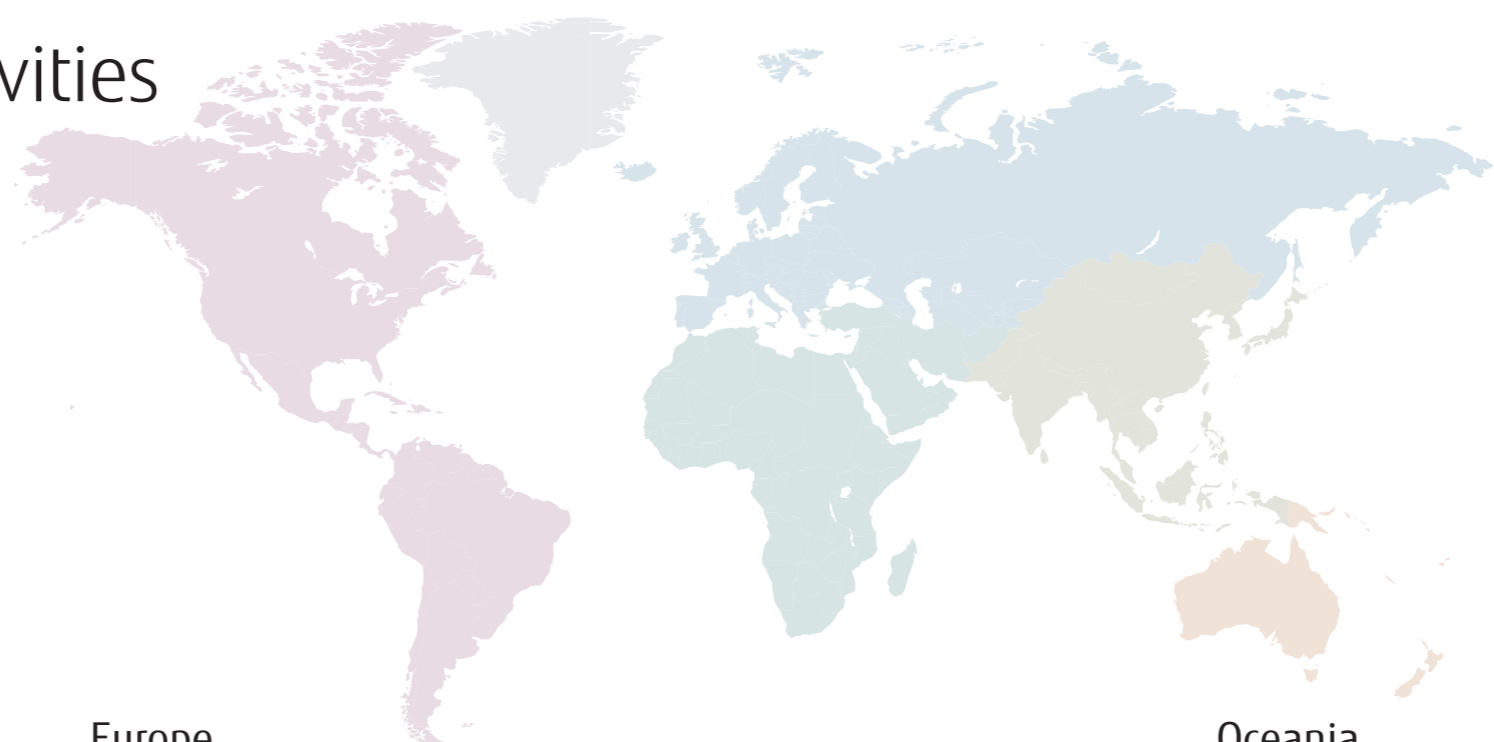

## North and South Americas



AHR Expo



HVAC trade shows in Brazil



Distributor conference in USA



Call center


## Middle East




Exhibition



Training in Kuwait

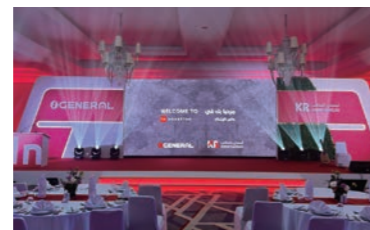

Launch event in Oman

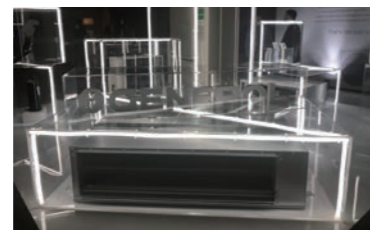

New product seminar in UAE

## Europe



HVAC trade show in Germany



Training in Germany



HVAC trade show in Germany



Training seminar in Italy



Event in the United Kingdom

## Oceania



HVAC trade show in Australia



Launch event in New Zealand



Launch event in New Zealand

## Asia



Thanksgiving party in Taiwan



Exhibition in India



Opening ceremony in India



New product presentation seminar in Singapore



Service training in Vietnam

## International authoritative design awards



The NEWS Dealer Design Awards



Gold Award (Category: HVAC & PLUMBING) in Reader's Choice Awards



TOP OF MIND 2016 First prize in "MARCA DE EQUIPAMENTO DE AR-CONDICIONADO" category of "CLIMATIZACAO" division



Superbrands is the world's largest independent arbiter of branding.



The iF Product Design Award is given annually by iF International Forum Design GmbH for industrial products from around the world.



The Plus X Award is the world's largest innovation award for technology, sports and lifestyle.



reddot winner 2024

A product design competition that has been held since 1955. Products that win the award are given the "Red Dot" seal, a sign of international recognition of quality.



One of the famous design award in the world. Designs are judged on innovation and aesthetics, as well as their benefit to users, clients/brands, and society.



ProductReview.com.au's annual awards are selected from products and services that have been well-rated by the ProductReview community.



Voted by Australians as the 'Most Trusted Brand' - Air Conditioning Category 5 Years Running



China State Construction Engineering Luban Prize





The Good Design Award is an award sponsored by the Japan Institute of Design Promotion, and is given once a year to items of outstanding design.



# Project references


Introduced in over 50 countries worldwide

Highly popular for their excellent quality, energy efficiency, and ease of installation, Fujitsu General's products are installed in a wide range of buildings around the world, including high-rise office buildings, stores, hotels, public facilities, schools, hospitals, and residences.

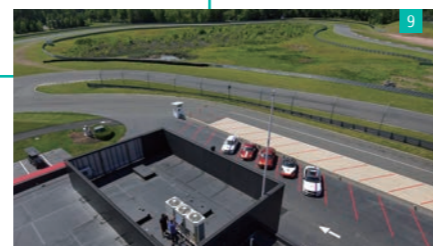


## For Light commercial use

- 1 Shop in Europe
- 2 Factory in Europe
- 3 School in Asia
- 4 Hospital in Asia
- 5 Office in Asia
- 6 Shop in Oceania
- 7 Office in Oceania
- 8 School in the Middle East
- 9 Public facility in the United States

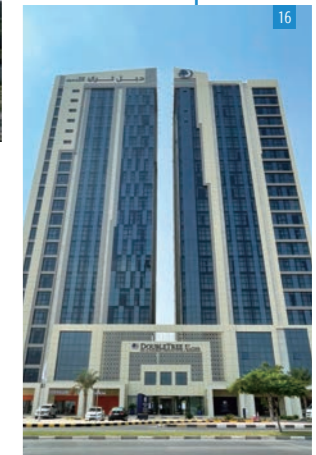

## For Commercial use

- 10 Public Square in Asia
- 11 Hotel in Asia
- 12 Hotel in Asia
- 13 Public facility in Asia
- 14 Apartment in Oceania
- 15 Apartment in Oceania
- 16 Hotel in the Middle East
- 17 Hotel in the Middle East

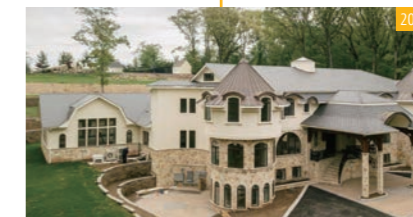

## For Residential use

- 18 Villa in the Africa
- 19 Residence in Oceania
- 20 Residence in the United States
- 21 Villa in the Middle East



# Global development & Production bases

We have established R&D bases in five countries from Japan, Europe, Asia, China, and North America to pursue environmental properties and comfort according to the needs of each region.

- Head office
- R&D center
- Manufacturing companies

## R&D center & Technology Research Building



R&D center in Fujitsu General (EURO) GmbH (Germany)



North America R&D Center (USA)




Fujitsu General Air Conditioning R&D (Thailand) Co., Ltd. (Thailand)



R&D center in Fujitsu General (Shanghai)



JAPAN Head office, R&D center and 60 m height difference testing tower (Japan)

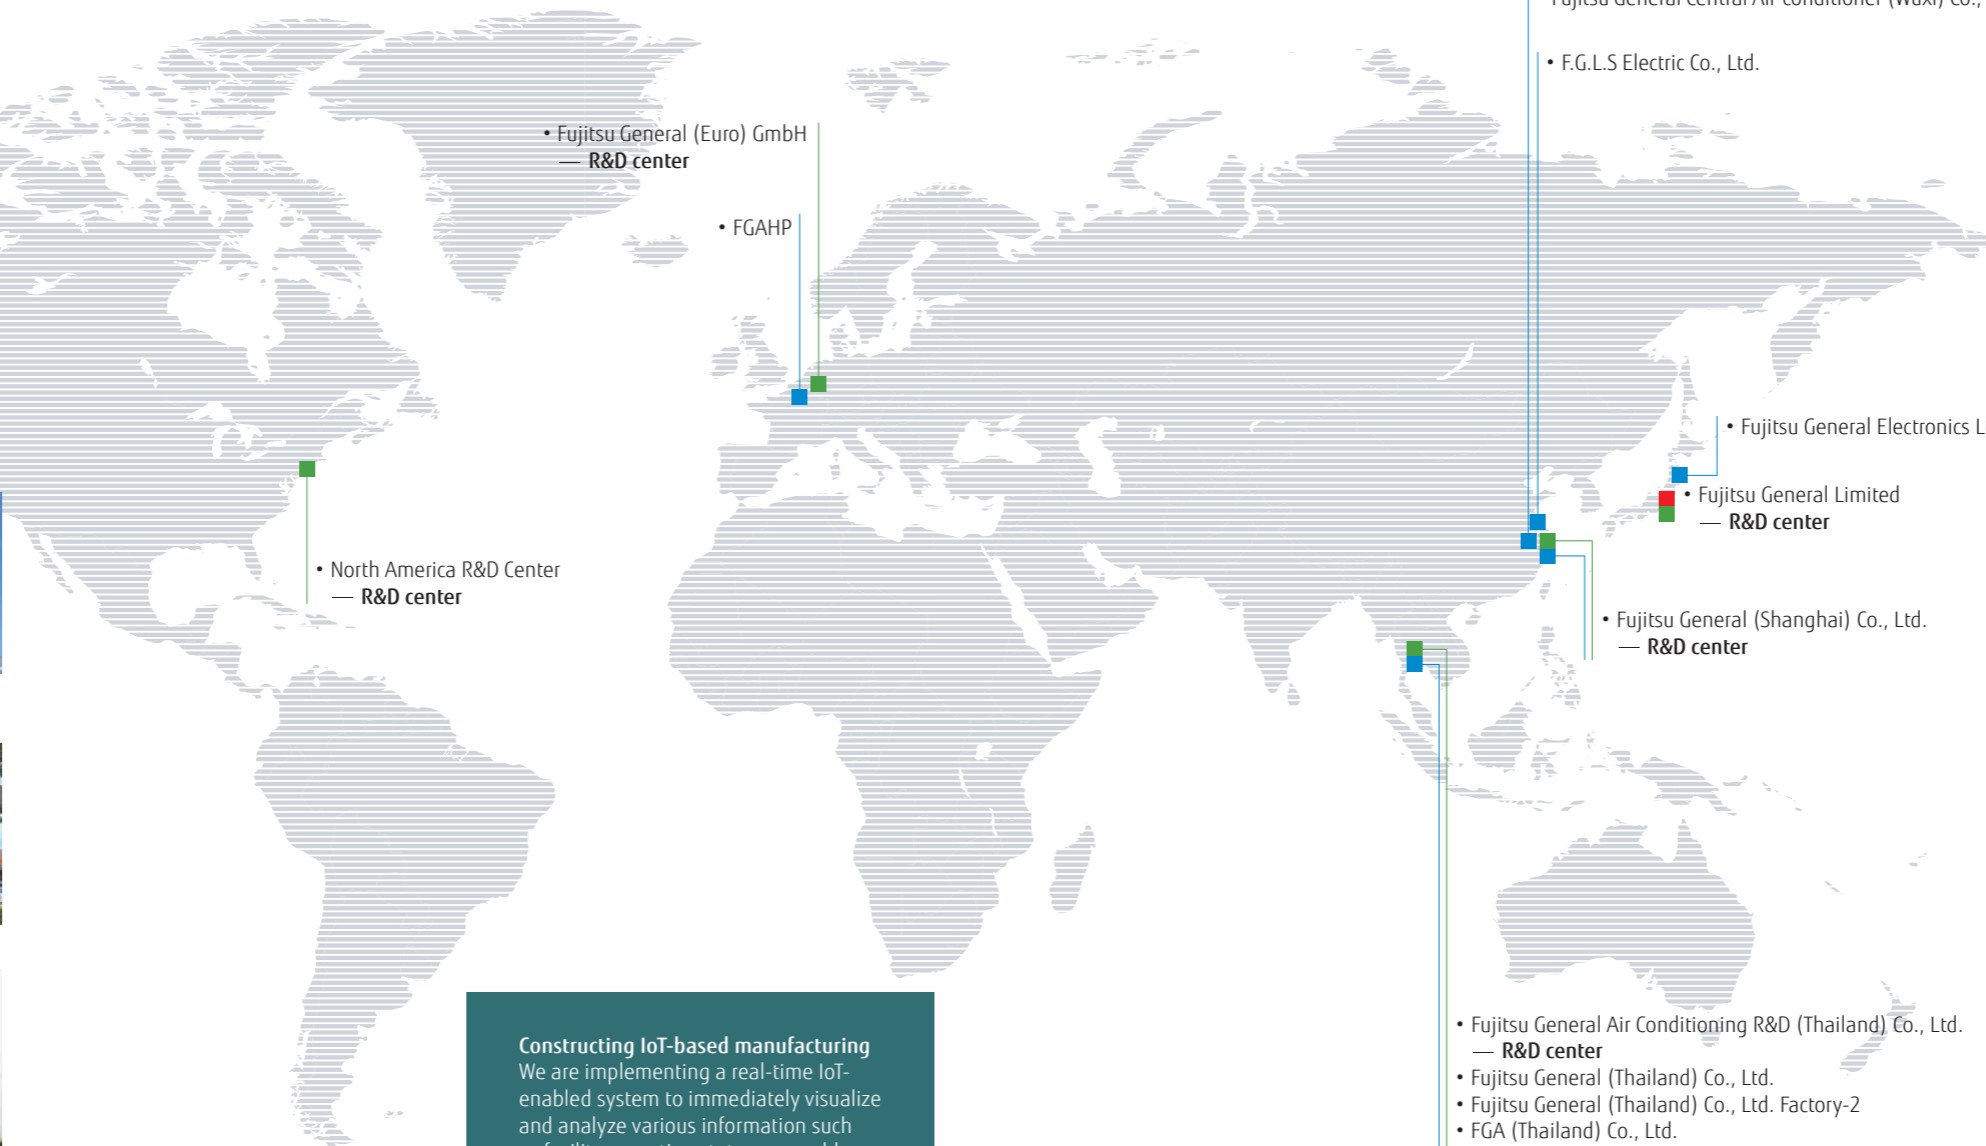

**Constructing IoT-based manufacturing**  
We are implementing a real-time IoT-enabled system to immediately visualize and analyze various information such as facility operating status, assembly line production progress, and parts inventory and transportation status. This will further enhance the accuracy of production and shipping forecasts in the Head Office and factory management departments. The system will also help improve activities by employees at production sites, with the aim of improving the efficiency of the production process, the efficiency of parts distribution operations, and the utilization rates of the facilities.

## Technology research building in Japan Head office



## Overseas manufacturing companies



Fujitsu General (Shanghai) Co., Ltd. (China)



F.G.L.S. Electric Co., Ltd. (China)



Fujitsu General Central Air-conditioner (Wuxi) Co., Ltd. (China)



Fujitsu General Electronics Ltd. (Japan)



FGA (Thailand) Co., Ltd. (Thailand)



TCFG Compressor (Thailand) Co., Ltd. (Thailand)



Fujitsu General (Thailand) Co., Ltd. (Thailand) Factory-2



Fujitsu General (Thailand) Co., Ltd. (Thailand)



Fujitsu General Air Conditioning R&D (Thailand) Co., Ltd. (Thailand)



# High-quality development & Production facilities

## Advanced Research Facilities and Equipment

### Performance tests



**Airflow measurement room**  
Measure the airflow of air conditioners, from compact room air conditioner models to variable refrigerant flow (VRF) systems.



**Calorimeter**  
Measure the temperature, humidity, and airflow at the inlet and outlet of the air conditioner to evaluate its cooling and heating capacity.



**Silent room**  
Measure the operating sounds of air conditioners on walls and ceilings with reduced sound reflection.

Fujitsu General is one of Japan's leading manufacturers with R&D centers in Japan. The research and development conducted in these facilities contributes to providing our customers with the highest quality and performance.

### Reliability tests



**Constant temperature room**  
Verify product performance in cooling and heating operations under various temperature and humidity conditions.



**Practical test room**  
Check whether the performance of the air conditioner can be sustained under the conditions of the actual housing environment.



**Shower test room**  
Check if the electrical box of the outdoor unit is protected from strong wind and rain, such as during a typhoon.

### Transportation and Handling Tests



Compressibility test





Vibration test



Technology research building in Japan Head office

## Testing laboratory

Fujitsu General EMC Laboratory Limited



### 60-m Height Difference testing tower


Tests oil circulation in a compressor for reliability.



## Certification of ISO 9001 and ISO 14001

■ ISO 9001  
■ ISO 14001  
( ) Number of companies

The Group's 5 overseas production subsidiaries are individually certified with ISO 9001 and ISO 14001. The Group's 11 overseas sales subsidiaries have been certified with ISO 14001 since 2012.

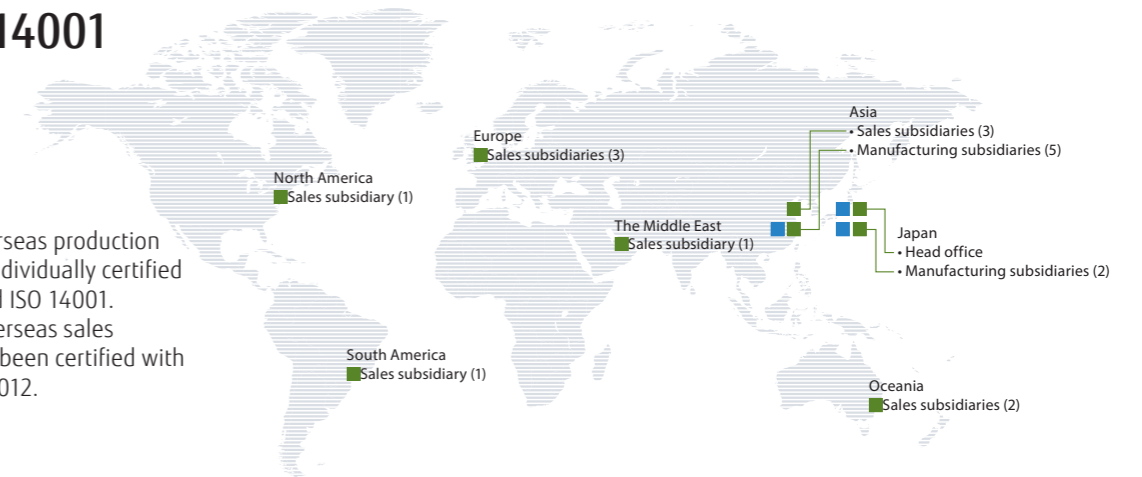

## Product Quality Assurance


All Fujitsu General plants are ISO 9001 certified and operate under a unified quality control system. We deliver to customers all over the world high-quality products that have passed stringent quality inspections.

### Receiving inspection


We require all our parts suppliers to submit test reports to ensure that all parts we receive from them meet our quality standards. Our in-house test department inspects incoming parts to ensure their compliance with RoHS as required by the EU. We also conduct 100% inspection of main parts to prevent defective parts from making it to assembly lines.

### Quality inspection of products

We carry out stringent quality inspections in all production processes performed in our plants. To keep the quality of our products high, inspectors check their quality from start to finish on production lines.

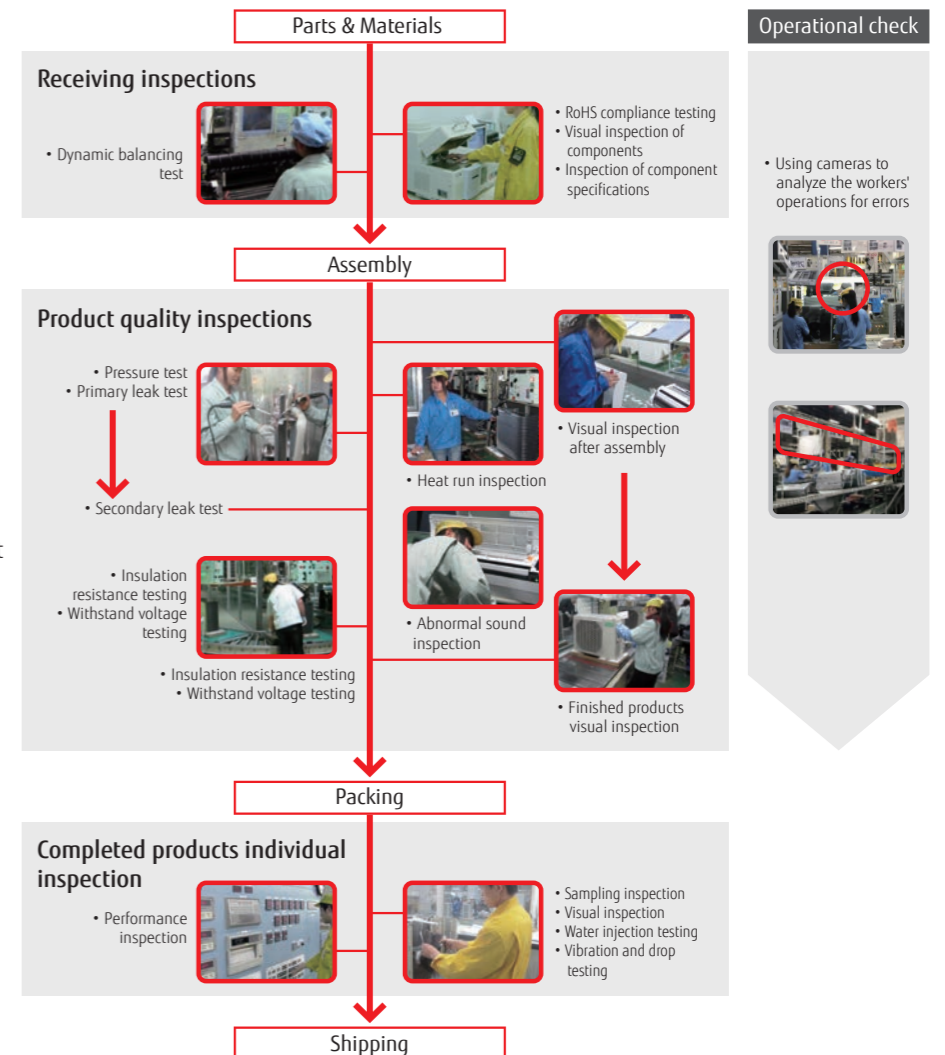

# 2024 New Products

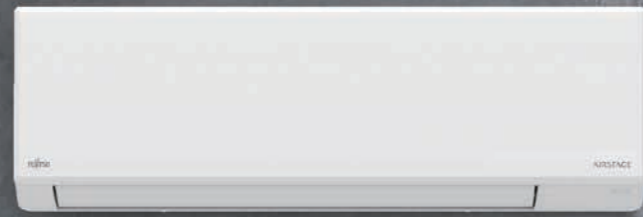

**R32** Split, Wall-mounted type  
Built-in W-LAN adapter models

**KL Series** ECO Range  
Compact Size (Cooling-enhanced type)

**S-032-033**

- 7-12 classes, 3 models
- Elegant & smart square design
- High energy saving
- Comfortable airflow & Quiet operation
- Smart device control
- Easy access to the flare pipe connection



SPLIT



MULTI-SPLIT



## Wall-mounted type Built-in W-LAN adapter models

Designer Range, Standard Range

**S-016, 020** **M-006, 022**


- Improved energy efficiency from the current products
- 7-14 classes, 8 models
- High energy saving
- Built-in WLAN adapter
- Comfortable airflow & Quiet operation
- Easy access to the flare pipe connection



**KG Series** Designer Range  
High Spec & Design



**KM Series** Standard Range  
High-Efficiency & Comfort

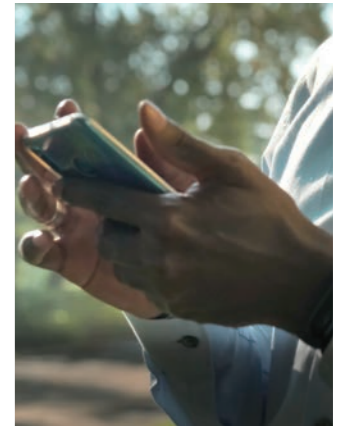


**Smart Device control**  
You need to install the "AIRSTAGE Mobile" app on your smart device in order to control the air conditioner.

ECO Range

**S-022-023** **M-006, 023**

- 5-12 classes, 4 models \*5 class only for multi-split
- Elegant & smart square design
- High energy saving
- Comfortable airflow & Quiet operation
- Built-in WLAN adapter
- Easy access to the flare pipe connection

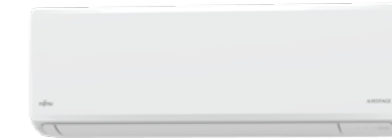

**KN Series** ECO Range  
Compact Size

Soft black color models

**S-020** **M-022**

- Soft Black
- 7-14 classes, 4 models
- High energy saving
- Built-in WLAN adapter
- Easy access to the flare pipe connection



Wireless R.C.



**KM Series** Standard Range  
High-Efficiency & Comfort



**Impression of Soft Black**  
Soft Black is a natural black color with a relatively gentle tone and no strong contrast. A Soft Black harmonizes with the environment and creates a warm atmosphere.



## Medium static pressure duct

High-efficiency & Comfort

**S-040-043** **M-007, 025**

- 12-54 classes \*Multi-split is only 12-22 classes
- Slim & Compact design
- High energy saving
- Easy maintenance
- Drain hose as standard
- Wide range of static pressures



12-18 class



22 /24 class  
\*Multi-split is only 12-22 classes



30-54 class





## VRF J-VS

### Heat Pump for Small-capacity type

Outdoor unit

V-020-025

- **Sustainable:** R32 refrigerant with reduced global warming potential
- **Saving CO2:** Top class high energy saving
- **Small Body:** Easy carriage and installation
- **Situational Piping Design:** Long pipe length, Up to 13 indoor units\* can be connected
- **Sightliness installation:** External static pressure, cooling piping system

\*: 6 HP model



Indoor unit

V-058-065

- 4 - 24 classes, 3 type, 34 models
- Compact & Slim design
- Flexible installation



Compact Cassette



Low Static Pressure Duct  
Slim Duct/Slim Concealed Floor



Wall-mounted type

## CONTROL SYSTEM

### Wired remote controller

Design type

C-010-011

- Harmonizes with the Installation Space
- Intuitive operation
- Status LED Colors
- Refrigerant cycle monitor
- Logo Display
- AIRSTAGE Remo Set application (free download)
- Initial Settings / Indoor Unit Function



### New Monobloc system

Comfort series

Future Release

- 5-10 kW classes, 3 Models
- High energy efficiency
- Quiet operation
- Easy installation & maintenance



## SUPPORT

### AIRSTAGE Service Monitor Tool

for Single-split, Multi-split, Air to water

Sp-010-011


- Improved work efficiency
- Bluetooth communication
- Compact and lightweight design
- New application with simple design
- Refrigerant cycle graph display

UTY-ASSXZ1




AIRSTAGE Service Monitor Tool

\*Android only.  
You need to install the "AIRSTAGE Service Monitor Tool" app on your smart device.

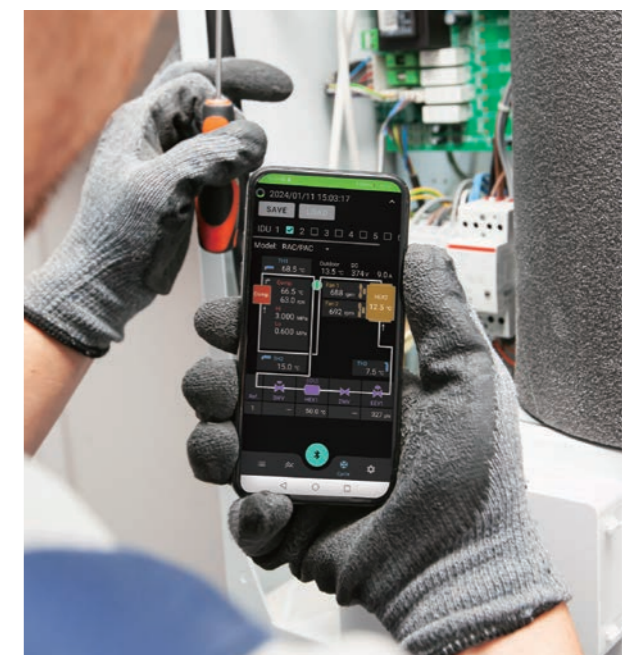


From Business to private spaces  
**SOLUTIONS**

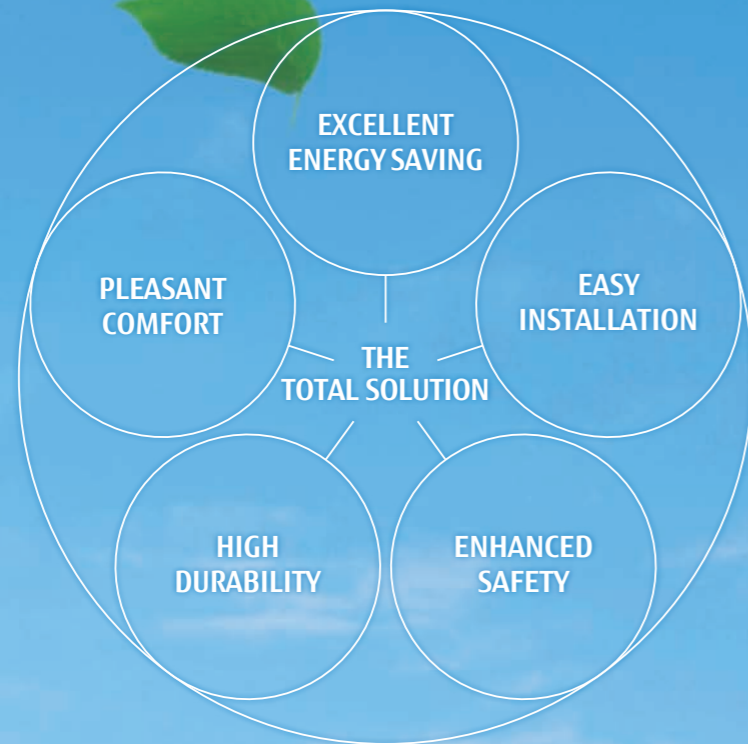

**Key solution points**

Fujitsu General's total solutions are tailored to each property's unique needs.

Fujitsu General provides the best control solutions for buildings.

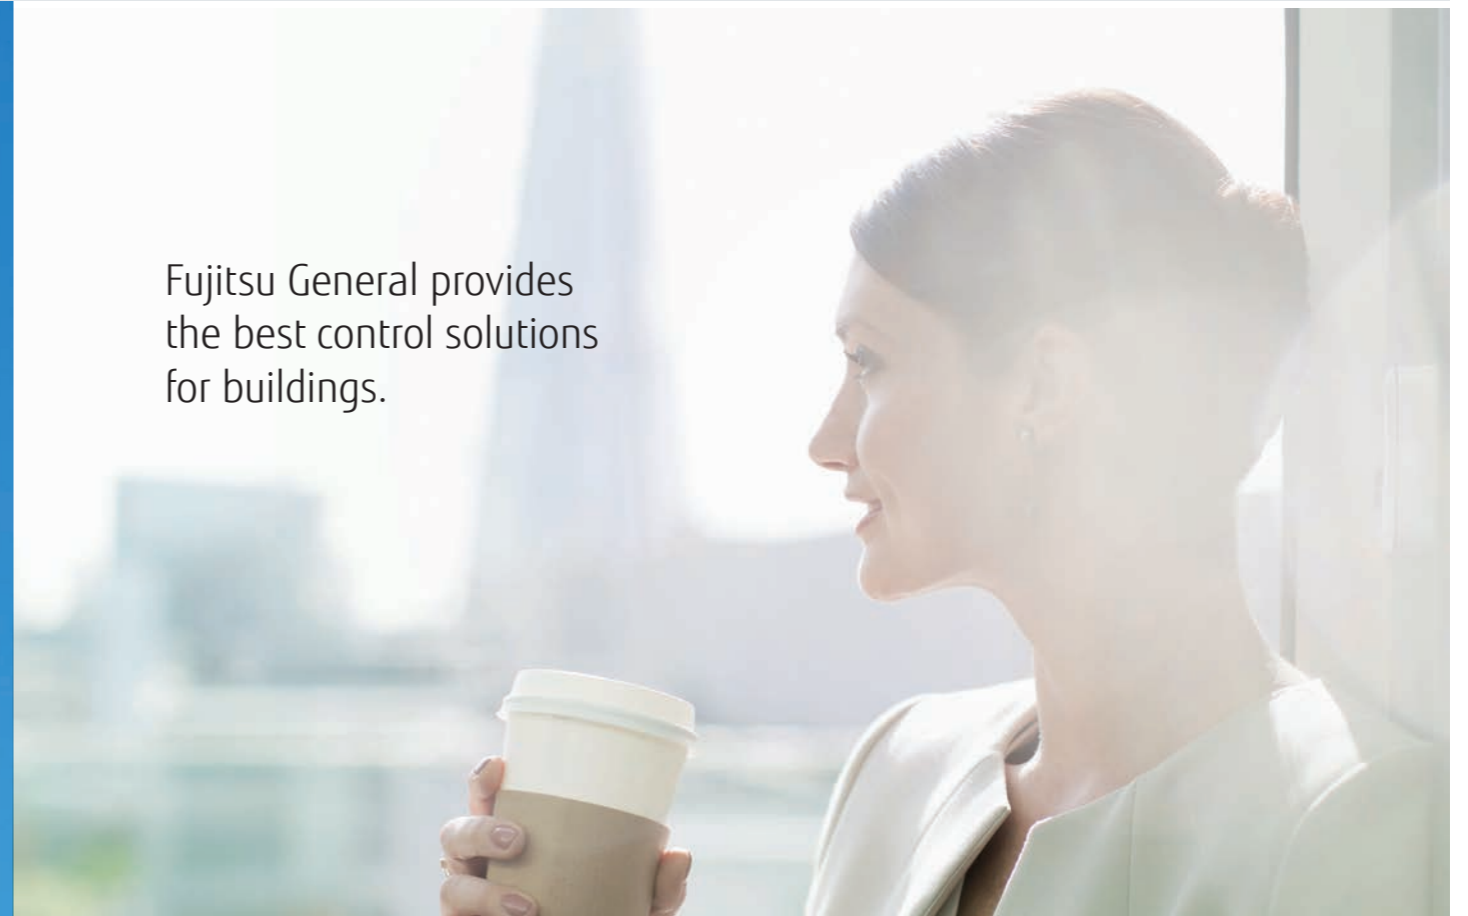

**Target buildings**

- A casual conversation with a colleague at work
- A presentation in a large meeting room
- A restaurant you stop by Your living room

We have a comprehensive lineup of air conditioners ideal for all these situations—from business to private spaces. Fujitsu General's air conditioners are used in all aspects of everyday life.



**For Light commercial use**

Comfortable and economical air conditioning systems, ideal for small and midsize commercial buildings

- 036 Restaurants, Shops
- 038 Small offices
- 040 Hotels
- 042 Schools



**For Commercial use**

Single and modular VRF systems for high efficiency, comfort, design flexibility, ease of installation, and high reliability

- 044 Large Buildings



**For Residences**

Smart air conditioning systems with extensive control options for comfort and convenience of use

- 046 Residences

# Restaurant, shops






For Light commercial use

Fujitsu General provides perfect total air conditioning systems that offer seamless support by tenant, by purpose, and by customer visit frequency in shops and restaurants with multiple lighting and a high density of customers.



## Single split

For Restaurants

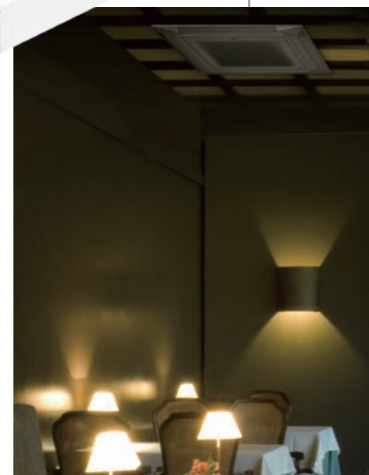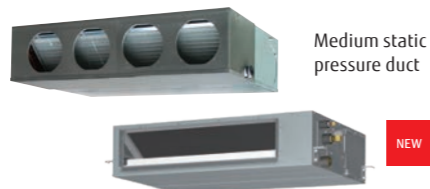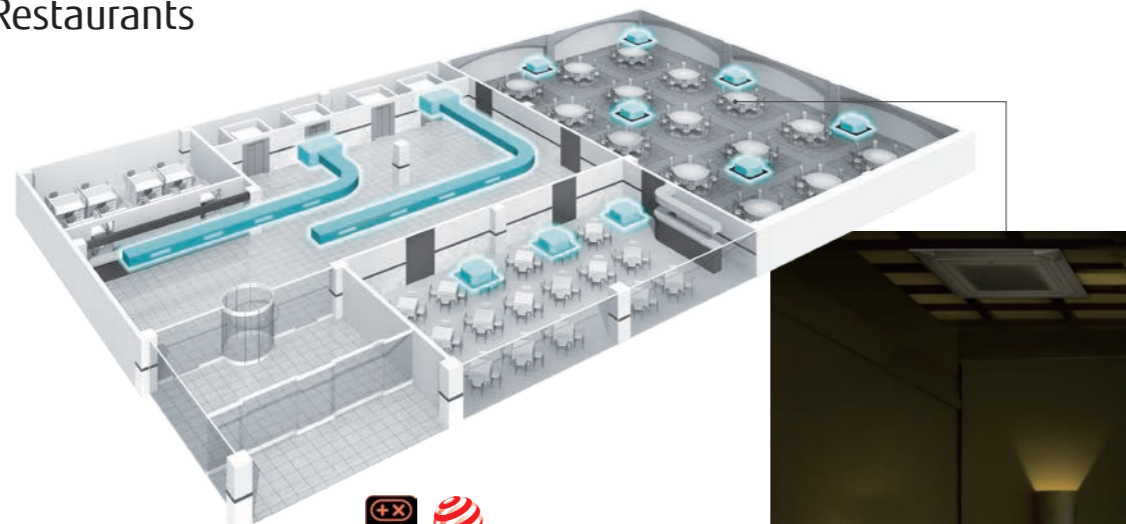

### R32 large model lineup expanded


Expanded lineup of ceiling, cassette, and duct types suitable for large spaces using environmentally friendly R32 refrigerant

### Two panel colors

Both black and white panels are available for Cassette type. Black panels are suitable for dark places such as atmospheric restaurants. White panels, by contrast, are more appropriate for use in brightly lit spaces such as offices. (Available for Single split and VRF indoor units)

## Simultaneous multi-split

For Shops

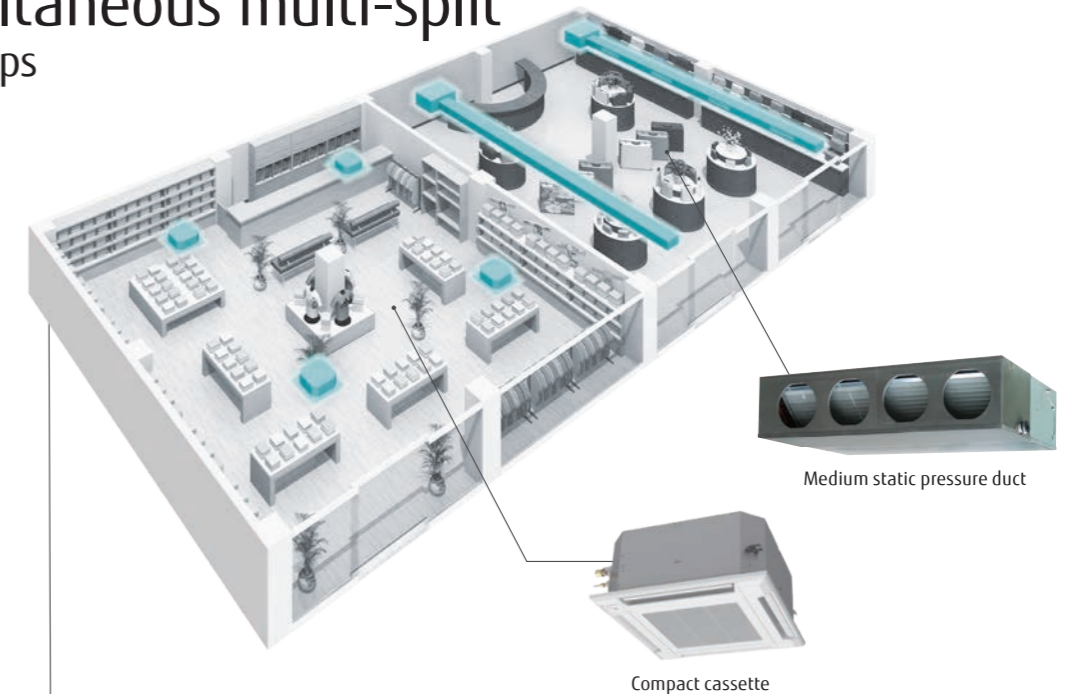


### Various indoor unit lineup

You can choose from 3 types of indoor units to suit the atmosphere and layout of your shop.



### Small, lightweight outdoor unit


Models equipped with the new R32 refrigerant Compared to current models, the outdoor unit is more compact and easier to install. (45/54 models)  
Compact cassette Series for grid ceiling were added to the lineup of indoor units to improve ease of installation.

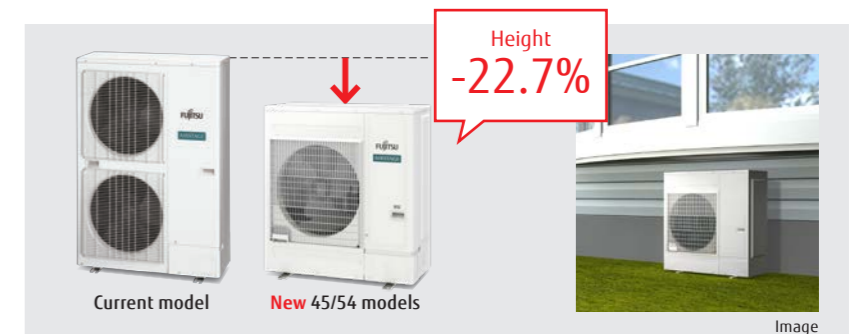

# Small offices

For Light commercial use

Fujitsu General offers a perfect total air conditioning system for small office buildings with multiple small rooms, taking into consideration energy savings, low noise, comfortable air volume, usage and purpose, and centralized control.

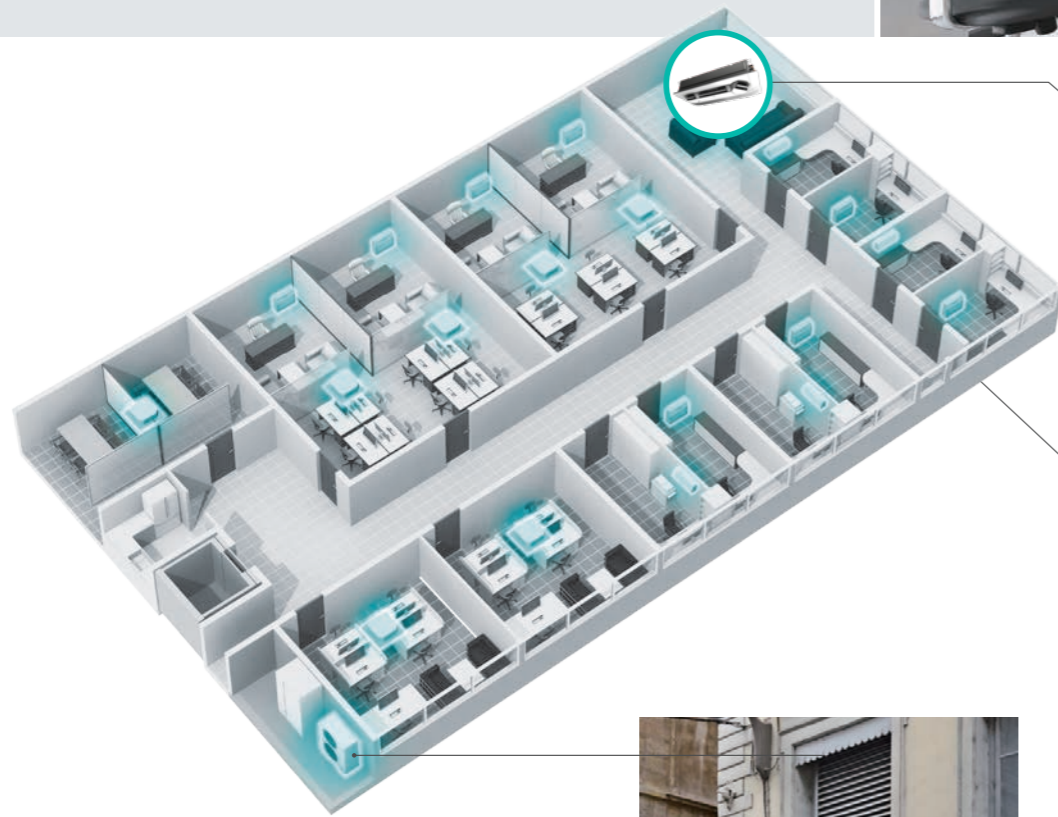

## Breakthrough 3D flow cassette with innovative pursuit of comfort

The left and right air outlet ports with a maximum rotation angle of 100° and the wide central air outlet port create a comfortable space with less uneven temperature.



## Central remote controller with improved operability

Controls the temperature of each room easily, and manages and sets the operation control for a week. Energy-saving management by setting upper and lower temperature limits and operating prohibitions.



Central remote controller UTY-DCGYZ3


NEW

## Remote Management


### Remote monitoring / Remote operation

New central remote controller can control your tenant's air conditioner anytime and anywhere. When the central remote controller manages the indoor units of some tenants, air conditioning of each tenant can be managed separately online.

### Increased the Number of Accounts

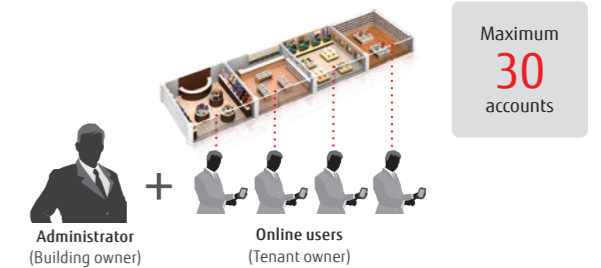

Maximum  
30  
accounts

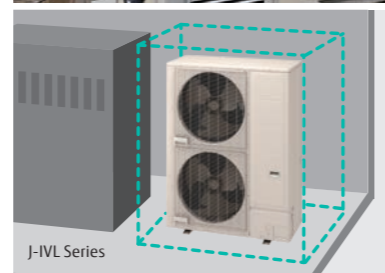

## Compact outdoor unit with low noise design

Takes up little space even when installed in a machine room or on the roof. Sufficient static pressure can be maintained even with louvers. Low-noise mode suffices even for nighttime operations at low noise levels.






## VRF J Series compact outdoor units with up to 18 HP

Suitable for the buildings with multiple small rooms. Up to 42 indoor units\* can be connected.

\*Only J-IVL Series 18 HP model

## Wide lineup of indoor units of low-capacity class

Various low-capacity 1.1 kW indoor units are available for small rooms and spaces.

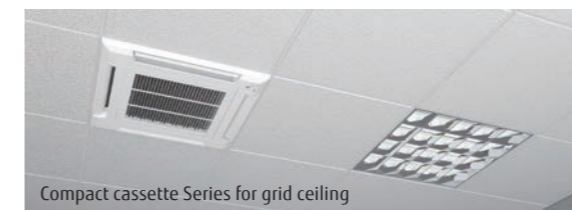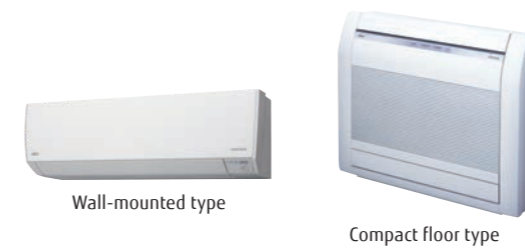


## Compact wired remote controller

Compact size with a large screen for easy operation. The stylish design harmonizes with the interior.

# Hotels


For Light commercial use

Fujitsu General offers total air conditioning systems perfect for low-rise, small hotels that take into account energy savings, external appearance, safety, and ease of installation.

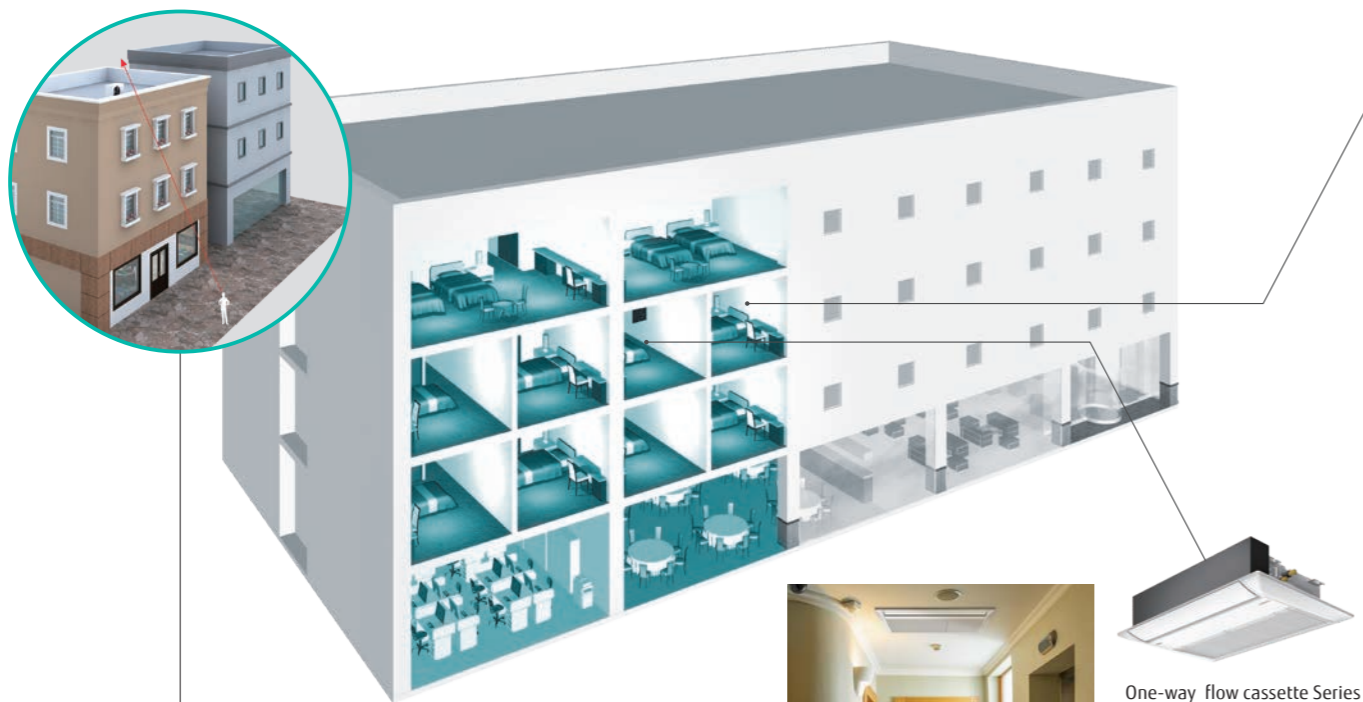


## Guest room air conditioning with superior comfort, energy efficiency, and ease of installation


**Space saving**  
Mini duct type with a height of 198 mm and a depth of 450 mm. Easily installed in a narrow ceiling space.



Mini duct

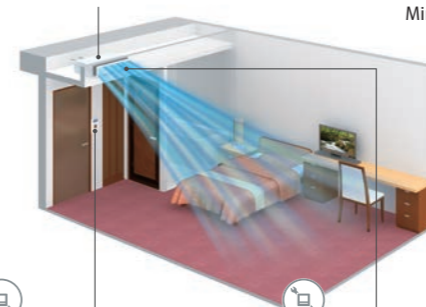


**Card key switch available**  
Linked to a card key to prevent people from forgetting to turn off the air conditioner.




External connection switch

**Comfortable airflow by switching the up/down airflow direction**  
The Auto louver grille kit creates comfortable airflow by adjusting the air direction.




Auto louver grille kit

**Ventilation of each room can be achieved relatively inexpensively by combining an appropriate duct fan (locally procured) through a hole for Fresh air in the indoor unit. If the airflow required to ventilate the room is not sufficient, use ERV (Energy Recovery Ventilator).**

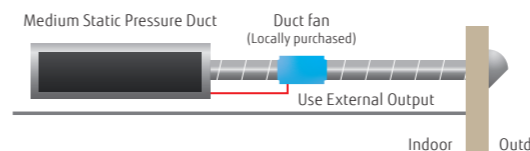

## Centralized control of air conditioning for shared spaces

Centralized control of air conditioning for shared spaces Lobbies, hallways, and other common spaces are centrally controlled for air conditioning. Central Remote Controller can manage VRF products, but Split products can also be managed together via Network converter.

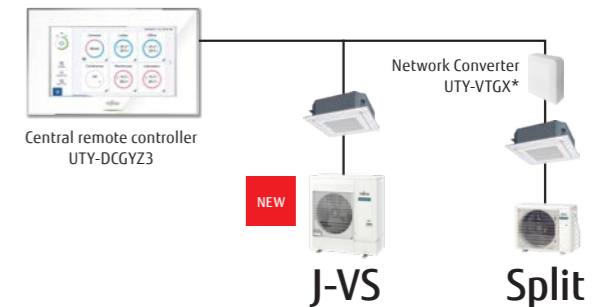

**Wired remote controller (design type) with sophisticated design.** The touch panel can be easily operated by swiping vertically and horizontally.



Wired remote controller (design type) UTY-RVRY



Hotel logo display

## Large space air conditioning for the reception area and lobby

Duct type Big duct Series suitable for large spaces with high ceilings



Select the product best suited to the characteristics of the property.


|                                 | Split | VRF J-VS | VRF VR-IV |
|---------------------------------|-------|----------|-----------|
| Project size                    | Small | Middle   | Large     |
| Individual Air conditioning     | Great | Good     | Great     |
| Reduction of installation space | Fair  | Great    | Great     |
| Landscape (hide outdoor unit)   | Fair* | Great    | Fair      |
| Maintenance (individualized)    | Great | Good     | Fair      |

\*Depends on pipe length constraints

# Schools


For Light commercial use

Fujitsu General offers indoor units that allow multiple connections with a compact design that reduces the installation area and increases the flexibility for selecting installation locations, making them perfect for midsize educational institutions. One single outdoor unit is able to cover an entire school building.

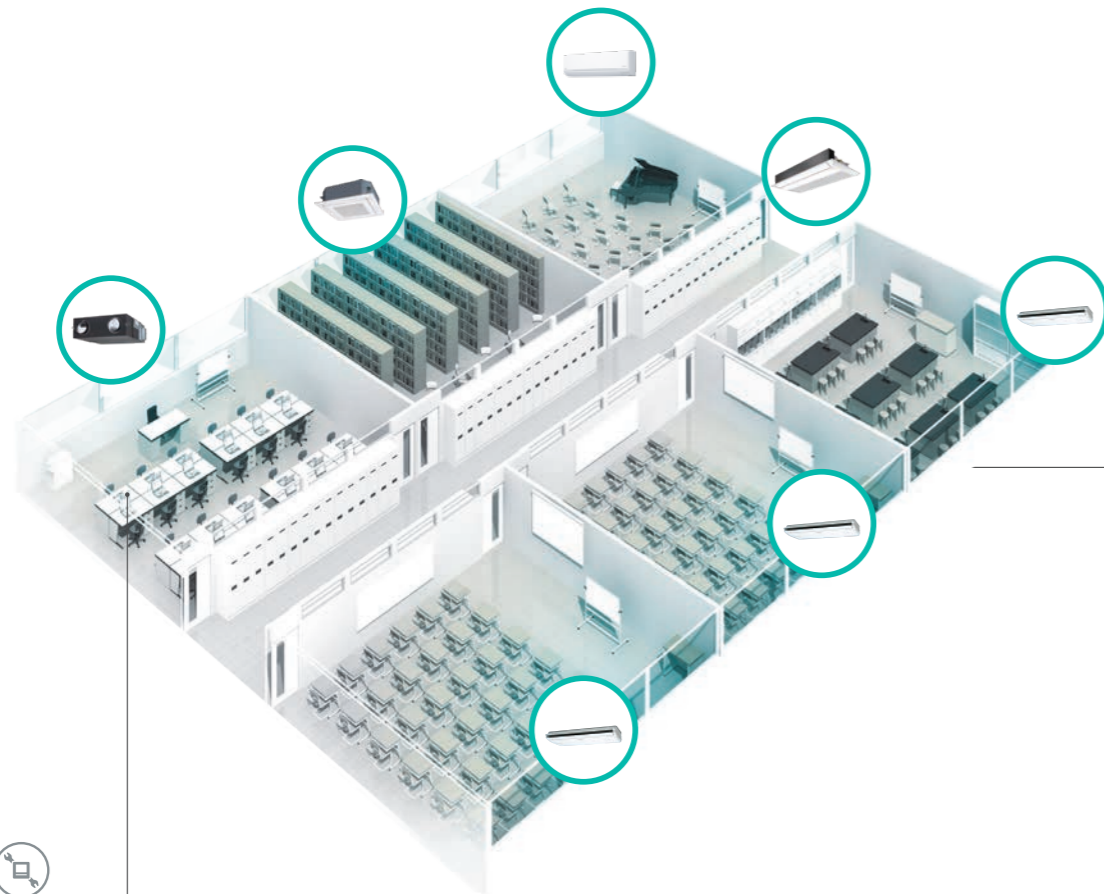


## Centralized control of both air conditioning and ventilation equipment

Centralized control is also possible to stop the operation of not only air conditioners but also lighting and ventilation equipment. These features are useful for managing the energy efficiency of the entire building.

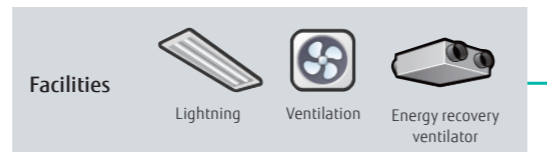


System controller Lite

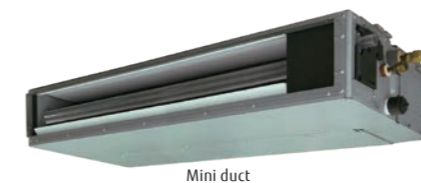

## Wide variety of indoor units

Support complex applications for regular classrooms, special classrooms and auditoriums. Ventilators can also be added easily.

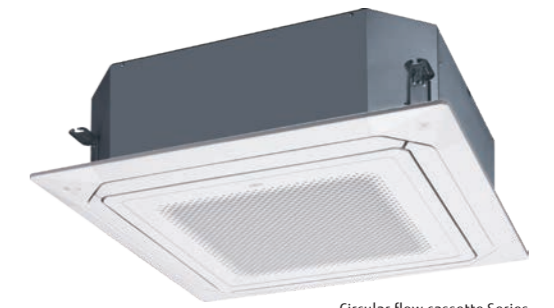


## Comfortable room air conditioning without airflow sensation


Circular flow cassette blows air in all directions at a uniform temperature.



## Individual airflow direction control to prevent people from being exposed to airflow

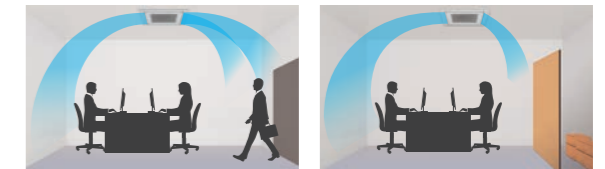

## Energy-saving operation when unattended, in conjunction with a Human sensor.

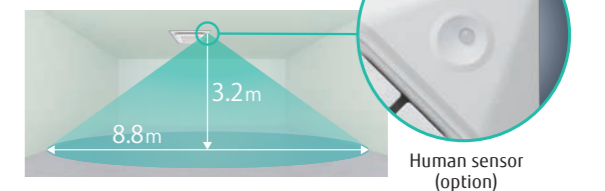



# Large buildings

For Commercial use

Fujitsu General offers modular VRF systems that pursue high efficiency, comfort, design flexibility, ease of installation, and reliability for high-rise buildings.



## Abundant lineup optimized for the operating environment

The VRF system meets a variety of needs, including energy-saving models and models with compatibility to outdoor temperatures of up to 46°C.



### VRF VR-IV

Smart, cutting-edge design Extensive lineup from 8 HP to 48 HP with the capacity ratio of indoor units connectable up to 150%.


#### 34 models with 8 to 48 HP

- Space saving combination: 21 models from 8 to 48 HP
- Energy efficient combination: 13 models from 16 to 44 HP

### VRF V-IV

#### 34 models from 8 to 48 HP

- Space saving combination: 21 models from 10 to 48 HP
- Energy efficient combination: 13 models from 16 to 46 HP

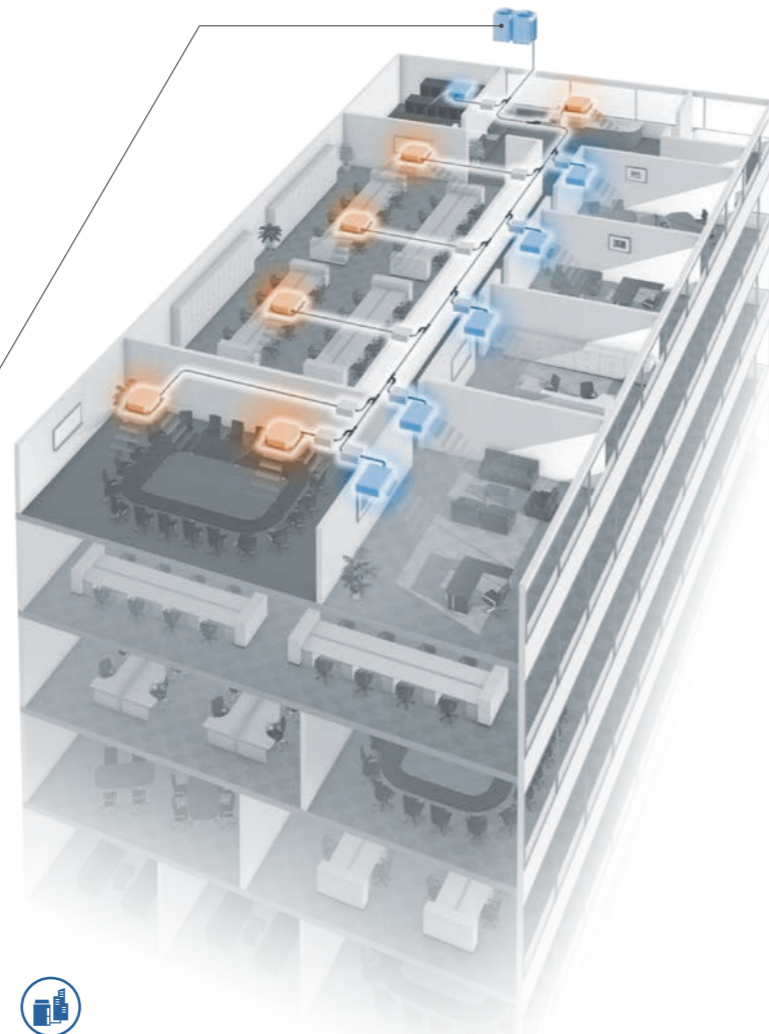

## Height difference up to 110 m

The height difference between the outdoor unit and the indoor unit is normally 50 m for the V-IV Series, but can be extended to 110 m by installing the Pressure sensor kit.

\* Can only be connected to the V-IV Series




## Centralized control

Not only indoor units in the building, but also facilities such as ventilation can be controlled easily by anyone




System controller (UTY-APGXZ1)  
System controller Lite (UTY-ALGXZ1 & UTY-PLGXX2)



## Linkage with various BMS


Linking with MODBUS®, BACnet®, KNX® and other interfaces allows centralized control of equipment other than air conditioning.

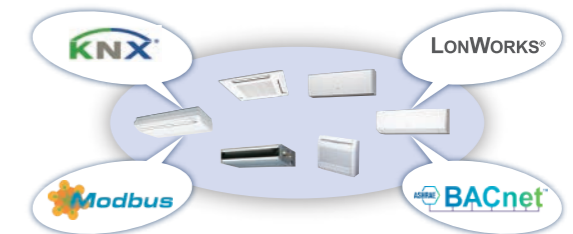

## High system flexibility


The industry-leading high static pressure, long pipe design, and connection capacity enable flexible installation on each floor and installation of various indoor units.

**82\* Pa**  
\*: V-IV Series, 80Pa for VR-IV Series

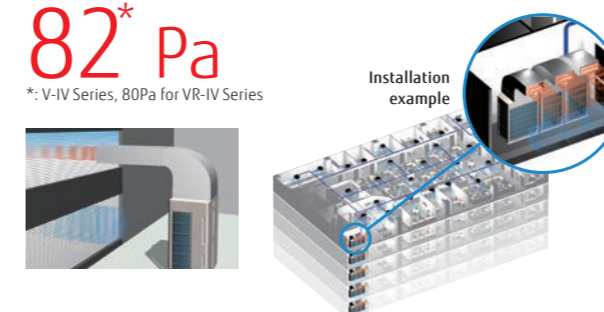

## Prompt service support

Web monitoring tool and System controller remotely monitor the air conditioning of the entire building. Self-diagnosis in cooperation with the management company enables quick response in case of an emergency.

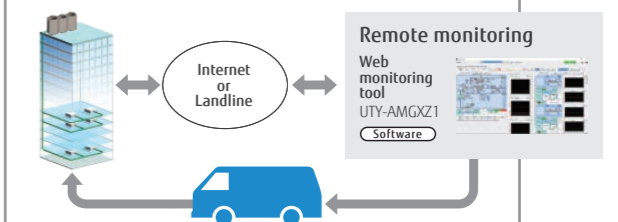

# Residences

For Apartments & Houses

From the living room, where the whole family relaxes, to bedrooms, children's rooms and other small rooms, Fujitsu General has designed systems suited to spaces that reflect the rhythm of life.



 **A variety of indoor units to suit the characteristics of each room**




**For Living & Dining room**

**Cool beauty design model**  
This series features a special European-style design. The light, elegant and three-dimensional expression achieved by the curved surface is beautiful from all angles.



**For Large rooms**

**Standard & Comfort model**  
The basic functions and powerful, comfortable airflow volume controls are optimal for large spaces.

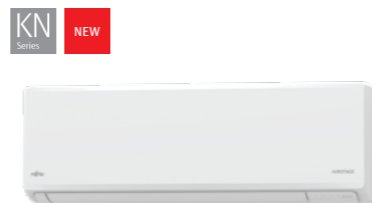


**For Bedrooms or Home offices**

**ECO Range, Compact size**  
High performance and compact design suitable for bedrooms, home offices and other small spaces



**For Primary bedrooms or Living rooms**


**Award winning design, Quiet models**  
High performance, low noise with emphasis on design

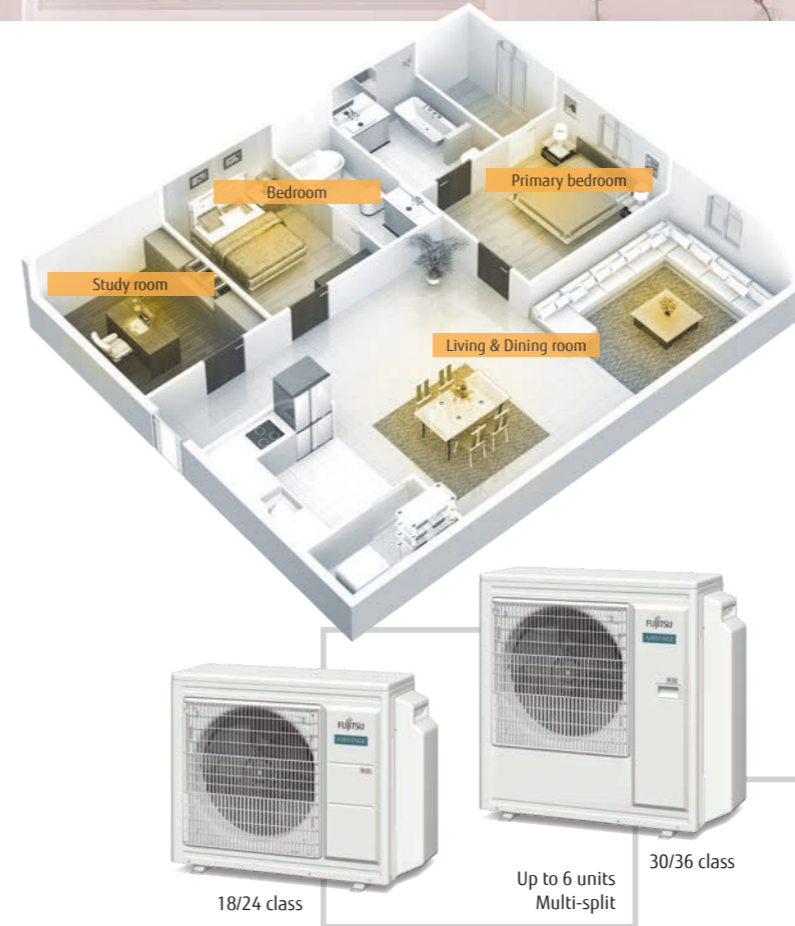

**Outdoor units suitable for residential environments**


 **R32 Multi-split type released**

Models are now available with environment-friendly R32 refrigerant. A number of products with improved external design have been added to the indoor unit lineup.

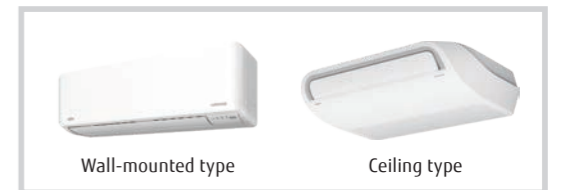

Wall-mounted type

Ceiling type

 **Operated by smart speaker**

Simply talk to the smart speaker to operate the air conditioner and check its operating status while doing other things.



With the WLAN adapter and the AIRSTAGE Mobile app, you can control the heating and cooling of your home anytime, anywhere.





## Light Commercial & Residential SPLIT & MULTI-SPLIT

Energy saving design to provide a comfortable indoor environment while being environment-friendly.

These are air conditioners that are both user-friendly and environment-friendly. Fujitsu General air conditioners cater to a wide range of needs, from living rooms, bedrooms, stores, small offices, through to hotels.

### SPLIT

- Refrigerant R32 models
  - Wall-mounted type
  - Cassette
  - Duct
  - Floor
  - Ceiling
- Refrigerant R410A models
  - Duct

### MULTI-SPLIT

- Refrigerant R32 models
  - 2-unit to 5-unit Multi-split
  - Simultaneous Multi-split Twin/Triple
- Refrigerant R410A models
  - 6-unit Multi-split
  - Simultaneous Multi-split Twin/Triple/Double Twin



## SPLIT & MULTI-SPLIT

Light Commercial &  
Residential



## Light Commercial & Residential SPLIT

- S-004 Split Overview
- S-006 Indoor Units Lineup
- S-010 Features
- S-015 Features Explanation
- S-060 Wall-mounted Specifications
- S-063 ECO Series Lineup Specifications
- S-068 Feature Summary



### Refrigerant R32 models

**Wall-mounted type** – Built in W-LAN adapter model

- S-016 Designer Range
  - High Spec & Design
  - Cool Beauty Design
- S-020 Standard Range – High-Efficiency & Comfort
- S-022 ECO Range – Compact Size

### Wall-mounted type

- S-024 Standard Range
  - High-Efficiency & Large Rooms
- S-028 ECO Range
  - Compact Size
  - Comfort for Large Rooms
  - Cooling-enhanced type

### Cassette

- S-034 Compact 4-way Flow Range – Compact Size
- S-036 Circular Flow Range – Comfort for Large Rooms

### Duct

- S-038 Slim Duct – Slim Design
- S-040 Medium Static Pressure Duct
  - High-Efficiency & Comfort
  - Compact Size
  - Standard
- S-050 High Static Pressure Duct

### Floor, Ceiling

- S-056 Floor – Compact Size
- S-058 Ceiling



### Refrigerant R410A models

#### Duct

- S-052 High Static Pressure Duct
- S-054 Big Duct



# Split Overview

Fujitsu General provides its customers with 5 types and 149 models of air conditioning systems perfect for various customer applications and layouts. Added to this lineup recently are the environment-friendly R32 refrigerant models.



Wall-mounted type, Designer Series, Cool Beauty Design

## Existing pipes can be reused if they meet our guidelines

Please consult with our regional sales subsidiaries for details.

### Cautions when reusing the existing pipes

- The thickness of the pipes must be 0.8 mm or thicker in accordance with the pipe diameter.
- Use flares that have been reworked to be compatible with the new refrigerant, and are compliant with ISO 14903.
- Select suitable wiring in accordance with the installation manual of the new air conditioning unit.
- When pump-down is not possible or when the inner pipe walls are dirty, make sure to clean the pipes before connecting new ones.
- When using different diameters pipes from the standard sizes,
  - The performance may not reach the published specification value.
  - Dedicated flare nuts compliant with ISO 14903 should be procured locally.
  - Restrictions apply to pipe lengths, refrigerant volumes, and room sizes.



### Wall-mounted type

Simple and easy to install, all models, are expertly designed to control airflow and save energy. The design, with its flat and simple appeal, perfectly matches room interiors. Many of the models in the lineup adopt the new environmentally friendly R32 refrigerant.



### Duct

The main unit is hidden in the wall, making the room look neat and tidy. Mini Duct and Slim Duct models are also available for installation in narrow spaces between beams or above the ceiling. Large models, suitable for air conditioning vast spaces, allow multiple outlets to be installed in just one unit, and are perfect for atypical room layouts.



### Cassette

The Cassette type, which blends in perfectly with the interior design, blows air in all four directions to create an even air-conditioning for the entire space. We have a variety of series including Compact models with a uniquely designed panel to match grid ceilings, and Circular Flow models that send airflow in a 360° direction.



### Floor

The compact and slim design makes this model suitable for installation in commercial as well as residential buildings. This model is also recommended as a heating device because it delivers a warm airflow from both the top and bottom outlets.



### Ceiling

As with the wall-mounted unit, ceiling installation is very easy, and the unit's thin structure with a height of just 240 mm allows neat installation. The powerful airflow that can reach far away from the wide outlet is perfect for large meeting rooms, audiovisual rooms, and other rectangular spaces with a lot of depth.

# Indoor Units Lineup



FUJITSU GENERAL (Euro) GmbH participates in the ECP program for AC. Check ongoing validity of certificate: [www.eurovent-certification.com](http://www.eurovent-certification.com)

| Type   | Range   | Refrigerant              | Model         | Class                      |                            |                            |                            |            |    |            |            |            |    |    |    |    |    |
|--|---|--------------------------|---------------|----------------------------|----------------------------|----------------------------|----------------------------|------------|----|------------|------------|------------|----|----|----|----|----|
|  |   |                          |               | 7                          | 9                          | 12                         | 14                         | 18         | 22 | 24         | 30         | 36         | 45 | 54 | 60 | 72 | 90 |
| Wall-mounted type<br>Built in WLAN adapter model | Designer Range<br>High Spec & Design            | R32<br>Cooling & Heating | NEW KG Series | ASEH07KGTG                 | ASEH09KGTG                 | ASEH12KGTG                 | ASEH14KGTG                 |            |    |            |            |            |    |    |    |    |    |
|  | Designer Range<br>Cool Beauty Design            | R32<br>Cooling & Heating | KE Series     | ASEG07KETF<br>ASEG07KETF-B | ASEG09KETF<br>ASEG09KETF-B | ASEG12KETF<br>ASEG12KETF-B | ASEG14KETF<br>ASEG14KETF-B |            |    |            |            |            |    |    |    |    |    |
|  | Standard Range<br>High-Efficiency & Comfort     | R32<br>Cooling & Heating | NEW KM Series | ASEH07KMCG<br>ASEH07KMCG-B | ASEH09KMCG<br>ASEH09KMCG-B | ASEH12KMCG<br>ASEH12KMCG-B | ASEH14KMCG<br>ASEH14KMCG-B |            |    |            |            |            |    |    |    |    |    |
|  | ECO Range<br>Compact Size                       | R32<br>Cooling & Heating | NEW KN Series | ASEH07KNCA                 | ASEH09KNCA                 | ASEH12KNCA                 |                            |            |    |            |            |            |    |    |    |    |    |
| Wall-mounted type                                | Standard Range<br>High-Efficiency & Large Rooms | R32<br>Cooling & Heating | KM Series     |                            |                            |                            |                            | ASEG18KMTE |    | ASEG24KMTE |            |            |    |    |    |    |    |
|  | Standard Range<br>High-Efficiency & Large Rooms | R32<br>Cooling & Heating | KM Series     |                            |                            |                            |                            |            |    |            | ASEH30KMTB | ASEH36KMTB |    |    |    |    |    |
|  | ECO Range<br>Compact Size                       | R32<br>Cooling & Heating | KP Series     | ASEG07KPCE                 | ASEG09KPCE                 | ASEG12KPCE                 |                            |            |    |            |            |            |    |    |    |    |    |
|  | ECO Range<br>Comfort for Large Rooms            | R32<br>Cooling & Heating | KL Series     |                            |                            |                            |                            | ASEG18KLCA |    | ASEG24KLCA |            |            |    |    |    |    |    |
|  | ECO Range<br>Cooling-enhanced                   | R32<br>Cooling & Heating | NEW KL Series | ASEH07KLTA                 | ASEH09KLTA                 | ASEH12KLTA                 |                            |            |    |            |            |            |    |    |    |    |    |
|  |   |                          |               |                            |                            |                            |                            |            |    |            |            |            |    |    |    |    |    |

# Indoor Units Lineup



FUJITSU GENERAL (Euro) GmbH participates in the ECP program for AC. Check ongoing validity of certificate: [www.eurovent-certification.com](http://www.eurovent-certification.com)

| Type                       | Range  | Refrigerant              | Model                          | Class |             |             |             |             |             |             |             |             |             |             |            |            |            |
|----------------------------|--|--------------------------|--------------------------------|-------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|------------|------------|------------|
|                            |  |                          |                                | 7     | 9           | 12          | 14          | 18          | 22          | 24          | 30          | 36          | 45          | 54          | 60         | 72         | 90         |
| Cassette                   | Compact 4-way Flow Range<br>Compact Size                 | Cooling & Heating        |                                |       | AUXG09KVLA  | AUXG12KVLA  | AUXG14KVLA  | AUXG18KVLA  | AUXG22KVLA  | AUXG24KVLA  |             |             |             |             |            |            |            |
|                            | Circular Flow Range<br>Comfort for Large Rooms           | Cooling & Heating        | <br>18/22/24 30/36/45/54       |       |             |             |             | AUXG18KRLB  | AUXG22KRLB  | AUXG24KRLB  | AUXG30KRLB  | AUXG36KRLB  | AUXG45KRLB  | AUXG54KRLB  |            |            |            |
| Duct                       | Slim Duct  | Cooling & Heating        | <br>09/12/14 18                |       | ARXG09KLLAP | ARXG12KLLAP | ARXG14KLLAP | ARXG18KLLAP |             |             |             |             |             |             |            |            |            |
|                            | Medium Static Pressure Duct<br>High-Efficiency & Comfort | Cooling & Heating        | <br>12/14/18 22/24 30/36/45/54 |       |             | ARXH12KMTAP | ARXH14KMTAP | ARXH18KMTAP | ARXH22KMTAP | ARXH24KMTAP | ARXH30KMTAP | ARXH36KMTAP | ARXH45KMTAP | ARXH54KMTAP |            |            |            |
|                            | Medium Static Pressure Duct<br>Compact Size              | Cooling & Heating        | <br>12/14 18/22/24/30 36/45/54 |       |             | ARXG12KHTAP | ARXG14KHTAP | ARXG18KHTAP | ARXG22KHTAP | ARXG24KHTAP | ARXG30KHTAP | ARXG36KHTAP | ARXG45KHTAP | ARXG54KHTAP |            |            |            |
|                            | Medium Static Pressure Duct<br>Standard                  | Cooling & Heating        |                                |       |             |             |             |             |             | ARXG22KMLB  | ARXG24KMLA  | ARXG30KMLA  | ARXG36KMLA  | ARXG45KMLA  |            |            |            |
|                            | High Static Pressure Duct                                | Cooling & Heating        |                                |       |             |             |             |             |             |             |             |             |             | ARXG45KHTB  | ARXG54KHTB |            |            |
|                            |  | Cooling & Heating        |                                |       |             |             |             |             |             |             |             |             |             |             |            | ARYG60LHTA |            |
|                            | Big Duct   | Cooling & Heating        |                                |       |             |             |             |             |             |             |             |             |             |             |            |            | ARYG72LHTA |
| Floor<br>Compact & Comfort | Cooling & Heating  |                          |                                |       | AGEG09KVCA  | AGEG12KVCA  | AGEG14KVCA  |             |             |             |             |             |             |             |            |            |            |
| Ceiling                    | Cooling & Heating  | <br>18/22 24/30 36/45/54 |                                |       |             |             |             | ABEG18KRTA  | ABEG22KRTA  | ABEG24KRTA  | ABEG30KRTA  | ABEG36KRTA  | ABEG45KRTA  | ABEG54KRTA  |            |            |            |

# Features


## High-Efficiency

### ALL DC All DC Inverter Technology



#### DC twin-rotary compressor

A high-efficiency 2-cylinder rotary compressor with a DC inverter optimizes the internal structure of the compressor to achieve higher energy efficiency compared to similar compressors.

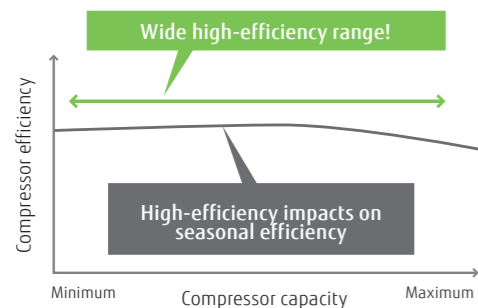


#### DC fan motor

The DC fan motor produces high power, a wide operating range, and high-efficiency.



#### Sine-wave DC inverter control

High-efficiency operation is realized by using sine-wave DC inverter control.




### Heat Exchanger for Wall-mounted type

#### High-density multipath heat exchanger

Thinner and denser heat exchangers and multipath efficiency technology have substantially improved heat exchange performance.

#### High-performance sub-cool heat exchanger


A counter-type bypass circuit has been incorporated to achieve a higher performance. (Large multi-split type, VRF)

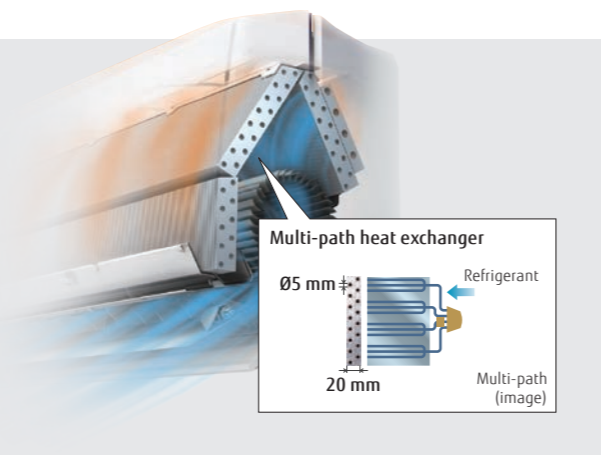

## High Energy Saving


### Human sensor control

The Human sensor monitors the movements of people in a room and operates the air conditioner at a lower capacity when people leave the room. When people come back to the room, it automatically returns to the previous operating mode.

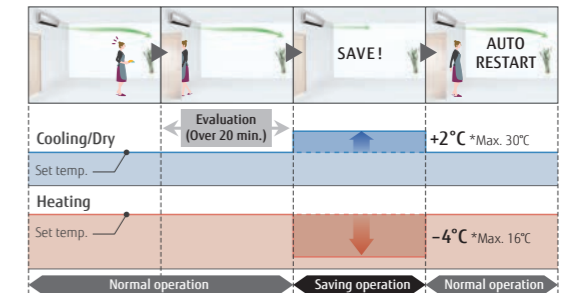


### Economy operation

Limits maximum operation, reducing the power consumption, and thereby suppressing the maximum load.

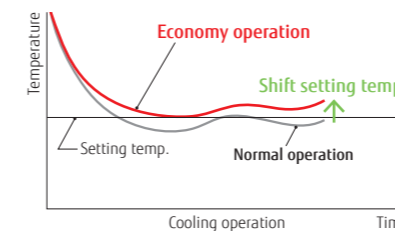


### Setting temperature range limitation

The minimum and maximum temperature range can be set giving further energy savings while considering the comfort of the occupants.

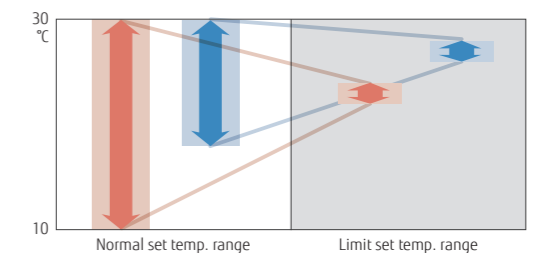


### Set temperature auto return

- The set temperature automatically returns to the previously set temperature.
- The time range in which the set temperature can be changed is from 10 to 120 minutes.

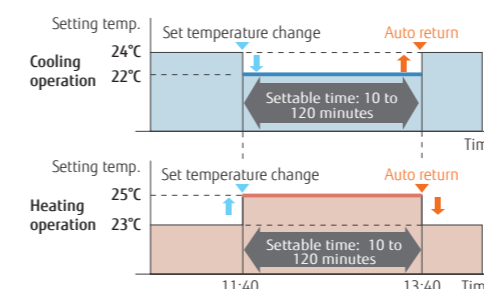

### Auto-off timer

- The indoor unit is automatically turned off when it reaches a preset operating time frame.
- The time frame of the Auto-off timer can be flexibly scheduled.
- Auto-off times can be set from 30 to 240 minutes.

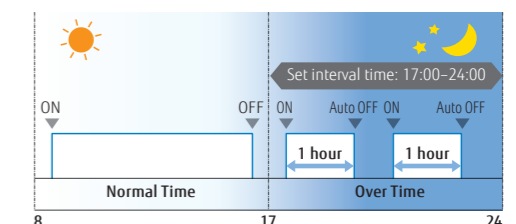


# More Comfort




## Powerful operation

Maximum airflow and maximum compressor speed are maintained for the period necessary to reach the set temperature quickly.

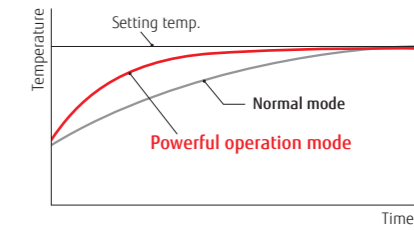


## 10°C heat

After a person has left the room, the system switches to minimum heating operation to maintain the room temperature. (Maintained at 10°C)

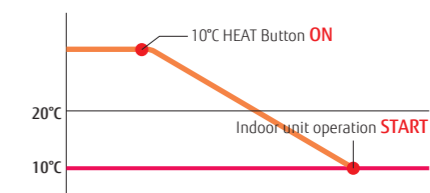



## Power diffuser

These three technologies enable precise wind direction control and improve ventilation efficiency; our airflow control offers a more comfortable environment.

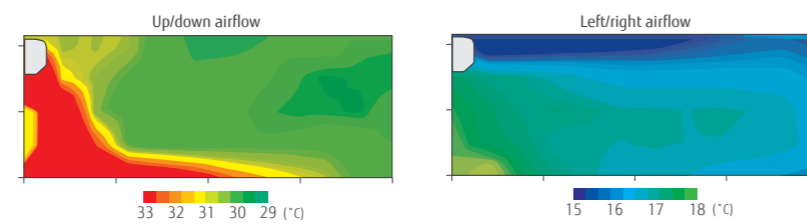

## Wireless LAN control

Users can control their air conditioners from anywhere with their mobile devices while out or on the move.

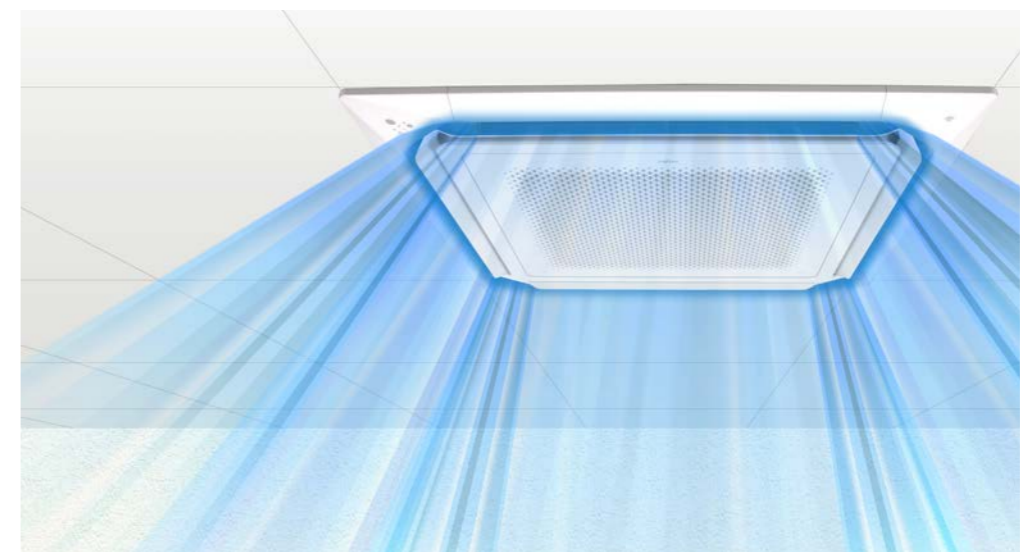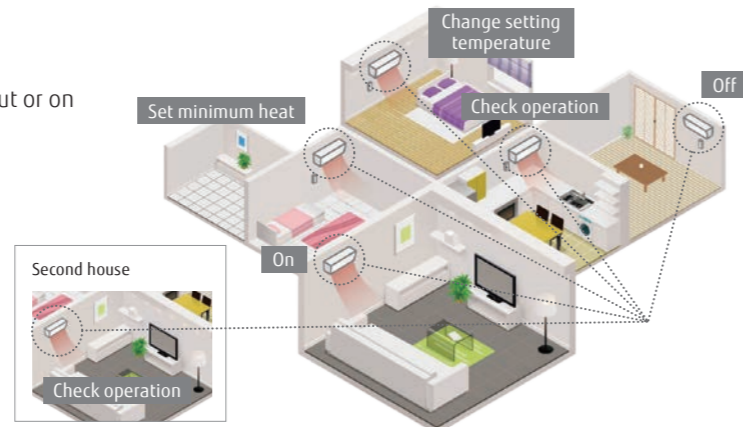

## Uniform air conditioning

Circular airflow to achieve uniform air conditioning without temperature unevenness in workspaces




# Quiet and Comfort Control



## Low Noise Technology


### Outdoor unit fan

Outdoor unit fan design with a small separation vortex, minimized air volume by fan control, and top-class low noise




### Air stabilizer in Duct

Low-noise duct structure with a built-in air stabilizer

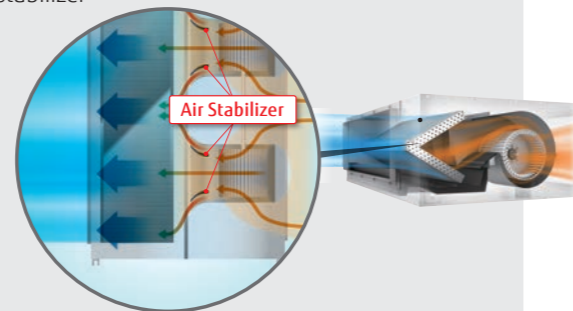


### Outdoor unit low noise operation

Users can choose low noise levels, depending on the installation environment. Operation time can be set by timer.

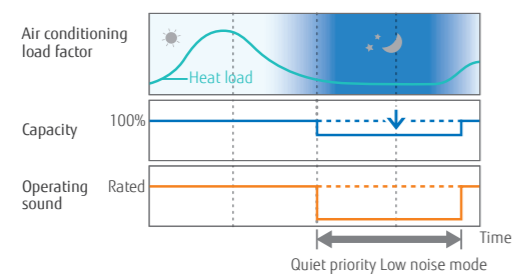

### Auto changeover

In an auto setting, the system automatically switches between cooling and heating modes according to the set temperature and room temperature.

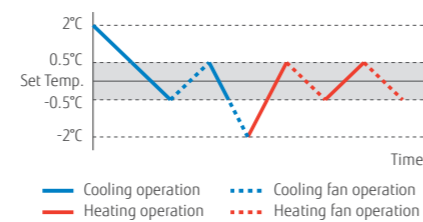

### Fresh air intake for Cassette, Duct, Ceiling

Fresh air is taken in by a fan connected to an external control unit.



# Feature Explanation

## Energy-Saving Features

- Save Human sensor**: The Human sensor detects the movement of people in the room and determines whether to switch to energy saving operation.
- Human sensor control**: The Human sensor (option) detects movement of people in the room and decides whether to save energy or stop the unit.
- Economy operation**: The thermostat setting is adjusted automatically according to the room temperature to avoid unnecessary cooling or heating.
- Setting temperature range limitation**: Sets the minimum and maximum limits on room temperature to establish the right balance between energy saving and a comfortable environment.
- Set temperature auto return**: The setting temperature automatically returns to the previously set temperature.

## Features for Comfort

- Power diffuser**: An additional louver that opens based on input from monitoring sensors to quickly enhance immediate comfort needs.
- Outdoor unit low noise operation**: The noise level of the outdoor unit can be selected.
- 10°C Heat**: The room temperature can be set to go no lower than 10°C, thus ensuring that the room does not get too cold when not occupied.
- Double swing automatic**: Complex swing action of the louver enables automatic swing in both the left/right and up/down directions.
- UP/DOWN swing louver**: The vertical louver automatically swings up and down.
- Connectable fresh air duct**: Outside air can be introduced by attaching a locally purchased duct to the fresh air knockout and an optional part.
- Auto restart**: In the event of a temporary power failure, the air conditioner will automatically restart in the same operating mode as before, once the power supply is restored.
- Individual airflow direction control**: Each louver of a 4-way Cassette type can be controlled individually to provide comfortable airflow.
- Auto changeover**: The unit automatically switches between heating and cooling modes based on the temperature setting and the room temperature.
- Automatic fan speed**: A micro-computer automatically adjusts the airflow to follow the changes in room temperature.
- Fresh air intake**: Fresh air can be taken in by a fan connected to an external control unit.
- Connectable distributing duct**: Locally purchased branch ducts can be attached to the systems to distribute the airflow.

## Convenience Features

- Auto-off timer**: Automatically stops operation when a fixed time has elapsed from the start of operation.
- Sleep timer**: A micro-computer gradually changes the room temperature automatically to promote a comfortable night's sleep.
- Program timer**: This digital timer allows selection of one of four options: ON, OFF, ON + OFF, or OFF + ON.
- Weekly timer**: Different ON-OFF times can be set for each day.
- Weekly & Temperature setback timer**: Weekly & Temperature setback timer can set the temperature for 2-time spans and for each day of the week.
- Filter sign**: Indicates the filter cleaning period by blinking.
- External error output**
- External ON/OFF input**
- Multi System Control**: Operation using "Lead Lag Operation", "Back up operation", "Lag Operation" is possible. (Page C-011)
- Special Cooling**: "Special Cooling" is a function that supports the operation of "Multi System Control".
- Wireless LAN control**: The optional WLAN adapter enables the air conditioner to be operated by smartphone or tablet PC from outside the home.

## Clean Features

- Ion deodorization filter**: The filter deodorizes by powerfully decomposing absorbed odors using the oxidizing and reducing effects of ions generated by an ultra-fine-particle ceramic.
- Apple-catechin filter**: The Apple-catechin filter uses static electricity to clean fine particles and dust from the air.
- Washable panel**: Since the front panel is easy to remove, maintenance is also easy.
- Silver Ion Filter**: The Silver ion filter helps to keep indoor air free from viruses, bacteria and molds.
- Long-life filter**

## Installation / Support

- Automatic airflow adjustment**: Automatically detects required airflow in each application case and adjusts the volume.
- Drain pump as standard**
- Refrigerant cycle monitor**: The values of each sensor and actuator can be displayed, and the status of the refrigeration cycle can be checked.
- Blue fin**



All DC models



# Wall-mounted type

Built-in WLAN adapter model  
Designer Range  
High Spec & Design



KG Series




## High energy saving

Top class high efficiency is achieved by high efficient lambda-shaped heat exchanger, large cross flow fan and new refrigerant.


Rank **A+++\*** SEER **9.80\*** SCOP **5.20\***

\*07/09/12 models      \*07 model      \*07/09/12 models

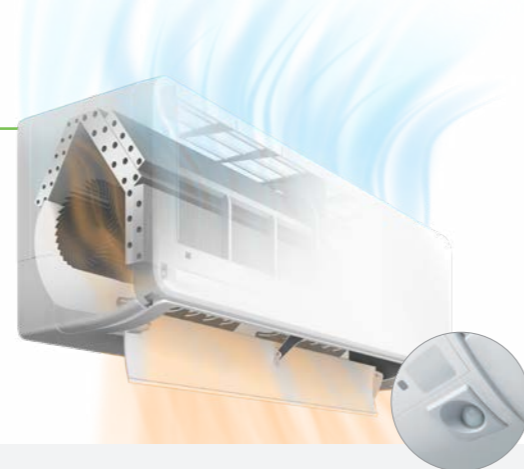


### Hybrid-heat exchanger

The large hybrid heat exchanger has greatly improved the heat exchange efficiency to achieve top-level SEER and SCOP.

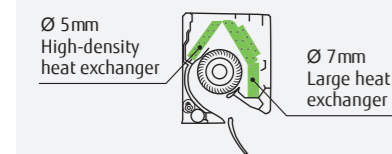


### Ø107 Large cross-flow fan

The large-diameter fan generates air volume efficiently even at reduced power.



### Human sensor

The Human sensor monitors the movements of people in a room and operates the air conditioner at a lower capacity when people leave the room. When people come back to the room, it automatically returns to the previous operating mode.



## Comfortable airflow & Quiet operation

The large louver and the new air-blowing structure create a comfortable air flow that spreads all the way down to the user's feet with quiet operation.



## Smart device control

A WLAN adapter is included as standard equipment. By installing the AIRSTAGE mobile app on your smart device, you can check and control the operating status of the air conditioner from anywhere indoors or outdoors.


\* See page C-020 for details on smart device control.



## Refrigerant cycle monitor (Option)

Wired Remote Controller (Touch Panel) will support to display some sensor values for maintenance and service support.

\*Wired remote controller (UTY-RNRY25 or UTY-RVRY) is required.

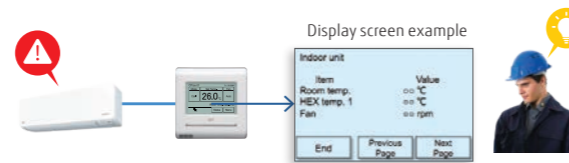

Model: ASEH07KGTG / ASEH09KGTG / ASEH12KGTG / ASEH14KGTG



## Specifications

| Model name                            | Indoor unit                     |           | Outdoor unit |                   | ASEH07KGTG | ASEH09KGTG        | ASEH12KGTG | ASEH14KGTG        |  |
|---------------------------------------|---------------------------------|-----------|--------------|-------------------|------------|-------------------|------------|-------------------|--|
|                                       |                                 |           |              |                   | AOEH07KGGC | AOEH09KGGC        | AOEH12KGGC | AOEH14KGGC        |  |
| Power Source                          | Single phase, ~230 V, 50 Hz     |           |              |                   |            |                   |            |                   |  |
| Capacity                              | Cooling                         | Rated     | kW           | 2.0               |            | 2.5               |            | 3.4               |  |
|                                       |                                 | Min.-Max. |              | 0.9-3.3           |            | 0.9-3.6           |            | 0.9-4.1           |  |
|                                       | Heating                         | Rated     |              | 2.5               |            | 2.8               |            | 4.0               |  |
| Min.-Max.                             |                                 | 0.9-5.2   |              | 0.9-5.4           |            | 0.9-6.1           |            | 0.9-6.4           |  |
| Input Power                           | Cooling/Heating                 |           | kW           | 0.400 / 0.500     |            | 0.550 / 0.600     |            | 0.870 / 0.910     |  |
| EER                                   | Cooling                         |           | W/W          | 5.00              |            | 4.55              |            | 3.91              |  |
|                                       | Heating                         |           |              | 5.00              |            | 4.67              |            | 4.40              |  |
| Pdesign                               | Cooling/Heating (-10°C)         |           | kW           | 2.0 / 2.3         |            | 2.5 / 2.4         |            | 3.4 / 2.5         |  |
| SEER                                  | Cooling                         |           | W/W          | 9.80              |            | 9.40              |            | 8.80              |  |
|                                       | Heating (Average)               |           |              | 5.20              |            | 5.20              |            | 5.20              |  |
| SCOP                                  | Cooling                         |           | A+++         |                   |            |                   |            |                   |  |
|                                       | Heating (Average)               |           |              | A+++              |            | A+++              |            | A++               |  |
| Max. Operating Current                | Cooling/Heating                 |           | A            | 6.5 / 9.0         |            | 6.5 / 9.0         |            | 6.5 / 9.0         |  |
| Annual Energy Consumption             | Cooling                         |           | kWh/a        | 71                |            | 93                |            | 135               |  |
|                                       | Heating                         |           |              | 618               |            | 646               |            | 673               |  |
| Moisture Removal                      | Indoor (Cooling)                |           | l/h          | 1.1               |            | 1.3               |            | 1.6               |  |
|                                       | Indoor (Heating)                |           |              | 36 / 32 / 29 / 19 |            | 38 / 34 / 29 / 19 |            | 40 / 35 / 30 / 19 |  |
| Sound Pressure Level                  | Outdoor (Cooling/Heating)       |           | dB(A)        | 38 / 34 / 31 / 20 |            | 39 / 34 / 31 / 20 |            | 42 / 38 / 33 / 21 |  |
|                                       | Indoor (Cooling/Heating)        |           |              | 42 / 43           |            | 44 / 45           |            | 50 / 50           |  |
| Sound Power Level                     | Indoor (Cooling/Heating)        |           | dB(A)        | 49 / 51           |            | 52 / 52           |            | 56 / 58           |  |
|                                       | Outdoor (Cooling/Heating)       |           |              | 56 / 56           |            | 58 / 58           |            | 65 / 66           |  |
| Airflow Rate                          | Indoor/Outdoor (Cooling)        |           | m³/h         | 570 / 1,390       |            | 640 / 1,480       |            | 680 / 1,800       |  |
|                                       | Indoor/Outdoor (Heating)        |           |              | 610 / 1,350       |            | 630 / 1,420       |            | 750 / 1,690       |  |
| Net Dimensions                        | Indoor                          |           | mm           | 270 × 834 × 215   |            | 270 × 834 × 215   |            | 270 × 834 × 215   |  |
|                                       | Outdoor                         |           |              | 542 × 799 × 290   |            | 542 × 799 × 290   |            | 542 × 799 × 290   |  |
| Weight                                | Indoor                          |           | kg           | 10                |            | 10                |            | 10                |  |
|                                       | Outdoor                         |           |              | 30                |            | 30                |            | 31                |  |
| Connection Pipe Diameter (Liquid/Gas) |                                 |           | mm           | 6.35 / 9.52       |            | 6.35 / 9.52       |            | 6.35 / 9.52       |  |
|                                       | Drain Hose Diameter (I.D./O.D.) |           |              | 13.8 / 15 to 16.8 |            | 13.8 / 15 to 16.8 |            | 13.8 / 15 to 16.8 |  |
| Max. Pipe Length (Pre-Charge)         |                                 |           | m            | 20 (15)           |            | 20 (15)           |            | 20 (15)           |  |
| Max. Height Difference                |                                 |           | m            | 15                |            | 15                |            | 15                |  |
| Operating Range                       | Cooling                         |           | °CDB         | -10 to 50         |            | -10 to 50         |            | -10 to 50         |  |
|                                       | Heating                         |           |              | -15 to 24         |            | -15 to 24         |            | -15 to 24         |  |
| Refrigerant                           | Type (Global Warming Potential) |           | kg (CO2eq-T) | R32 (675)         |            | R32 (675)         |            | R32 (675)         |  |
|                                       | Charge                          |           |              | 0.75 (0.506)      |            | 0.75 (0.506)      |            | 0.85 (0.574)      |  |

## Optional parts


\* For optional parts compatibility of Intesis devices, please refer to the optional parts compatibility list page C-050 to C-053 and C-066.

- Wired Remote Controller (Design type): UTY-RVRY
- Compact wired remote controller: UTY-RCRYZ1
- Wired remote controller (touch panel): UTY-RNRY25
- Wired remote controller: UTY-RLRY
- Simple remote controller (without operation mode): UTY-RHRY
- Simple remote controller: UTY-RSRY
- External switch controller: UTY-TERX
- Communication kit: UTY-TWRXZ2
- External connect kit: UTY-XWZX
- Simple remote controller: UTY-RSRY
- External switch controller: UTY-TERX
- Communication kit: UTY-TWRXZ2
- External connect kit: UTY-XWZX
- External connect kit: UTY-XWZX25
- Network Converter for single split (DC power supply type): UTY-VTGX
- Network Converter for single split (AC power supply type): UTY-VTGXV
- Silver Ion filter: UTR-FA16-5
- External input and output PCB\*: UTY-XCSXZ2

\*1 It is required when 2 or more external input and output ports are used.

## Dimensions

(Unit: mm)

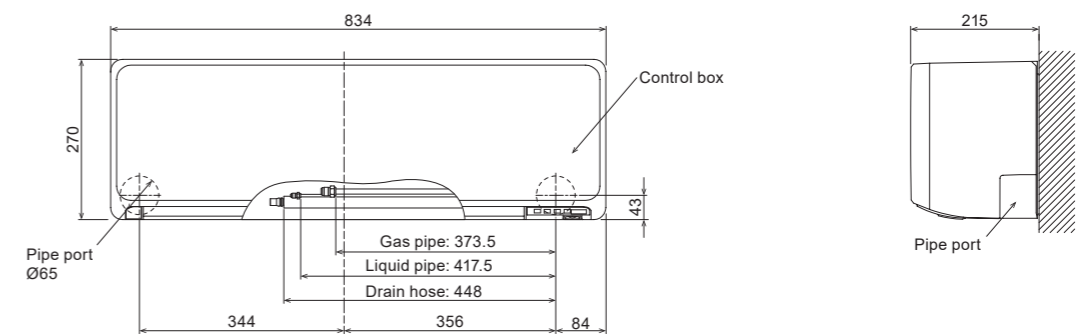

# Wall-mounted type

Built-in WLAN adapter model  
Designer Range  
Cool Beauty Design



## Cool beauty design

We have designed this series exclusively for the European market. The exterior design harmonizes beautifully with any decor and adds comfortable elegance to the room. The light, elegant and three-dimensional expression achieved by the curved surface is beautiful from any angle.




### CMF: COLOR MATERIAL FINISH


The texture of the front panel expresses the craftsmanship of Europe, and changes its expression with the changing light of the day.

## High energy saving

Top class high efficiency is achieved by high efficient lambda-shaped heat exchanger, large cross flow fan and new refrigerant.

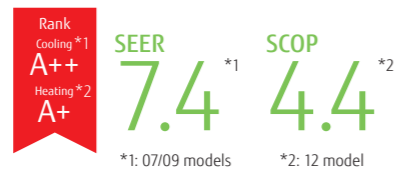

### Hybrid-heat exchanger



### Ø107 Large cross-flow fan



## Smart device control

A WLAN adapter is included as standard equipment. By installing the AIRSTAGE mobile app on your smart device, you can check and control the operating status of the air conditioner from anywhere indoors or outdoors.

\* See page C-020 for details on smart device control.



## Comfortable airflow & Quiet operation

The large louver and the new air-blowing structure create a comfortable air flow that spreads all the way down to the user's feet with quiet operation.



Model: ASEG07KETF / ASEG09KETF / ASEG12KETF / ASEG14KETF (Peal white X White)  
ASEG07KETF-B / ASEG09KETF-B / ASEG12KETF-B / ASEG14KETF-B (Silver X Dark gray)



## Specifications

| Model name                            | Indoor unit                     |              | Outdoor unit    |                                  | ASEG07KETF<br>ASEG07KETF-B  | ASEG09KETF<br>ASEG09KETF-B | ASEG12KETF<br>ASEG12KETF-B | ASEG14KETF<br>ASEG14KETF-B |  |
|---------------------------------------|---------------------------------|--------------|-----------------|----------------------------------|-----------------------------|----------------------------|----------------------------|----------------------------|--|
|                                       |                                 |              |                 |                                  | AOEG07KETA                  | AOEG09KETA                 | AOEG12KETA                 | AOEG14KETA                 |  |
| Power Source                          |                                 |              |                 |                                  | Single phase, ~230 V, 50 Hz |                            |                            |                            |  |
| Capacity                              | Cooling                         | Rated        | kW              | 2.0                              |                             | 2.5                        |                            | 3.4                        |  |
|                                       |                                 | Min.-Max.    |                 | 0.9 - 3.0                        |                             | 0.9 - 3.2                  |                            | 0.9 - 3.9                  |  |
|                                       | Heating                         | Rated        | kW              | 2.5                              |                             | 2.8                        |                            | 4.0                        |  |
|                                       |                                 | Min.-Max.    |                 | 0.9 - 3.4                        |                             | 0.9 - 4.0                  |                            | 0.9 - 5.3                  |  |
| Input Power                           | Cooling/Heating                 |              | kW              | 0.450/0.555                      |                             | 0.630/0.620                |                            | 0.935/0.960                |  |
| EER                                   | Cooling                         |              | W/W             | 4.43                             |                             | 3.97                       |                            | 3.65                       |  |
| COP                                   | Heating                         |              | W/W             | 4.52                             |                             | 4.52                       |                            | 4.17                       |  |
| Pdesign                               | Cooling/Heating (-10°C)         |              | kW              | 2.0/2.3                          |                             | 2.5/2.4                    |                            | 3.4/2.5                    |  |
| SEER                                  | Cooling                         |              | W/W             | 7.40                             |                             | 7.30                       |                            | 6.90                       |  |
| SCOP                                  | Heating (Average)               |              | W/W             | 4.10                             |                             | 4.10                       |                            | 4.40                       |  |
| Energy Efficiency Class               | Cooling                         |              |                 | A++                              |                             | A++                        |                            | A++                        |  |
|                                       | Heating (Average)               |              |                 | A+                               |                             | A+                         |                            | A+                         |  |
| Max. Operating Current                | Cooling/Heating                 |              | A               | 6.5/9.0                          |                             | 6.5/9.0                    |                            | 6.5/9.0                    |  |
| Annual Energy Consumption             | Cooling                         |              | kWh/a           | 95                               |                             | 118                        |                            | 163                        |  |
|                                       | Heating                         |              | kWh/a           | 785                              |                             | 819                        |                            | 795                        |  |
| Moisture Removal                      |                                 |              | l/h             | 1.0                              |                             | 1.3                        |                            | 1.8                        |  |
| Sound Pressure Level                  | Indoor (Cooling)                | H/M/L/Q      | dB(A)           | 38/33/29/20                      |                             | 40/34/29/20                |                            | 40/35/30/20                |  |
|                                       | Indoor (Heating)                | H/M/L/Q      |                 | 41/35/31/22                      |                             | 42/36/31/22                |                            | 42/38/33/22                |  |
|                                       | Outdoor (Cooling/Heating)       | High         |                 | 46/46                            |                             | 46/46                      |                            | 50/50                      |  |
|                                       | Indoor (Cooling/Heating)        | High         |                 | 54/56                            |                             | 55/57                      |                            | 55/58                      |  |
| Sound Power Level                     | Outdoor (Cooling/Heating)       | High         |                 | 61/61                            |                             | 61/62                      |                            | 65/65                      |  |
|                                       | Indoor/Outdoor (Cooling)        | High         |                 | 650/1,650                        |                             | 700/1,650                  |                            | 700/1,700                  |  |
| Airflow Rate                          | Indoor/Outdoor (Heating)        | High         |                 | 720/1,450                        |                             | 750/1,450                  |                            | 770/1,470                  |  |
|                                       | Indoor                          |              |                 | 295 × 950 (wall side: 840) × 230 |                             |                            |                            |                            |  |
| Net Dimensions H x W x D              | Outdoor                         | mm           | 541 × 663 × 290 |                                  | 541 × 663 × 290             |                            | 541 × 663 × 290            |                            |  |
| Weight                                | Indoor                          | kg           | 11              |                                  | 11                          |                            | 11                         |                            |  |
|                                       | Outdoor                         | kg           | 23              |                                  | 23                          |                            | 25                         |                            |  |
| Connection Pipe Diameter (Liquid/Gas) |                                 |              | mm              | 6.35/9.52                        |                             | 6.35/9.52                  |                            | 6.35/9.52                  |  |
| Drain Hose Diameter (I.D./O.D.)       |                                 |              | mm              | 13.8/15.0 to 16.8                |                             | 13.8/15.0 to 16.8          |                            | 13.8/15.0 to 16.8          |  |
| Max. Pipe Length (Pre-Charge)         |                                 |              | m               | 20 (15)                          |                             | 20 (15)                    |                            | 20 (15)                    |  |
| Max. Height Difference                |                                 |              |                 | 15                               |                             | 15                         |                            | 15                         |  |
| Operating Range                       | Cooling                         | °CDB         | -10 to 46       |                                  | -10 to 46                   |                            | -10 to 46                  |                            |  |
|                                       | Heating                         | °CDB         | -15 to 24       |                                  | -15 to 24                   |                            | -15 to 24                  |                            |  |
| Refrigerant                           | Type (Global Warming Potential) |              | R32 (675)       |                                  | R32 (675)                   |                            | R32 (675)                  |                            |  |
|                                       | Charge                          | kg (CO2eq-T) | 0.6 (0.405)     |                                  | 0.6 (0.405)                 |                            | 0.7 (0.473)                |                            |  |

## Optional parts


\* For optional parts compatibility of Intesis devices, please refer to the optional parts compatibility list page C-050 to C-053 and C-066.

|  |            |                             |            |  |            |
|--|------------|-----------------------------|------------|--|------------|
| Wired Remote Controller (Design type):             | UTY-RVRY   | Simple remote controller:   | UTY-RSRY   | Network Converter for single split (DC power supply type): | UTY-VTGX   |
| Compact wired remote controller:                   | UTY-RCRYZ1 | Communication kit:          | UTY-TWRXZ2 | Network Converter for single split (AC power supply type): | UTY-VTGXV  |
| Wired remote controller (touch panel):             | UTY-RNRYZ5 | External connect kit:       | UTY-XWZX   | Silver Ion filter:   | UTR-FAT6-5 |
| Wired remote controller:                           | UTY-RLRY   |                             | UTY-XWZXZ5 | External input and output PCB*1:                           | UTY-XCSXZ2 |
| Simple remote controller (without operation mode): | UTY-RHRY   | External switch controller: | UTY-TERX   |  |            |

\*1 It is required when 2 or more external input and output ports are used.

## Dimensions

(Unit: mm)

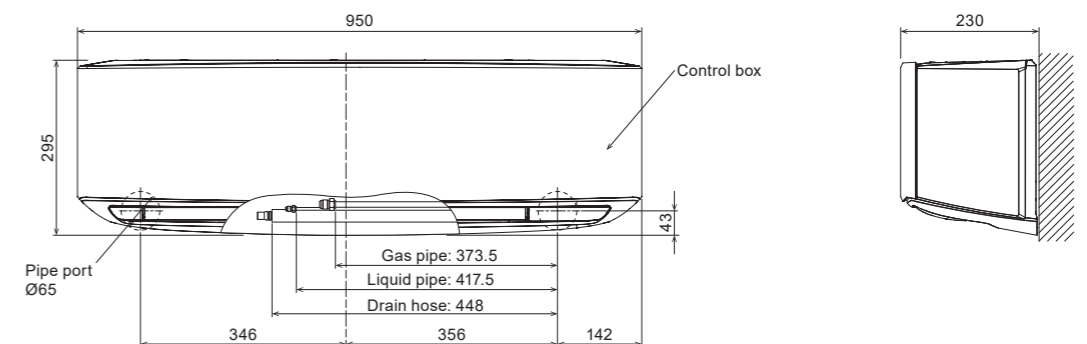

# Wall-mounted type

Built-in WLAN adapter model  
Standard Range  
High-Efficiency & Comfort

KM Series



## Slim & stylish square design

The slim and stylish square design of this indoor unit is realized by using a high-density, multipath heat exchanger and a high-efficiency wind blower.



## Warm & gentle color option

Both white and soft black color are relatively gentle tones and no strong contrast, each color harmonize with the environment and create a warm atmosphere.

## High energy saving

High-efficiency has been achieved by the lambda-shaped heat exchanger, large cross-flow fan, and the new refrigerant.

Rank Cooling A++ Heating A++\*

SEER 8.40\* SCOP 4.60\*

\*07/09/12 models

## Comfortable airflow & Quiet operation

The large louver and the new air-blowing structure create a comfortable air flow that spreads all the way down to the user's feet with quiet operation.

Quiet & Comfort

20 dB(A)

Cooling only

## Smart device control

A WLAN adapter is included as standard equipment. By installing the AIRSTAGE mobile app on your smart device, you can check and control the operating status of the air conditioner from anywhere indoors or outdoors.


\* See page C-020 for details on smart device control.



## Refrigerant cycle monitor (Option)

Wired Remote Controller (Touch Panel) will support to display some sensor values for maintenance and service support.

\*Wired remote controller (UTY-RNRYZ5 or UTY-RVRY) is required.

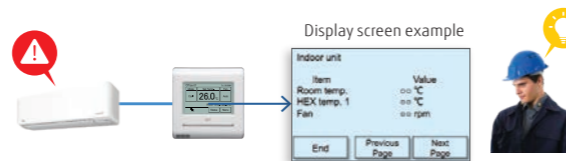

Model: ASEH07KMCG / ASEH09KMCG / ASEH12KMCG / ASEH14KMCG  
ASEH07KMCG-B / ASEH09KMCG-B / ASEH12KMCG-B / ASEH14KMCG-B



## Specifications

| Model name                            | Indoor unit                     |              | ASEH07KMCG / ASEH07KMCG-B |  | ASEH09KMCG / ASEH09KMCG-B |  | ASEH12KMCG / ASEH12KMCG-B |  | ASEH14KMCG / ASEH14KMCG-B |  |
|---------------------------------------|---------------------------------|--------------|---------------------------|--|---------------------------|--|---------------------------|--|---------------------------|--|
|                                       | Outdoor unit                    |              | AOEH07KMCG                |  | AOEH09KMCG                |  | AOEH12KMCG                |  | AOEH14KMCG                |  |
| Power Source                          | Single phase, ~230 V, 50 Hz     |              |                           |  |                           |  |                           |  |                           |  |
| Capacity                              | Cooling                         | Rated        | 2.0                       |  | 2.5                       |  | 3.4                       |  | 4.2                       |  |
|                                       |                                 | Min.-Max.    | 0.9-3.0                   |  | 0.9-3.2                   |  | 0.9-3.9                   |  | 0.9-4.4                   |  |
| Capacity                              | Heating                         | Rated        | 2.5                       |  | 2.8                       |  | 4.0                       |  | 5.4                       |  |
|                                       |                                 | Min.-Max.    | 0.9-3.4                   |  | 0.9-4.0                   |  | 0.9-5.3                   |  | 0.9-6.0                   |  |
| Input Power                           | Cooling/Heating                 | kW           | 0.450 / 0.555             |  | 0.650 / 0.620             |  | 0.960 / 1.020             |  | 1.220 / 1.410             |  |
| EER                                   | Cooling                         | W/W          | 4.43                      |  | 3.85                      |  | 3.54                      |  | 3.44                      |  |
| COP                                   | Heating                         | W/W          | 4.52                      |  | 4.52                      |  | 3.92                      |  | 3.83                      |  |
| Pdesign                               | Cooling/Heating (-10°C)         | kW           | 2.0 / 2.3                 |  | 2.5 / 2.4                 |  | 3.4 / 2.5                 |  | 4.2 / 4.0                 |  |
| SEER                                  | Cooling                         | W/W          | 8.40                      |  | 8.40                      |  | 7.70                      |  | 7.10                      |  |
| SCOP                                  | Heating (Average)               | W/W          | 4.60                      |  | 4.60                      |  | 4.60                      |  | 4.10                      |  |
| Energy Efficiency Class               | Cooling                         |              | A++                       |  | A++                       |  | A++                       |  | A++                       |  |
|                                       | Heating (Average)               |              | A++                       |  | A++                       |  | A++                       |  | A+                        |  |
| Max. Operating Current                | Cooling/Heating                 | A            | 6.5 / 9.0                 |  | 6.5 / 9.0                 |  | 6.5 / 9.0                 |  | 6.5 / 9.0                 |  |
| Annual Energy Consumption             | Cooling                         | kWh/a        | 83                        |  | 104                       |  | 155                       |  | 207                       |  |
|                                       | Heating                         | kWh/a        | 700                       |  | 730                       |  | 761                       |  | 1,366                     |  |
| Moisture Removal                      |                                 | l/h          | 1.0                       |  | 1.3                       |  | 1.8                       |  | 2.1                       |  |
| Sound Pressure Level                  | Indoor (Cooling)                | H/M/L/Q      | 38 / 33 / 29 / 20         |  | 40 / 34 / 29 / 20         |  | 40 / 35 / 30 / 20         |  | 43 / 36 / 30 / 20         |  |
|                                       | Indoor (Heating)                | H/M/L/Q      | 41 / 35 / 31 / 22         |  | 42 / 36 / 31 / 22         |  | 42 / 38 / 33 / 22         |  | 44 / 39 / 33 / 24         |  |
| Sound Power Level                     | Outdoor (Cooling/Heating)       | High         | 46 / 46                   |  | 46 / 46                   |  | 50 / 50                   |  | 50 / 50                   |  |
|                                       | Indoor (Cooling/Heating)        | High         | 54 / 56                   |  | 55 / 57                   |  | 55 / 58                   |  | 57 / 59                   |  |
| Airflow Rate                          | Indoor/Outdoor (Cooling)        | High         | 650 / 1,650               |  | 700 / 1,650               |  | 700 / 1,700               |  | 770 / 1,680               |  |
|                                       | Indoor/Outdoor (Heating)        | High         | 720 / 1,450               |  | 750 / 1,450               |  | 780 / 1,470               |  | 820 / 1,580               |  |
| Net Dimensions H x W x D              | Indoor                          | mm           | 270 x 834 x 222           |  | 270 x 834 x 222           |  | 270 x 834 x 222           |  | 270 x 834 x 222           |  |
|                                       | Outdoor                         | mm           | 541 x 663 x 290           |  | 541 x 663 x 290           |  | 541 x 663 x 290           |  | 542 x 799 x 290           |  |
| Weight                                | Indoor                          | kg           | 10                        |  | 10                        |  | 10                        |  | 10                        |  |
|                                       | Outdoor                         | kg           | 22                        |  | 22                        |  | 24                        |  | 31                        |  |
| Connection Pipe Diameter (Liquid/Gas) |                                 | mm           | 6.35 / 9.52               |  | 6.35 / 9.52               |  | 6.35 / 9.52               |  | 6.35 / 9.52               |  |
| Drain Hose Diameter (I.D./O.D.)       |                                 | mm           | 13.8 / 15 to 16.8         |  | 13.8 / 15 to 16.8         |  | 13.8 / 15 to 16.8         |  | 13.8 / 15 to 16.8         |  |
| Max. Pipe Length (Pre-Charge)         |                                 | m            | 20 (15)                   |  | 20 (15)                   |  | 20 (15)                   |  | 20 (15)                   |  |
| Max. Height Difference                |                                 | m            | 15                        |  | 15                        |  | 15                        |  | 15                        |  |
| Operating Range                       | Cooling                         | °CDB         | -10 to 50                 |  | -10 to 50                 |  | -10 to 50                 |  | -10 to 50                 |  |
|                                       | Heating                         | °CDB         | -15 to 24                 |  | -15 to 24                 |  | -15 to 24                 |  | -15 to 24                 |  |
| Refrigerant                           | Type (Global Warming Potential) |              | R32 (675)                 |  | R32 (675)                 |  | R32 (675)                 |  | R32 (675)                 |  |
|                                       | Charge                          | kg (CO2eq-T) | 0.60 (0.405)              |  | 0.60 (0.405)              |  | 0.70 (0.473)              |  | 0.85 (0.574)              |  |

## Optional parts


\* For optional parts compatibility of Intesis devices, please refer to the optional parts compatibility list page C-050 to C-053 and C-066.

|   |                                       |  |
|---|---------------------------------------|--|
| Wired Remote Controller (Design type): UTY-RVRY             | Simple remote controller: UTY-RSRY    | Network Converter for single split (DC power supply type): UTY-VTGX  |
| Compact wired remote controller: UTY-RCRYZ1                 | Communication kit: UTY-TWRXZ2         | Network Converter for single split (AC power supply type): UTY-VTGXV |
| Wired remote controller (touch panel): UTY-RNRYZ5           | External connect kit: UTY-XWZX        | Silver Ion filter: UTR-FA16-5  |
| Wired remote controller: UTY-RLRY                           | External switch controller: UTY-XWZX5 | External input and output PCB*: UTY-XCSXZ2                           |
| Simple remote controller (without operation mode): UTY-RHRY | External switch controller: UTY-TERX  |  |

\*1 It is required when 2 or more external input and output ports are used.

## Dimensions

(Unit: mm)

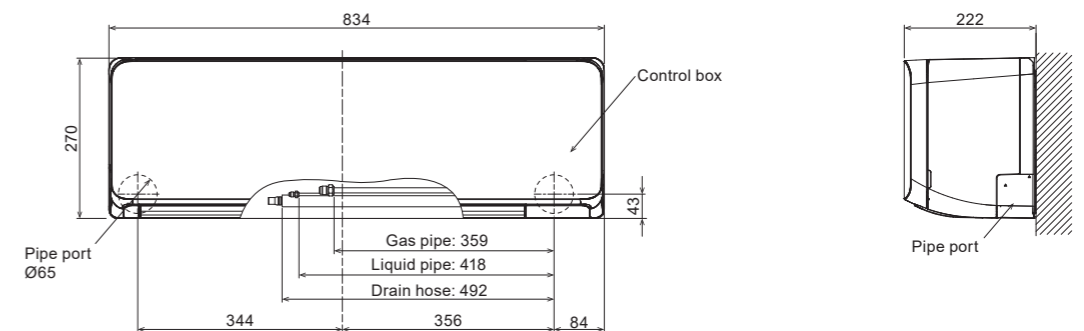

# Wall-mounted type

Built-in WLAN adapter model  
ECO Range  
Compact Size



## Elegant & smart square design

An elegant and smart type in the eco range. The delicate shading of the ridge line makes the unit an accessory for the room.



## High energy saving

The size of the heat exchanger has increased to improve performance, making it more powerful despite its compact size.

Rank Cooling A++ Heating A+

SEER 7.8\* SCOP 4.4

\* 07 model

## Comfortable airflow & Quiet operation

The large louver and the new air-blowing structure create a comfortable air flow that spreads all the way down to the user's feet with quiet operation.

Quiet & Comfort

20 dB(A)

Cooling only

## Smart device control

A WLAN adapter is included as standard equipment. By installing the AIRSTAGE mobile app on your smart device, you can check and control the operating status of the air conditioner from anywhere indoors or outdoors.

\* See page C-020 for details on smart device control.

AIRSTAGE Mobile

"ON" before returning home.

## Highly efficient operation even at high outdoor temperatures


Even when installed in areas with high outdoor air temperatures (Max. 50°C\*), it is comfortable because it can cool the interior well.

\* suction temperature of the outdoor unit

Operation Range MAX 50°C (Cooling operation)



Model: ASEH07KNCA / ASEH09KNCA / ASEH12KNCA

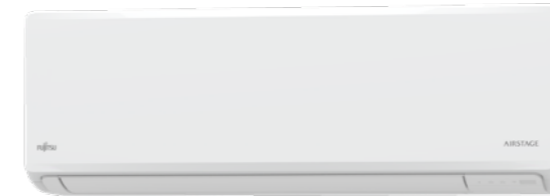

## Specifications

| Model name                            | Indoor unit                     |           | ASEH07KNCA        | ASEH09KNCA        | ASEH12KNCA        |
|---------------------------------------|---------------------------------|-----------|-------------------|-------------------|-------------------|
|                                       | Outdoor unit                    |           | AOEH07KNCA        | AOEH09KNCA        | AOEH12KNCA        |
| Power Source                          | Single phase, ~230 V, 50 Hz     |           |                   |                   |                   |
| Capacity                              | Cooling                         | Rated     | 2.0               | 2.5               | 3.4               |
|                                       |                                 | Min.-Max. | 0.9-2.9           | 0.9-3.1           | 0.9-3.8           |
|                                       | Heating                         | Rated     | 2.5               | 2.8               | 3.8               |
| Min.-Max.                             |                                 | 0.9-3.4   | 0.9-4.0           | 0.9-4.8           |                   |
| Input Power                           | Cooling/Heating                 | kW        | 0.50 / 0.58       | 0.74 / 0.70       | 1.05 / 1.02       |
| EER                                   | Cooling                         | W/W       | 4.00              | 3.38              | 3.24              |
|                                       | Heating                         | W/W       | 4.31              | 4.00              | 3.73              |
| Pdesign                               | Cooling/Heating (-10°C)         | kW        | 2.0 / 2.3         | 2.5 / 2.4         | 3.4 / 2.5         |
| SEER                                  | Cooling                         | W/W       | 7.8               | 7.4               | 7.0               |
|                                       | Heating (Average)               | W/W       | 4.4               | 4.4               | 4.4               |
| Energy Efficiency Class               | Cooling                         |           | A++               | A++               | A++               |
|                                       | Heating (Average)               |           | A+                | A+                | A+                |
| Max. Operating Current                | Cooling/Heating                 | A         | 6.5 / 9.0         | 6.5 / 9.0         | 6.5 / 9.0         |
| Annual Energy Consumption             | Cooling                         | kWh/a     | 90                | 118               | 170               |
|                                       | Heating                         | kWh/a     | 731               | 763               | 795               |
| Moisture Removal                      |                                 | l/h       | 1.0               | 1.0               | 1.4               |
| Sound Pressure Level                  | Indoor (Cooling)                | H/M/L/Q   | 36 / 33 / 29 / 20 | 38 / 35 / 29 / 20 | 40 / 36 / 32 / 20 |
|                                       | Indoor (Heating)                | H/M/L/Q   | 38 / 33 / 30 / 22 | 38 / 33 / 30 / 22 | 39 / 35 / 31 / 22 |
| Sound Power Level                     | Outdoor (Cooling/Heating)       | High      | 43 / 44           | 44 / 45           | 49 / 49           |
|                                       | Indoor (Cooling/Heating)        | High      | 51 / 52           | 53 / 52           | 55 / 53           |
| Airflow Rate                          | Indoor/Outdoor (Cooling)        | High      | 530 / 1,430       | 580 / 1,430       | 600 / 1,460       |
|                                       | Indoor/Outdoor (Heating)        | High      | 580 / 1,390       | 580 / 1,390       | 600 / 1,360       |
| Net Dimensions H x W x D              | Indoor                          | mm        | 270 x 784 x 222   | 270 x 784 x 222   | 270 x 784 x 222   |
|                                       | Outdoor                         | mm        | 541 x 663 x 290   | 541 x 663 x 290   | 541 x 663 x 290   |
| Weight                                | Indoor                          | kg        | 9                 | 9                 | 9                 |
|                                       | Outdoor                         | kg        | 22                | 22                | 24                |
| Connection Pipe Diameter (Liquid/Gas) |                                 | mm        | 6.35 / 9.52       | 6.35 / 9.52       | 6.35 / 9.52       |
| Drain Hose Diameter (I.D./O.D.)       |                                 | mm        | 13.8 / 15 to 16.8 | 13.8 / 15 to 16.8 | 13.8 / 15 to 16.8 |
| Max. Pipe Length (Pre-Charge)         |                                 | m         | 20 (15)           | 20 (15)           | 20 (15)           |
| Max. Height Difference                |                                 | m         | 15                | 15                | 15                |
| Operating Range                       | Cooling                         | °CDB      | -10 to 50         | -10 to 50         | -10 to 50         |
|                                       | Heating                         | °CDB      | -15 to 24         | -15 to 24         | -15 to 24         |
| Refrigerant Charge                    | Type (Global Warming Potential) |           | R32 (675)         | R32 (675)         | R32 (675)         |
|                                       | kg (CO2eq-T)                    |           | 0.57 (0.385)      | 0.57 (0.385)      | 0.65 (0.439)      |


## Optional parts

\* For optional parts compatibility of Intesis devices, please refer to the optional parts compatibility list page C-050 to C-053 and C-066.

Silver Ion Filter: UTR-FA16-5

## Dimensions

(Unit: mm)

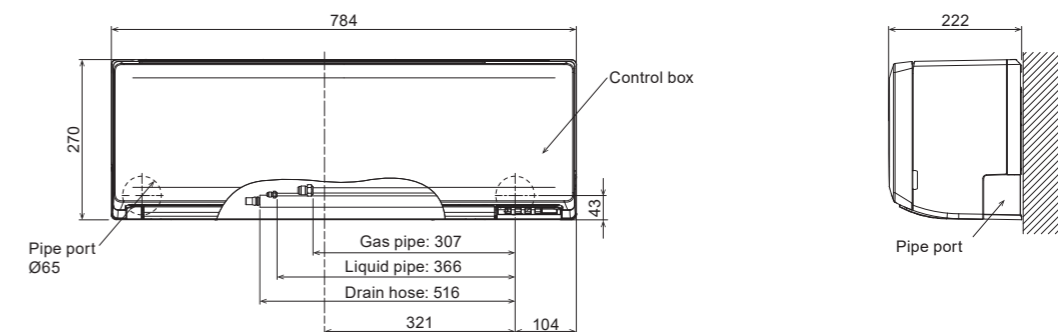

# Wall-mounted type

## Standard Range

High-Efficiency & Large Rooms




KM Series



### High energy saving


High-efficiency has been achieved by the lambda-shaped heat exchanger, large cross-flow fan, and the new refrigerant.

Rank **A++**  
 SEER **7.8**  
 SCOP **4.6**  
\*18 model

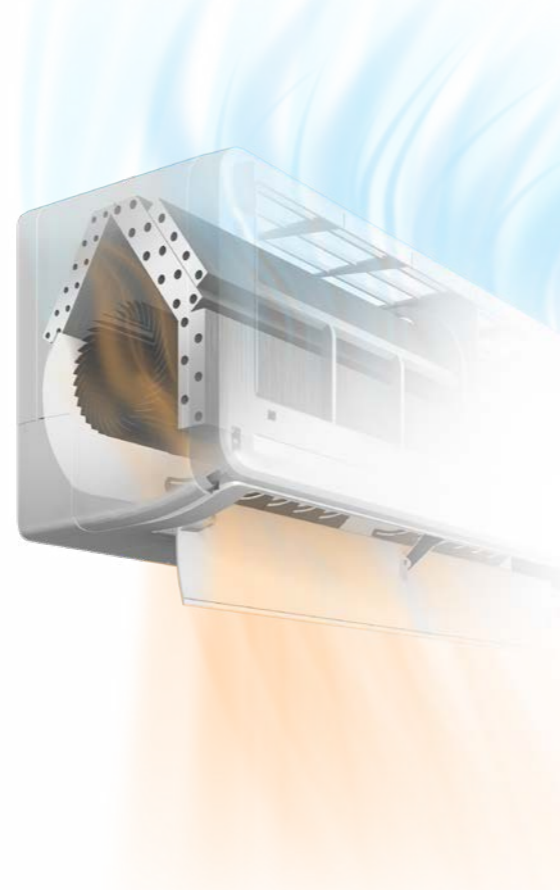


#### Hybrid-heat exchanger

The large hybrid heat exchanger has greatly improved the heat exchange efficiency to achieve top-level SEER and SCOP.



#### Ø107 Large cross-flow fan

The large-diameter fan generates air volume efficiently even at reduced power.



### Smart device control (Option)

With the optional WLAN adapter installed in the air conditioner, you can control it from anywhere with your smart device.

\* For more information about smart device control, please refer to the page C-020.




You need to install the AIRSTAGE Mobile app on your smart device in order to control the air conditioner.



### Easy access to the flare pipe connection

Installation when left outlet piping is easier by removable under cover of the indoor unit chassis. Installation when center outlet piping is easier by design change of wall hook bracket.

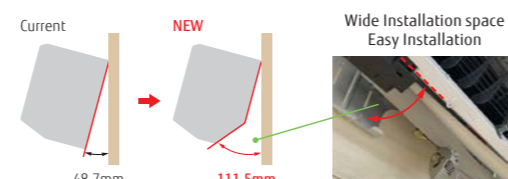

Model: ASEG18KMTE / ASEG24KMTE



For ASEG18KMTE



For ASEG24KMTE

### Specifications

| Model name                            | Indoor unit                     |                   | Outdoor unit    |                   | ASEG18KMTE      | ASEG24KMTE        |
|---------------------------------------|---------------------------------|-------------------|-----------------|-------------------|-----------------|-------------------|
|                                       | AOEG18KMTA                      |                   | AOEG24KMTA      |                   |                 |                   |
| Power Source                          | Single phase, ~230 V, 50 Hz     |                   |                 |                   |                 |                   |
| Capacity                              | Cooling                         | Rated             | kW              | 5.2               |                 | 7.1               |
|                                       |                                 | Min.-Max.         |                 | 0.9-6.0           |                 | 0.9-8.3           |
|                                       | Heating                         | Rated             | 6.3             |                   | 8.0             |                   |
| Min.-Max.                             |                                 | 0.9-8.7           |                 | 0.9-10.1          |                 |                   |
| Input Power                           | Cooling/Heating                 |                   | kW              | 1.39/1.56         |                 | 2.08/1.91         |
| EER                                   | Cooling                         |                   |                 | 3.74              |                 | 3.41              |
|                                       |                                 | Heating           |                 | 4.04              |                 | 4.19              |
| COP                                   | Cooling/Heating (-10°C)         |                   |                 | 5.2/4.8           |                 | 7.1/7.1           |
|                                       |                                 | Heating           |                 | 7.77              |                 | 7.30              |
| SEER                                  | Cooling                         |                   |                 | 4.60              |                 | 4.20              |
|                                       |                                 | Heating (Average) |                 | A++               |                 | A++               |
| SCOP                                  | Heating (Average)               |                   |                 | A++               |                 | A+                |
|                                       |                                 | Cooling/Heating   |                 | A                 | 9.5/13.5        |                   |
| Annual Energy Consumption             | Cooling                         |                   |                 | 234               |                 | 340               |
|                                       |                                 | Heating           |                 | 1,460             |                 | 2,362             |
| Moisture Removal                      |                                 |                   | l/h             | 1.7               |                 | 2.7               |
|                                       | Indoor (Cooling)                | H/M/L/Q           | 45/40/35/29     |                   | 49/40/35/29     |                   |
| Sound Pressure Level                  | Indoor (Heating)                | H/M/L/Q           | 46/40/35/29     |                   | 49/40/35/29     |                   |
|                                       | Outdoor (Cooling/Heating)       | High              | 50/50           |                   | 54/52           |                   |
| Sound Power Level                     | Indoor (Cooling/Heating)        | High              | 60/61           |                   | 65/65           |                   |
|                                       | Outdoor (Cooling/Heating)       | High              | 65/65           |                   | 67/66           |                   |
| Airflow Rate                          | Indoor/Outdoor (Cooling)        | High              | 980/2,350       |                   | 1,170/3,240     |                   |
|                                       | Indoor/Outdoor (Heating)        | High              | 1,020/2,100     |                   | 1,170/2,820     |                   |
| Net Dimensions<br>H x W x D           | Indoor                          | mm                | 280 x 980 x 240 |                   | 280 x 980 x 240 |                   |
|                                       | Outdoor                         | mm                | 632 x 799 x 290 |                   | 716 x 820 x 315 |                   |
| Weight                                | Indoor                          | kg                | 12.5            |                   | 12.5            |                   |
|                                       | Outdoor                         | kg                | 36              |                   | 42              |                   |
| Connection Pipe Diameter (Liquid/Gas) |                                 |                   | mm              | 6.35/12.70        |                 | 6.35/12.70        |
| Drain Hose Diameter (I.D./O.D.)       |                                 |                   |                 | 13.8/15.8 to 16.7 |                 | 13.8/15.8 to 16.7 |
| Max. Pipe Length (Pre-Charge)         |                                 |                   | m               | 25 (15)           |                 | 30 (15)           |
| Max. Height Difference                |                                 |                   |                 | 20                |                 | 25                |
| Operating Range                       | Cooling                         | °CDB              | -10 to 46       |                   | -10 to 46       |                   |
|                                       | Heating                         |                   | -15 to 24       |                   | -15 to 24       |                   |
| Refrigerant                           | Type (Global Warming Potential) |                   |                 | R32 (675)         |                 | R32 (675)         |
|                                       | Charge                          | kg (CO2eq-T)      |                 | 1.02 (0.689)      |                 | 1.32 (0.891)      |

### Optional parts


\* For optional parts compatibility of Intesis devices, please refer to the optional parts compatibility list page C-050 to C-053 and C-066.

|  |            |                                  |              |  |            |
|--|------------|----------------------------------|--------------|--|------------|
| Wired Remote Controller (Design type):             | UTY-RVRY   | External connect kit:            | UTY-XWZX25   | Network Converter for single split (DC power supply type): | UTY-VTGX   |
| Compact wired remote controller:                   | UTY-RCRYZ1 | Communication kit:               | UTY-TWRXZ2   | Network Converter for single split (AC power supply type): | UTY-VTGXV  |
| Wired remote controller (touch panel):             | UTY-RNRYZ5 | External input and output PCB*1: | UTY-XCSXZ2   | Silver Ion filter:   | UTR-FA16-5 |
| Wired remote controller:                           | UTY-RLRY   | WLAN adapter:                    | UTY-TFSXF2   | External switch controller:                                | UTY-TERX   |
| Simple remote controller (without operation mode): | UTY-RHRY   |                                  | UTY-TFSXH3   |  |            |
| Simple remote controller:                          | UTY-RSRY   |                                  | FG-AC-WIF1Z1 |  |            |

\*1 It is required when 2 or more external input and output ports are used.

### Dimensions

(Unit: mm)

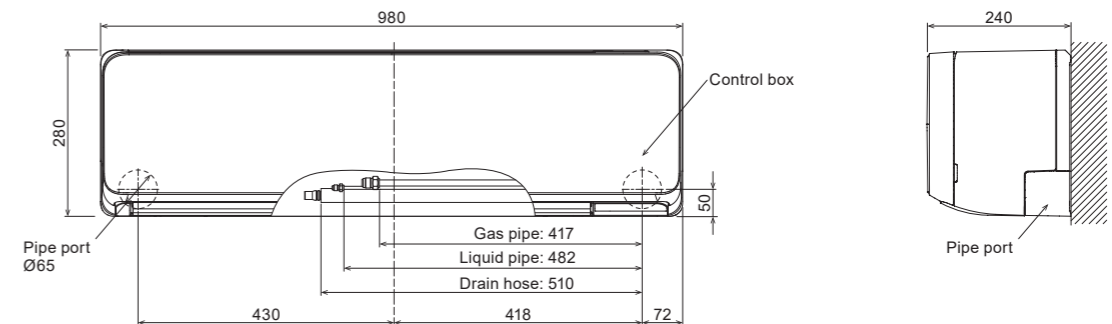

# Wall-mounted type

## Standard Range

High-Efficiency & Large Rooms




KM Series



### Special Cooling


When it is necessary to be constantly cooled such as rooms with a high heat load, it is possible to operate the cooling with keeping performance even when the outside temperature is low.

- \*Wired remote controller (UTY-RNRYZ5) is required.
- \*Please note that we will not provide compensation for any damages suffered to your appliances or data as a result of using this function.
- \*Please use it in low-humidity environments.
- Condensation and other problems may be caused when used in high-humidity environments.

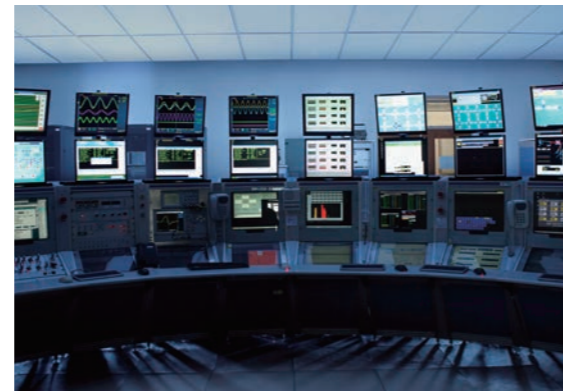

### Human sensor


The Human sensor monitors the movements of people in a room and operates the air conditioner at a lower capacity when people leave the room. When people come back to the room, it automatically returns to the previous operating mode.

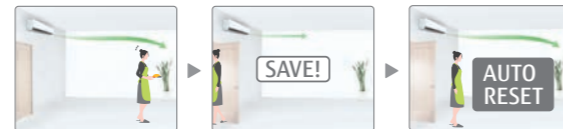

### Refrigerant cycle monitor (Option)

Wired Remote Controller (Touch Panel) will support to display some sensor values for maintenance and service support.

- \*Wired remote controller (UTY-RNRYZ5 or UTY-RVRY) is required.

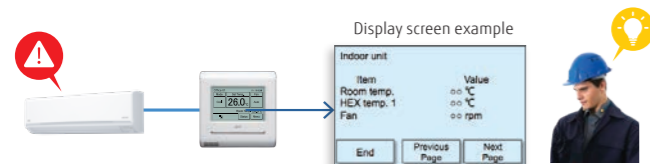

### Smart device control (Option)

With the optional WLAN adapter installed in the air conditioner, you can control it from anywhere with your smart device.

- \* For more information about smart device control, please refer to the page C-020.



### Model: ASEH30KMTB / ASEH36KMTB



Wireless RC



### Specifications

| Model name                            | Indoor unit                     |           | ASEH30KMTB                |             | ASEH36KMTB        |             |
|---------------------------------------|---------------------------------|-----------|---------------------------|-------------|-------------------|-------------|
|                                       | Outdoor unit                    |           | AOEH30KMTB                |             | AOEH36KMTB        |             |
| Power Source                          |                                 |           | Single phase, ~230V, 50Hz |             |                   |             |
| Capacity                              | Cooling                         | Rated     | 8.0                       |             | 9.4               |             |
|                                       |                                 | Min.-Max. | 2.9-9.0                   |             | 2.9-10.0          |             |
|                                       | Heating                         | Rated     | 8.8                       |             | 10.1              |             |
| Min.-Max.                             |                                 | 2.2-11.8  |                           | 2.7-12.6    |                   |             |
| Input Power                           | Cooling/Heating                 | kW        | 2.33/2.20                 |             | 3.16/2.73         |             |
| EER                                   | Cooling                         |           | 3.43                      |             | 2.97              |             |
| COP                                   | Heating                         | W/W       | 4.00                      |             | 3.70              |             |
| Pdesign                               | Cooling/Heating (-10°C)         | kW        | 8.0/6.5                   |             | 9.4/7.1           |             |
| SEER                                  | Cooling                         | W/W       | 6.68                      |             | 6.10              |             |
| SCOP                                  | Heating (Average)               |           | 4.50                      |             | 4.50              |             |
| Energy Efficiency Class               | Cooling                         |           | A++                       |             | A++               |             |
|                                       | Heating (Average)               |           | A+                        |             | A+                |             |
| Max. Operating Current                | Cooling/Heating                 | A         | 21.0/21.0                 |             | 21.5/21.5         |             |
| Annual Energy Consumption             | Cooling                         | kWh/a     | 419                       |             | 534               |             |
|                                       | Heating                         |           | 1,994                     |             | 2,189             |             |
| Moisture Removal                      |                                 |           | 2.6                       |             | 3.8               |             |
|                                       | Indoor (Cooling)                | H/M/L/Q   | 50/44/40/33               |             | 50/44/40/33       |             |
| Sound Pressure Level                  | Indoor (Heating)                | H/M/L/Q   | 49/44/39/33               |             | 49/44/39/33       |             |
|                                       | Outdoor (Cooling/Heating)       | High      | 53/55                     |             | 55/55             |             |
| Sound Power Level                     | Indoor (Cooling/Heating)        | High      | 65/65                     |             | 65/65             |             |
|                                       | Outdoor (Cooling/Heating)       | High      | 68/69                     |             | 70/70             |             |
| Airflow Rate                          | Indoor/Outdoor (Cooling)        | High      | 1,330/3,750               |             | 1,330/3,750       |             |
|                                       | Indoor/Outdoor (Heating)        | High      | 1,330/3,750               |             | 1,330/3,750       |             |
| Net Dimensions<br>H x W x D           | Indoor                          | mm        | 340 x 1,150 x 280         |             | 340 x 1,150 x 280 |             |
|                                       | Outdoor                         | mm        | 788 x 940 x 320           |             | 788 x 940 x 320   |             |
| Weight                                | Indoor                          | kg        | 18.5                      |             | 18.5              |             |
|                                       | Outdoor                         | kg        | 52.0                      |             | 52.0              |             |
| Connection Pipe Diameter (Liquid/Gas) |                                 |           | 9.52/15.88                |             | 9.52/15.88        |             |
| Drain Hose Diameter (I.D./O.D.)       |                                 |           | 13.8/15.8 to 16.7         |             | 13.8/15.8 to 16.7 |             |
| Max. Pipe Length (Pre-Charge)         |                                 |           | 50(30)                    |             | 50(30)            |             |
| Max. Height Difference                |                                 |           | 30                        |             | 30                |             |
| Operating Range                       | Cooling                         | °CDB      | -15to46                   |             | -15to46           |             |
|                                       | Heating                         |           | -15to24                   |             | -15to24           |             |
| Refrigerant                           | Type (Global Warming Potential) |           | R32(675)                  |             | R32(675)          |             |
|                                       | Charge                          |           | kg (CO2eq-T)              | 1.90(1.283) |                   | 1.90(1.283) |

### Optional parts


\* For optional parts compatibility of Intesis devices, please refer to the optional parts compatibility list page C-050 to C-053 and C-066.

- |  |            |                                  |              |  |            |
|--|------------|----------------------------------|--------------|--|------------|
| Wired Remote Controller (Design type):             | UTY-RVRY   | External connect kit:            | UTY-XWZX25   | Network Converter for single split (DC power supply type): | UTY-VTGX   |
| Compact wired remote controller:                   | UTY-RCRYZ1 | Communication kit:               | UTY-TWRXZ2   | Network Converter for single split (AC power supply type): | UTY-VTGXV  |
| Wired remote controller (touch panel):             | UTY-RNRYZ5 | External input and output PCB*1: | UTY-XCSXZ2   | Silver Ion Filter:   | UTR-FA13-3 |
| Wired remote controller:                           | UTY-RLRY   | WLAN adapter:                    | UTY-TFSXF2   | External switch controller:                                | UTY-TERX   |
| Simple remote controller (without operation mode): | UTY-RHRY   |                                  | UTY-TFSXH3   |  |            |
| Simple remote controller:                          | UTY-RSRY   |                                  | FG-AC-WIF1Z1 |  |            |

\*1 It is required when 2 or more external input and output ports are used.

### Dimensions

(Unit: mm)

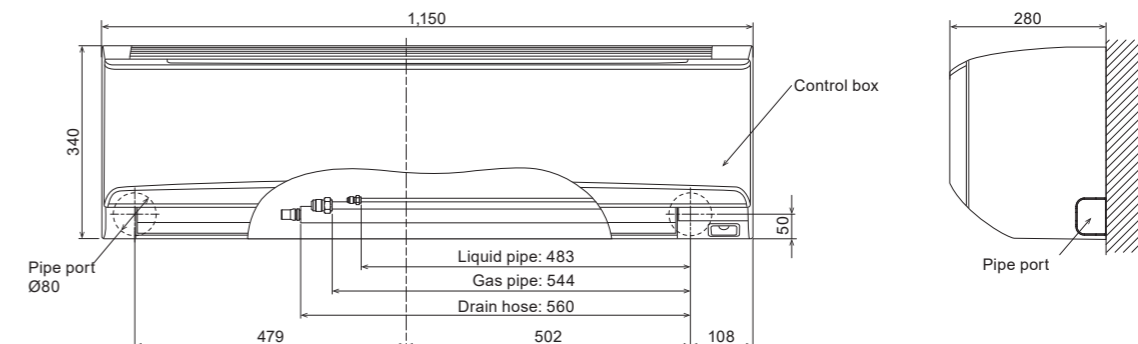

**Wall-mounted type**  
ECO Range  
Compact Size

KP Series



**Slim & stylish square design**

The slim and stylish square design of this indoor unit is realized by using a high-density, multipath heat exchanger and a high-efficiency wind blower.



**High energy saving**

High-efficiency has been achieved by the lambda-shaped heat exchanger, large cross-flow fan, and the new refrigerant.

Rank Cooling A++ Heating A+  
SEER 6.7<sup>\*1</sup> SCOP 4.1<sup>\*2</sup>  
\*1: 07/09 models \*2: 12 model

**Comfortable airflow & Quiet operation**

The large louver and the new air-blowing structure create a comfortable air flow that spreads all the way down to the user's feet with quiet operation.



**Smart device control (Option)**


With the optional WLAN adapter installed in the air conditioner, you can control it from anywhere with your smart device.

\* For more information about smart device control, please refer to the page C-020.



**Easy access to the flare pipe connection**

Installation when left outlet piping is easier by removable under cover of the indoor unit chassis. Installation when center outlet piping is easier by design change of wall hook bracket.

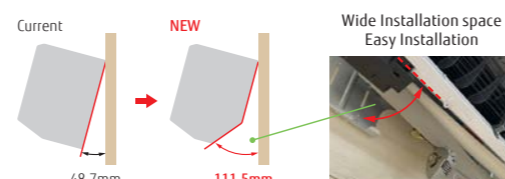

Model: ASEG07KPCE / ASEG09KPCE / ASEG12KPCE



**Specifications**

| Model name                      | Indoor unit                           |              | Outdoor unit    |                   | ASEG07KPCE      | ASEG09KPCE        | ASEG12KPCE      |                   |  |
|---------------------------------|---------------------------------------|--------------|-----------------|-------------------|-----------------|-------------------|-----------------|-------------------|--|
|                                 | AOEG07KPCA                            |              | AOEG09KPCA      |                   | AOEG12KPCA      |                   | AOEG12KPCA      |                   |  |
| Power Source                    | Single phase, ~230 V, 50 Hz           |              |                 |                   |                 |                   |                 |                   |  |
| Capacity                        | Cooling                               | Rated        | kW              | 2.0               |                 | 2.5               |                 | 3.4               |  |
|                                 |                                       | Min.-Max.    |                 | 0.9-2.8           |                 | 0.9-3.0           |                 | 0.9-3.7           |  |
|                                 | Heating                               | Rated        |                 | 2.5               |                 | 2.8               |                 | 3.8               |  |
| Min.-Max.                       |                                       | 0.9-3.4      |                 | 0.9-3.8           |                 | 0.9-4.8           |                 |                   |  |
| Input Power                     | Cooling/Heating                       |              | kW              | 0.48/0.63         |                 | 0.71/0.79         |                 | 1.00/1.14         |  |
| EER                             | Cooling                               |              | W/W             | 4.17              |                 | 3.52              |                 | 3.40              |  |
|                                 | Heating                               |              |                 | 3.97              |                 | 3.54              |                 | 3.33              |  |
| Pdesign                         | Cooling/Heating (-10°C)               |              | kW              | 2.0/2.2           |                 | 2.5/2.4           |                 | 3.4/2.5           |  |
| SEER                            | Cooling                               |              | W/W             | 6.70              |                 | 6.70              |                 | 6.30              |  |
|                                 | Heating (Average)                     |              |                 | 4.00              |                 | 4.00              |                 | 4.10              |  |
| Energy Efficiency Class         | Cooling                               |              | A               | A++               |                 | A++               |                 | A++               |  |
|                                 | Heating (Average)                     |              |                 | A+                |                 | A+                |                 | A+                |  |
| Max. Operating Current          | Cooling/Heating                       |              | A               | 6.5/9.0           |                 | 6.5/9.0           |                 | 6.5/9.0           |  |
| Annual Energy Consumption       | Cooling                               |              | kWh/a           | 104               |                 | 131               |                 | 189               |  |
|                                 | Heating                               |              |                 | 769               |                 | 840               |                 | 853               |  |
| Moisture Removal                | Cooling                               |              | l/h             | 1.0               |                 | 1.3               |                 | 1.8               |  |
| Sound Pressure Level            | Indoor (Cooling)                      | H/M/L/Q      | dB(A)           | 45/38/31/22       |                 | 45/38/31/22       |                 | 46/40/33/22       |  |
|                                 | Indoor (Heating)                      | H/M/L/Q      |                 | 45/40/36/26       |                 | 45/40/36/26       |                 | 46/40/35/27       |  |
| Sound Power Level               | Outdoor (Cooling/Heating)             | High         | dB(A)           | 45/46             |                 | 47/47             |                 | 49/51             |  |
|                                 | Indoor (Cooling/Heating)              | High         |                 | 57/58             |                 | 58/58             |                 | 59/59             |  |
|                                 | Outdoor (Cooling/Heating)             | High         |                 | 57/58             |                 | 59/59             |                 | 62/62             |  |
|                                 | Indoor/Outdoor (Cooling)              | High         |                 | 580/1,650         |                 | 580/1,650         |                 | 630/1,700         |  |
| Airflow Rate                    | Indoor/Outdoor (Heating)              | High         | m³/h            | 580/1,450         |                 | 580/1,450         |                 | 630/1,470         |  |
|                                 | Indoor                                | mm           |                 | 270 × 784 × 224   |                 | 270 × 784 × 224   |                 | 270 × 784 × 224   |  |
| Net Dimensions H x W x D        | Outdoor                               | mm           | 541 × 663 × 290 |                   | 541 × 663 × 290 |                   | 541 × 663 × 290 |                   |  |
|                                 | Indoor                                | kg           | 8               |                   | 8               |                   | 8               |                   |  |
| Weight                          | Outdoor                               | kg           | 23              |                   | 23              |                   | 25              |                   |  |
|                                 | Connection Pipe Diameter (Liquid/Gas) | mm           | 6.35/9.52       |                   | 6.35/9.52       |                   | 6.35/9.52       |                   |  |
| Drain Hose Diameter (I.D./O.D.) |                                       |              |                 | 11.8/15.0 to 16.8 |                 | 11.8/15.0 to 16.8 |                 | 11.8/15.0 to 16.8 |  |
| Max. Pipe Length (Pre-Charge)   |                                       |              |                 | 20 (15)           |                 | 20 (15)           |                 | 20 (15)           |  |
| Max. Height Difference          |                                       |              |                 | 15                |                 | 15                |                 | 15                |  |
| Operating Range                 | Cooling                               | °CDB         | -10 to 46       |                   | -10 to 46       |                   | -10 to 46       |                   |  |
|                                 | Heating                               | °CDB         | -15 to 24       |                   | -15 to 24       |                   | -15 to 24       |                   |  |
| Refrigerant                     | Type (Global Warming Potential)       | R32 (675)    |                 |                   | R32 (675)       |                   | R32 (675)       |                   |  |
|                                 | Charge                                | kg (CO2eq-T) | 0.55 (0.371)    |                   | 0.55 (0.371)    |                   | 0.59 (0.398)    |                   |  |


**Optional parts**

\* For optional parts compatibility of Intesis devices, please refer to the optional parts compatibility list page C-050 to C-053 and C-066.

- WLAN adapter: UTY-TFSXF2, UTY-TFSXH3
- Silver Ion Filter: UTR-FA16-5

**Dimensions**

(Unit: mm)

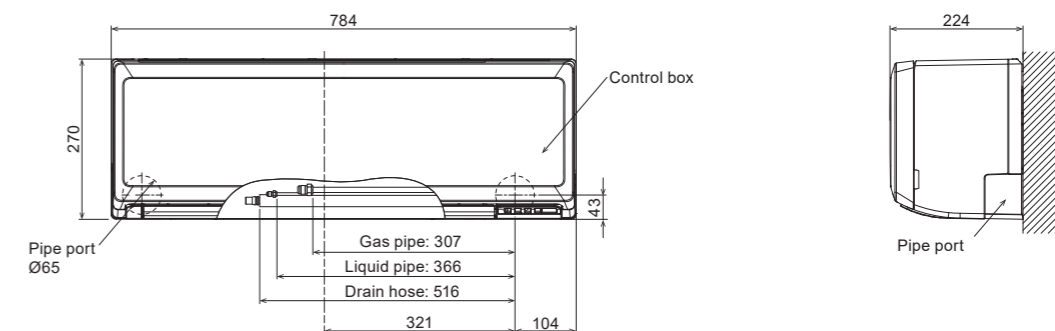

# Wall-mounted type ECO Range Comfort for Large Rooms



KL Series




## Narrow width & Compact design

Compact and versatile. Powerful airflow is realized despite the 790-mm width compact design for small spaces such as bedrooms or home offices.




## Economy operation

Set temperature automatically increases or decreases by 1°C. The thermostat setting is adjusted automatically according to the room temperature to avoid unnecessary cooling or heating.

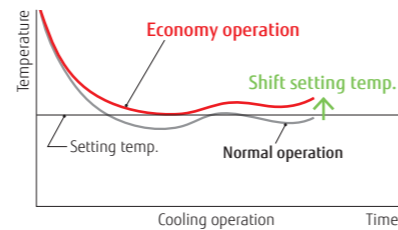

## Powerful operation


In powerful operation mode, the compressor operates at maximum speed for 20 minutes to provide a powerful airflow. Rapid cooling and heating makes the room comfortable quickly.

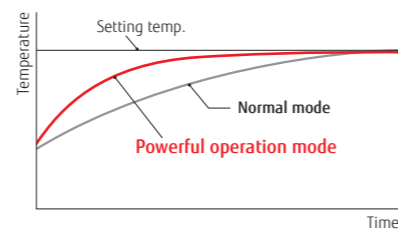

## ON-OFF programmable timer

You can set ON/OFF or OFF/ON times depending on your lifestyle needs. (Setting time: 0.5, 1, 1.5, 2, 2.5, ----9.5, 10, 11, 12 hours)

## Low ambient operation

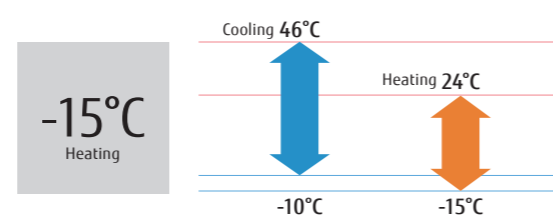

Model: ASEG18KLCA / ASEG24KLCA



Wireless RC



For ASEG18KLCA

For ASEG24KLCA

## Specifications

| Model name                            | Indoor unit                     |                   | Outdoor unit |                   | ASEG18KLCA  | ASEG24KLCA        |
|---------------------------------------|---------------------------------|-------------------|--------------|-------------------|-------------|-------------------|
|                                       | AOEG18KLCA                      |                   | AOEG24KLCA   |                   |             |                   |
| Power Source                          | Single phase, ~230 V, 50 Hz     |                   |              |                   |             |                   |
| Capacity                              | Cooling                         | Rated             | kW           | 5.2               |             | 7.1               |
|                                       |                                 | Min.-Max.         |              | 0.9-5.5           |             | 0.9-7.7           |
|                                       | Heating                         | Rated             | 6.3          |                   | 8.0         |                   |
| Min.-Max.                             |                                 | 0.6-7.6           |              | 0.9-9.0           |             |                   |
| Input Power                           | Cooling/Heating                 |                   | kW           | 1.685/1.80        |             | 2.42/2.225        |
| EER                                   | Cooling                         |                   |              | 3.09              |             | 2.93              |
|                                       |                                 | Heating           |              | 3.50              |             | 3.60              |
| COP                                   | Cooling/Heating (-10°C)         |                   |              | 5.20/4.80         |             | 7.10/7.10         |
|                                       |                                 | Heating (Average) |              | 4.30              |             | 4.00              |
| Pdesign                               | Cooling                         |                   |              | 7.20              |             | 7.10              |
|                                       |                                 | Heating (Average) |              | 4.30              |             | 4.00              |
| SEER                                  | Cooling                         |                   |              | 7.20              |             | 7.10              |
|                                       |                                 | Heating (Average) |              | 4.30              |             | 4.00              |
| SCOP                                  | Heating (Average)               |                   |              | 4.30              |             | 4.00              |
|                                       |                                 | Cooling           |              | A++               |             | A++               |
| Energy Efficiency Class               | Heating (Average)               |                   |              | A+                |             | A+                |
|                                       |                                 | Cooling/Heating   |              | A                 |             | A                 |
| Max. Operating Current                | Cooling/Heating                 |                   | A            | 9.5/13.5          |             | 13.5/17.5         |
| Annual Energy Consumption             | Cooling                         |                   |              | 253               |             | 350               |
|                                       |                                 | Heating           |              | 1563              |             | 2485              |
| Moisture Removal                      |                                 |                   | l/h          | 1.9               |             | 3.1               |
|                                       | Indoor (Cooling)                | H/M/L/Q           | 47/44/40/35  |                   | 51/45/38/33 |                   |
| Sound Pressure Level                  | Indoor (Heating)                | H/M/L/Q           | 50/45/41/37  |                   | 52/45/41/37 |                   |
|                                       | Outdoor (Cooling/Heating)       | High              | 50/56        |                   | 55/57       |                   |
| Sound Power Level                     | Indoor (Cooling/Heating)        | High              | 60/65        |                   | 64/65       |                   |
|                                       | Outdoor (Cooling/Heating)       | High              | 61/66        |                   | 65/67       |                   |
| Airflow Rate                          | Indoor/Outdoor (Cooling)        | High              | 865/1,830    |                   | 1,040/2,885 |                   |
|                                       | Indoor/Outdoor (Heating)        | High              | 995/2,265    |                   | 1,040/3,030 |                   |
| Net Dimensions<br>H x W x D           | Indoor                          | mm                |              | 293 x 790 x 249   |             | 293 x 790 x 249   |
|                                       | Outdoor                         | mm                |              | 542 x 799 x 290   |             | 632 x 799 x 290   |
| Weight                                | Indoor                          | kg                |              | 9.5               |             | 10.0              |
|                                       | Outdoor                         | kg                |              | 33                |             | 38                |
| Connection Pipe Diameter (Liquid/Gas) |                                 |                   | mm           | 6.35/9.52         |             | 6.35/12.70        |
| Drain Hose Diameter (I.D./O.D.)       |                                 |                   | mm           | 13.8/15.8 to 16.7 |             | 13.8/15.8 to 16.7 |
| Max. Pipe Length (Pre-Charge)         |                                 |                   | m            | 25 (15)           |             | 30 (15)           |
| Max. Height Difference                |                                 |                   |              | 20                |             | 25                |
| Operating Range                       | Cooling                         | °CDB              |              | -10 to 46         |             | -10 to 46         |
|                                       | Heating                         | °CDB              |              | -15 to 24         |             | -15 to 24         |
| Refrigerant                           | Type (Global Warming Potential) |                   |              | R32 (675)         |             | R32 (675)         |
|                                       | Charge                          | kg (CO2eq-T)      |              | 0.85 (0.574)      |             | 1.10 (0.743)      |


## Optional parts

\* For optional parts compatibility of Intesis devices, please refer to the optional parts compatibility list page C-050 to C-053 and C-066.

Silver Ion Filter: UTR-FA16-5

## Dimensions

(Unit: mm)

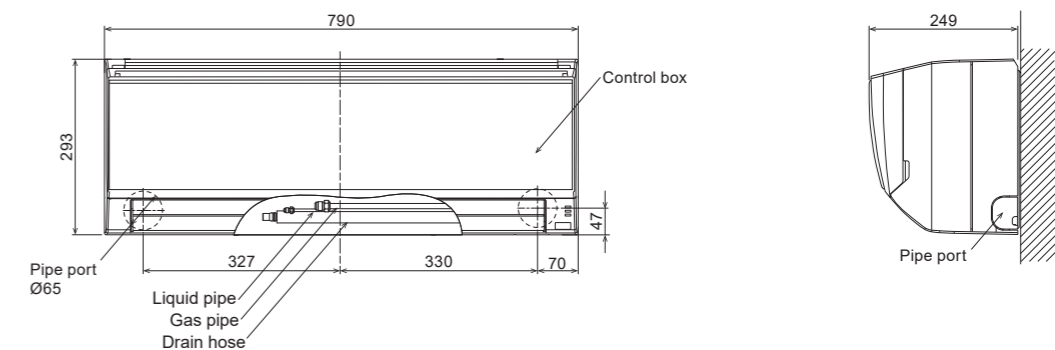



# Wall-mounted type

## ECO Range

Cooling-enhanced type

KL Series



### Highly efficient operation even at high outdoor temperatures

Even when installed in areas with high outdoor air temperatures (Max. 52°C\*), it is comfortable because it can cool the interior well.

\*suction temperature of the outdoor unit

Rank **A++**

SEER **7.1**<sup>\*</sup>

Operation Range **MAX 52°C**

\*07 model (Cooling operation)



### MINIMAL SMART design

The new smart design eliminates mechanical elements and offers a sophisticated, premium impression. Its compact size, with a width of 770 mm, allows for flexible installation in limited room space.



### Comfortable airflow & Quiet operation

The large louver and the new air-blowing structure create a comfortable air flow that spreads all the way down to the user's feet with quiet operation.




### Smart device control (Option)

With the optional WLAN adapter installed in the air conditioner, you can control it from anywhere with your smart device.

\* For more information about smart device control, please refer to the page C-020.



Model: ASEH07KLTA / ASEH09KLTA / ASEH12KLTA

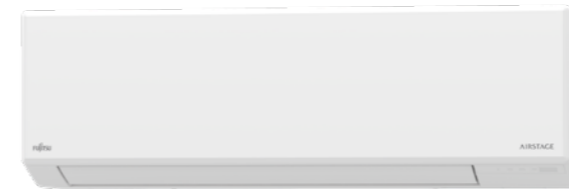

Wireless RC



### Specifications

| Model name                            | Indoor unit                     |              | ASEH07KLTA        | ASEH09KLTA        | ASEH12KLTA        |
|---------------------------------------|---------------------------------|--------------|-------------------|-------------------|-------------------|
|                                       | Outdoor unit                    |              | AOEH07KLTA        | AOEH09KLTA        | AOEH12KLTA        |
| Power Source                          | Single phase, ~230 V, 50 Hz     |              |                   |                   |                   |
| Capacity                              | Cooling                         | Rated        | 2.0               | 2.5               | 3.4               |
|                                       |                                 | Min.-Max.    | 0.9-2.8           | 0.9-3.0           | 0.9-3.7           |
|                                       | Heating                         | Rated        | 2.4               | 2.5               | 3.4               |
| Min.-Max.                             |                                 | 0.9-3.3      | 0.9-3.5           | 0.9-3.7           |                   |
| Input Power                           | Cooling/Heating                 | kW           | 0.54 / 0.64       | 0.76 / 0.67       | 1.05 / 0.915      |
| EER                                   | Cooling                         | W/W          | 3.70              | 3.29              | 3.24              |
| COP                                   | Heating                         | W/W          | 3.75              | 3.73              | 3.72              |
| Pdesign                               | Cooling/Heating (-10°C)         | kW           | 2.0 / 2.2         | 2.5 / 2.3         | 3.4 / 2.5         |
| SEER                                  | Cooling                         | W/W          | 7.10              | 6.80              | 6.70              |
| SCOP                                  | Heating (Average)               | W/W          | 4.10              | 4.10              | 4.10              |
| Energy Efficiency Class               | Cooling                         |              | A++               | A++               | A++               |
|                                       | Heating (Average)               |              | A+                | A+                | A+                |
| Max. Operating Current                | Cooling/Heating                 | A            | 6.0 / 6.0         | 6.0 / 6.0         | 7.0 / 7.0         |
| Annual Energy Consumption             | Cooling                         | kWh/a        | 99                | 129               | 178               |
|                                       | Heating                         | kWh/a        | 752               | 786               | 854               |
| Moisture Removal                      |                                 | l/h          | 0.18              | 0.55              | 1.26              |
| Sound Pressure Level                  | Indoor (Cooling)                | H/M/L/Q      | 41 / 36 / 29 / 21 | 43 / 36 / 29 / 21 | 43 / 37 / 30 / 21 |
|                                       | Indoor (Heating)                | H/M/L/Q      | 41 / 37 / 32 / 23 | 43 / 37 / 32 / 23 | 43 / 37 / 32 / 23 |
| Sound Power Level                     | Outdoor (Cooling/Heating)       | High         | 47 / 47           | 47 / 47           | 50 / 50           |
|                                       | Indoor (Cooling/Heating)        | High         | 54 / 55           | 55 / 55           | 55 / 56           |
| Airflow Rate                          | Indoor/Outdoor (Cooling)        | High         | 600 / 1,650       | 620 / 1,650       | 620 / 1,700       |
|                                       | Indoor/Outdoor (Heating)        | High         | 600 / 1,450       | 620 / 1,450       | 640 / 1,470       |
| Net Dimensions                        | Indoor                          | mm           | 250 × 770 × 218   | 250 × 770 × 218   | 250 × 770 × 218   |
|                                       | Outdoor                         | mm           | 541 × 663 × 290   | 541 × 663 × 290   | 541 × 663 × 290   |
| Weight                                | Indoor                          | kg           | 7.0               | 7.0               | 7.5               |
|                                       | Outdoor                         | kg           | 19                | 19                | 22                |
| Connection Pipe Diameter (Liquid/Gas) |                                 | mm           | 6.35 / 9.52       | 6.35 / 9.52       | 6.35 / 9.52       |
| Drain Hose Diameter (I.D./O.D.)       |                                 | mm           | 13.8 / 15 to 16.8 | 13.8 / 15 to 16.8 | 13.8 / 15 to 16.8 |
| Max. Pipe Length (Pre-Charge)         |                                 | m            | 20 (15)           | 20 (15)           | 20 (15)           |
| Max. Height Difference                |                                 |              | 15                | 15                | 15                |
| Operating Range                       | Cooling                         | °CDB         | 10 to 52          | 10 to 52          | 10 to 52          |
|                                       | Heating                         | °CDB         | -15 to 24         | -15 to 24         | -15 to 24         |
| Refrigerant                           | Type (Global Warming Potential) |              | R32 (675)         | R32 (675)         | R32 (675)         |
|                                       | Charge                          | kg (CO2eq-T) | 0.53(0.358)       | 0.53(0.358)       | 0.60(0.405)       |

### Optional parts

\* For optional parts compatibility of Intesis devices, please refer to the optional parts compatibility list page C-050 to C-053 and C-066.


WLAN adapter: UTY-TFSXF2

UTY-TFSXH3

Silver Ion Filter: UTR-FA16-5

### Dimensions

(Unit: mm)

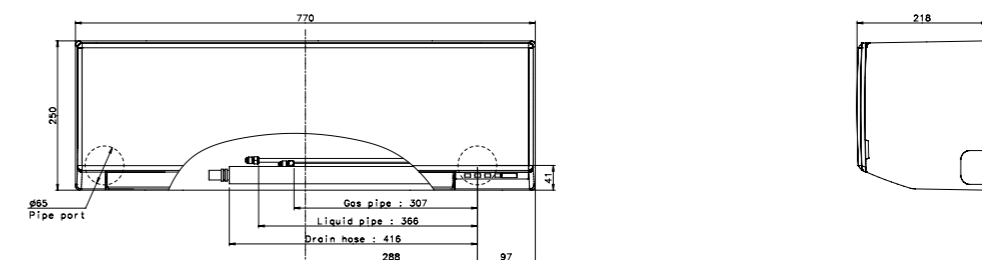

# Compact Cassette

Compact 4-way Flow Range  
Compact Size



Model: AUXG09KVLA / AUXG12KVLA / AUXG14KVLA / AUXG18KVLA / AUXG22KVLA / AUXG24KVLA



### Specifications

| Model name                            | Indoor unit                     |              | AUXG09KVLA                  | AUXG12KVLA      | AUXG14KVLA      | AUXG18KVLA      | AUXG22KVLA      | AUXG24KVLA      |
|---------------------------------------|---------------------------------|--------------|-----------------------------|-----------------|-----------------|-----------------|-----------------|-----------------|
|                                       | Outdoor unit                    |              | AOEG09KBTB                  | AOEG12KBTB      | AOEG14KBTB      | AOEG18KBTB      | AOEG22KBTB      | AOEG24KBTB      |
| Power Source                          |                                 |              | Single phase, ~230 V, 50 Hz |                 |                 |                 |                 |                 |
| Capacity                              | Cooling                         | Rated        | 2.5                         | 3.5             | 4.3             | 5.2             | 6.0             | 6.8             |
|                                       |                                 | Min.-Max.    | 0.9-3.2                     | 0.9-4.4         | 0.9-5.4         | 0.9-5.9         | 0.9-6.7         | 0.9-8.0         |
|                                       | Heating                         | Rated        | 3.2                         | 4.1             | 5.0             | 6.0             | 7.0             | 7.5             |
| Min.-Max.                             |                                 | 0.9-4.7      | 0.9-5.7                     | 0.9-6.5         | 0.9-7.5         | 0.9-8.0         | 0.9-9.1         |                 |
| EER                                   | Cooling/Heating                 | kW           | 0.55/0.79                   | 0.93/1.08       | 1.28/1.32       | 1.60/1.66       | 1.82/1.87       | 2.21/2.03       |
| COP                                   | Cooling                         | W/W          | 4.57                        | 3.76            | 3.36            | 3.25            | 3.30            | 3.08            |
|                                       | Heating                         | W/W          | 4.05                        | 3.80            | 3.79            | 3.61            | 3.74            | 3.69            |
| Pdesign                               | Cooling/Heating (-10°C)         | kW           | 2.5/2.6                     | 3.5/3.4         | 4.3/3.8         | 5.2/4.4         | 6.0/4.8         | 6.8/6.0         |
| SEER                                  | Cooling                         | W/W          | 6.70                        | 6.60            | 6.50            | 6.60            | 6.60            | 6.10            |
|                                       | Heating (Average)               | W/W          | 4.40                        | 4.30            | 4.40            | 4.20            | 4.30            | 4.00            |
| Energy Efficiency Class               | Cooling                         |              | A++                         | A++             | A++             | A++             | A++             | A++             |
|                                       | Heating (Average)               |              | A+                          | A+              | A+              | A+              | A+              | A+              |
| Max. Operating Current                | Cooling/Heating                 | A            | 7.9/7.9                     | 9.7/9.7         | 10.2/10.2       | 12.1/12.1       | 12.6/12.6       | 13.6/13.6       |
| Annual Energy Consumption             | Cooling                         | kWh/a        | 131                         | 186             | 231             | 275             | 318             | 390             |
|                                       | Heating                         | kWh/a        | 826                         | 1,106           | 1,208           | 1,466           | 1,562           | 2,097           |
| Moisture Removal                      |                                 | l/h          | 0.6                         | 1.2             | 1.5             | 2.2             | 2.6             | 2.7             |
|                                       |                                 |              |                             |                 |                 |                 |                 |                 |
| Sound Pressure Level                  | Indoor (Cooling)                | H/M/L/Q      | 33/31/29/27                 | 37/34/30/27     | 38/34/30/27     | 38/34/30/26     | 44/42/36/30     | 49/44/36/30     |
|                                       | Indoor (Heating)                | H/M/L/Q      | 34/32/29/27                 | 37/34/31/29     | 43/38/34/30     | 43/38/34/30     | 45/43/40/33     | 49/45/40/33     |
| Sound Power Level                     | Outdoor (Cooling/Heating)       | High         | 46/46                       | 47/47           | 49/49           | 50/50           | 51/51           | 53/54           |
|                                       | Indoor (Cooling/Heating)        | High         | 46/47                       | 49/49           | 50/55           | 50/55           | 56/57           | 59/61           |
|                                       | Outdoor (Cooling/Heating)       | High         | 59/59                       | 61/61           | 62/62           | 62/62           | 63/63           | 65/66           |
|                                       | Indoor/Outdoor (Cooling)        | High         | 540/1,480                   | 600/1,580       | 680/1,670       | 680/2,160       | 830/2,240       | 930/2,700       |
| Airflow Rate                          | Indoor/Outdoor (Heating)        | High         | 540/1,410                   | 600/1,520       | 800/1,580       | 800/1,830       | 860/1,960       | 930/2,700       |
|                                       |                                 |              |                             |                 |                 |                 |                 |                 |
| Net Dimensions H x W x D              | Indoor                          | mm           | 245 × 570 × 570             | 245 × 570 × 570 | 245 × 570 × 570 | 245 × 570 × 570 | 245 × 570 × 570 | 245 × 570 × 570 |
|                                       | Outdoor                         | mm           | 542 × 799 × 290             | 542 × 799 × 290 | 542 × 799 × 290 | 632 × 799 × 290 | 632 × 799 × 290 | 716 × 820 × 315 |
| Weight                                | Indoor                          | kg           | 15                          | 15              | 15              | 15              | 16              | 16              |
|                                       | Outdoor                         | kg           | 32                          | 33              | 33              | 36              | 38              | 42              |
| Connection Pipe Diameter (Liquid/Gas) |                                 | mm           | 6.35/9.52                   | 6.35/9.52       | 6.35/9.52       | 6.35/12.70      | 6.35/12.70      | 6.35/12.70      |
| Drain Hose Diameter (I.D./O.D.)       |                                 | mm           | 25/32                       | 25/32           | 25/32           | 25/32           | 25/32           | 25/32           |
| Max. Pipe Length (Pre-Charge)         |                                 | m            | 20 (15)                     | 25 (15)         | 25 (15)         | 30 (20)         | 30 (20)         | 30 (20)         |
| Max. Height Difference                |                                 |              | 15                          | 20              | 20              | 20              | 25              | 25              |
| Operating Range                       | Cooling                         | °CDB         | -15 to 46                   | -15 to 46       | -15 to 46       | -15 to 46       | -15 to 46       | -15 to 46       |
|                                       | Heating                         | °CDB         | -15 to 24                   | -15 to 24       | -15 to 24       | -15 to 24       | -15 to 24       | -15 to 24       |
| Refrigerant                           | Type (Global Warming Potential) |              | R32 (675)                   | R32 (675)       | R32 (675)       | R32 (675)       | R32 (675)       | R32 (675)       |
|                                       | Charge                          | kg (CO2eq-T) | 0.85 (0.574)                | 0.85 (0.574)    | 0.85 (0.574)    | 1.02 (0.689)    | 1.25 (0.844)    | 1.25 (0.844)    |
| Cassette Grille                       | Model name                      |              | UTG-UFYF-W                  | UTG-UFYF-W      | UTG-UFYF-W      | UTG-UFYF-W      | UTG-UFYF-W      | UTG-UFYF-W      |
|                                       | Dimensions (H × W × D)          | mm           | 49 × 620 × 620              | 49 × 620 × 620  | 49 × 620 × 620  | 49 × 620 × 620  | 49 × 620 × 620  | 49 × 620 × 620  |
|                                       | Weight                          | kg           | 2.3                         | 2.3             | 2.3             | 2.3             | 2.3             |                 |


### Compact and stylish panel design

The compact and stylish panel fits nicely into a grid-type ceiling. Its linear design is a perfect fit into a grid of 620 mm × 620 mm in the ceiling.



### Easy maintenance

You can access the unit for maintenance simply by removing a ceiling panel next to the grille. As no inspection hole needs to be cut through the ceiling, no additional construction cost is incurred.

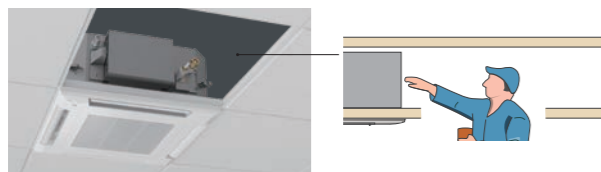

The air inlet grille can be installed to open in any direction for easy maintenance.



### Flexible installation

The unit fits nicely into the decor of a grid-type ceiling and can be installed near the lighting or a ventilation opening.



### Link up with a variety of central control system (Option)

Centralized control including facilities and equipment in addition to air conditioning is possible by linking up with MODBUS, KNX interfaces.




### Optional parts

\* For optional parts compatibility of Intesis devices, please refer to the optional parts compatibility list page C-050 to C-053 and C-066.

|   |                                      |  |
|---|--------------------------------------|--|
| Wired Remote Controller (Design type): UTY-RVRY             | Wireless remote controller: UTY-LNTY | Network Converter for single split (DC power supply type): UTY-VTGX  |
| Compact wired remote controller: UTY-RCRYZ1                 | External switch controller: UTY-TERX | Network Converter for single split (AC power supply type): UTY-VTGXV |
| Wired remote controller (touch panel): UTY-RNRYZ5           | WLAN adapter: UTY-TFSXZ1             | Insulation kit for high humidity: UTZ-KXGC                           |
| Wired remote controller: UTY-RLRY                           | FG-RC-WIF1Z2                         | External input and output PCB: UTY-XCSX                              |
| UTY-RNNYM   | UTY-TFSXJ3                           | External input and output PCB box: UTZ-GXRA                          |
| UTY-RVNYM   | FG-AC-WIF1Z1                         | Silver Ion Filter: UTD-HFAA  |
| Simple remote controller (without operation mode): UTY-RHRY | Air Outlet Shutter Plate: UTR-YDZB   | Fresh air intake kit: UTZ-VXAA                                       |
| Simple remote controller: UTY-RSRY                          | Cassette Grille: UTG-UFYF-W          | External connect kit: UTY-XWZXG                                      |

### Dimensions

(Unit: mm)

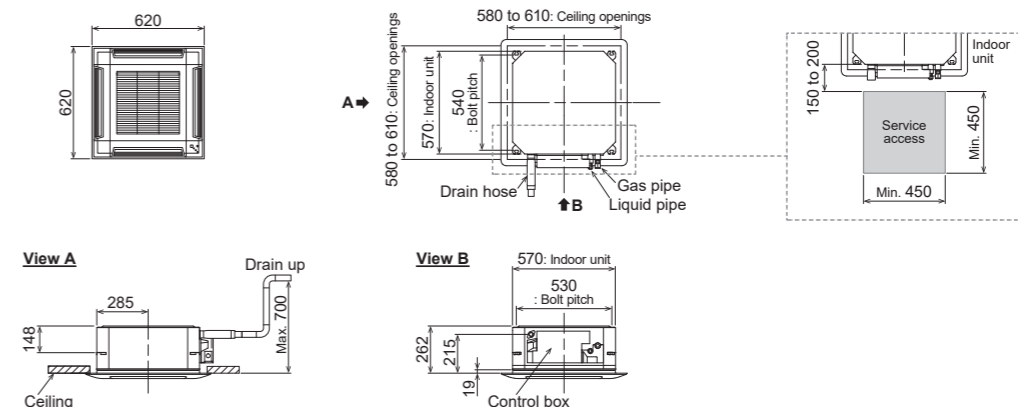

# Cassette

## Circular Flow Range

### Comfort for Large Rooms

UTG-UKYA-B  
Black Grille



### Unique circular flow design

The Cassette model realizes a Circular Flow to blow a large airflow in a 360° direction by using a high-performance DC fan motor, turbo fan, and a unique seamless airflow louver design.



Airflows avoid blowing cool air directly at the occupants in the room, providing more comfortable air conditioning. Provides efficient air conditioning based on the room layout

### Individual louver control


Each louver can be controlled individually with a wired remote controller equipped with a touch panel to provide different directional airflows according to the room layout.

\*Wired remote controller (touch panel) (UTY-RNRGZ3) only

**The Human sensor yields more energy savings.**  
Energy saving operation starts automatically by detecting the motion of a person. Two modes of save operation mode and stop mode can be selected.

### Compact and lightweight outdoor unit

The outdoor units for the 45,000 BTU and 54,000 BTU models have been completely redesigned. Easier installation is achieved for this compact and lightweight outdoor unit.

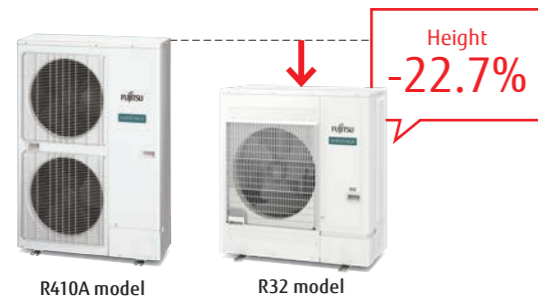

### Link up with a variety of central control system (Option)

Centralized control including facilities and equipment in addition to air conditioning is possible by linking up with MODBUS, KNX interfaces.



### Various cassette grilles

Both black and white grilles are available. Three types of grilles are available: a white grille with a remote controller; a white grille without a remote controller; and a black grille without a remote controller. Select to match the atmosphere and/or usage of the room.



Model: AUXG18KRLB / AUXG22KRLB / AUXG24KRLB / AUXG30KRLB / AUXG36KRLB / AUXG45KRLB / AUXG54KRLB  
AUXG36KRLB [3-phase] / AUXG45KRLB [3-phase] / AUXG54KRLB [3-phase]



### Specifications

| Model name                            | Indoor unit                     |   |   |  |  |  |  |  | AUXG18KRLB |  |  | AUXG22KRLB |  |  | AUXG24KRLB |  |  | AUXG30KRLB |  |  | AUXG36KRLB |  |  | AUXG45KRLB |  |  | AUXG54KRLB |  |  |
|---------------------------------------|---------------------------------|---|---|--|--|--|--|--|------------|--|--|------------|--|--|------------|--|--|------------|--|--|------------|--|--|------------|--|--|------------|--|--|
|                                       | Outdoor unit                    |   |   |  |  |  |  |  | AOEG18KRTB |  |  | AOEG22KRTB |  |  | AOEG24KRTB |  |  | AOEG30KRTB |  |  | AOEG36KRTB |  |  | AOEG45KRTB |  |  | AOEG54KRTB |  |  |
| Power Source                          | Single phase, ~230 V, 50 Hz     |   |   |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |
| Capacity                              | Cooling                         | Rated   | kW  |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |
|                                       |                                 | Min.-Max.   | 5.2 6.0 6.8 8.5 9.5 12.1 13.4 9.5 12.1 13.4 |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |
| Heating                               | Rated                           | 0.9-5.9 0.9-6.7 0.9-8.0 2.8-10.0 2.8-11.2 4.0-14.0 4.5-14.5 2.8-11.2 4.0-14.0 4.5-14.5  |   |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |
|                                       | Min.-Max.                       | 6.0 7.0 7.5 10.0 10.8 13.5 15.5 10.8 13.5 15.5  |   |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |
| Input Power                           | Cooling/Heating                 | kW  |   |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |
| EER                                   | Cooling                         | W/W   |   |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |
| COP                                   | Heating                         | W/W   |   |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |
| Pdesign                               | Cooling/Heating (-10°C)         | kW  |   |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |
| SEER                                  | Cooling                         | W/W   |   |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |
| SCOP                                  | Heating (Average)               | W/W   |   |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |
| Energy Efficiency Class               | Cooling                         | A+  |   |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |
|                                       | Heating (Average)               | A+  |   |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |
| Max. Operating Current                | Cooling/Heating                 | A   |   |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |
| Annual Energy Consumption             | Cooling                         | kWh/a   |   |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |
|                                       | Heating                         | kWh/a   |   |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |
| Moisture Removal                      | l/h                             |   |   |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |
| Sound Pressure Level                  | Indoor (Cooling)                | H/M/L/Q   | dB(A)                                       |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |
|                                       | Indoor (Heating)                | H/M/L/Q   | dB(A)                                       |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |
| Sound Power Level                     | Indoor (Cooling/Heating)        | High  | dB(A)                                       |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |
|                                       | Indoor (Cooling/Heating)        | High  | dB(A)                                       |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |
| Airflow Rate                          | Indoor/Outdoor (Cooling)        | High  | m³/h  |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |
|                                       | Indoor/Outdoor (Heating)        | High  | m³/h  |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |
| Net Dimensions H x W x D              | Indoor                          | mm  |   |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |
|                                       | Outdoor                         | mm  |   |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |
| Weight                                | Indoor                          | kg  |   |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |
|                                       | Outdoor                         | kg  |   |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |
| Connection Pipe Diameter (Liquid/Gas) | mm                              |   |   |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |
| Drain Hose Diameter (I.D./O.D.)       | mm                              |   |   |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |
| Max. Pipe Length (Pre-Charge)         | m                               |   |   |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |
| Max. Height Difference                | m                               |   |   |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |
| Operating Range                       | Cooling                         | °CDB  |   |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |
|                                       | Heating                         | °CDB  |   |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |
| Refrigerant                           | Type (Global Warming Potential) | R32 (675)   |   |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |
|                                       | Charge                          | kg (CO2eq-T)  |   |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |
| Cassette Grille                       | Variation                       | UTG-UKYA-W: White wired remote controller (touch panel)<br>UTG-UKYC-W: White/UTG-UKYA-B*1: Black<br>UTG-UKYC-W: White/UTG-UKYA-B*1: Black |   |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |
|                                       | Dimensions (H x W x D)          | mm  |   |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |
|                                       | Weight                          | kg  |   |  |  |  |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |            |  |  |

\*1: IR Receiver kit and Human sensor kit cannot be connected.


### Optional parts

\*For optional parts compatibility of Intesis devices, please refer to the optional parts compatibility list page C-050 to C-053 and C-066.

|  |            |                                    |              |  |            |
|--|------------|------------------------------------|--------------|--|------------|
| Wired Remote Controller (Design type):             | UTY-RVRY   | WLAN adapter:                      | UTY-TFSXZ1   | Cassette Grille:   | UTG-UKYA-B |
| Compact wired remote controller:                   | UTY-RCRYZ1 |                                    | FG-RC-WIF1Z2 |  | UTG-UKYA-W |
| Wired remote controller (touch panel):             | UTY-RNRYZ5 |                                    | UTY-TFSXJ3   |  | UTG-UKYC-W |
| Wired remote controller:                           | UTY-RLRY   |                                    | FG-AC-WIF1Z1 | Network Converter for single split (DC power supply type): | UTY-VTGX   |
|  | UTY-RNNYM  | External input and output PCB:     | UTY-XCSX     | Network Converter for single split (AC power supply type): | UTY-VTGXV  |
|  | UTY-RVNYM  | External input and output PCB box: | UTZ-GXRA     | Silver Ion Filter:   | UTD-HFRA   |
| Simple remote controller (without operation mode): | UTY-RHRY   | Insulation kit for high humidity:  | UTZ-KXRA     | External connect kit:                                      | UTY-XWZXZG |
| Simple remote controller:                          | UTY-RSRY   | Fresh air intake kit:              | UTZ-VXRA     |  |            |
| Human sensor kit:                                  | UTY-SHZXC  | Wide Panel:                        | UTG-AKXA-W   | (Outdoor unit 30/36/45/54)                                 |            |
| External switch controller:                        | UTY-TERX   | Panel Spacer:                      | UTG-BKXA-W   | External connect kit:                                      | UTY-XWZXZ3 |
| IR receiver unit                                   | UTY-LBITYC | Air Outlet Shutter Plate:          | UTR-YDZK     |  |            |

### Dimensions

(Unit: mm)

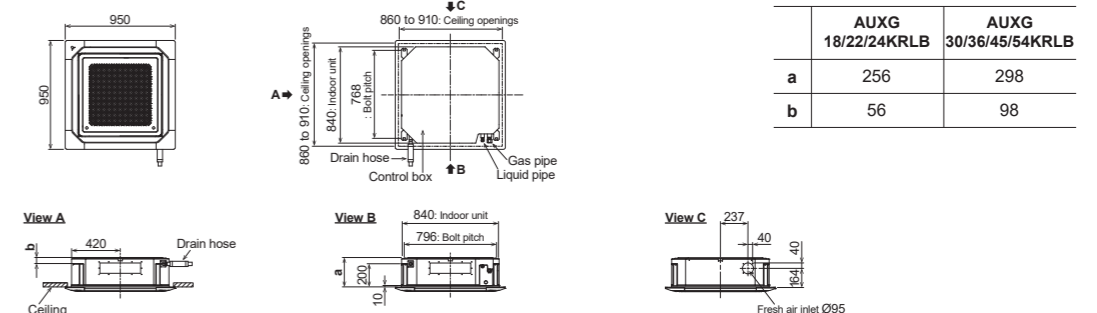

## Slim Duct

Slim Design



### Slim design

The slim design fits nicely into narrow spaces under the ceiling. Drain hose as standard accessory



### Compact and lightweight outdoor unit

The compact and lightweight outdoor unit offers greater flexibility in the choice of installation location. This makes it easier to use this outdoor unit.



### Wide range of static pressures

The use of a DC fan motor makes it possible to adjust the static pressure between 0 and 90 Pa. The static pressure range can be changed by a remote controller.



Static pressure range  
0 to 90 Pa

### Auto louver grille kit (Option)

The optional clean-looking flat Auto louver blends into any interior and provides a comfortable airflow.




### Link up with a variety of central control system (Option)


Centralized control including facilities and equipment in addition to air conditioning is possible by linking up with MODBUS, KNX interfaces.



Model: ARXG09KLLAP / ARXG12KLLAP / ARXG14KLLAP / ARXG18KLLAP

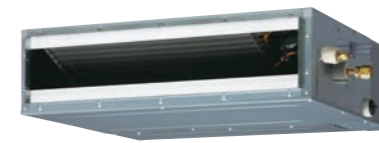

ARXG09/12/14KLLAP

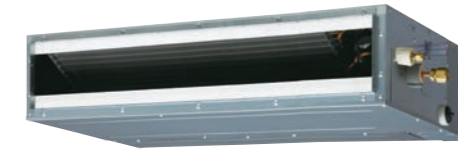

ARXG18KLLAP



For ARXG09/12/14KLLAP For ARXG18KLLAP

### Specifications

| Model name                            | Indoor unit                     |              | ARXG09KLLAP     | ARXG12KLLAP     | ARXG14KLLAP     | ARXG18KLLAP     |
|---------------------------------------|---------------------------------|--------------|-----------------|-----------------|-----------------|-----------------|
|                                       | Outdoor unit                    |              | AOEG09KBTB      | AOEG12KBTB      | AOEG14KBTB      | AOEG18KBTB      |
| Power Source                          | Single phase, ~230 V, 50 Hz     |              |                 |                 |                 |                 |
| Capacity                              | Cooling                         | Rated        | 2.5             | 3.5             | 4.3             | 5.2             |
|                                       |                                 | Min.-Max.    | 0.9-3.2         | 0.9-4.4         | 0.9-5.4         | 0.9-5.9         |
|                                       | Heating                         | Rated        | 3.2             | 4.1             | 5.0             | 6.0             |
| Min.-Max.                             |                                 | 0.9-4.7      | 0.9-5.7         | 0.9-6.5         | 0.9-7.5         |                 |
| Input Power                           | Cooling/Heating                 | kW           | 0.60/0.79       | 0.93/1.08       | 1.28/1.32       | 1.55/1.62       |
| EER                                   | Cooling                         | W/W          | 4.17            | 3.76            | 3.36            | 3.35            |
| COP                                   | Heating                         | W/W          | 4.05            | 3.80            | 3.79            | 3.70            |
| Pdesign                               | Cooling/Heating (-10°C)         | kW           | 2.5/2.6         | 3.5/3.4         | 4.3/3.8         | 5.2/4.4         |
| SEER                                  | Cooling                         | W/W          | 6.20            | 6.10            | 5.80            | 6.20            |
| SCOP                                  | Heating                         | W/W          | 4.30            | 4.00            | 3.90            | 4.10            |
| Energy Efficiency Class               | Cooling                         |              | A++             | A++             | A+              | A++             |
|                                       | Heating                         |              | A+              | A+              | A               | A+              |
| Max. Operating Current                | Cooling/Heating                 | A            | 7.9/7.9         | 9.7/9.7         | 10.2/10.2       | 12.1/12.1       |
| Annual Energy Consumption             | Cooling                         | kWh/a        | 141             | 201             | 259             | 293             |
|                                       | Heating                         |              | 845             | 1,189           | 1,362           | 1,501           |
| Moisture Removal                      |                                 | l/h          | 0.7             | 1.3             | 1.5             | 2.0             |
| Sound Pressure Level                  | Indoor (Cooling)                | H/M/L/Q      | 28/27/26/25     | 29/28/26/25     | 32/30/28/26     | 32/30/29/27     |
|                                       | Indoor (Heating)                | H/M/L/Q      | 28/26/25/24     | 29/28/26/24     | 32/30/28/25     | 32/30/29/27     |
| Sound Power Level                     | Outdoor (Cooling/Heating)       | High         | 46/46           | 47/47           | 49/49           | 50/50           |
|                                       | Indoor (Cooling/Heating)        | High         | 57/57           | 58/58           | 60/60           | 58/58           |
| Airflow Rate                          | Indoor/Outdoor (Cooling)        | High         | 600/1,480       | 650/1,580       | 800/1,670       | 940/2,160       |
|                                       | Indoor/Outdoor (Heating)        | High         | 600/1,410       | 650/1,520       | 800/1,580       | 940/1,830       |
| Static pressure range (Standard)      |                                 | Pa           | 0 to 90 (25)    | 0 to 90 (25)    | 0 to 90 (25)    | 0 to 90 (25)    |
| Net Dimensions H x W x D              | Indoor                          | mm           | 198 x 700 x 620 | 198 x 700 x 620 | 198 x 700 x 620 | 198 x 900 x 620 |
|                                       | Outdoor                         | mm           | 542 x 799 x 290 | 542 x 799 x 290 | 542 x 799 x 290 | 632 x 799 x 290 |
| Weight                                | Indoor                          | kg           | 17              | 17              | 17              | 20              |
|                                       | Outdoor                         | kg           | 32              | 33              | 33              | 36              |
| Connection Pipe Diameter (Liquid/Gas) |                                 | mm           | 6.35/9.52       | 6.35/9.52       | 6.35/9.52       | 6.35/12.70      |
| Drain Hose Diameter (I.D./O.D.)       |                                 | mm           | 25/32           | 25/32           | 25/32           | 25/32           |
| Max. Pipe Length (Pre-Charge)         |                                 | m            | 20 (15)         | 25 (15)         | 25 (15)         | 30 (20)         |
| Max. Height Difference                |                                 |              | 15              | 20              | 20              | 20              |
| Operating Range                       | Cooling                         | °CDB         | -15 to 46       | -15 to 46       | -15 to 46       | -15 to 46       |
|                                       | Heating                         |              | -15 to 24       | -15 to 24       | -15 to 24       | -15 to 24       |
| Refrigerant                           | Type (Global Warming Potential) |              | R32 (675)       | R32 (675)       | R32 (675)       | R32 (675)       |
|                                       | Charge                          | kg (CO2eq-T) | 0.85 (0.574)    | 0.85 (0.574)    | 0.85 (0.574)    | 1.02 (0.689)    |





### Optional parts

\* For optional parts compatibility of Intesis devices, please refer to the optional parts compatibility list page C-050 to C-053 and C-066.

|  |            |                             |                  |  |                    |
|--|------------|-----------------------------|------------------|--|--------------------|
| Wired Remote Controller (Design type):             | UTY-RVRY   | WLAN adapter:               | UTY-TFSXZ1       | Network Converter for single split (DC power supply type): | UTY-VTGX           |
| Compact wired remote controller:                   | UTY-RCRYZ1 |                             | FG-RC-WIF122     | Network Converter for single split (AC power supply type): | UTY-VTGXV          |
| Wired remote controller (touch panel):             | UTY-RNRYZ5 |                             | UTY-TFSXJ3       | External connect kit:                                      | UTY-XWZXZG         |
| Wired remote controller:                           | UTY-RLRY   | Silver Ion Filter:          | FG-AC-WIF121     | Remote sensor unit:  | UTY-XS2XZ1         |
|  | UTY-RNNYM  |                             | UTD-HFTA (09-14) | Auto Louver Grille Kit:                                    | UTD-GXTA-W (09-14) |
|  | UTY-RVNYM  |                             | UTD-HFTB (18)    |  | UTD-GXTB-W (18)    |
| Simple remote controller (without operation mode): | UTY-RHRY   | External switch controller: | UTY-TERX         |  |                    |
| Simple remote controller:                          | UTY-RSRY   | IR receiver unit:           | UTY-LBTYM        |  |                    |


### Dimensions

(Unit: mm)

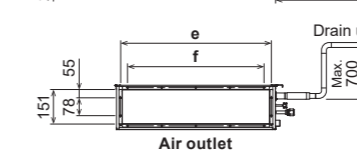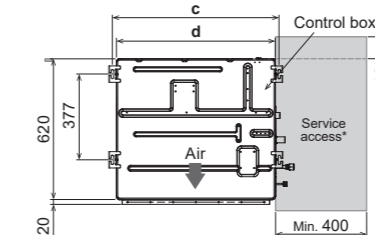

|   | ARXG 09 / 12 / 14KLLAP | ARXG18KLLAP |
|---|------------------------|-------------|
| a | 574                    | 774         |
| b | P200×2=400             | P200×3=600  |
| c | 734                    | 934         |
| d | 700                    | 900         |
| e | 650                    | 850         |
| f | P100×6=600             | P100×8=800  |

\*The design of the service access depends on the installation method. Refer to the installation manual for more information.




# Medium Static Pressure Duct

High-Efficiency & Comfort



## Slim & Compact design


The new product has reduced the height to 240 mm, making it more compact. The slim design fits nicely into narrow spaces under the ceiling.

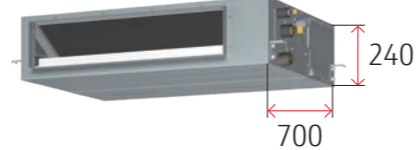

(Unit: mm)

## High energy saving

The new model has achieved high energy efficiency rank with a compact design.



SEER **6.50**<sup>\*1</sup>


SCOP **4.20**<sup>\*2</sup>

\*1: 12/22 models

\*2: 12/22/24 models

## Easy maintenance

The indoor units have large panels on both sides providing easy maintenance in narrow spaces.

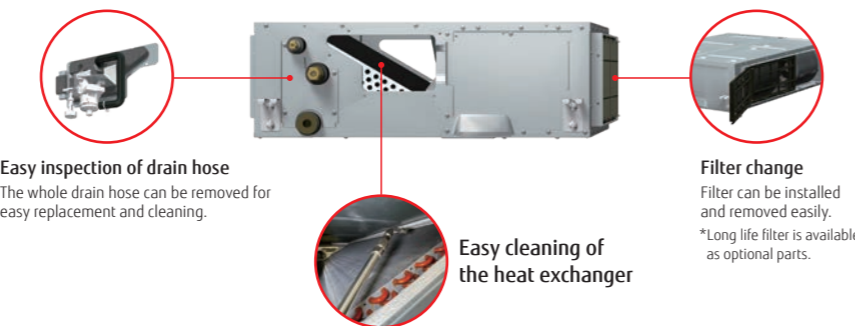

**Easy inspection of drain hose**  
The whole drain hose can be removed for easy replacement and cleaning.

**Filter change**  
Filter can be installed and removed easily.  
\*Long life filter is available as optional parts.

**Easy cleaning of the heat exchanger**

## Drain hose as standard

A drain hose is a standard accessory, making it easy to design drainage even in narrow spaces under the ceiling.



## Wide range of static pressures

Static pressures can be changed in the range of 30 to 150 Pa.

Static pressure range **30 to 150 Pa**

Model: ARXH12KMTAP / ARXH14KMTAP / ARXH18KMTAP / ARXH22KMTAP / ARXH24KMTAP



ARXH12/14/18KMTAP



ARXH22/24KMTAP



For ARXH12/14KMTAP For ARXH18/22KMTAP For ARXH24KMTAP

## Specifications

| Model name                            | Indoor unit                     |                           | ARXH12KMTAP       | ARXH14KMTAP       | ARXH18KMTAP       | ARXH22KMTAP       | ARXH24KMTAP       |
|---------------------------------------|---------------------------------|---------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
|                                       | Outdoor unit                    |                           | AOEG12KBTB        | AOEG14KBTB        | AOEG18KBTB        | AOEG22KBTB        | AOEG24KBTB        |
| Power Source                          | Single phase, ~230 V, 50 Hz     |                           |                   |                   |                   |                   |                   |
| Capacity                              | Cooling                         | Rated                     | 3.5               | 4.3               | 5.2               | 6.0               | 6.8               |
|                                       |                                 | Min.-Max.                 | 0.9-4.4           | 0.9-5.4           | 0.9-5.9           | 0.9-6.7           | 0.9-8.0           |
|                                       | Heating                         | Rated                     | 4.1               | 5.0               | 6.0               | 7.0               | 7.5               |
| Min.-Max.                             |                                 | 0.9-5.7                   | 0.9-6.5           | 0.9-7.5           | 0.9-8.0           | 0.9-9.1           |                   |
| Input Power                           | Cooling/Heating                 | kW                        | 0.930 / 1.080     | 1.260 / 1.320     | 1.580 / 1.740     | 1.67 / 1.84       | 1.89 / 1.87       |
| EER                                   | Cooling                         | W/W                       | 3.76              | 3.40              | 3.30              | 3.60              | 3.60              |
| COP                                   | Heating                         | W/W                       | 3.80              | 3.79              | 3.45              | 3.80              | 4.01              |
| Pdesign                               | Cooling/Heating (-10°C)         | kW                        | 3.5 / 3.4         | 4.3 / 3.8         | 5.2 / 4.4         | 6.0 / 4.8         | 6.8 / 6.0         |
| SEER                                  | Cooling                         | W/W                       | 6.50              | 6.10              | 6.20              | 6.50              | 6.40              |
| SCOP                                  | Heating (Average)               | W/W                       | 4.20              | 4.00              | 4.10              | 4.20              | 4.20              |
| Energy Efficiency Class               | Cooling                         |                           | A++               | A++               | A++               | A++               | A++               |
|                                       | Heating (Average)               |                           | A+                | A+                | A+                | A+                | A+                |
| Max. Operating Current                | Cooling/Heating                 | A                         | 9.7 / 9.7         | 10.2 / 10.2       | 12.1 / 12.1       | 12.6 / 12.6       | 13.6 / 13.6       |
| Annual Energy Consumption             | Cooling                         | kWh/a                     | 196               | 255               | 301               | 331               | 380               |
|                                       | Heating                         | kWh/a                     | 1,133             | 1,330             | 1,501             | 1,598             | 1,999             |
| Moisture Removal                      |                                 | l/h                       | 1.3               | 1.3               | 2.0               | 1.5               | 2.2               |
| Sound Pressure Level                  | Indoor (Cooling)                | H/M/L/Q                   | 29 / 27 / 25 / 23 | 32 / 29 / 27 / 25 | 33 / 30 / 28 / 26 | 32 / 28 / 25 / 24 | 34 / 30 / 28 / 26 |
|                                       | Indoor (Heating)                | H/M/L/Q                   | 29 / 27 / 25 / 23 | 32 / 29 / 27 / 25 | 33 / 30 / 28 / 26 | 32 / 28 / 25 / 24 | 34 / 30 / 28 / 26 |
| Sound Power Level                     | Outdoor (Cooling/Heating)       | High                      | 47 / 47           | 49 / 49           | 50 / 50           | 51 / 51           | 53 / 54           |
|                                       | Indoor (Cooling/Heating)        | High                      | 58 / 58           | 59 / 59           | 60 / 60           | 58 / 58           | 60 / 60           |
| Airflow Rate                          | Indoor (Cooling/Heating)        | High                      | 61 / 61           | 62 / 62           | 62 / 62           | 63 / 63           | 65 / 66           |
|                                       | Indoor/Outdoor (Cooling)        | High                      | 650 / 1,580       | 800 / 1,670       | 840 / 2,160       | 1,150 / 2,240     | 1,230 / 2,700     |
| Static pressure range (Standard)      | Indoor/Outdoor (Heating)        | High                      | 650 / 1,520       | 800 / 1,580       | 840 / 1,830       | 1,150 / 1,960     | 1,230 / 2,700     |
|                                       |                                 | Pa                        | 30 to 150 (40)    | 30 to 150 (40)    | 30 to 150 (40)    | 30 to 150 (40)    | 30 to 150 (50)    |
| Net Dimensions                        | Indoor                          | mm                        | 240 × 700 × 700   | 240 × 700 × 700   | 240 × 700 × 700   | 240 × 1,000 × 700 | 240 × 1,000 × 700 |
|                                       | Outdoor                         | mm                        | 542 × 799 × 290   | 542 × 799 × 290   | 632 × 799 × 290   | 632 × 799 × 290   | 716 × 820 × 315   |
| Weight                                | Indoor                          | kg                        | 24                | 24                | 24                | 31                | 31                |
|                                       | Outdoor                         | kg                        | 33                | 33                | 36                | 38                | 42                |
| Connection Pipe Diameter (Liquid/Gas) |                                 | mm                        | 6.35 / 9.52       | 6.35 / 9.52       | 6.35 / 12.7       | 6.35 / 12.70      | 6.35 / 12.70      |
| Drain Hose Diameter (I.D./O.D.)       |                                 | mm                        | 25 / 32           | 25 / 32           | 25 / 32           | 25 / 32           | 25 / 32           |
| Max. Pipe Length (Pre-Charge)         |                                 | m                         | 25 (15)           | 25 (15)           | 30 (20)           | 30 (20)           | 30 (20)           |
| Max. Height Difference                |                                 | m                         | 20                | 20                | 20                | 25                | 25                |
| Operating Range                       | Cooling                         | °CDB                      | -15 to 46         | -15 to 46         | -15 to 46         | -15 to 46         | -15 to 46         |
|                                       | Heating                         | °CDB                      | -15 to 24         | -15 to 24         | -15 to 24         | -15 to 24         | -15 to 24         |
| Refrigerant                           | Type (Global Warming Potential) |                           | R32 (675)         | R32 (675)         | R32 (675)         | R32 (675)         | R32 (675)         |
|                                       | Charge                          | kg (CO <sub>2</sub> eq-1) | 0.85 (0.574)      | 0.85 (0.574)      | 1.02 (0.689)      | 1.25 (0.844)      | 1.25 (0.844)      |


## Optional parts

\* For optional parts compatibility of Intesis devices, please refer to the optional parts compatibility list page C-050 to C-053 and C-066.

|  |            |                    |                     |  |            |
|--|------------|--------------------|---------------------|--|------------|
| Wired Remote Controller (Design type):             | UTY-RVRY   | Silver ion filter: | UTD-HFNC (12/14/18) | External input and output PCB:                             | UTY-XCSX   |
| Compact wired remote controller:                   | UTY-RCRYZ1 |                    | UTD-HFNB (22/24)    | External input and output PCB bracket:                     | UTZ-GXDA   |
| Wired remote controller (touch panel):             | UTY-RNRYZ5 | Long-life filter:  | UTD-LFDC (12/14/18) | Network Converter for single split (DC power supply type): | UTY-VTGX   |
| Wired remote controller:                           | UTY-RLRY   |                    | UTD-LFDB (22/24)    | Network Converter for single split (AC power supply type): | UTY-VTGXV  |
| Simple remote controller (without operation mode): | UTY-RHRY   | MODBUS converter:  | UTY-VMSX            | External connect kit:                                      | UTY-XWZXZG |
| Simple remote controller:                          | UTY-RSRY   | KNX converter:     | UTY-VKSX            | IR receiver unit:  | UTY-LBTYM  |
| Remote sensor unit:                                | UTY-XSZX   | WLAN adapter:      | UTY-TFSXZ1          | External switch controller:                                | UTY-TERX   |
|  | UTY-XSZXZ1 |                    | UTY-TFSXZ3          |  |            |

## Dimensions

(Unit: mm)

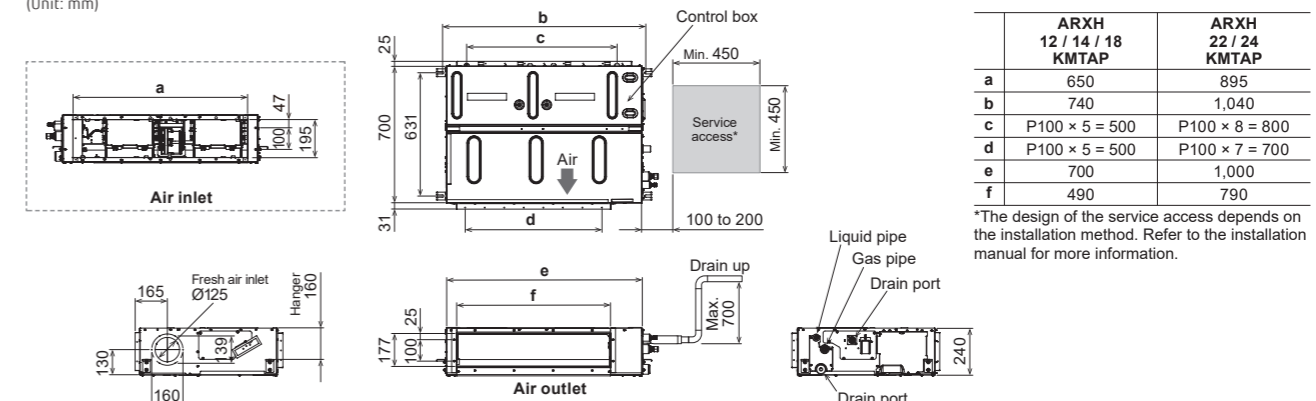

# Medium Static Pressure Duct

High-Efficiency & Comfort



## Slim & Compact design


The new product has reduced the height to 240 mm, making it more compact. The slim design fits nicely into narrow spaces under the ceiling.



(Unit: mm)

## High energy saving

The new model has achieved high energy efficiency rank with a compact design.



SEER **6.23**<sup>\*1</sup>

SCOP **4.10**<sup>\*2</sup>

\*1: 30 model

\*2: 36 model

## Easy maintenance

The indoor units have large panels on both sides providing easy maintenance in narrow spaces.



**Easy inspection of drain hose**  
The whole drain hose can be removed for easy replacement and cleaning.

**Filter change**  
Filter can be installed and removed easily.  
\*Long life filter is available as optional parts.

## Drain hose as standard

A drain hose is a standard accessory, making it easy to design drainage even in narrow spaces under the ceiling.




## Wide range of static pressures

Static pressures can be changed in the range of 30 to 150 Pa.

Static pressure range **30 to 150 Pa**

Model: ARXH30KMTAP / ARXH36KMTAP / ARXH45KMTAP / ARXH54KMTAP  
ARXH36KMTAP [3-phase] / ARXH45KMTAP [3-phase] / ARXH54KMTAP [3-phase]

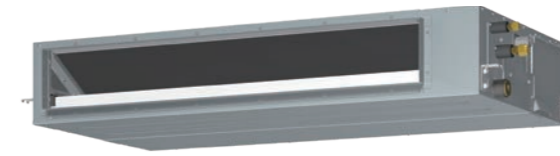

ARXH30/36/45/54KMTAP



For ARXH30/36KMTAP For ARXH45/54KMTAP

## Specifications

| Model name                            | Indoor unit                     |           |                           | ARXH30KMTAP       | ARXH36KMTAP       | ARXH45KMTAP       | ARXH36KMTAP            | ARXH45KMTAP       | ARXH54KMTAP       |
|---------------------------------------|---------------------------------|-----------|---------------------------|-------------------|-------------------|-------------------|------------------------|-------------------|-------------------|
|                                       | Outdoor unit                    |           |                           | AOEG30KBTB        | AOEG36KBTB        | AOEG45KBTB        | AOEG36KRTA             | AOEG45KRTA        | AOEG54KRTA        |
| Power Source                          | Single phase, ~230 V, 50 Hz     |           |                           |                   |                   |                   | 3-phase, ~400 V, 50 Hz |                   |                   |
| Capacity                              | Cooling                         | Rated     | kW                        | 8.5               | 9.5               | 12.1              | 9.5                    | 12.1              | 13.4              |
|                                       |                                 | Min.-Max. |                           | 2.8-10.0          | 2.8-11.2          | 4.0-13.5          | 2.8-11.2               | 4.0-13.5          | 4.5-14.5          |
|                                       | Heating                         | Rated     | 10.0                      | 10.8              | 13.5              | 10.8              | 13.5                   | 15.5              |                   |
|                                       |                                 | Min.-Max. | 2.7-11.2                  | 2.7-12.7          | 4.2-16.2          | 2.7-12.7          | 4.2-16.2               | 4.7-16.5          |                   |
| Input Power                           | Cooling/Heating                 |           | kW                        | 2.57 / 2.50       | 2.97 / 2.70       | 3.87 / 3.73       | 2.97 / 2.70            | 3.87 / 3.73       | 4.62 / 4.65       |
| EER                                   | Cooling                         |           | W/W                       | 3.31              | 3.20              | 3.13              | 3.20                   | 3.13              | 2.90              |
| COP                                   | Heating                         |           |                           | 4.00              | 4.00              | 3.62              | 4.00                   | 3.62              | 3.33              |
| Pdesign                               | Cooling/Heating (-10°C)         |           | kW                        | 8.5 / 8.0         | 9.5 / 8.7         | -                 | 9.5 / 8.7              | -                 | -                 |
| SEER                                  | Cooling                         |           | W/W                       | 6.23              | 6.10              | -                 | 6.10                   | -                 | -                 |
| SCOP                                  | Heating (Average)               |           |                           | 4.00              | 4.10              | -                 | 4.10                   | -                 | -                 |
| Energy Efficiency Class               | Cooling                         |           |                           | A++               | A++               | -                 | A++                    | -                 | -                 |
|                                       | Heating (Average)               |           |                           | A+                | A+                | -                 | A+                     | -                 | -                 |
| Max. Operating Current                | Cooling/Heating                 |           | A                         | 22.6 / 22.6       | 22.6 / 22.6       | 28.5 / 28.5       | 10.5 / 10.5            | 14.0 / 14.0       | 14.0 / 14.0       |
| Annual Energy Consumption             | Cooling                         |           | kWh/a                     | 485               | 553               | -                 | 553                    | -                 | -                 |
|                                       | Heating                         |           |                           | 2,795             | 2,970             | -                 | 2,970                  | -                 | -                 |
| Moisture Removal                      |                                 |           | l/h                       | 1.8               | 2.0               | 4.0               | 2.0                    | 4.0               | 5.0               |
| Sound Pressure Level                  | Indoor (Cooling)                | H/M/L/Q   | dB(A)                     | 38 / 34 / 31 / 28 | 38 / 34 / 31 / 28 | 40 / 36 / 32 / 29 | 38 / 34 / 31 / 28      | 40 / 36 / 32 / 29 | 40 / 36 / 32 / 29 |
|                                       | Indoor (Heating)                | H/M/L/Q   |                           | 38 / 34 / 31 / 28 | 38 / 34 / 31 / 28 | 40 / 36 / 32 / 29 | 38 / 34 / 31 / 28      | 40 / 36 / 32 / 29 | 40 / 36 / 32 / 29 |
| Sound Power Level                     | Outdoor (Cooling/Heating)       | High      |                           | 53 / 55           | 55 / 55           | 57 / 57           | 55 / 55                | 57 / 57           | 57 / 59           |
|                                       | Indoor (Cooling/Heating)        | High      |                           | 64 / 64           | 65 / 65           | 67 / 67           | 65 / 65                | 67 / 67           | 67 / 67           |
| Airflow Rate                          | Indoor/Outdoor (Cooling)        | High      | m <sup>3</sup> /h         | 1,950 / 3,750     | 2,070 / 3,750     | 2,160 / 4,450     | 2,070 / 3,750          | 2,160 / 4,450     | 2,160 / 4,450     |
|                                       | Indoor/Outdoor (Heating)        | High      |                           | 1,950 / 3,750     | 2,070 / 3,750     | 2,160 / 4,450     | 2,070 / 3,750          | 2,160 / 4,450     | 2,160 / 4,450     |
| Static pressure range (Standard)      |                                 |           | Pa                        | 30 to 150 (50)    | 30 to 150 (50)    | 30 to 150 (60)    | 30 to 150 (50)         | 30 to 150 (60)    | 30 to 150 (60)    |
| Net Dimensions H x W x D              | Indoor                          |           | mm                        | 240 × 1,400 × 700 | 240 × 1,400 × 700 | 240 × 1,400 × 700 | 240 × 1,400 × 700      | 240 × 1,400 × 700 | 240 × 1,400 × 700 |
|                                       | Outdoor                         |           | mm                        | 788 × 940 × 320   | 788 × 940 × 320   | 998 × 940 × 320   | 788 × 940 × 320        | 998 × 940 × 320   | 998 × 940 × 320   |
| Weight                                | Indoor                          |           | kg                        | 42                | 42                | 42                | 42                     | 42                | 42                |
|                                       | Outdoor                         |           | kg                        | 52                | 52                | 67                | 53                     | 67                | 67                |
| Connection Pipe Diameter (Liquid/Gas) |                                 |           | mm                        | 9.52 / 15.88      | 9.52 / 15.88      | 9.52 / 15.88      | 9.52 / 15.88           | 9.52 / 15.88      | 9.52 / 15.88      |
| Drain Hose Diameter (I.D./O.D.)       |                                 |           | mm                        | 25 / 32           | 25 / 32           | 25 / 32           | 25 / 32                | 25 / 32           | 25 / 32           |
| Max. Pipe Length (Pre-Charge)         |                                 |           | m                         | 50 (30)           | 50 (30)           | 50 (30)           | 50 (30)                | 50 (30)           | 50 (30)           |
| Max. Height Difference                |                                 |           |                           | 30                | 30                | 30                | 30                     | 30                | 30                |
| Operating Range                       | Cooling                         |           | °CDB                      | -15 to 46         | -15 to 46         | -15 to 46         | -15 to 46              | -15 to 46         | -15 to 46         |
|                                       | Heating                         |           |                           | -15 to 24         | -15 to 24         | -15 to 24         | -15 to 24              | -15 to 24         | -15 to 24         |
| Refrigerant                           | Type (Global Warming Potential) |           |                           | R32 (675)         | R32 (675)         | R32 (675)         | R32 (675)              | R32 (675)         | R32 (675)         |
|                                       | Charge                          |           | kg (CO <sub>2</sub> eq-1) | 1.90 (1.283)      | 1.90 (1.283)      | 2.70 (1.823)      | 1.90 (1.283)           | 2.70 (1.823)      | 2.70 (1.823)      |


## Optional parts

\* For optional parts compatibility of Intesis devices, please refer to the optional parts compatibility list page C-050 to C-053 and C-066.

|  |            |                             |            |  |            |
|--|------------|-----------------------------|------------|--|------------|
| Wired Remote Controller (Design type):             | UTY-RVRY   | IR receiver unit:           | UTY-LBTYM  | External input and output PCB:                             | UTY-XCSX   |
| Compact wired remote controller:                   | UTY-RCRYZ1 | Silver ion filter:          | UTY-HFNA   | External input and output PCB bracket:                     | UTZ-GXDA   |
| Wired remote controller (touch panel):             | UTY-RNRZY5 | Long-life filter:           | UTD-LFDA   | Network Converter for single split (DC power supply type): | UTY-VTGX   |
| Wired remote controller:                           | UTY-RLRY   | MODBUS converter:           | UTY-VMSX   | Network Converter for single split (AC power supply type): | UTY-VTGXV  |
| Simple remote controller (without operation mode): | UTY-RHRY   | KNX converter:              | UTY-VKX    | External connect kit:                                      | UTY-XWZXZG |
| Simple remote controller:                          | UTY-RSRY   | WLAN adapter:               | UTY-TFSXZ1 |  |            |
| Remote sensor unit:                                | UTY-XSZX   |                             | UTY-TFSXJ3 | (Outdoor unit)   |            |
|  | UTY-XSZXZ1 | External switch controller: | UTY-TERX   | External connect kit:                                      | UTY-XWZXZ3 |

## Dimensions

(Unit: mm)

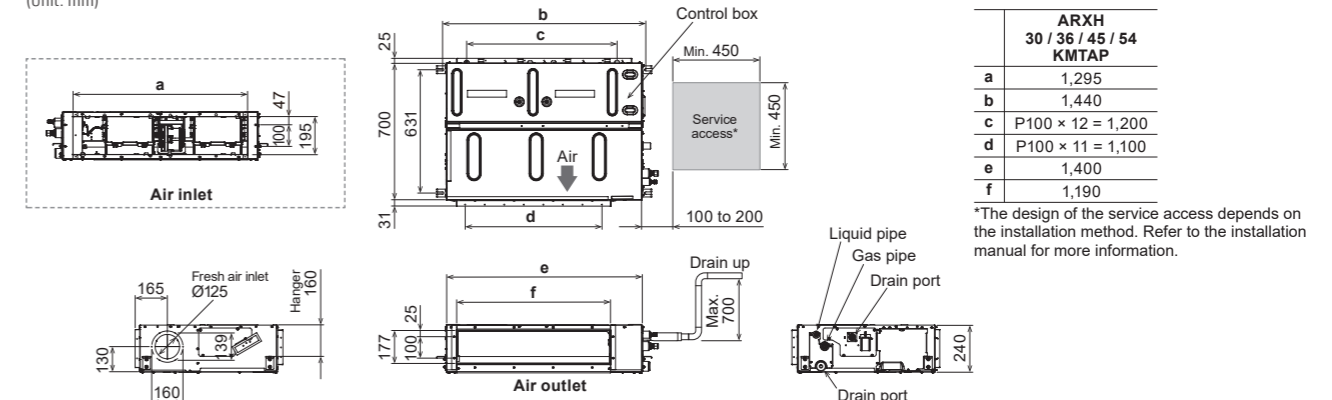

| ARXH 30 / 36 / 45 / 54 KMTAP |                   |
|------------------------------|-------------------|
| a                            | 1,295             |
| b                            | 1,440             |
| c                            | P100 × 12 = 1,200 |
| d                            | P100 × 11 = 1,100 |
| e                            | 1,400             |
| f                            | 1,190             |

\*The design of the service access depends on the installation method. Refer to the installation manual for more information.


# Medium Static Pressure Duct

Compact Size




## High-efficiency & Quiet operation

The combination of the V-shaped heat exchanger, air stabilizer, and the high-efficiency DC fan motor enable high-efficiency and quiet operation.

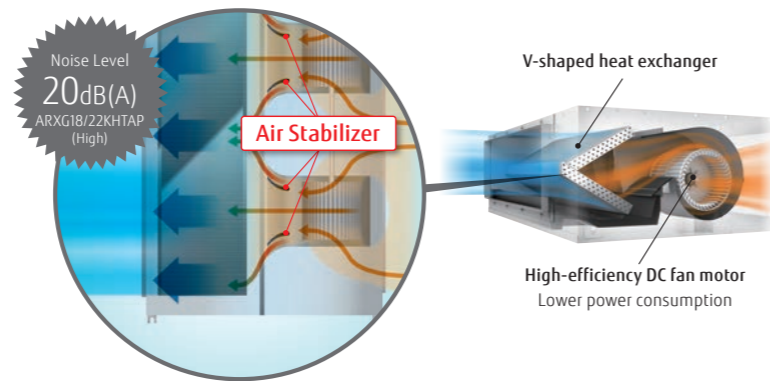

## Small, lightweight outdoor unit


The outdoor unit in this series is smaller and lighter than previous-generation outdoor units. It can be installed in a narrow space.

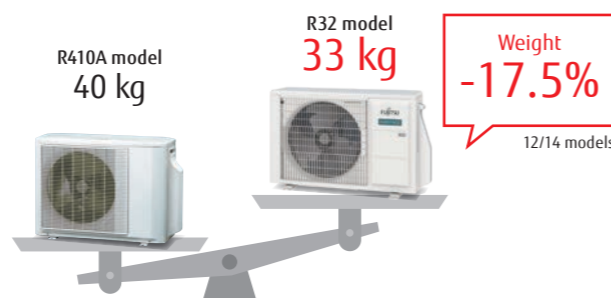

## Automatic airflow adjustment function

This unique and innovative function detects required air flow in each application case and automatically adjust the volume.

Automatically adjust!

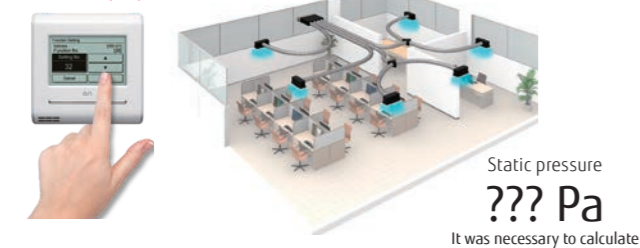


## Link up with a variety of central control system (Option)

Centralized control including facilities and equipment in addition to air conditioning is possible by linking up with MODBUS, KNX interfaces.



Model: ARXG12KHTAP / ARXG14KHTAP / ARXG18KHTAP / ARXG22KHTAP / ARXG24KHTAP / ARXG30KHTAP

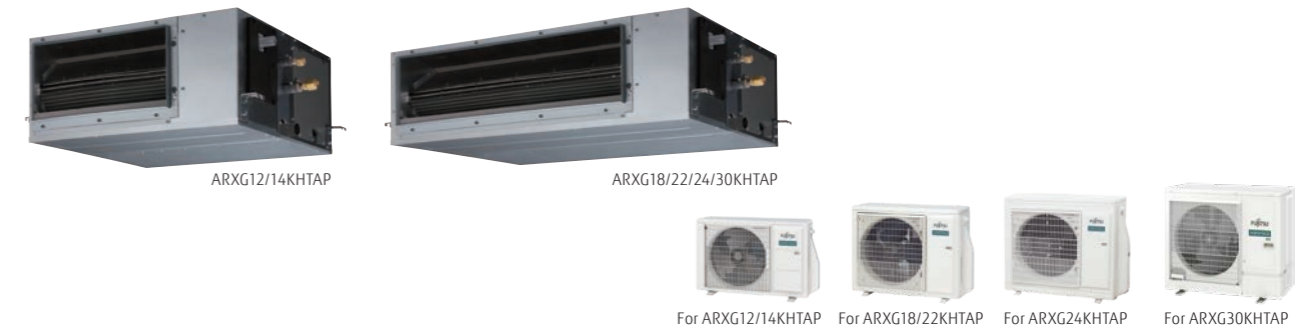

### Specifications

| Model name                            | Indoor unit                     |              | ARXG12KHTAP     | ARXG14KHTAP     | ARXG18KHTAP       | ARXG22KHTAP       | ARXG24KHTAP       | ARXG30KHTAP       |
|---------------------------------------|---------------------------------|--------------|-----------------|-----------------|-------------------|-------------------|-------------------|-------------------|
|                                       | Outdoor unit                    |              | AOEG12KBTB      | AOEG14KBTB      | AOEG18KBTB        | AOEG22KBTB        | AOEG24KBTB        | AOEG30KBTB        |
| Power Source                          | Single phase, ~230 V, 50 Hz     |              |                 |                 |                   |                   |                   |                   |
| Capacity                              | Cooling                         | Rated        | 3.5             | 4.3             | 5.2               | 6.0               | 6.8               | 8.5               |
|                                       |                                 | Min.-Max.    | 0.9-4.4         | 0.9-5.4         | 0.9-5.9           | 0.9-6.7           | 0.9-8.0           | 2.8-10.0          |
|                                       | Heating                         | Rated        | 4.1             | 5.0             | 6.0               | 7.0               | 7.5               | 10.0              |
| Min.-Max.                             |                                 | 0.9-5.7      | 0.9-6.5         | 0.9-7.5         | 0.9-8.0           | 0.9-9.1           | 2.7-11.2          |                   |
| Input Power                           | Cooling/Heating                 | kW           | 0.87/1.00       | 1.17/1.25       | 1.36/1.56         | 1.71/1.81         | 1.89/1.85         | 2.65/2.63         |
| EER                                   | Cooling                         | W/W          | 4.02            | 3.68            | 3.82              | 3.51              | 3.60              | 3.21              |
| COP                                   | Heating                         | W/W          | 4.10            | 4.00            | 3.85              | 3.87              | 4.06              | 3.80              |
| Pdesign                               | Cooling/Heating (-10°C)         | kW           | 3.5/3.4         | 4.3/3.8         | 5.2/4.4           | 6.0/4.8           | 6.8/6.0           | 8.5/8.0           |
| SEER                                  | Cooling                         | W/W          | 6.30            | 6.20            | 6.50              | 6.50              | 6.50              | 6.23              |
| SCOP                                  | Heating (Average)               | W/W          | 4.10            | 4.00            | 4.10              | 4.20              | 4.10              | 4.00              |
| Energy Efficiency Class               | Cooling                         |              | A++             | A++             | A++               | A++               | A++               | A++               |
|                                       | Heating (Average)               |              | A+              | A+              | A+                | A+                | A+                | A+                |
| Max. Operating Current                | Cooling/Heating                 | A            | 9.7/9.7         | 10.2/10.2       | 12.1/12.1         | 12.6/12.6         | 13.6/13.6         | 22.6/22.6         |
| Annual Energy Consumption             | Cooling                         | kWh/a        | 194             | 243             | 280               | 323               | 366               | 477               |
|                                       | Heating                         | kWh/a        | 1,159           | 1,328           | 1,501             | 1,597             | 2,048             | 2,796             |
| Moisture Removal                      |                                 | l/h          | 0.7             | 0.9             | 1.2               | 1.5               | 1.8               | 2.3               |
| Sound Pressure Level                  | Indoor (Cooling)                | H/M/L/Q      | 32/27/26/24     | 33/28/27/25     | 28/25/22/20       | 28/25/22/20       | 32/28/24/21       | 36/33/30/29       |
|                                       | Outdoor (Cooling/Heating)       | High         | 47/47           | 49/49           | 50/50             | 51/51             | 53/54             | 53/55             |
| Sound Power Level                     | Indoor (Cooling/Heating)        | High         | 57/58           | 59/60           | 54/54             | 57/57             | 57/57             | 63/65             |
|                                       | Outdoor (Cooling/Heating)       | High         | 61/61           | 62/62           | 62/62             | 63/63             | 65/66             | 68/69             |
| Airflow Rate                          | Indoor/Outdoor (Cooling)        | High         | 850/1,580       | 950/1,670       | 1,050/2,160       | 1,050/2,240       | 1,360/2,700       | 1,700/3,750       |
|                                       | Indoor/Outdoor (Heating)        | High         | 850/1,520       | 950/1,580       | 1,050/1,830       | 1,050/1,960       | 1,360/2,700       | 1,700/3,750       |
| Static pressure range (Standard)      |                                 | Pa           | 30 to 200 (35)  | 30 to 200 (35)  | 30 to 200 (35)    | 30 to 200 (35)    | 30 to 200 (35)    | 30 to 200 (47)    |
| Net Dimensions H x W x D              | Indoor                          | mm           | 300 x 700 x 700 | 300 x 700 x 700 | 300 x 1,000 x 700 | 300 x 1,000 x 700 | 300 x 1,000 x 700 | 300 x 1,000 x 700 |
|                                       | Outdoor                         | mm           | 542 x 799 x 290 | 542 x 799 x 290 | 632 x 799 x 290   | 632 x 799 x 290   | 716 x 820 x 315   | 788 x 940 x 320   |
| Weight                                | Indoor                          | kg           | 27              | 27              | 35                | 35                | 36                | 36                |
|                                       | Outdoor                         | kg           | 33              | 33              | 36                | 38                | 42                | 52                |
| Connection Pipe Diameter (Liquid/Gas) |                                 | mm           | 6.35/9.52       | 6.35/9.52       | 6.35/12.70        | 6.35/12.70        | 6.35/12.70        | 9.52/15.88        |
| Drain Hose Diameter (I.D./O.D.)       |                                 | mm           | 25/32           | 25/32           | 25/32             | 25/32             | 25/32             | 25/32             |
| Max. Pipe Length (Pre-Charge)         |                                 | m            | 25 (15)         | 25 (15)         | 30 (20)           | 30 (20)           | 30 (20)           | 50 (30)           |
| Max. Height Difference                | Cooling                         |              | 20              | 20              | 20                | 25                | 25                | 30                |
|                                       | Heating                         |              | -15 to 24       | -15 to 24       | -15 to 24         | -15 to 24         | -15 to 24         | -15 to 24         |
| Operating Range                       | Cooling                         | °CDB         | -15 to 46       | -15 to 46       | -15 to 46         | -15 to 46         | -15 to 46         | -15 to 46         |
|                                       | Heating                         | °CDB         | -15 to 24       | -15 to 24       | -15 to 24         | -15 to 24         | -15 to 24         | -15 to 24         |
| Refrigerant                           | Type (Global Warming Potential) |              | R32 (675)       | R32 (675)       | R32 (675)         | R32 (675)         | R32 (675)         | R32 (675)         |
|                                       | Charge                          | kg (CO2eq-t) | 0.85 (0.574)    | 0.85 (0.574)    | 1.02 (0.689)      | 1.25 (0.844)      | 1.25 (0.844)      | 1.90 (1.283)      |


### Optional parts

\* For optional parts compatibility of Intesis devices, please refer to the optional parts compatibility list page C-050 to C-053 and C-066.

|  |            |                    |                  |  |            |
|--|------------|--------------------|------------------|--|------------|
| Wired Remote Controller (Design type):             | UTY-RVRY   | Long-life filter:  | UTD-LFNB (18-30) | External input and output PCB:                             | UTY-XCSX   |
| Compact wired remote controller:                   | UTY-RCRYZ1 |                    | UTD-LFNC (12-14) | External connect kit:                                      | UTY-XWZXZG |
| Wired remote controller (touch panel):             | UTY-RNRYZ5 | Silver Ion Filter: | UTD-HFNB (18-30) | External input and output PCB bracket:                     | UTZ-GXNA   |
| Wired remote controller:                           | UTY-RLRY   |                    | UTD-HFNC (12/14) | Network Converter for single split (DC power supply type): | UTY-VTGV   |
|  | UTY-RNNYM  | WLAN adapter:      | UTY-TFSXZ1       | Network Converter for single split (AC power supply type): | UTY-VTGVXV |
|  | UTY-RVNYM  |                    | FG-RC-WIF122     | External switch controller:                                | UTY-TERX   |
| Simple remote controller (without operation mode): | UTY-RHRY   |                    | UTY-TFSXJ3       |  |            |
| Simple remote controller:                          | UTY-RSRY   |                    | FG-AC-WIF121     |  |            |
| Remote sensor unit:                                | UTY-XS2XZ1 | IR receiver unit:  | UTY-LBTYM        | (Outdoor unit 30)  |            |
|  |            |                    |                  | External connect kit:                                      | UTY-XWZXZ3 |

### Dimensions


(Unit: mm)

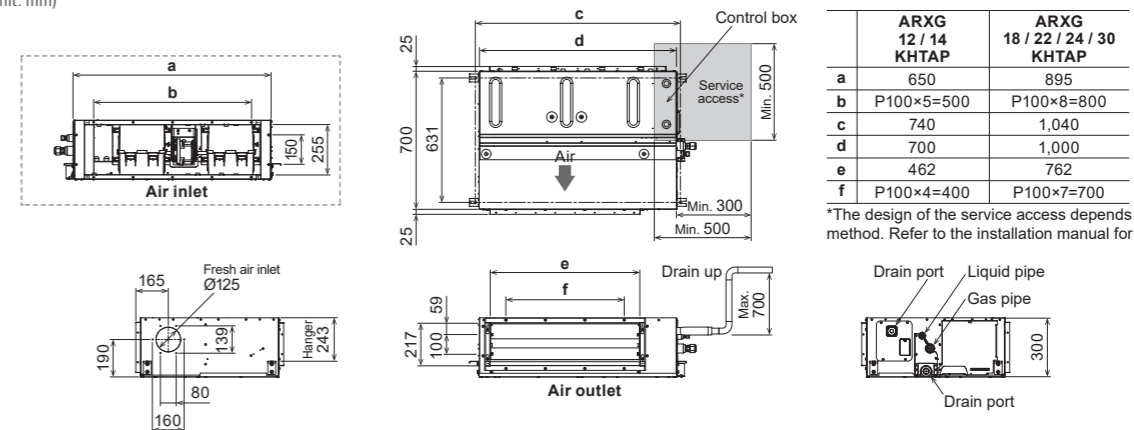

\*The design of the service access depends on the installation method. Refer to the installation manual for more information.


# Medium Static Pressure Duct

Compact Size




## High-efficiency & Quiet operation

The combination of the V-shaped heat exchanger, air stabilizer, and the high-efficiency DC fan motor enable high-efficiency and quiet operation.

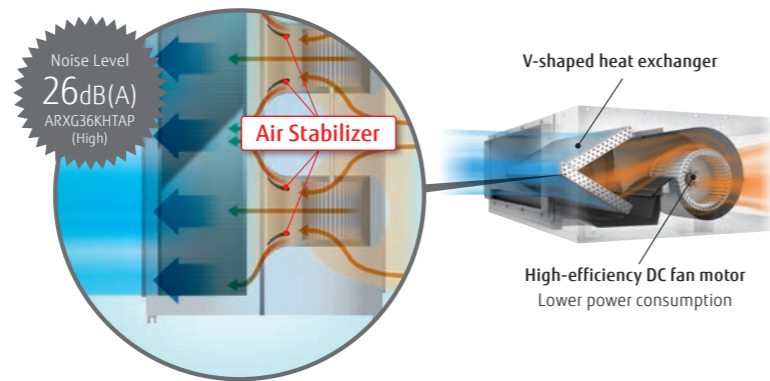

## Small, lightweight outdoor unit

The outdoor unit in this series is smaller and lighter than previous-generation outdoor units. It can be installed in a narrow space.

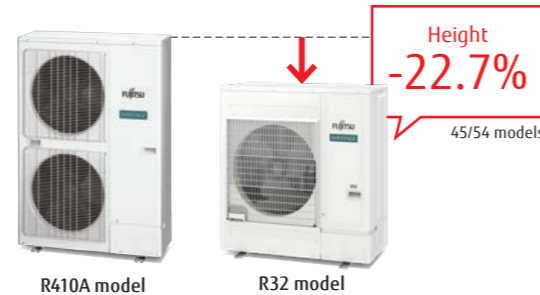

## Automatic airflow adjustment function

This unique and innovative function detects required air flow in each application case and automatically adjust the volume.

Automatically adjust!



## Link up with a variety of central control system (Option)

Centralized control including facilities and equipment in addition to air conditioning is possible by linking up with MODBUS, KNX interfaces.



Model: ARXG36KHTAP / ARXG45KHTAP / ARXG54KHTAP  
ARXG36KHTAP [3-phase] / ARXG45KHTAP [3-phase] / ARXG54KHTAP [3-phase]



## Specifications

| Model name                            | Indoor unit                     |              |                   | Outdoor unit           |                   |                   |                   |                   |
|---------------------------------------|---------------------------------|--------------|-------------------|------------------------|-------------------|-------------------|-------------------|-------------------|
|                                       | ARXG36KHTAP                     | ARXG45KHTAP  | ARXG54KHTAP       | AOEG36KBTB             | AOEG45KBTB        | AOEG54KBTB        |                   |                   |
| Power Source                          | Single phase, ~230 V, 50 Hz     |              |                   | 3-phase, ~400 V, 50 Hz |                   |                   |                   |                   |
| Capacity                              | Cooling                         | Rated        | 9.5               | 12.1                   | 13.4              | 9.5               | 12.1              | 13.4              |
|                                       |                                 | Min.-Max.    | 2.8-11.2          | 4.0-14.0               | 4.5-14.5          | 2.8-11.2          | 4.0-14.0          | 4.5-14.5          |
|                                       | Heating                         | Rated        | 10.8              | 13.5                   | 15.5              | 10.8              | 13.5              | 15.5              |
| Input Power                           | Cooling/Heating                 | Rated        | 2.7-12.7          | 4.2-16.2               | 4.7-16.5          | 2.7-12.7          | 4.2-16.2          | 4.7-16.5          |
|                                       |                                 | Min.-Max.    | 2.86/2.48         | 3.53/3.37              | 4.42/3.89         | 2.86/2.48         | 3.53/3.37         | 4.42/3.89         |
|                                       | Heating                         | Rated        | 4.35              | 4.01                   | 3.98              | 4.35              | 4.01              | 3.98              |
| EER                                   | Cooling                         | W/W          | 3.32              | 3.43                   | 3.03              | 3.32              | 3.43              | 3.03              |
| COP                                   | Heating                         | W/W          | 4.35              | 4.01                   | 3.98              | 4.35              | 4.01              | 3.98              |
| Pdesign                               | Cooling/Heating (-10°C)         | kW           | 9.5/8.7           | -                      | -                 | 9.5/8.7           | -                 | -                 |
| SEER                                  | Cooling                         | W/W          | 6.10              | -                      | -                 | 6.10              | -                 | -                 |
| SCOP                                  | Heating (Average)               | W/W          | 4.20              | -                      | -                 | 4.20              | -                 | -                 |
| Energy Efficiency Class               | Cooling                         |              | A++               | -                      | -                 | A++               | -                 | -                 |
|                                       | Heating (Average)               |              | A+                | -                      | -                 | A+                | -                 | -                 |
| Max. Operating Current                | Cooling/Heating                 | A            | 22.6/22.6         | 28.5/28.5              | 28.5/28.5         | 10.5/10.5         | 14.0/14.0         | 14.0/14.0         |
| Annual Energy Consumption             | Cooling                         | kWh/a        | 544               | -                      | -                 | 544               | -                 | -                 |
|                                       | Heating                         | kWh/a        | 2,898             | -                      | -                 | 2,898             | -                 | -                 |
| Moisture Removal                      |                                 | l/h          | 2.0               | 2.6                    | 3.7               | 2.0               | 2.6               | 3.7               |
| Sound Pressure Level                  | Indoor (Cooling)                | H/M/L/Q      | 36/31/28/26       | 39/35/31/29            | 39/35/31/29       | 36/31/28/26       | 39/35/31/29       | 39/35/31/29       |
|                                       | Outdoor (Cooling/Heating)       | High         | 33/31/28/26       | 39/35/31/29            | 39/35/31/29       | 33/31/28/26       | 39/35/31/29       | 39/35/31/29       |
| Sound Power Level                     | Indoor (Cooling/Heating)        | High         | 55/55             | 57/57                  | 57/59             | 55/55             | 57/57             | 57/59             |
|                                       | Outdoor (Cooling/Heating)       | High         | 64/63             | 67/69                  | 67/69             | 64/63             | 67/69             | 67/69             |
| Airflow Rate                          | Indoor/Outdoor (Cooling)        | High         | 2,050/3,750       | 2,550/4,450            | 2,550/4,450       | 2,050/3,750       | 2,550/4,450       | 2,550/4,450       |
|                                       | Indoor/Outdoor (Heating)        | High         | 1,850/3,750       | 2,550/4,450            | 2,550/4,450       | 1,850/3,750       | 2,550/4,450       | 2,550/4,450       |
| Static pressure range (Standard)      |                                 | Pa           | 30 to 200 (47)    | 30 to 200 (60)         | 30 to 200 (60)    | 30 to 200 (47)    | 30 to 200 (60)    | 30 to 200 (60)    |
| Net Dimensions H x W x D              | Indoor                          | mm           | 300 x 1,400 x 700 | 300 x 1,400 x 700      | 300 x 1,400 x 700 | 300 x 1,400 x 700 | 300 x 1,400 x 700 | 300 x 1,400 x 700 |
|                                       | Outdoor                         | mm           | 788 x 940 x 320   | 998 x 940 x 320        | 998 x 940 x 320   | 788 x 940 x 320   | 998 x 940 x 320   | 998 x 940 x 320   |
| Weight                                | Indoor                          | kg           | 46                | 46                     | 46                | 46                | 46                | 46                |
|                                       | Outdoor                         | kg           | 52                | 67                     | 67                | 53                | 67                | 67                |
| Connection Pipe Diameter (Liquid/Gas) |                                 | mm           | 9.52/15.88        | 9.52/15.88             | 9.52/15.88        | 9.52/15.88        | 9.52/15.88        | 9.52/15.88        |
| Drain Hose Diameter (I.D./O.D.)       |                                 | mm           | 25/32             | 25/32                  | 25/32             | 25/32             | 25/32             | 25/32             |
| Max. Pipe Length (Pre-Charge)         |                                 | m            | 50 (30)           | 50 (30)                | 50 (30)           | 50 (30)           | 50 (30)           | 50 (30)           |
| Max. Height Difference                |                                 |              | 30                | 30                     | 30                | 30                | 30                | 30                |
| Operating Range                       | Cooling                         | °CDB         | -15 to 46         | -15 to 46              | -15 to 46         | -15 to 46         | -15 to 46         | -15 to 46         |
|                                       | Heating                         | °CDB         | -15 to 24         | -15 to 24              | -15 to 24         | -15 to 24         | -15 to 24         | -15 to 24         |
| Refrigerant                           | Type (Global Warming Potential) |              | R32 (675)         | R32 (675)              | R32 (675)         | R32 (675)         | R32 (675)         | R32 (675)         |
|                                       | Charge                          | kg (CO2eq-T) | 1.90 (1.283)      | 2.70 (1.823)           | 2.70 (1.823)      | 1.90 (1.283)      | 2.70 (1.823)      | 2.70 (1.823)      |


## Optional parts

\* For optional parts compatibility of Intesis devices, please refer to the optional parts compatibility list page C-050 to C-053 and C-066.

|  |            |                             |              |  |            |
|--|------------|-----------------------------|--------------|--|------------|
| Wired Remote Controller (Design type):             | UTY-RVRY   | Long-life filter:           | UTD-LFNA     | External input and output PCB:                             | UTY-XCSX   |
| Compact wired remote controller:                   | UTY-RCRYZ1 | Silver Ion Filter:          | UTD-HFNA     | External input and output PCB bracket:                     | UTZ-GXNA   |
| Wired remote controller (touch panel):             | UTY-RNRYZ5 |                             | UTY-TFSXZ1   | Network Inverter for single split (DC power supply type):  | UTY-VTGX   |
| Wired remote controller:                           | UTY-RLRY   |                             | FG-RC-WIF1Z2 | Network Converter for single split (AC power supply type): | UTY-VTGXV  |
|  | UTY-RNNYM  | WLAN adapter:               | UTY-TFSXJ3   |  |            |
|  | UTY-RVNYM  |                             | FG-AC-WIF1Z1 | (Outdoor unit 36/45/54)                                    |            |
| Simple remote controller (without operation mode): | UTY-RHRY   | External switch controller: | UTY-TERX     | External connect kit:                                      | UTY-XWZXZ3 |
| Simple remote controller:                          | UTY-RSRY   | IR receiver unit:           | UTY-LBRYM    |  |            |
| Remote sensor unit:                                | UTY-XSZXZ1 | External connect kit:       | UTY-XWZXZG   |  |            |

## Dimensions

(Unit: mm)

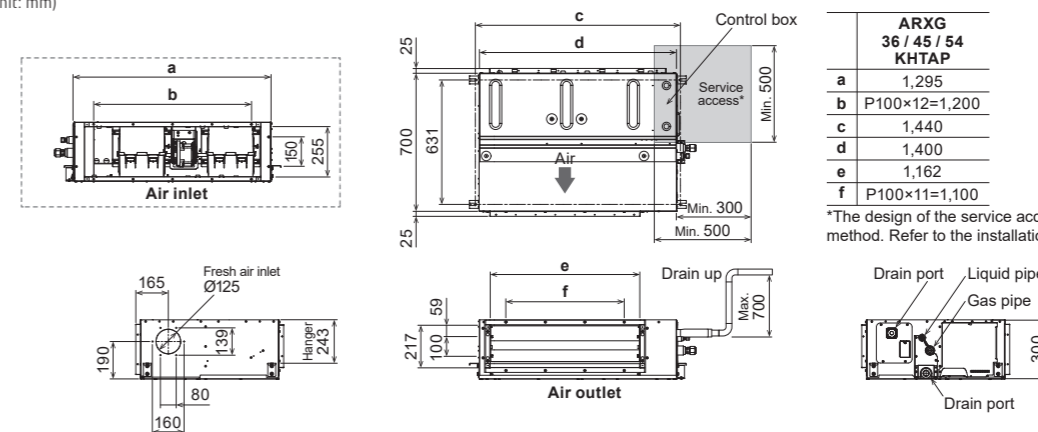

| ARXG 36 / 45 / 54 KHTAP |               |
|-------------------------|---------------|
| a                       | 1,295         |
| b                       | P100×12=1,200 |
| c                       | 1,440         |
| d                       | 1,400         |
| e                       | 1,162         |
| f                       | P100×11=1,100 |

\*The design of the service access depends on the installation method. Refer to the installation manual for more information.




# Medium Static Pressure Duct Standard



## Easy maintenance

Structural improvement is attained by making the bottom panel in two pieces—front and rear. The internal fan casing is also manufactured in two pieces—upper and lower. As a result, the motor and fan can be easily accessed and maintained by removing the rear panel and the lower casing while leaving the main chassis in place.

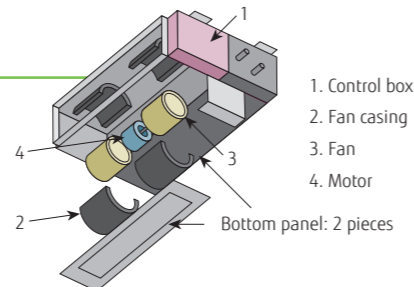


See below for case of rear-suction type

## Slim & Compact design


### Indoor Unit

The slim and compact design of the indoor unit, with the control box mounted on the side, allows installation in narrow spaces.

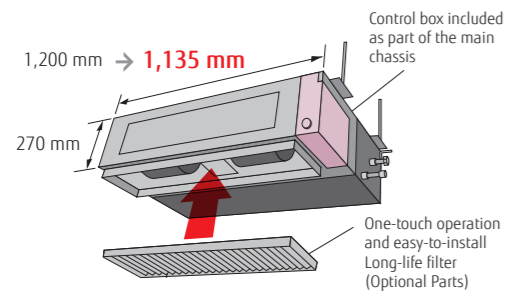


### Outdoor Unit

The outdoor units for the 45,000 BTU and 54,000 BTU models have been completely redesigned. Easier installation is achieved for this compact and lightweight outdoor unit.

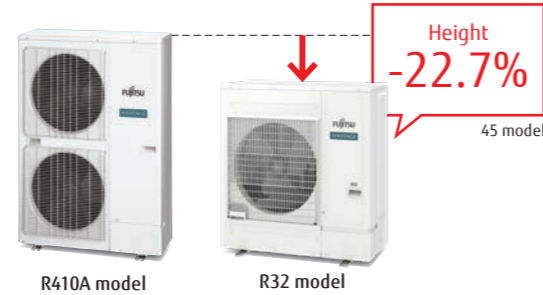

## Two-direction drain piping




## Link up with a variety of central control system (Option)

Centralized control including facilities and equipment in addition to air conditioning is possible by linking up with MODBUS, KNX interfaces.



Model: ARXG22KMLB / ARXG24KMLA / ARXG30KMLA / ARXG36KMLA / ARXG45KMLA  
ARXG36KMLA [3-phase] / ARXG45KMLA [3-phase]

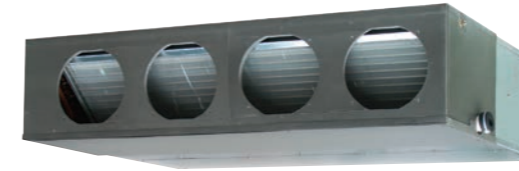

## Specifications

| Model name                            | Indoor unit                     |              | ARXG22KMLB        | ARXG24KMLA        | ARXG30KMLA        | ARXG36KMLA        | ARXG45KMLA        | ARXG36KMLA             | ARXG45KMLA        |
|---------------------------------------|---------------------------------|--------------|-------------------|-------------------|-------------------|-------------------|-------------------|------------------------|-------------------|
|                                       | Outdoor unit                    |              | AOEG22KBTB        | AOEG24KBTB        | AOEG30KBTB        | AOEG36KBTB        | AOEG45KBTB        | AOEG36KRTA             | AOEG45KRTA        |
| Power Source                          | Single phase, ~230 V, 50 Hz     |              |                   |                   |                   |                   |                   | 3-phase, ~400 V, 50 Hz |                   |
| Capacity                              | Cooling                         | Rated        | 6.0               | 6.8               | 8.5               | 9.5               | 12.1              | 9.5                    | 12.1              |
|                                       |                                 | Min.-Max.    | 0.9-6.7           | 0.9-8.0           | 2.8-10.0          | 2.8-11.2          | 4.0-13.0          | 2.8-11.2               | 4.0-13.0          |
|                                       | Heating                         | Rated        | 7.0               | 7.5               | 10.0              | 10.8              | 13.5              | 10.8                   | 13.5              |
| Min.-Max.                             |                                 | 0.9-8.0      | 0.9-9.1           | 2.7-11.2          | 2.7-12.7          | 4.2-15.2          | 2.7-12.7          | 4.2-15.2               |                   |
| Input Power                           | Cooling/Heating                 | kW           | 1.78/1.87         | 2.14/1.97         | 2.65/2.63         | 2.97/2.88         | 4.22/3.84         | 2.97/2.88              | 4.22/3.84         |
| EER                                   | Cooling                         | W/W          | 3.37              | 3.18              | 3.21              | 3.20              | 2.87              | 3.20                   | 2.87              |
| COP                                   | Heating                         | W/W          | 3.74              | 3.80              | 3.80              | 3.75              | 3.52              | 3.75                   | 3.52              |
| Pdesign                               | Cooling/Heating (-10°C)         | kW           | 6.0/4.8           | 6.8/6.0           | 8.5/8.0           | 9.5/8.7           | -                 | 9.5/8.7                | -                 |
| SEER                                  | Cooling                         | W/W          | 6.10              | 6.20              | 6.23              | 6.10              | -                 | 6.10                   | -                 |
| SCOP                                  | Heating                         | W/W          | 4.10              | 4.10              | 4.00              | 4.00              | -                 | 4.00                   | -                 |
| Energy Efficiency Class               | Cooling                         |              | A++               | A++               | A++               | A++               | -                 | A++                    | -                 |
|                                       | Heating                         |              | A+                | A+                | A+                | A+                | -                 | A+                     | -                 |
| Max. Operating Current                | Cooling/Heating                 | A            | 12.6/12.6         | 13.6/13.6         | 22.6/22.6         | 22.6/22.6         | 28.5/28.5         | 10.5/10.5              | 14.0/14.0         |
| Annual Energy Consumption             | Cooling                         | kWh/a        | 344               | 384               | 477               | 545               | -                 | 545                    | -                 |
|                                       | Heating                         | kWh/a        | 1,637             | 2,045             | 2,797             | 3,044             | -                 | 3,044                  | -                 |
| Moisture Removal                      |                                 | l/h          | 2.1               | 2.5               | 2.5               | 3.0               | 4.0               | 3.0                    | 4.0               |
| Sound Pressure Level                  | Indoor (Cooling)                | H/M/L/Q      | 31/29/27/25       | 31/29/27/25       | 39/35/30/26       | 39/35/30/26       | 42/38/32/28       | 39/35/30/26            | 42/38/32/28       |
|                                       | Indoor (Heating)                | H/M/L/Q      | 31/29/27/25       | 31/29/27/25       | 42/35/30/26       | 42/35/30/26       | 42/38/32/28       | 42/35/30/26            | 42/38/32/28       |
| Sound Power Level                     | Outdoor (Cooling/Heating)       | High         | 51/51             | 53/54             | 53/55             | 55/55             | 57/57             | 55/55                  | 57/57             |
|                                       | Outdoor (Cooling/Heating)       | High         | 60/62             | 60/62             | 65/69             | 65/70             | 68/70             | 65/70                  | 68/70             |
| Airflow Rate                          | Indoor/Outdoor (Cooling)        | High         | 1,100/2,240       | 1,100/2,700       | 1,900/3,750       | 1,900/3,750       | 2,100/4,450       | 1,900/3,750            | 2,100/4,450       |
|                                       | Indoor/Outdoor (Heating)        | High         | 1,100/1,960       | 1,100/2,700       | 2,100/3,750       | 2,100/3,750       | 2,100/4,450       | 2,100/3,750            | 2,100/4,450       |
| Static pressure range (Standard)      |                                 | Pa           | 30 to 150 (35)    | 30 to 150 (35)    | 30 to 150 (47)    | 30 to 150 (47)    | 30 to 150 (60)    | 30-150 (47)            | 30-150 (60)       |
| Net Dimensions                        | Indoor                          | mm           | 270 × 1,135 × 700 | 270 × 1,135 × 700 | 270 × 1,135 × 700 | 270 × 1,135 × 700 | 270 × 1,135 × 700 | 270 × 1,135 × 700      | 270 × 1,135 × 700 |
| H x W x D                             | Outdoor                         | mm           | 632 × 799 × 290   | 716 × 820 × 315   | 788 × 940 × 320   | 788 × 940 × 320   | 998 × 940 × 320   | 788 × 940 × 320        | 998 × 940 × 320   |
| Weight                                | Indoor                          | kg           | 35                | 35                | 38                | 38                | 39                | 38                     | 39                |
|                                       | Outdoor                         | kg           | 38                | 42                | 52                | 52                | 67                | 53                     | 67                |
| Connection Pipe Diameter (Liquid/Gas) |                                 | mm           | 6.35/12.70        | 6.35/12.70        | 9.52/15.88        | 9.52/15.88        | 9.52/15.88        | 9.52/15.88             | 9.52/15.88        |
| Drain Hose Diameter (I.D./O.D.)       |                                 | mm           | 35.7/38.1         | 35.7/38.1         | 35.7/38.1         | 35.7/38.1         | 35.7/38.1         | 35.7/38.1              | 35.7/38.1         |
| Max. Pipe Length (Pre-Charge)         |                                 | m            | 30 (20)           | 30 (20)           | 50 (30)           | 50 (30)           | 50 (30)           | 50 (30)                | 50 (30)           |
| Max. Height Difference                |                                 | m            | 25                | 25                | 30                | 30                | 30                | 30                     | 30                |
| Operating Range                       | Cooling                         | °CDB         | -15 to 46         | -15 to 46         | -15 to 46         | -15 to 46         | -15 to 46         | -15 to 46              | -15 to 46         |
|                                       | Heating                         | °CDB         | -15 to 24         | -15 to 24         | -15 to 24         | -15 to 24         | -15 to 24         | -15 to 24              | -15 to 24         |
| Refrigerant                           | Type (Global Warming Potential) |              | R32 (675)         | R32 (675)         | R32 (675)         | R32 (675)         | R32 (675)         | R32 (675)              | R32 (675)         |
|                                       | Charge                          | kg (CO2eq-T) | 1.25 (0.844)      | 1.25 (0.844)      | 1.90 (1.283)      | 1.90 (1.283)      | 2.70 (1.823)      | 1.90 (1.283)           | 2.70 (1.823)      |


## Optional parts

\* For optional parts compatibility of Intesis devices, please refer to the optional parts compatibility list page C-050 to C-053 and C-066.

|  |            |                     |              |  |            |
|--|------------|---------------------|--------------|--|------------|
| Wired Remote Controller (Design type):             | UTY-RVRY   | WLAN adapter:       | UTY-TFSXZ1   | Network Converter for single split (DC power supply type): | UTY-VTGX   |
| Compact wired remote controller:                   | UTY-RCRYZ1 |                     | FG-RC-WIF1Z2 | Network Converter for single split (AC power supply type): | UTY-VTGXV  |
| Wired remote controller (touch panel):             | UTY-RNRYZ5 |                     | UTY-TFSXJ3   | Long-life filter:  | UTD-LF25NA |
| Wired remote controller:                           | UTY-RLRY   |                     | FG-AC-WIF1Z1 | Silver Ion Filter:   | UTD-HFND   |
|  | UTY-RNNYM  | Flange (Round):     | UTD-RF204    | External connect kit:                                      | UTY-XWZXZG |
|  | UTY-RVNYM  | Flange (Square):    | UTD-SF045T   |  |            |
| Simple remote controller (without operation mode): | UTY-RHRY   | IR receiver unit:   | UTY-LBTYM    | (Outdoor unit 30/36/45)                                    |            |
| Simple remote controller:                          | UTY-RSRY   | Remote sensor unit: | UTY-XSZXZ1   | External connect kit:                                      | UTY-XWZXZ3 |
| External switch controller:                        | UTY-TERX   | Drain pump unit:    | UTZ-PX1NBA   |  |            |

## Dimensions

(Unit: mm)

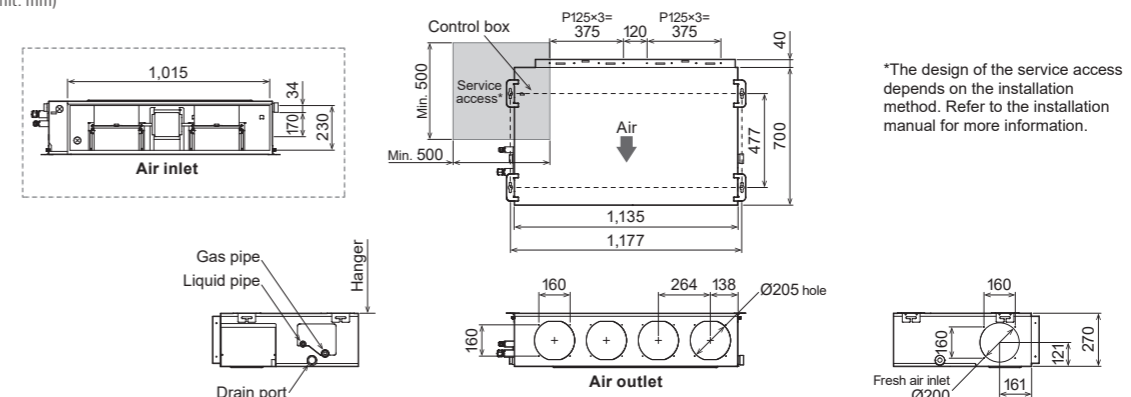



\*The design of the service access depends on the installation method. Refer to the installation manual for more information.

# High Static Pressure Duct



## Easy installation (Compact & Lightweight)

The indoor and outdoor units are designed to be compact and light by reducing the basic chassis size and the overall material weight.

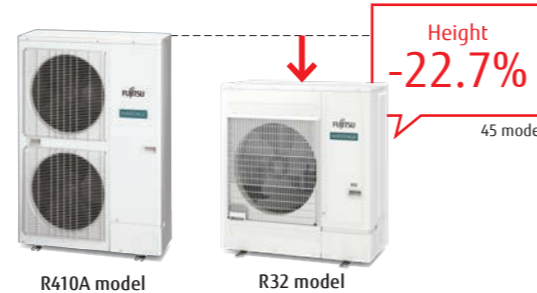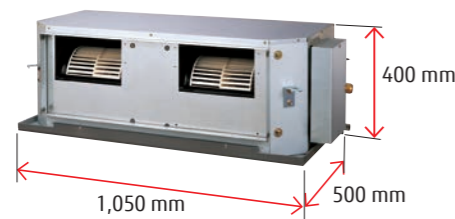


## Design also suits high static pressure



## Low noise

Slanted corners at the top help reduce turbulent airflow. Low noise is realized by adopting a plastic case and a plastic fan.

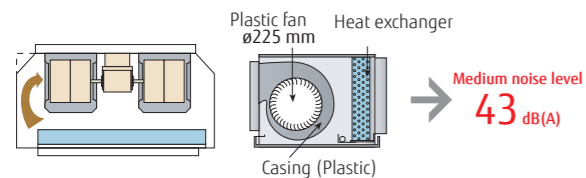

## Link up with a variety of central control system (Option)

Centralized control including facilities and equipment in addition to air conditioning is possible by linking up with MODBUS, KNX interfaces.



Model: ARXG45KHTB / ARXG54KHTB  
ARXG45KHTB [3-phase] / ARXG54KHTB [3-phase]



### Specifications

| Model name                            | Indoor unit                     |              | ARXG45KHTB        | ARXG54KHTB             | ARXG45KHTB        | ARXG54KHTB        |
|---------------------------------------|---------------------------------|--------------|-------------------|------------------------|-------------------|-------------------|
|                                       | Outdoor unit                    |              | AOEG45KHTB        | AOEG54KHTB             | AOEG45KRTA        | AOEG54KRTA        |
| Power Source                          | Single phase, ~230 V, 50 Hz     |              |                   | 3-phase, ~400 V, 50 Hz |                   |                   |
| Capacity                              | Cooling                         | Rated        | 12.1              | 13.4                   | 12.1              | 13.4              |
|                                       |                                 | Min.-Max.    | 4.0-14.0          | 5.0-14.5               | 4.0-14.0          | 5.0-14.5          |
|                                       | Heating                         | Rated        | 13.5              | 15.5                   | 13.5              | 15.5              |
|                                       |                                 | Min.-Max.    | 5.0-16.2          | 5.5-18.0               | 5.0-16.2          | 5.5-18.0          |
| Input Power                           | Cooling/Heating                 | kW           | 4.16/3.61         | 4.77/4.18              | 4.16/3.61         | 4.77/4.18         |
| EER                                   | Cooling                         | W/W          | 2.91              | 2.81                   | 2.91              | 2.81              |
| COP                                   | Heating                         | W/W          | 3.74              | 3.71                   | 3.74              | 3.71              |
| Pdesign                               | Cooling/Heating (-10°C)         | kW           | -                 | -                      | -                 | -                 |
| SEER                                  | Cooling                         | W/W          | -                 | -                      | -                 | -                 |
| SCOP                                  | Heating                         | W/W          | -                 | -                      | -                 | -                 |
| Energy Efficiency Class               | Cooling                         | -            | -                 | -                      | -                 | -                 |
|                                       | Heating                         | -            | -                 | -                      | -                 | -                 |
| Max. Operating Current                | Cooling/Heating                 | A            | 28.5/28.5         | 28.5/28.5              | 14.0/14.0         | 14.0/14.0         |
| Annual Energy Consumption             | Cooling                         | kWh/a        | -                 | -                      | -                 | -                 |
|                                       | Heating                         | kWh/a        | -                 | -                      | -                 | -                 |
| Moisture Removal                      |                                 | l/h          | 1.5               | 2.0                    | 1.5               | 2.0               |
| Sound Pressure Level                  | Indoor (Cooling)                | H/M/L        | 47/43/40          | 47/43/40               | 47/43/40          | 47/43/40          |
|                                       | Indoor (Heating)                | H/M/L        | 47/43/40          | 47/43/40               | 47/43/40          | 47/43/40          |
| Sound Power Level                     | Outdoor (Cooling/Heating)       | High         | 57/57             | 57/59                  | 57/57             | 57/59             |
|                                       | Indoor (Cooling/Heating)        | High         | 75/74             | 75/74                  | 75/74             | 75/74             |
| Airflow Rate                          | Indoor/Outdoor (Cooling)        | High         | 3,350/4,450       | 3,350/4,450            | 3,350/4,450       | 3,350/4,450       |
|                                       | Indoor/Outdoor (Heating)        | High         | 3,350/4,450       | 3,350/4,450            | 3,350/4,450       | 3,350/4,450       |
| Static pressure range (Standard)      |                                 | Pa           | 100 to 250 (100)  | 100 to 250 (100)       | 100 to 250 (100)  | 100 to 250 (100)  |
| Net Dimensions                        | Indoor                          | mm           | 400 × 1,050 × 500 | 400 × 1,050 × 500      | 400 × 1,050 × 500 | 400 × 1,050 × 500 |
| H x W x D                             | Outdoor                         | mm           | 998 × 940 × 320   | 998 × 940 × 320        | 998 × 940 × 320   | 998 × 940 × 320   |
| Weight                                | Indoor                          | kg           | 46                | 46                     | 46                | 46                |
|                                       | Outdoor                         | kg           | 67                | 67                     | 67                | 67                |
| Connection Pipe Diameter (Liquid/Gas) |                                 | mm           | 9.52/15.88        | 9.52/15.88             | 9.52/15.88        | 9.52/15.88        |
| Drain port Diameter (I.D./O.D.)       |                                 | mm           | 23.4/25.4         | 23.4/25.4              | 23.4/25.4         | 23.4/25.4         |
| Max. Pipe Length (Pre-Charge)         |                                 | m            | 50 (30)           | 50 (30)                | 50 (30)           | 50 (30)           |
| Max. Height Difference                |                                 | m            | 30                | 30                     | 30                | 30                |
| Operating Range                       | Cooling                         | °CDB         | -15 to 46         | -15 to 46              | -15 to 46         | -15 to 46         |
|                                       | Heating                         | °CDB         | -15 to 24         | -15 to 24              | -15 to 24         | -15 to 24         |
| Refrigerant                           | Type (Global Warming Potential) |              | R32 (675)         | R32 (675)              | R32 (675)         | R32 (675)         |
|                                       | Charge                          | kg (CO2eq-T) | 2.70 (1.823)      | 2.70 (1.823)           | 2.70 (1.823)      | 2.70 (1.823)      |


### Optional parts

\* For optional parts compatibility of Intesis devices, please refer to the optional parts compatibility list page C-050 to C-053 and C-066.

|   |  |  |
|---|--|--|
| Wired Remote Controller (Design type): UTY-RVRY   | Remote sensor unit: UTY-XSZXZ1                   | Network Converter for single split (DC power supply type): UTY-VTGX  |
| Compact wired remote controller: UTY-RCRYZ1       | Long-life filter: UTD-LF60KA                     | Network Converter for single split (AC power supply type): UTY-VTGXV |
| Wired remote controller (touch panel): UTY-RNRYZ5 | External switch controller: UTY-TERX             | Silver Ion Filter: UTD-HFKB  |
| Wired remote controller: UTY-RLRY                 | WLAN adapter: UTY-TFSXZ1                         | External connect kit: UTY-XWZXZG                                     |
| Simple remote controller: UTY-RSRY                |  |  |
|   |  |  |
|   |  |  |
| IR Receiver unit: UTY-LBTYM                       | External input and output PCB: UTY-XCSX+UTZ-GXEA | (Outdoor unit) External connect kit: UTY-XWZXZ3                      |

### Dimensions

(Unit: mm)

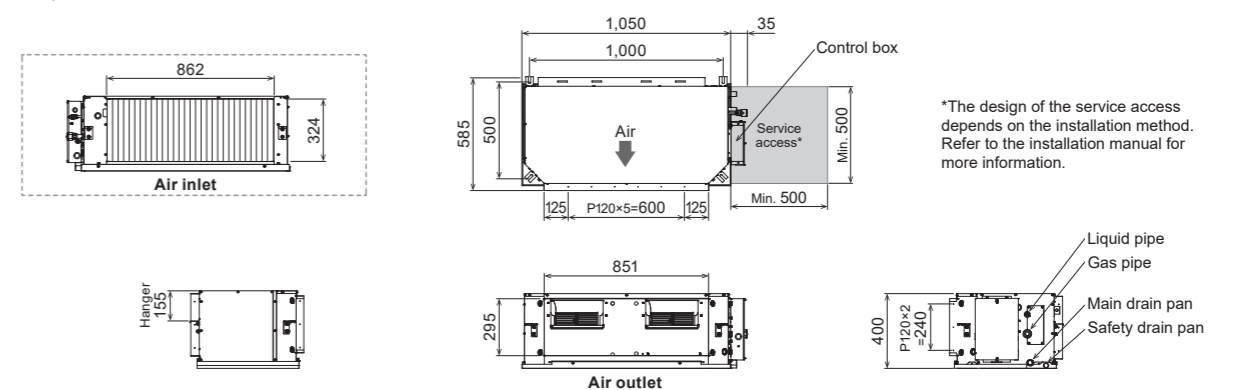

\*The design of the service access depends on the installation method. Refer to the installation manual for more information.



# High Static Pressure Duct



## High energy efficiency


Much greater efficiency is achieved by the use of all-DC inverter technology.

## Design also corresponding to high static pressure

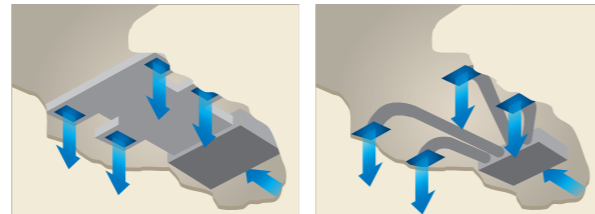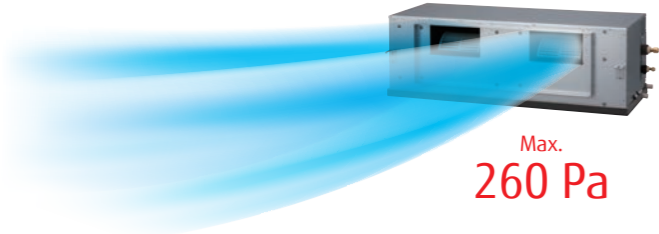


## Easy installation (Compact & Lightweight)

The indoor unit is designed to be compact and light by reducing the basic chassis size and the overall material weight.

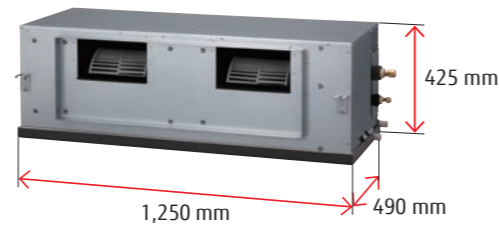

## Low noise

Slanted corners at the top help reduce turbulent airflow. Low noise is realized by adopting a plastic case and a plastic fan.

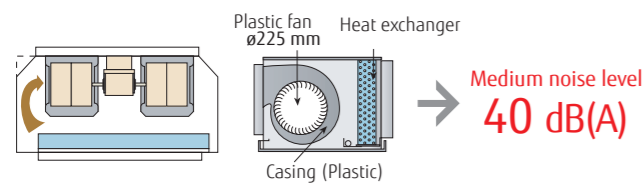

## Link up with a variety of central control system (Option)

Centralized control including facilities and equipment in addition to air conditioning is possible by linking up with MODBUS, KNX interfaces.



## Model: ARYG60LHTA [3-phase]



## Specifications

| Model name                       | Indoor unit                           |              | ARYG60LHTA        |          |
|----------------------------------|---------------------------------------|--------------|-------------------|----------|
|                                  | Outdoor unit                          |              | AOYG60LATT        |          |
| Power Source                     | 3-phase, ~400 V, 50 Hz                |              |                   |          |
| Capacity                         | Cooling                               | Rated        | kW                | 15.0     |
|                                  |                                       | Min.-Max.    |                   | 6.2-17.5 |
|                                  | Heating                               | Rated        |                   | 18.0     |
| Input Power                      | Cooling/Heating                       | Min.-Max.    | 6.2-20.0          |          |
|                                  |                                       |              | 4.70/5.15         |          |
| EER                              | Cooling                               | W/W          | 3.19              |          |
| COP                              | Heating                               |              | 3.50              |          |
| Max. Operating Current           | Cooling/Heating                       | A            | 12.5 / 12.5       |          |
| Moisture Removal                 |                                       | l/h          | 2.0               |          |
| Sound Pressure                   | Indoor (Cooling)                      | H/M/L/Q      | 45/40/36/-        |          |
|                                  | Indoor (Heating)                      | H/M/L/Q      | 45/40/36/-        |          |
|                                  | Outdoor (Cooling/Heating)             | High         | 56/58             |          |
| Airflow Rate                     | Indoor/Outdoor (Cooling)              | High         | 3,550/6,900       |          |
|                                  | Indoor/Outdoor (Heating)              | High         | 3,550/7,300       |          |
| Static pressure range (Standard) |                                       | Pa           | 60 to 260 (60)    |          |
| Net Dimensions                   | Indoor                                | mm           | 425 × 1,250 × 490 |          |
| H x W x D                        | Outdoor                               | mm           | 1,290 × 900 × 330 |          |
|                                  | Indoor                                | kg           | 54                |          |
| Weight                           | Outdoor                               | kg           | 104               |          |
|                                  | Connection Pipe Diameter (Liquid/Gas) | mm           | 9.52/15.88        |          |
| Drain Hose Diameter (I.D./O.D.)  |                                       |              | 23.4/25.4         |          |
| Max. Pipe Length (Pre-Charge)    |                                       | m            | 75 (30)           |          |
| Max. Height Difference           |                                       |              | 30                |          |
| Operating Range                  | Cooling                               | *CDB         | -15 to 46         |          |
|                                  | Heating                               |              | -15 to 24         |          |
| Refrigerant                      | Type (Global Warming Potential)       |              | R410A (2,088)     |          |
|                                  | Charge                                | kg (CO2eq-T) | 3.45 (7.204)      |          |


## Optional parts

\* For optional parts compatibility of Intesis devices, please refer to the optional parts compatibility list page C-050 to C-053 and C-066.

|                             |              |  |            |
|-----------------------------|--------------|--|------------|
| Wired remote controller:    | UTY-RNNYM    | Network Converter for single split (DC power supply type): | UTY-VTGX   |
| Wired remote controller:    | UTY-RVNYM    | Network Converter for single split (AC power supply type): | UTY-VTGXV  |
| External switch controller: | UTY-TERX     | External connect kit:                                      | UTD-ECS5A  |
| WLAN adapter:               | UTY-TFNXZ1   | (Outdoor unit)   |            |
|                             | FG-RC-WIF1Z2 | External connect kit:                                      | UTY-XWZXZ2 |
| Remote sensor unit:         | UTY-XSZXZ1   |  |            |
| IR receiver unit:           | UTY-LRHYM    |  |            |

## Dimensions

(Unit: mm)

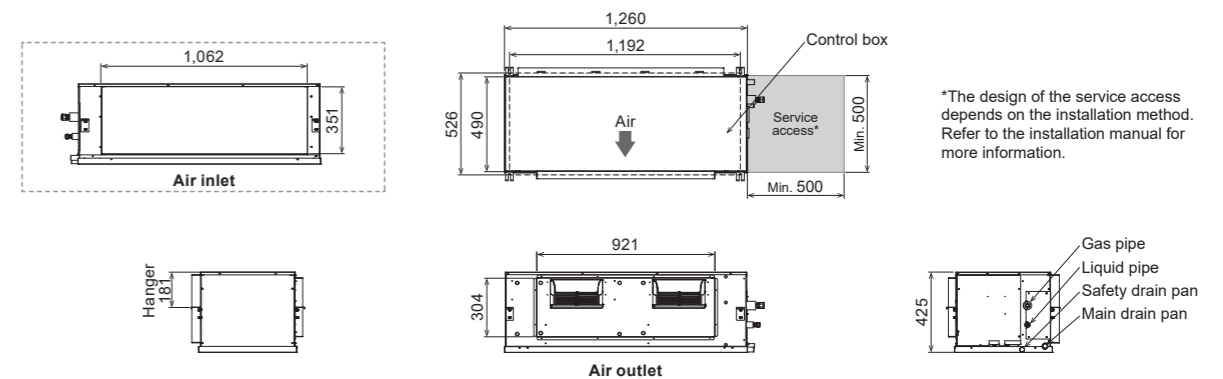

\*The design of the service access depends on the installation method. Refer to the installation manual for more information.



# Floor Compact Size



Model: AGE09KVCA / AGE12KVCA / AGE14KVCA



### Specifications

| Model name                            | Indoor unit                     |           | Outdoor unit |                   | AGE09KVCA                   | AGE12KVCA         | AGE14KVCA    |
|---------------------------------------|---------------------------------|-----------|--------------|-------------------|-----------------------------|-------------------|--------------|
|                                       | AOEG09KVCA                      |           | AOEG12KVCA   |                   | AOEG14KVCA                  |                   |              |
| Power Source                          |                                 |           |              |                   | Single phase, ~230 V, 50 Hz |                   |              |
| Capacity                              | Cooling                         | Rated     | kW           | 2.5               | 3.5                         | 4.2               |              |
|                                       |                                 | Min.-Max. |              | 0.9-3.5           | 0.9-4.0                     | 0.9-5.2           |              |
|                                       | Heating                         | Rated     | 3.5          | 4.5               | 5.2                         |                   |              |
| Min.-Max.                             |                                 | 0.9-5.1   | 0.9-5.3      | 0.9-6.3           |                             |                   |              |
| Input Power                           | Cooling/Heating                 |           | kW           | 0.53/0.81         | 0.88/1.22                   | 1.06/1.41         |              |
| EER                                   | Cooling                         |           |              | 4.70              | 4.00                        | 3.95              |              |
|                                       | Heating                         |           |              | 4.30              | 3.70                        | 3.70              |              |
| Pdesign                               | Cooling/Heating (-10°C)         |           | kW           | 2.50/2.60         | 3.50/3.50                   | 4.20/4.20         |              |
| SEER                                  | Cooling                         |           |              | 8.50              | 8.20                        | 8.10              |              |
|                                       | Heating (Average)               |           |              | 4.30              | 4.10                        | 4.00              |              |
| SCOP                                  | Cooling                         |           |              | A+++              | A++                         | A+                |              |
|                                       | Heating (Average)               |           |              | A+                | A+                          | A+                |              |
| Max. Operating Current                | Cooling/Heating                 |           | A            | 7.0/8.5           | 7.0/8.5                     | 11.0/12.0         |              |
| Annual Energy Consumption             | Cooling                         |           |              | 103               | 149                         | 181               |              |
|                                       | Heating (Average)               |           |              | 845               | 1,192                       | 1,466             |              |
| Moisture Removal                      | Cooling                         |           |              | 1.3               | 1.8                         | 2.1               |              |
|                                       | Heating                         |           |              |                   |                             |                   |              |
| Sound Pressure Level                  | Indoor (Cooling)                | H/M/L/Q   | dB(A)        | 40/35/29/22       | 40/35/29/22                 | 44/38/31/22       |              |
|                                       | Indoor (Heating)                | H/M/L/Q   |              | 41/35/29/22       | 41/35/29/22                 | 43/37/29/22       |              |
| Sound Power Level                     | Outdoor (Cooling/Heating)       | High      | dB(A)        | 43/47             | 45/51                       | 51/50             |              |
|                                       | Indoor (Cooling/Heating)        | High      |              | 53/54             | 53/54                       | 57/56             |              |
| Airflow Rate                          | Outdoor (Cooling/Heating)       | High      | m³/h         | 58/61             | 61/64                       | 63/63             |              |
|                                       | Indoor/Outdoor (Cooling)        | High      |              | 570/1,530         | 570/1,530                   | 650/2,210         |              |
| Net Dimensions H x W x D              | Indoor (Cooling/Heating)        | High      | mm           | 600/1,510         | 600/1,510                   | 650/2,100         |              |
|                                       | Outdoor (Cooling/Heating)       | High      |              | 600 × 740 × 200   | 600 × 740 × 200             | 600 × 740 × 200   |              |
| Weight                                | Indoor (Cooling/Heating)        | High      | kg           | 542 × 799 × 290   | 542 × 799 × 290             | 632 × 799 × 290   |              |
|                                       | Outdoor (Cooling/Heating)       | High      |              | 14                | 14                          | 14                |              |
| Connection Pipe Diameter (Liquid/Gas) | Indoor (Cooling/Heating)        | High      | mm           | 31                | 31                          | 38                |              |
|                                       | Outdoor (Cooling/Heating)       | High      |              | 6.35/9.52         | 6.35/9.52                   | 6.35/9.52         |              |
| Drain Hose Diameter (I.D./O.D.)       |                                 |           | mm           | 13.8/15.8 to 16.7 | 13.8/15.8 to 16.7           | 13.8/15.8 to 16.7 |              |
| Max. Pipe Length (Pre-Charge)         |                                 |           | m            | 20 (15)           | 20 (15)                     | 20 (15)           |              |
| Max. Height Difference                |                                 |           | m            | 15                | 15                          | 15                |              |
| Operating Range                       | Cooling                         |           |              | -10 to 46         | -10 to 46                   | -10 to 46         |              |
|                                       | Heating                         |           |              | -15 to 24         | -15 to 24                   | -15 to 24         |              |
| Refrigerant Charge                    | Type (Global Warming Potential) |           |              | R32 (675)         | R32 (675)                   | R32 (675)         |              |
|                                       | Charge                          |           |              | kg (CO2eq-T)      | 0.85 (0.574)                | 0.85 (0.574)      | 0.94 (0.635) |


### High energy saving

The Floor 09 class achieves a top-class SEER of 8.50 and an A+++ seasonal efficiency rank for cooling. The Floor 09 class achieves an improved SCOP of 4.30 and an A+ seasonal efficiency rank for heating.



### Flexible & easy installation


The compact and whole-surface suction design provides flexible installation options, including floor-standing, embedded, half concealed, and wall mount installation to match the room layout.

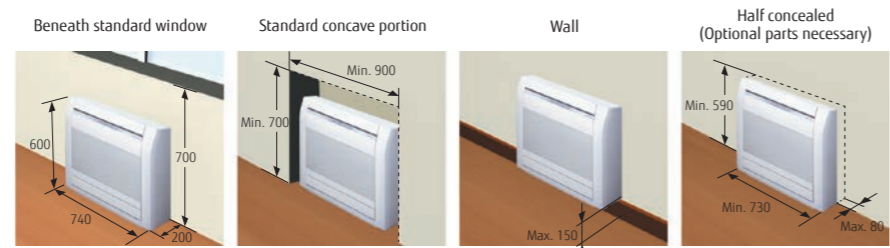

\* Concaved position installation with concealment is prohibited.

### Low ambient operation

Factory-guaranteed cooling operation down to -10°C ambient temperature.

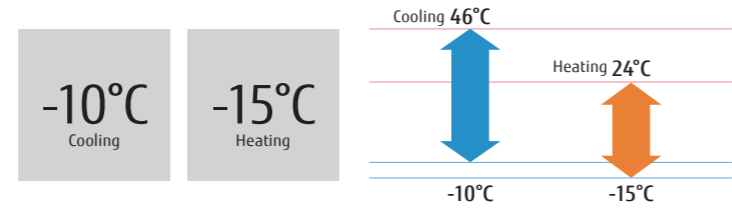

### Smart device control (Option)


With the optional WLAN adapter installed in the air conditioner, you can control it from anywhere with your smart device.

\* See page C-020 for details on smart device control.



### 10°C heat

The room temperature can be set to go no lower than 10°C, thus ensuring that the room does not get too cold when not occupied.

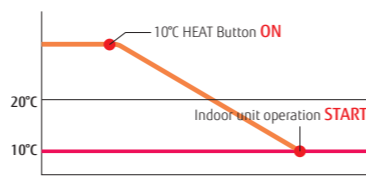


### Optional parts

\* For optional parts compatibility of Intesis devices, please refer to the optional parts compatibility list page C-050 to C-053 and C-066.

- Wired Remote Controller (Design type): UTY-RVRY
- Compact wired remote controller: UTY-RCRYZ1
- Wired remote controller (touch panel): UTY-RNRYZ5
- Wired remote controller: UTY-RLRY
- Simple remote controller (without operation mode): UTY-RHRY
- Simple remote controller: UTY-RSRY
- External switch controller: UTY-TERX
- WLAN adapter: UTY-TFSXZ1
- FG-AC-WIF1Z1
- UTY-TFSXJ3
- UTR-STA
- UTY-TWRXZ3
- Network Converter for single split (DC power supply type): UTY-VTGX
- Network Converter for single split (AC power supply type): UTY-VTGXV
- Silver Ion Filter: UTR-FA03-5
- External connect kit: UTY-XWZX25

### Dimensions

(Unit: mm)

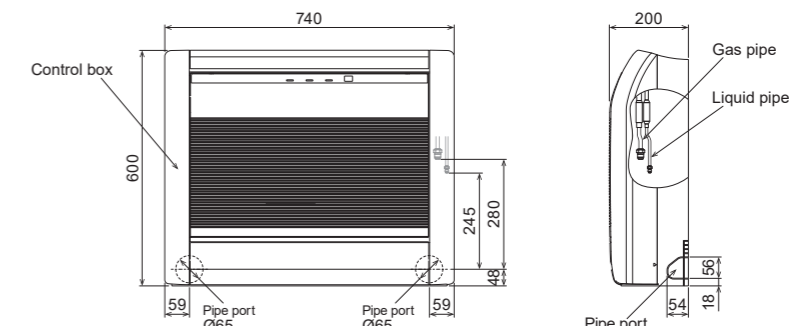

# Ceiling




## Light elegant design

The light-elegant, gently curved surface gives a sense of comfort and well-being.



## Easy installation

The indoor unit can be easily installed under the ceiling thanks to the uniquely designed mounting kit.

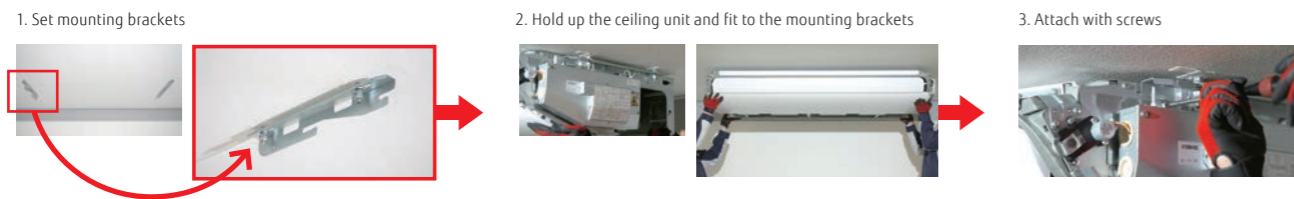

## Easy maintenance

The front panel can be opened without removing it for safe & speedy maintenance.



The drain pan can be removed for cleaning.



Components in the control box can be easily accessed from the wide side opening.



## Flexible installation

The drain hose and pipe can be contained in the casing and connected in the right, left, angled, or downward direction.



## Link up with a variety of central control system (Option)

Centralized control including facilities and equipment in addition to air conditioning is possible by linking up with MODBUS, KNX interfaces.



Model: ABEG18KRTA / ABEG22KRTA / ABEG24KRTA / ABEG30KRTA / ABEG36KRTA / ABEG45KRTA / ABEG36KRTA [3-phase] / ABEG45KRTA [3-phase] / ABEG54KRTA [3-phase]



## Specifications

| Model name                            | Indoor unit               |           | ABEG18KRTA                  |                   |                   | ABEG22KRTA        |                   |                   | ABEG24KRTA        |                   |                   | ABEG30KRTA        |                   |                   | ABEG36KRTA             |                   |                   | ABEG45KRTA        |                   |                   | ABEG36KRTA        |                   |                   | ABEG45KRTA        |                   |                   | ABEG54KRTA        |                   |                   |                   |                   |                 |
|---------------------------------------|---------------------------|-----------|-----------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-----------------|
|                                       | Outdoor unit              |           | AOEG18KBTB                  | AOEG22KBTB        | AOEG24KBTB        | AOEG30KBTB        | AOEG36KBTB        | AOEG45KBTB        | AOEG36KRTA        | AOEG45KRTA        | AOEG54KRTA        | AOEG36KRTA        | AOEG45KRTA        | AOEG54KRTA        | AOEG36KRTA             | AOEG45KRTA        | AOEG54KRTA        | AOEG36KRTA        | AOEG45KRTA        | AOEG54KRTA        | AOEG36KRTA        | AOEG45KRTA        | AOEG54KRTA        | AOEG36KRTA        | AOEG45KRTA        | AOEG54KRTA        | AOEG36KRTA        | AOEG45KRTA        | AOEG54KRTA        |                   |                   |                 |
| Power Source                          |                           |           | Single phase, ~230 V, 50 Hz |                   |                   |                   |                   |                   |                   |                   |                   |                   |                   |                   | 3-phase, ~400 V, 50 Hz |                   |                   |                   |                   |                   |                   |                   |                   |                   |                   |                   |                   |                   |                   |                   |                   |                 |
| Capacity                              | Cooling                   | Rated     | 5.2                         | 6.0               | 6.8               | 8.5               | 9.5               | 12.1              | 9.5               | 12.1              | 13.4              | 9.5               | 12.1              | 13.4              | 9.5                    | 12.1              | 13.4              | 9.5               | 12.1              | 13.4              | 9.5               | 12.1              | 13.4              | 9.5               | 12.1              | 13.4              | 9.5               | 12.1              | 13.4              |                   |                   |                 |
|                                       |                           | Min.-Max. | 0.9-5.9                     | 0.9-6.7           | 0.9-8.0           | 2.8-10.0          | 2.8-11.2          | 4.0-13.5          | 2.8-11.2          | 4.0-13.5          | 4.5-14.5          | 2.8-11.2          | 4.0-13.5          | 4.5-14.5          | 2.8-11.2               | 4.0-13.5          | 4.5-14.5          | 2.8-11.2          | 4.0-13.5          | 4.5-14.5          | 2.8-11.2          | 4.0-13.5          | 4.5-14.5          | 2.8-11.2          | 4.0-13.5          | 4.5-14.5          | 2.8-11.2          | 4.0-13.5          | 4.5-14.5          |                   |                   |                 |
|                                       | Heating                   | Rated     | 6.0                         | 7.0               | 7.5               | 10.0              | 10.8              | 13.5              | 10.8              | 13.5              | 15.5              | 10.8              | 13.5              | 15.5              | 10.8                   | 13.5              | 15.5              | 10.8              | 13.5              | 15.5              | 10.8              | 13.5              | 15.5              | 10.8              | 13.5              | 15.5              | 10.8              | 13.5              | 15.5              |                   |                   |                 |
| Input Power                           | Cooling/Heating           | Min.-Max. | 0.9-7.5                     | 0.9-8.0           | 0.9-9.1           | 2.7-11.2          | 2.7-12.7          | 4.2-16.2          | 2.7-12.7          | 4.2-16.2          | 4.7-16.5          | 2.7-12.7          | 4.2-16.2          | 4.7-16.5          | 2.7-12.7               | 4.2-16.2          | 4.7-16.5          | 2.7-12.7          | 4.2-16.2          | 4.7-16.5          | 2.7-12.7          | 4.2-16.2          | 4.7-16.5          | 2.7-12.7          | 4.2-16.2          | 4.7-16.5          | 2.7-12.7          | 4.2-16.2          | 4.7-16.5          |                   |                   |                 |
|                                       |                           | kW        | 1.55/1.62                   | 1.87/1.95         | 2.14/1.97         | 2.65/2.77         | 2.96/2.88         | 4.22/3.84         | 2.96/2.88         | 4.22/3.84         | 4.45/4.43         | 2.96/2.88         | 4.22/3.84         | 4.45/4.43         | 2.96/2.88              | 4.22/3.84         | 4.45/4.43         | 2.96/2.88         | 4.22/3.84         | 4.45/4.43         | 2.96/2.88         | 4.22/3.84         | 4.45/4.43         | 2.96/2.88         | 4.22/3.84         | 4.45/4.43         | 2.96/2.88         | 4.22/3.84         | 4.45/4.43         |                   |                   |                 |
| EER                                   | Cooling                   | W/W       | 3.35                        | 3.21              | 3.18              | 3.21              | 3.21              | 2.87              | 3.21              | 2.87              | 3.01              | 3.21              | 2.87              | 3.01              | 3.21                   | 2.87              | 3.01              | 3.21              | 2.87              | 3.01              | 3.21              | 2.87              | 3.01              | 3.21              | 2.87              | 3.01              | 3.21              | 2.87              | 3.01              |                   |                   |                 |
| COP                                   | Heating                   | W/W       | 3.70                        | 3.59              | 3.81              | 3.61              | 3.75              | 3.52              | 3.75              | 3.52              | 3.50              | 3.75              | 3.52              | 3.50              | 3.75                   | 3.52              | 3.50              | 3.75              | 3.52              | 3.50              | 3.75              | 3.52              | 3.50              | 3.75              | 3.52              | 3.50              | 3.75              | 3.52              | 3.50              |                   |                   |                 |
| Pdesign                               | Cooling/Heating (-10°C)   | kW        | 5.2/4.4                     | 6.0/4.8           | 6.8/6.0           | 8.5/8.0           | 9.5/8.7           | -                 | 9.5/8.7           | -                 | -                 | 9.5/8.7           | -                 | -                 | 9.5/8.7                | -                 | -                 | 9.5/8.7           | -                 | -                 | 9.5/8.7           | -                 | -                 | 9.5/8.7           | -                 | -                 | 9.5/8.7           | -                 | -                 |                   |                   |                 |
| SEER                                  | Cooling                   | W/W       | 6.2                         | 6.1               | 6.2               | 6.1               | 6.37              | -                 | 6.37              | -                 | -                 | 6.37              | -                 | -                 | 6.37                   | -                 | -                 | 6.37              | -                 | -                 | 6.37              | -                 | -                 | 6.37              | -                 | -                 | 6.37              | -                 | -                 |                   |                   |                 |
| SCOP                                  | Heating (Average)         | W/W       | 4.1                         | 4.0               | 4.1               | 4.0               | 4.21              | -                 | 4.21              | -                 | -                 | 4.21              | -                 | -                 | 4.21                   | -                 | -                 | 4.21              | -                 | -                 | 4.21              | -                 | -                 | 4.21              | -                 | -                 | 4.21              | -                 | -                 |                   |                   |                 |
| Energy Efficiency Class               | Cooling                   |           | A++                         | A++               | A++               | A++               | A++               | -                 | A++               | -                 | -                 | A++               | -                 | -                 | A++                    | -                 | -                 | A++               | -                 | -                 | A++               | -                 | -                 | A++               | -                 | -                 | A++               | -                 | -                 |                   |                   |                 |
|                                       | Heating (Average)         |           | A+                          | A+                | A+                | A+                | A+                | -                 | A+                | -                 | -                 | A+                | -                 | -                 | A+                     | -                 | -                 | A+                | -                 | -                 | A+                | -                 | -                 | A+                | -                 | -                 | A+                | -                 | -                 |                   |                   |                 |
| Max. Operating Current                | Cooling/Heating           | A         | 12.1/12.1                   | 12.6/12.6         | 13.6/13.6         | 22.6/22.6         | 22.6/22.6         | 28.5/28.5         | 22.6/22.6         | 28.5/28.5         | 14.0/14.0         | 22.6/22.6         | 28.5/28.5         | 14.0/14.0         | 22.6/22.6              | 28.5/28.5         | 14.0/14.0         | 22.6/22.6         | 28.5/28.5         | 14.0/14.0         | 22.6/22.6         | 28.5/28.5         | 14.0/14.0         | 22.6/22.6         | 28.5/28.5         | 14.0/14.0         | 22.6/22.6         | 28.5/28.5         | 14.0/14.0         |                   |                   |                 |
| Annual Energy Consumption             | Cooling                   | kWh/a     | 293                         | 344               | 384               | 486               | 524               | -                 | 524               | -                 | -                 | 524               | -                 | -                 | 524                    | -                 | -                 | 524               | -                 | -                 | 524               | -                 | -                 | 524               | -                 | -                 | 524               | -                 | -                 |                   |                   |                 |
|                                       | Heating                   | kWh/a     | 1,501                       | 1,677             | 2,042             | 2,796             | 2,904             | -                 | 2,904             | -                 | -                 | 2,904             | -                 | -                 | 2,904                  | -                 | -                 | 2,904             | -                 | -                 | 2,904             | -                 | -                 | 2,904             | -                 | -                 | 2,904             | -                 | -                 |                   |                   |                 |
| Moisture Removal                      |                           | l/h       | 2.0                         | 2.5               | 2.2               | 3.0               | 2.6               | 4.5               | 2.6               | 4.5               | 5.0               | 2.6               | 4.5               | 5.0               | 2.6                    | 4.5               | 5.0               | 2.6               | 4.5               | 5.0               | 2.6               | 4.5               | 5.0               | 2.6               | 4.5               | 5.0               | 2.6               | 4.5               | 5.0               |                   |                   |                 |
| Sound Pressure Level                  | Indoor (Cooling)          | H/M/L/Q   | 38/36/33/31                 | 42/37/34/31       | 41/36/32/29       | 45/40/35/32       | 44/40/37/32       | 45/41/39/34       | 44/40/37/32       | 45/41/39/34       | 48/44/41/38       | 44/40/37/32       | 45/41/39/34       | 48/44/41/38       | 44/40/37/32            | 45/41/39/34       | 48/44/41/38       | 44/40/37/32       | 45/41/39/34       | 48/44/41/38       | 44/40/37/32       | 45/41/39/34       | 48/44/41/38       | 44/40/37/32       | 45/41/39/34       | 48/44/41/38       | 44/40/37/32       | 45/41/39/34       | 48/44/41/38       |                   |                   |                 |
|                                       | Indoor (Heating)          | H/M/L/Q   | 38/36/33/31                 | 42/37/34/31       | 41/36/32/29       | 45/40/35/32       | 44/40/37/32       | 45/41/39/34       | 44/40/37/32       | 45/41/39/34       | 48/44/41/38       | 44/40/37/32       | 45/41/39/34       | 48/44/41/38       | 44/40/37/32            | 45/41/39/34       | 48/44/41/38       | 44/40/37/32       | 45/41/39/34       | 48/44/41/38       | 44/40/37/32       | 45/41/39/34       | 48/44/41/38       | 44/40/37/32       | 45/41/39/34       | 48/44/41/38       | 44/40/37/32       | 45/41/39/34       | 48/44/41/38       |                   |                   |                 |
| Sound Power Level                     | Outdoor (Cooling/Heating) | High      | 50/50                       | 51/51             | 53/54             | 53/55             | 55/55             | 57/57             | 50/50             | 51/51             | 53/54             | 53/55             | 55/55             | 57/57             | 50/50                  | 51/51             | 53/54             | 53/55             | 55/55             | 57/57             | 50/50             | 51/51             | 53/54             | 53/55             | 55/55             | 57/57             | 50/50             | 51/51             | 53/54             | 53/55             | 55/55             | 57/57           |
|                                       | Outdoor (Cooling/Heating) | High      | 53/53                       | 57/57             | 56/56             | 60/60             | 59/59             | 60/60             | 59/59             | 60/60             | 63/63             | 53/53             | 57/57             | 56/56             | 60/60                  | 59/59             | 60/60             | 63/63             | 53/53             | 57/57             | 56/56             | 60/60             | 59/59             | 60/60             | 63/63             | 53/53             | 57/57             | 56/56             | 60/60             | 59/59             | 60/60             | 63/63           |
| Airflow Rate                          | Indoor/Outdoor (Cooling)  | High      | 840/2,160                   | 900/2,240         | 1,230/2,700       | 1,400/3,750       | 1,850/3,750       | 1,900/4,450       | 840/2,160         | 900/2,240         | 1,230/2,700       | 1,400/3,750       | 1,850/3,750       | 1,900/4,450       | 840/2,160              | 900/2,240         | 1,230/2,700       | 1,400/3,750       | 1,850/3,750       | 1,900/4,450       | 840/2,160         | 900/2,240         | 1,230/2,700       | 1,400/3,750       | 1,850/3,750       | 1,900/4,450       | 840/2,160         | 900/2,240         | 1,230/2,700       | 1,400/3,750       | 1,850/3,750       | 1,900/4,450     |
|                                       | Indoor/Outdoor (Heating)  | High      | 840/1,830                   | 900/1,960         | 1,230/2,700       | 1,400/3,750       | 1,800/3,750       | 1,850/4,450       | 840/1,830         | 900/1,960         | 1,230/2,700       | 1,400/3,750       | 1,800/3,750       | 1,850/4,450       | 840/1,830              | 900/1,960         | 1,230/2,700       | 1,400/3,750       | 1,800/3,750       | 1,850/4,450       | 840/1,830         | 900/1,960         | 1,230/2,700       | 1,400/3,750       | 1,800/3,750       | 1,850/4,450       | 840/1,830         | 900/1,960         | 1,230/2,700       | 1,400/3,750       | 1,800/3,750       | 1,850/4,450     |
| Net Dimensions                        | Indoor                    | mm        | 235 × 1,080 × 705           | 235 × 1,080 × 705 | 235 × 1,080 × 705 | 235 × 1,390 × 705 | 235 × 1,390 × 705 | 235 × 1,700 × 705 | 235 × 1,080 × 705 | 235 × 1,080 × 705 | 235 × 1,700 × 705 | 235 × 1,700 × 705 | 235 × 1,700 × 705 | 235 × 1,080 × 705 | 235 × 1,080 × 705      | 235 × 1,700 × 705 | 235 × 1,700 × 705 | 235 × 1,080 × 705 | 235 × 1,080 × 705 | 235 × 1,700 × 705 | 235 × 1,700 × 705 | 235 × 1,700 × 705 | 235 × 1,080 × 705 | 235 × 1,080 × 705 | 235 × 1,700 × 705 | 235 × 1,700 × 705 | 235 × 1,700 × 705 | 235 × 1,080 × 705 | 235 × 1,080 × 705 | 235 × 1,700 × 705 | 235 × 1,700 × 705 |                 |
|                                       | Outdoor                   | mm        | 632 × 799 × 290             | 632 × 799 × 290   | 716 × 820 × 315   | 788 × 940 × 320   | 788 × 940 × 320   | 998 × 940 × 320   | 632 × 799 × 290   | 632 × 799 × 290   | 716 × 820 × 315   | 788 × 940 × 320   | 788 × 940 × 320   | 998 × 940 × 320   | 632 × 799 × 290        | 632 × 799 × 290   | 716 × 820 × 315   | 788 × 940 × 320   | 788 × 940 × 320   | 998 × 940 × 320   | 632 × 799 × 290   | 632 × 799 × 290   | 716 × 820 × 315   | 788 × 940 × 320   | 788 × 940 × 320   | 998 × 940 × 320   | 632 × 799 × 290   | 632 × 799 × 290   | 716 × 820 × 315   | 788 × 940 × 320   | 788 × 940 × 320   | 998 × 940 × 320 |
| Weight                                | Indoor                    | kg        | 24                          | 24                | 31                | 31                | 38                | 38                | 24                | 24                | 31                | 31                | 38                | 38                | 24                     | 24                | 31                | 31                | 38                | 24                | 24                | 31                | 31                | 38                | 38                | 24                | 24                | 31                | 31                | 38                | 38                |                 |
|                                       | Outdoor                   | kg        | 36                          | 38                | 42                | 52                | 52                | 67                | 36                | 38                | 42                | 52                | 52                | 67                | 36                     | 38                | 42                | 52                | 52                | 67                | 36                | 38                | 42                | 52                | 52                | 67                | 36                | 38                | 42                | 52                | 52                | 67              |
| Connection Pipe Diameter (Liquid/Gas) |                           | mm        | 6.35/12.7                   | 6.35/12.7         | 6.35/12.7         | 9.52/15.88        | 9.52/15.88        | 9.52/15.88        | 6.35/12.7         | 6.35/12.7         | 6.35/12.7         | 9.52/15.88        | 9.52/15.88        | 9.52/15.88        | 6.35/12.7              | 6.35/12.7         | 6.35/12.7         | 9.52/15.88        | 9.52/15.88        | 9.52/15.88        | 6.35/12.7         | 6.35/12.7         | 6.35/12.7         | 9.52/15.88        | 9.52/15.88        | 9.52/15.88        | 6.35/12.7         | 6.35/12.7         | 6.35/12.7         | 9.52/15.88        | 9.52/15.88        |                 |
| Drain Hose Diameter (I.D./O.D.)       |                           | mm        | 25/32                       | 25/32             | 25/32             | 25/32             | 25/32             | 25/32             | 25/32             | 25/32             | 25/32             | 25/32             | 25/32             | 25/32             | 25/32                  | 25/32             | 25/32             | 25/32             | 25/32             | 25/32             | 25/32             | 25/32             | 25/32             | 25/32             | 25/32             | 25/32             | 25/32             | 25/32             | 25/32             | 25/32             | 25/32             | 25/32           |
| Max. Pipe Length (Pre-Charge)         |                           | m         | 30 (20)                     | 30 (20)           | 30 (20)           |                   |                   |                   |                   |                   |                   |                   |                   |                   |                        |                   |                   |                   |                   |                   |                   |                   |                   |                   |                   |                   |                   |                   |                   |                   |                   |                 |



# Wall-mounted Specifications

## Designer Series High-Spec & Design (WLAN adapter Internal Models)

| Model name                            | Indoor unit                     |                 | ASYG07KGTF                  | ASYG09KGTF      | ASYG12KGTF      | ASYG14KGTF      |
|---------------------------------------|---------------------------------|-----------------|-----------------------------|-----------------|-----------------|-----------------|
|                                       | Outdoor unit                    |                 | AOYG07KGCB                  | AOYG09KGCB      | AOYG12KGCB      | AOYG14KGCB      |
| Power Source                          |                                 |                 | Single phase, ~230 V, 50 Hz |                 |                 |                 |
| Capacity                              | Cooling                         | Rated           | 2.0                         | 2.5             | 3.4             | 4.2             |
|                                       |                                 | Min.-Max.       | 0.9-3.2                     | 0.9-3.4         | 0.9-4.1         | 0.9-4.5         |
|                                       | Heating                         | Rated           | 2.5                         | 2.8             | 4.0             | 5.4             |
|                                       |                                 | Min.-Max.       | 0.9-5.2                     | 0.9-5.4         | 0.9-6.1         | 0.9-6.4         |
| Input Power                           |                                 | Cooling/Heating | 0.400/0.500                 | 0.555/0.560     | 0.805/0.910     | 1.175/1.350     |
| EER                                   | Cooling                         |                 | 5.00                        | 4.50            | 4.22            | 3.57            |
| COP                                   | Heating                         |                 | 5.00                        | 5.00            | 4.40            | 4.00            |
| Pdesign                               | Cooling/Heating (-10°C)         |                 | 2.0/2.3                     | 2.5/2.4         | 3.4/2.5         | 4.2/4.0         |
| SEER                                  | Cooling                         |                 | 8.10                        | 8.90            | 8.70            | 7.90            |
| SCOP                                  | Heating (Average)               |                 | 5.30                        | 5.20            | 5.20            | 4.50            |
| Energy Efficiency Class               | Cooling                         |                 | A++                         | A+++            | A+++            | A++             |
|                                       | Heating (Average)               |                 | A+++                        | A+++            | A+++            | A+              |
| Max. Operating Current                | Cooling/Heating                 |                 | 6.5/9.0                     | 6.5/9.0         | 6.5/9.0         | 9.0/10.5        |
| Annual Energy Consumption             | Cooling                         |                 | 86                          | 98              | 137             | 186             |
|                                       | Heating                         |                 | 606                         | 645             | 673             | 1,242           |
| Moisture Removal                      |                                 |                 | l/h                         | 1.0             | 1.3             | 1.8             |
| Sound Pressure Level                  | Indoor (Cooling)                | H/M/L/Q         | 38/33/29/19                 | 40/34/29/19     | 40/35/30/19     | 43/36/30/20     |
|                                       | Indoor (Heating)                | H/M/L/Q         | 41/35/31/21                 | 42/36/31/21     | 42/38/33/21     | 44/39/33/24     |
| Sound Power Level                     | Outdoor (Cooling/Heating)       | High            | 46/46                       | 46/48           | 50/50           | 50/50           |
|                                       | Indoor (Cooling/Heating)        | High            | 54/56                       | 55/57           | 56/58           | 57/59           |
|                                       | Outdoor (Cooling/Heating)       | High            | 61/62                       | 61/63           | 65/66           | 65/66           |
|                                       | Indoor/Outdoor (Cooling)        | High            | 650/1,610                   | 700/1,610       | 700/1,680       | 770/1,680       |
| Airflow Rate                          | Indoor/Outdoor (Heating)        | High            | 720/1,560                   | 750/1,610       | 770/1,580       | 800/1,580       |
|                                       | Net Dimensions H x W x D        |                 | mm                          | 270 x 834 x 215 | 270 x 834 x 215 | 270 x 834 x 215 |
| Weight                                | Indoor                          |                 | kg                          | 10              | 10              | 10              |
|                                       | Outdoor                         |                 | kg                          | 30              | 30              | 31              |
| Connection Pipe Diameter (Liquid/Gas) |                                 |                 | mm 6.35/9.52                |                 |                 |                 |
| Drain Hose Diameter (I.D./O.D.)       |                                 |                 | mm 13.8/15.0 to 16.8        |                 |                 |                 |
| Max. Pipe Length (Pre-Charge)         |                                 |                 | m 20 (15)                   |                 |                 |                 |
| Max. Height Difference                |                                 |                 | m 15                        |                 |                 |                 |
| Operating Range                       | Cooling                         |                 | °CDB -10 to 46              |                 |                 |                 |
|                                       | Heating                         |                 | °CDB -15 to 24              |                 |                 |                 |
| Refrigerant                           | Type (Global Warming Potential) |                 | R32 (675)                   |                 |                 |                 |
|                                       | Charge                          | kg (CO2eq-T)    | 0.75 (0.506)                | 0.75 (0.506)    | 0.85 (0.574)    | 0.85 (0.574)    |

## Designer Series High Spec & Design (WLAN adapter Option Models)

| Model name                            | Indoor unit                     |                 | ASYG07KGTE                  | ASYG09KGTE      | ASYG12KGTE      | ASYG14KGTE      |
|---------------------------------------|---------------------------------|-----------------|-----------------------------|-----------------|-----------------|-----------------|
|                                       | Outdoor unit                    |                 | AOYG07KGCA                  | AOYG09KGCA      | AOYG12KGCA      | AOYG14KGCA      |
| Power Source                          |                                 |                 | Single phase, ~230 V, 50 Hz |                 |                 |                 |
| Capacity                              | Cooling                         | Rated           | 2.0                         | 2.5             | 3.4             | 4.2             |
|                                       |                                 | Min.-Max.       | 0.9-3.2                     | 0.9-3.4         | 0.9-4.1         | 0.9-4.5         |
|                                       | Heating                         | Rated           | 2.5                         | 2.8             | 4.0             | 5.4             |
|                                       |                                 | Min.-Max.       | 0.9-5.2                     | 0.9-5.4         | 0.9-6.1         | 0.9-6.4         |
| Input Power                           |                                 | Cooling/Heating | 0.400/0.500                 | 0.555/0.560     | 0.805/0.910     | 1.175/1.350     |
| EER                                   | Cooling                         |                 | 5.00                        | 4.50            | 4.22            | 3.57            |
| COP                                   | Heating                         |                 | 5.00                        | 5.00            | 4.40            | 4.00            |
| Pdesign                               | Cooling/Heating (-10°C)         |                 | 2.0/2.3                     | 2.5/2.4         | 3.4/2.5         | 4.2/4.0         |
| SEER                                  | Cooling                         |                 | 9.10                        | 9.20            | 9.20            | 8.30            |
| SCOP                                  | Heating (Average)               |                 | 5.30                        | 5.20            | 5.20            | 4.50            |
| Energy Efficiency Class               | Cooling                         |                 | A+++                        | A+++            | A+++            | A++             |
|                                       | Heating (Average)               |                 | A+++                        | A+++            | A+++            | A+              |
| Max. Operating Current                | Cooling/Heating                 |                 | 6.5/9.0                     | 6.5/9.0         | 6.5/9.0         | 9.0/10.5        |
| Annual Energy Consumption             | Cooling                         |                 | 77                          | 95              | 129             | 177             |
|                                       | Heating                         |                 | 607                         | 645             | 672             | 1,242           |
| Moisture Removal                      |                                 |                 | l/h                         | 1.0             | 1.3             | 1.8             |
| Sound Pressure Level                  | Indoor (Cooling)                | H/M/L/Q         | 38/33/29/19                 | 40/34/29/19     | 40/35/30/19     | 43/36/30/20     |
|                                       | Indoor (Heating)                | H/M/L/Q         | 41/35/31/21                 | 42/36/31/21     | 42/38/33/21     | 44/39/33/24     |
| Sound Power Level                     | Outdoor (Cooling/Heating)       | High            | 46/46                       | 46/48           | 50/50           | 50/50           |
|                                       | Indoor (Cooling/Heating)        | High            | 54/56                       | 55/57           | 56/58           | 57/59           |
|                                       | Outdoor (Cooling/Heating)       | High            | 61/62                       | 61/63           | 65/66           | 65/66           |
|                                       | Indoor/Outdoor (Cooling)        | High            | 650/1,610                   | 700/1,610       | 700/1,680       | 770/1,680       |
| Airflow Rate                          | Indoor/Outdoor (Heating)        | High            | 720/1,560                   | 750/1,610       | 770/1,580       | 800/1,580       |
|                                       | Net Dimensions H x W x D        |                 | mm                          | 270 x 834 x 215 | 270 x 834 x 215 | 270 x 834 x 215 |
| Weight                                | Indoor                          |                 | kg                          | 10              | 10              | 10              |
|                                       | Outdoor                         |                 | kg                          | 30              | 30              | 31              |
| Connection Pipe Diameter (Liquid/Gas) |                                 |                 | mm 6.35/9.52                |                 |                 |                 |
| Drain Hose Diameter (I.D./O.D.)       |                                 |                 | mm 13.8/15.0 to 16.8        |                 |                 |                 |
| Max. Pipe Length (Pre-Charge)         |                                 |                 | m 20 (15)                   |                 |                 |                 |
| Max. Height Difference                |                                 |                 | m 15                        |                 |                 |                 |
| Operating Range                       | Cooling                         |                 | °CDB -10 to 46              |                 |                 |                 |
|                                       | Heating                         |                 | °CDB -15 to 24              |                 |                 |                 |
| Refrigerant                           | Type (Global Warming Potential) |                 | R32 (675)                   |                 |                 |                 |
|                                       | Charge                          | kg (CO2eq-T)    | 0.75 (0.506)                | 0.75 (0.506)    | 0.85 (0.574)    | 0.85 (0.574)    |

**Designer Series**  
Cool Beauty Design



| Model name                            | Indoor unit                     |              | ASYG07KETE<br>ASYG07KETE-B       | ASYG09KETE<br>ASYG09KETE-B | ASYG12KETE<br>ASYG12KETE-B | ASYG14KETE<br>ASYG14KETE-B |
|---------------------------------------|---------------------------------|--------------|----------------------------------|----------------------------|----------------------------|----------------------------|
|                                       | Outdoor unit                    |              | AOYG07KETA                       | AOYG09KETA                 | AOYG12KETA                 | AOYG14KETA                 |
| Power Source                          |                                 |              | Single phase, ~230 V, 50 Hz      |                            |                            |                            |
| Capacity                              | Cooling                         | Rated        | 2.0                              | 2.5                        | 3.4                        | 4.2                        |
|                                       |                                 | Min.-Max.    | 0.9 - 3.0                        | 0.9 - 3.2                  | 0.9 - 3.9                  | 0.9 - 4.4                  |
|                                       | Heating                         | Rated        | 2.5                              | 2.8                        | 4.0                        | 5.4                        |
|                                       |                                 | Min.-Max.    | 0.9 - 3.4                        | 0.9 - 4.0                  | 0.9 - 5.3                  | 0.9 - 6.0                  |
| Input Power                           | Cooling/Heating                 |              | kW 0.450/0.555                   | 0.630/0.620                | 0.935/0.960                | 1.220/1.410                |
| EER                                   | Cooling                         |              | 4.43                             | 3.97                       | 3.65                       | 3.44                       |
| COP                                   | Heating                         |              | 4.52                             | 4.52                       | 4.17                       | 3.83                       |
| Pdesign                               | Cooling/Heating (-10°C)         |              | kW 2.0/2.3                       | 2.5/2.4                    | 3.4/2.5                    | 4.2/4.0                    |
| SEER                                  | Cooling                         |              | 7.40                             | 7.40                       | 7.30                       | 6.90                       |
| SCOP                                  | Heating (Average)               |              | 4.10                             | 4.10                       | 4.40                       | 4.10                       |
| Energy Efficiency Class               | Cooling                         |              | A++                              | A++                        | A++                        | A++                        |
|                                       | Heating (Average)               |              | A+                               | A+                         | A+                         | A+                         |
| Max. Operating Current                | Cooling/Heating                 |              | A 6.5/9.0                        | 6.5/9.0                    | 6.5/9.0                    | 6.5/9.0                    |
| Annual Energy Consumption             | Cooling                         |              | kWh/a 95                         | 118                        | 163                        | 213                        |
|                                       | Heating                         |              | 785                              | 819                        | 795                        | 1,367                      |
| Moisture Removal                      |                                 |              | l/h 1.0                          | 1.3                        | 1.8                        | 2.1                        |
| Sound Pressure Level                  | Indoor (Cooling)                | H/M/L/Q      | 38/33/29/20                      | 40/34/29/20                | 40/35/30/20                | 43/36/30/20                |
|                                       | Indoor (Heating)                | H/M/L/Q      | 41/35/31/22                      | 42/36/31/22                | 42/38/33/22                | 44/39/33/24                |
| Sound Power Level                     | Outdoor (Cooling/Heating)       | High         | 46/46                            | 46/46                      | 50/50                      | 50/50                      |
|                                       | Indoor (Cooling/Heating)        | High         | 54/56                            | 55/57                      | 55/58                      | 57/59                      |
| Airflow Rate                          | Indoor/Outdoor (Cooling)        | High         | m³/h 650/1,650                   | 700/1,650                  | 700/1,700                  | 770/1,680                  |
|                                       | Indoor/Outdoor (Heating)        | High         | 720/1,450                        | 750/1,450                  | 770/1,470                  | 800/1,580                  |
| Net Dimensions H x W x D              | Indoor                          | mm           | 295 x 950 (wall side: 840) x 230 |                            |                            |                            |
| Weight                                | Outdoor                         | mm           | 541 x 663 x 290                  | 541 x 663 x 290            | 541 x 663 x 290            | 542 x 799 x 290            |
|                                       | Indoor                          | kg           | 11                               | 11                         | 11                         | 11.5                       |
| Connection Pipe Diameter (Liquid/Gas) | Indoor                          | kg           | 23                               | 23                         | 25                         | 31                         |
|                                       | Outdoor                         | mm           | 6.35/9.52                        | 6.35/9.52                  | 6.35/9.52                  | 6.35/9.52                  |
| Drain Hose Diameter (I.D./O.D.)       |                                 |              | 13.8/15.0 to 16.8                | 13.8/15.0 to 16.8          | 13.8/15.0 to 16.8          | 13.8/15.0 to 16.8          |
| Max. Pipe Length (Pre-Charge)         |                                 |              | m 20 (15)                        | 20 (15)                    | 20 (15)                    | 20 (15)                    |
| Max. Height Difference                |                                 |              | 15                               | 15                         | 15                         | 15                         |
| Operating Range                       | Cooling                         |              | °CDB -10 to 46                   | -10 to 46                  | -10 to 46                  | -10 to 46                  |
|                                       | Heating                         |              | -15 to 24                        | -15 to 24                  | -15 to 24                  | -15 to 24                  |
| Refrigerant                           | Type (Global Warming Potential) |              | R32 (675)                        | R32 (675)                  | R32 (675)                  | R32 (675)                  |
|                                       | Charge                          | kg (CO2eq-T) | 0.6 (0.405)                      | 0.6 (0.405)                | 0.7 (0.473)                | 0.85 (0.574)               |

**Standard Series**  
High-Efficiency & Comfort



| Model name                            | Indoor unit                     | W-LAN Adapter Internal Models | ASYG07KMCF                  | ASYG09KMCF        | ASYG12KMCF        | ASYG14KMCF        |
|---------------------------------------|---------------------------------|-------------------------------|-----------------------------|-------------------|-------------------|-------------------|
|                                       |                                 | W-LAN Adapter Option Models   | ASYG07KMCE                  | ASYG09KMCE        | ASYG12KMCE        | ASYG14KMCE        |
|                                       |                                 | Outdoor unit                  | AOYG07KMCC                  | AOYG09KMCC        | AOYG12KMCC        | AOYG14KMCC        |
| Power Source                          |                                 |                               | Single phase, ~230 V, 50 Hz |                   |                   |                   |
| Capacity                              | Cooling                         | Rated                         | 2.0                         | 2.5               | 3.4               | 4.2               |
|                                       |                                 | Min.-Max.                     | 0.9-3.0                     | 0.9-3.2           | 0.9-3.9           | 0.9-4.4           |
|                                       | Heating                         | Rated                         | 2.5                         | 2.8               | 4.0               | 5.4               |
|                                       |                                 | Min.-Max.                     | 0.9-3.4                     | 0.9-4.0           | 0.9-5.3           | 0.9-6.0           |
| Input Power                           | Cooling/Heating                 |                               | kW 0.450/0.555              | 0.630/0.620       | 0.935/0.960       | 1.220/1.410       |
| EER                                   | Cooling                         |                               | 4.43                        | 3.97              | 3.65              | 3.44              |
| COP                                   | Heating                         |                               | 4.52                        | 4.52              | 4.17              | 3.83              |
| Pdesign                               | Cooling/Heating (-10°C)         |                               | kW 2.0/2.3                  | 2.5/2.4           | 3.4/2.5           | 4.2/4.0           |
| SEER                                  | Cooling                         |                               | 7.40                        | 7.40              | 7.30              | 6.90              |
| SCOP                                  | Heating (Average)               |                               | 4.10                        | 4.10              | 4.40              | 4.10              |
| Energy Efficiency Class               | Cooling                         |                               | A++                         | A++               | A++               | A++               |
|                                       | Heating (Average)               |                               | A+                          | A+                | A+                | A+                |
| Max. Operating Current                | Cooling/Heating                 |                               | A 6.5/9.0                   | 6.5/9.0           | 6.5/9.0           | 6.5/9.0           |
| Annual Energy Consumption             | Cooling                         |                               | kWh/a 95                    | 118               | 163               | 213               |
|                                       | Heating                         |                               | 785                         | 819               | 795               | 1367              |
| Moisture Removal                      |                                 |                               | l/h 1.0                     | 1.3               | 1.8               | 2.1               |
| Sound Pressure Level                  | Indoor (Cooling)                | H/M/L/Q                       | 38/33/29/20                 | 40/34/29/20       | 40/35/30/20       | 43/36/30/20       |
|                                       | Indoor (Heating)                | H/M/L/Q                       | 41/35/31/22                 | 42/36/31/22       | 42/38/33/22       | 44/39/33/24       |
| Sound Power Level                     | Outdoor (Cooling/Heating)       | High                          | 46/46                       | 46/46             | 50/50             | 50/50             |
|                                       | Indoor (Cooling/Heating)        | High                          | 54/56                       | 55/57             | 55/58             | 57/59             |
| Airflow Rate                          | Indoor/Outdoor (Cooling)        | High                          | m³/h 650/1,650              | 700/1,650         | 700/1,700         | 770/1,680         |
|                                       | Indoor/Outdoor (Heating)        | High                          | 720/1,450                   | 750/1,450         | 780/1,470         | 820/1,580         |
| Net Dimensions H x W x D              | Indoor                          | mm                            | 270 x 834 x 222             | 270 x 834 x 222   | 270 x 834 x 222   | 270 x 834 x 222   |
| Weight                                | Outdoor                         | mm                            | 541 x 663 x 290             | 541 x 663 x 290   | 541 x 663 x 290   | 542 x 799 x 290   |
|                                       | Indoor                          | kg                            | 10                          | 10                | 10                | 10                |
| Connection Pipe Diameter (Liquid/Gas) | Outdoor                         | kg                            | 22                          | 22                | 24                | 31                |
|                                       | Indoor                          | mm                            | 6.35/9.52                   | 6.35/9.52         | 6.35/9.52         | 6.35/9.52         |
| Drain Hose Diameter (I.D./O.D.)       |                                 |                               | 13.8/15.0 to 16.8           | 13.8/15.0 to 16.8 | 13.8/15.0 to 16.8 | 13.8/15.0 to 16.8 |
| Max. Pipe Length (Pre-Charge)         |                                 |                               | m 20 (15)                   | 20 (15)           | 20 (15)           | 20 (15)           |
| Max. Height Difference                |                                 |                               | 15                          | 15                | 15                | 15                |
| Operating Range                       | Cooling                         |                               | °CDB -10 to 46              | -10 to 46         | -10 to 46         | -10 to 46         |
|                                       | Heating                         |                               | -15 to 24                   | -15 to 24         | -15 to 24         | -15 to 24         |
| Refrigerant                           | Type (Global Warming Potential) |                               | R32 (675)                   | R32 (675)         | R32 (675)         | R32 (675)         |
|                                       | Charge                          | kg (CO2eq-T)                  | 0.6 (0.405)                 | 0.6 (0.405)       | 0.7 (0.473)       | 0.85 (0.574)      |

**ECO Series Lineup**  
Specifications





Compact Cassette



| Model name                            | Indoor unit                     |              | AUXG09KVL A     | AUXG12KVL A     | AUXG14KVL A     | AUXG18KVL A     | AUXG22KVL A     | AUXG24KVL A     |
|---------------------------------------|---------------------------------|--------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
|                                       | Outdoor unit                    |              | AOEG09KATA      | AOEG12KATA      | AOEG14KATA      | AOEG18KATA      | AOEG22KATA      | AOEG24KATA      |
| Power Source                          | Single phase, ~230 V, 50 Hz     |              |                 |                 |                 |                 |                 |                 |
| Capacity                              | Cooling                         | Rated        | 2.5             | 3.5             | 4.3             | 5.2             | 6.0             | 6.8             |
|                                       |                                 | Min.-Max.    | 0.9-2.7         | 0.9-3.7         | 0.9-4.5         | 0.9-5.4         | 0.9-6.3         | 0.9-7.4         |
| Capacity                              | Heating                         | Rated        | 3.2             | 4.1             | 5.0             | 6.0             | 7.0             | 7.5             |
|                                       |                                 | Min.-Max.    | 0.9-3.9         | 0.9-4.4         | 0.9-5.3         | 0.9-6.3         | 0.9-7.4         | 0.9-8.6         |
| Input Power                           | Cooling/Heating                 | kW           | 0.68/0.88       | 1.09/1.17       | 1.37/1.42       | 1.69/1.72       | 1.95/2.00       | 2.26/2.08       |
| EER                                   | Cooling                         | W/W          | 3.68            | 3.21            | 3.14            | 3.08            | 3.08            | 3.01            |
| COP                                   | Heating                         | W/W          | 3.64            | 3.50            | 3.52            | 3.49            | 3.50            | 3.61            |
| Pdesign                               | Cooling/Heating (-10°C)         | kW           | 2.5/2.3         | 3.5/2.8         | 4.3/3.2         | 5.2/3.8         | 6.0/4.4         | 6.8/5.4         |
| SEER                                  | Cooling                         | W/W          | 6.2             | 6.1             | 6.1             | 6.1             | 6.1             | 5.9             |
| SCOP                                  | Heating                         | W/W          | 4.0             | 4.0             | 4.0             | 3.9             | 3.9             | 3.8             |
| Energy Efficiency Class               | Cooling                         |              | A++             | A++             | A++             | A++             | A++             | A+              |
|                                       | Heating                         |              | A+              | A+              | A+              | A               | A               | A               |
| Max. Operating Current                | Cooling/Heating                 | A            | 6.9/6.9         | 7.7/7.7         | 9.2/9.2         | 10.1/10.1       | 11.6/11.6       | 12.6/12.6       |
| Annual Energy Consumption             | Cooling                         | kWh/a        | 141             | 201             | 247             | 298             | 344             | 403             |
|                                       | Heating                         | kWh/a        | 804             | 979             | 1,120           | 1,362           | 1,578           | 1,988           |
| Moisture Removal                      |                                 | l/h          | 0.6             | 1.2             | 1.5             | 2.2             | 2.6             | 2.7             |
| Sound Pressure Level                  | Indoor (Cooling)                | H/M/L/Q      | 33/31/29/27     | 37/34/30/27     | 38/34/30/27     | 38/34/30/26     | 44/42/36/30     | 49/44/36/30     |
|                                       | Indoor (Heating)                | H/M/L/Q      | 34/32/29/27     | 37/34/31/29     | 43/38/34/30     | 43/38/34/30     | 45/43/40/33     | 49/45/40/33     |
| Sound Power Level                     | Outdoor (Cooling/Heating)       | High         | 47/48           | 49/50           | 50/51           | 51/52           | 52/53           | 54/55           |
|                                       | Indoor (Cooling/Heating)        | High         | 46/47           | 49/49           | 50/55           | 50/55           | 56/57           | 59/61           |
| Airflow Rate                          | Indoor/Outdoor (Cooling)        | High         | 540/1,610       | 600/1,630       | 680/1,670       | 680/1,710       | 830/2,240       | 930/2,885       |
|                                       | Indoor/Outdoor (Heating)        | High         | 540/1,550       | 600/1,410       | 800/1,580       | 800/1,840       | 860/2,240       | 930/2,350       |
| Net Dimensions                        | Indoor                          | mm           | 245 × 570 × 570 | 245 × 570 × 570 | 245 × 570 × 570 | 245 × 570 × 570 | 245 × 570 × 570 | 245 × 570 × 570 |
| H x W x D                             | Outdoor                         | mm           | 541 × 663 × 290 | 541 × 663 × 290 | 542 × 799 × 290 | 542 × 799 × 290 | 632 × 799 × 290 | 632 × 799 × 290 |
| Weight                                | Indoor                          | kg           | 15              | 15              | 15              | 15              | 16              | 16              |
|                                       | Outdoor                         | kg           | 23              | 25              | 32              | 33              | 36              | 38              |
| Connection Pipe Diameter (Liquid/Gas) |                                 | mm           | 6.35/9.52       | 6.35/9.52       | 6.35/9.52       | 6.35/12.70      | 6.35/12.70      | 6.35/12.70      |
| Drain port Diameter (I.D./O.D.)       |                                 | mm           | 25/32           | 25/32           | 25/32           | 25/32           | 25/32           | 25/32           |
| Max. Pipe Length (Pre-Charge)         |                                 | m            | 15 (15)         | 15 (15)         | 20 (15)         | 20 (15)         | 25 (15)         | 25 (20)         |
| Max. Height Difference                |                                 | m            | 15              | 15              | 15              | 15              | 20              | 20              |
| Operating Range                       | Cooling                         | °CDB         | -10 to 46       | -10 to 46       | -10 to 46       | -10 to 46       | -10 to 46       | -10 to 46       |
|                                       | Heating                         | °CDB         | -15 to 24       | -15 to 24       | -15 to 24       | -15 to 24       | -15 to 24       | -15 to 24       |
| Refrigerant                           | Type (Global Warming Potential) |              | R32 (675)       | R32 (675)       | R32 (675)       | R32 (675)       | R32 (675)       | R32 (675)       |
|                                       | Charge                          | kg (CO2eq-T) | 0.6 (0.405)     | 0.7 (0.473)     | 0.85 (0.574)    | 0.9 (0.608)     | 1.1 (0.743)     | 1.25 (0.844)    |
| Cassette Grille                       | Model name                      |              | UTG-UFYF-W      | UTG-UFYF-W      | UTG-UFYF-W      | UTG-UFYF-W      | UTG-UFYF-W      | UTG-UFYF-W      |
|                                       | Dimensions (H × W × D)          | mm           | 49 × 620 × 620  | 49 × 620 × 620  | 49 × 620 × 620  | 49 × 620 × 620  | 49 × 620 × 620  | 49 × 620 × 620  |
|                                       | Weight                          | kg           | 2.3             | 2.3             | 2.3             | 2.3             | 2.3             | 2.3             |

Circular Cassette (Slim type)



| Model name                            | Indoor unit                     |              | AUXG18KRL B  | AUXG22KRL B     | AUXG24KRL B     |
|---------------------------------------|---------------------------------|--------------|--|-----------------|-----------------|
|                                       | Outdoor unit                    |              | AOEG18KATA   | AOEG22KATA      | AOEG24KATA      |
| Power Source                          | Single phase, ~230 V, 50 Hz     |              |  |                 |                 |
| Capacity                              | Cooling                         | Rated        | 5.2  | 6.0             | 6.8             |
|                                       |                                 | Min.-Max.    | 0.9-5.4  | 0.9-6.3         | 0.9-7.4         |
| Capacity                              | Heating                         | Rated        | 6.0  | 7.0             | 7.5             |
|                                       |                                 | Min.-Max.    | 0.9-6.3  | 0.9-7.4         | 0.9-8.6         |
| Input Power                           | Cooling/Heating                 | kW           | 1.60/1.66  | 1.85/1.93       | 2.12/1.97       |
| EER                                   | Cooling                         | W/W          | 3.25   | 3.24            | 3.21            |
| COP                                   | Heating                         | W/W          | 3.61   | 3.63            | 3.81            |
| Pdesign                               | Cooling/Heating (-10°C)         | kW           | 5.2/3.8  | 6.0/4.4         | 6.8/5.4         |
| SEER                                  | Cooling                         | W/W          | 6.2  | 6.2             | 6.1             |
| SCOP                                  | Heating                         | W/W          | 4.1  | 4.1             | 4.0             |
| Energy Efficiency Class               | Cooling                         |              | A++  | A++             | A++             |
|                                       | Heating                         |              | A+   | A+              | A+              |
| Max. Operating Current                | Cooling/Heating                 | A            | 10.1/10.1  | 11.6/11.6       | 12.6/12.6       |
| Annual Energy Consumption             | Cooling                         | kWh/a        | 293  | 338             | 390             |
|                                       | Heating                         | kWh/a        | 1,297  | 1,502           | 1,887           |
| Moisture Removal                      |                                 | l/h          | 1.5  | 2.2             | 2.7             |
| Sound Pressure Level                  | Indoor (Cooling)                | H/M/L/Q      | 33/32/31/28  | 33/32/31/28     | 35/33/32/29     |
|                                       | Indoor (Heating)                | H/M/L/Q      | 33/32/31/28  | 33/32/31/28     | 35/33/32/29     |
| Sound Power Level                     | Outdoor (Cooling/Heating)       | High         | 51/52  | 52/53           | 54/55           |
|                                       | Indoor (Cooling/Heating)        | High         | 47/47  | 49/49           | 49/49           |
| Airflow Rate                          | Indoor/Outdoor (Cooling)        | High         | 1,050/1,710  | 1,050/2,240     | 1,150/2,885     |
|                                       | Indoor/Outdoor (Heating)        | High         | 1,050/1,840  | 1,050/2,240     | 1,150/2,350     |
| Net Dimensions                        | Indoor                          | mm           | 246 × 840 × 840  | 246 × 840 × 840 | 246 × 840 × 840 |
| H x W x D                             | Outdoor                         | mm           | 542 × 799 × 290  | 632 × 799 × 290 | 632 × 799 × 290 |
| Weight                                | Indoor                          | kg           | 23   | 24              | 24              |
|                                       | Outdoor                         | kg           | 33   | 36              | 38              |
| Connection Pipe Diameter (Liquid/Gas) |                                 | mm           | 6.35/12.70   | 6.35/12.70      | 6.35/12.70      |
| Drain port Diameter (I.D./O.D.)       |                                 | mm           | 25/32  | 25/32           | 25/32           |
| Max. Pipe Length (Pre-Charge)         |                                 | m            | 20 (15)  | 25 (15)         | 25 (20)         |
| Max. Height Difference                |                                 | m            | 15   | 20              | 20              |
| Operating Range                       | Cooling                         | °CDB         | -10 to 46  | -10 to 46       | -10 to 46       |
|                                       | Heating                         | °CDB         | -15 to 24  | -15 to 24       | -15 to 24       |
| Refrigerant                           | Type (Global Warming Potential) |              | R32 (675)  | R32 (675)       | R32 (675)       |
|                                       | Charge                          | kg (CO2eq-T) | 0.9 (0.608)  | 1.1 (0.743)     | 1.25 (0.844)    |
| Cassette Grille                       | Model name                      |              | UTG-UKYA-W: White wired remote controller (touch panel)<br>UTG-UKYC-W: White/UTG-UKYA-B*1: Black |                 |                 |
|                                       | Dimensions (H × W × D)          | mm           | 53 × 950 × 950   | 53 × 950 × 950  | 53 × 950 × 950  |
|                                       | Weight                          | kg           | 6.0  | 6.0             | 6.0             |

\*1: IR Receiver kit and Human sensor kit cannot be connected.

Circular Cassette (Large type)



| Model name                            | Indoor unit                     |              | AUXG30KRL B  | AUXG36KRL B     | AUXG45KRL B     | AUXG54KRL B     | AUXG36KRL B            | AUXG45KRL B     | AUXG54KRL B     |
|---------------------------------------|---------------------------------|--------------|--|-----------------|-----------------|-----------------|------------------------|-----------------|-----------------|
|                                       | Outdoor unit                    |              | AOEG30KATA   | AOEG36KATA      | AOEG45KATA      | AOEG54KATA      | AOEG36KQTA             | AOEG45KQTA      | AOEG54KQTA      |
| Power Source                          | Single phase, ~230 V, 50 Hz     |              |  |                 |                 |                 | 3-phase, ~400 V, 50 Hz |                 |                 |
| Capacity                              | Cooling                         | Rated        | 8.5  | 9.5             | 12.1            | 13.4            | 9.5                    | 12.1            | 13.4            |
|                                       |                                 | Min.-Max.    | 2.8-9.6  | 2.8-10.6        | 4.0-12.6        | 4.5-13.8        | 2.8-10.6               | 4.0-12.6        | 4.5-13.8        |
| Capacity                              | Heating                         | Rated        | 10.0   | 10.8            | 13.5            | 15.5            | 10.8                   | 13.5            | 15.5            |
|                                       |                                 | Min.-Max.    | 2.7-10.8   | 2.7-12.5        | 4.2-15.0        | 4.7-16.0        | 2.7-12.5               | 4.2-15.0        | 4.7-16.0        |
| Input Power                           | Cooling/Heating                 | kW           | 2.56/2.64  | 3.06/2.58       | 4.32/3.77       | 4.87/4.86       | 3.06/2.58              | 4.32/3.77       | 4.87/4.86       |
| EER                                   | Cooling                         | W/W          | 3.32   | 3.10            | 2.80            | 2.75            | 3.10                   | 2.80            | 2.75            |
| COP                                   | Heating                         | W/W          | 3.79   | 4.19            | 3.58            | 3.19            | 4.19                   | 3.58            | 3.19            |
| Pdesign                               | Cooling/Heating (-10°C)         | kW           | 8.5/8.0  | 9.5/8.7         | -               | -               | 9.5/8.7                | -               | -               |
| SEER                                  | Cooling                         | W/W          | 6.1  | 6.1             | -               | -               | 6.1                    | -               | -               |
| SCOP                                  | Heating                         | W/W          | 4.0  | 4.0             | -               | -               | 4.0                    | -               | -               |
| Energy Efficiency Class               | Cooling                         |              | A++  | A++             | -               | -               | A++                    | -               | -               |
|                                       | Heating                         |              | A+   | A+              | -               | -               | A+                     | -               | -               |
| Max. Operating Current                | Cooling/Heating                 | A            | 22.5/22.5  | 22.5/22.5       | 28.1/28.1       | 28.1/28.1       | 10.5/10.5              | 13.6/13.6       | 13.6/13.6       |
| Annual Energy Consumption             | Cooling                         | kWh/a        | 488  | 545             | -               | -               | 545                    | -               | -               |
|                                       | Heating                         | kWh/a        | 2,794  | 3,044           | -               | -               | 3,044                  | -               | -               |
| Moisture Removal                      |                                 | l/h          | 2.5  | 3.3             | 4.5             | 5.0             | 3.3                    | 4.5             | 5.0             |
| Sound Pressure Level                  | Indoor (Cooling)                | H/M/L/Q      | 40/38/36/33  | 44/41/38/34     | 46/42/39/35     | 47/43/40/36     | 44/41/38/34            | 46/42/39/35     | 47/43/40/36     |
|                                       | Indoor (Heating)                | H/M/L/Q      | 40/38/36/33  | 44/41/38/34     | 46/42/39/35     | 47/43/40/36     | 44/41/38/34            | 46/42/39/35     | 47/43/40/36     |
| Sound Power Level                     | Outdoor (Cooling/Heating)       | High         | 53/55  | 55/55           | 58/59           | 58/61           | 55/55                  | 60/60           | 61/61           |
|                                       | Indoor (Cooling/Heating)        | High         | 54/54  | 58/58           | 60/60           | 61/61           | 58/58                  | -/-             | -/-             |
| Airflow Rate                          | Indoor/Outdoor (Cooling)        | High         | 1,600/3,750  | 1,870/3,750     | 2,000/4,450     | 2,100/4,450     | 1,870/3,750            | 2,000/4,450     | 2,100/4,450     |
|                                       | Indoor/Outdoor (Heating)        | High         | 1,600/3,750  | 1,870/3,750     | 2,000/4,450     | 2,100/4,780     | 1,870/3,750            | 2,000/4,450     | 2,100/4,780     |
| Net Dimensions                        | Indoor                          | mm           | 288 × 840 × 840  | 288 × 840 × 840 | 288 × 840 × 840 | 288 × 840 × 840 | 288 × 840 × 840        | 288 × 840 × 840 |                 |
| H x W x D                             | Outdoor                         | mm           | 788 × 940 × 320  | 788 × 940 × 320 | 998 × 940 × 320 | 998 × 940 × 320 | 788 × 940 × 320        | 998 × 940 × 320 | 998 × 940 × 320 |
| Weight                                | Indoor                          | kg           | 26   | 29              | 29              | 29              | 29                     | 29              |                 |
|                                       | Outdoor                         | kg           | 52   | 52              | 61              | 63              | 53                     | 62              | 63              |
| Connection Pipe Diameter (Liquid/Gas) |                                 | mm           | 9.52/15.88   | 9.52/15.88      | 9.52/15.88      | 9.52/15.88      | 9.52/15.88             | 9.52/15.88      |                 |
| Drain port Diameter (I.D./O.D.)       |                                 | mm           | 25/32  | 25/32           | 25/32           | 25/32           | 25/32                  | 25/32           |                 |
| Max. Pipe Length (Pre-Charge)         |                                 | m            | 30 (30)  | 30 (30)         | 30 (30)         | 30 (30)         | 30 (30)                | 30 (30)         |                 |
| Max. Height Difference                |                                 | m            | 30   | 30              | 30              | 30              | 30                     | 30              |                 |
| Operating Range                       | Cooling                         | °CDB         | -10 to 46  | -10 to 46       | -10 to 46       | -10 to 46       | -10 to 46              | -10 to 46       |                 |
|                                       | Heating                         | °CDB         | -15 to 24  | -15 to 24       | -15 to 24       | -15 to 24       | -15 to 24              | -15 to 24       |                 |
| Refrigerant                           | Type (Global Warming Potential) |              | R32 (675)  | R32 (675)       | R32 (675)       | R32 (675)       | R32 (675)              | R32 (675)       |                 |
|                                       | Charge                          | kg (CO2eq-T) | 1.90 (1.283)   | 1.90 (1.283)    | 2.4 (1.620)     | 2.4 (1.620)     | 1.90 (1.283)           | 2.4 (1.620)     | 2.4 (1.620)     |
| Cassette Grille                       | Model name                      |              | UTG-UKYA-W: White wired remote controller (touch panel)<br>UTG-UKYC-W: White/UTG-UKYA-B*1: Black |                 |                 |                 |                        |                 |                 |
|                                       | Dimensions (H × W × D)          | mm           | 53 × 950 × 950   | 53 × 950 × 950  | 53 × 950 × 950  | 53 × 950 × 950  | 53 × 950 × 950         | 53 × 950 × 950  | 53 × 950 × 950  |
|                                       | Weight                          | kg           | 6.0  | 6.0             | 6.0             | 6.0             | 6.0                    | 6.0             |                 |

\*1: IR Receiver kit and Human sensor kit cannot be connected.

Slim Duct



| Model name   | Indoor unit                 |           | ARXG09KLL AP | ARXG12KLL AP | ARXG14KLL AP | ARXG18KLL AP |
|--------------|-----------------------------|-----------|--------------|--------------|--------------|--------------|
|              | Outdoor unit                |           | AOEG09KATA   | AOEG12KATA   | AOEG14KATA   | AOEG18KATA   |
| Power Source | Single phase, ~230 V, 50 Hz |           |              |              |              |              |
| Capacity     | Cooling                     | Rated     | 2.5          | 3.5          | 4.3          | 5.2          |
|              |                             | Min.-Max. | 0.9-2.7      | 0.9-3.7      | 0.9-4.5      | 0.9-5.4      |
| Capacity     | Heating                     | Rated     | 3.2          | 4.1          | 5.0          | 6.0          |
|              |                             | Min.-Max. | 0.9-3.9      | 0.9-4.4      | 0.9-5.3      | 0.9-6.3      |
| Input Power  | Cooling/Heating             | kW        | 0.69/0.88    | 1.09/1.17    | 1.37/1.42    | 1.66/1.71    |
| EER          | Cooling                     | W/W       | 3.62         | 3.21         | 3.14         | 3.13         |
| COP          | Heating                     | W/W       | 3.64         | 3.50         |              |              |

Medium Static Pressure Duct (High-Efficiency & Comfort)



| Model name                            | Indoor unit                     |              | ARXH12KMTAP       | ARXH14KMTAP       | ARXH18KMTAP       | ARXH22KMTAP       | ARXH24KMTAP       |
|---------------------------------------|---------------------------------|--------------|-------------------|-------------------|-------------------|-------------------|-------------------|
|                                       | Outdoor unit                    |              | AOEG12KATA        | AOEG14KATA        | AOEG18KATA        | AOEG22KATA        | AOEG24KATA        |
| Power Source                          | Single phase, ~230 V, 50 Hz     |              |                   |                   |                   |                   |                   |
| Capacity                              | Cooling                         | Rated        | 3.5               | 4.3               | 5.2               | 6.0               | 6.8               |
|                                       |                                 | Min.-Max.    | 0.9-3.7           | 0.9-4.5           | 0.9-5.4           | 0.9-6.3           | 0.9-7.4           |
|                                       | Heating                         | Rated        | 4.1               | 5.0               | 6.0               | 7.0               | 7.5               |
|                                       |                                 | Min.-Max.    | 0.9-4.4           | 0.9-5.3           | 0.9-6.3           | 0.9-7.4           | 0.9-8.6           |
| Input Power                           | Cooling/Heating                 | kW           | 1.060 / 1.170     | 1.340 / 1.420     | 1.730 / 1.820     | 1.85 / 1.97       | 2.06 / 1.97       |
| EER                                   | Cooling                         | W/W          | 3.30              | 3.21              | 3.00              | 3.24              | 3.30              |
| COP                                   | Heating                         | W/W          | 3.50              | 3.52              | 3.30              | 3.55              | 3.81              |
| Pdesign                               | Cooling/Heating (-10°C)         | kW           | 3.5 / 2.8         | 4.3 / 3.2         | 5.2 / 3.8         | 6.0 / 4.4         | 6.8 / 5.4         |
| SEER                                  | Cooling                         | W/W          | 6.00              | 5.80              | 5.90              | 6.00              | 6.00              |
| SCOP                                  | Heating (Average)               | W/W          | 3.90              | 3.90              | 3.90              | 3.90              | 3.90              |
| Energy Efficiency Class               | Cooling                         |              | A+                | A+                | A+                | A+                | A+                |
|                                       | Heating (Average)               |              | A                 | A                 | A                 | A                 | A                 |
| Max. Operating Current                | Cooling/Heating                 | A            | 7.7 / 7.7         | 9.2 / 9.2         | 10.1 / 10.1       | 11.6 / 11.6       | 12.6 / 12.6       |
| Annual Energy Consumption             | Cooling                         | kWh/a        | 212               | 267               | 316               | 358               | 405               |
|                                       | Heating                         | kWh/a        | 1,005             | 1,148             | 1,363             | 1,578             | 1,936             |
| Moisture Removal                      |                                 | l/h          | 1.3               | 1.3               | 2.0               | 1.5               | 2.2               |
| Sound Pressure Level                  | Indoor (Cooling)                | H/M/L/Q      | 29 / 27 / 25 / 23 | 32 / 29 / 27 / 25 | 33 / 30 / 28 / 26 | 32 / 28 / 25 / 24 | 34 / 30 / 28 / 26 |
|                                       | Indoor (Heating)                | H/M/L/Q      | 29 / 27 / 25 / 23 | 32 / 29 / 27 / 25 | 33 / 30 / 28 / 26 | 32 / 28 / 25 / 24 | 34 / 30 / 28 / 26 |
| Sound Power Level                     | Outdoor (Cooling/Heating)       | High         | 49 / 50           | 50 / 51           | 51 / 52           | 52 / 53           | 54 / 55           |
|                                       | Indoor (Cooling/Heating)        | High         | 58 / 58           | 59 / 59           | 60 / 60           | 58 / 58           | 60 / 60           |
| Airflow Rate                          | Indoor/Outdoor (Cooling)        | High         | 650 / 1,630       | 800 / 1,670       | 840 / 1,710       | 1,150 / 2,240     | 1,230 / 2,885     |
|                                       | Indoor/Outdoor (Heating)        | High         | 650 / 1,410       | 800 / 1,580       | 840 / 1,840       | 1,150 / 2,240     | 1,230 / 2,350     |
| Static pressure range (Standard)      |                                 | Pa           | 30 to 150 (40)    | 30 to 150 (40)    | 30 to 150 (40)    | 30 to 150 (40)    | 30 to 150 (50)    |
| Net Dimensions H x W x D              | Indoor                          | mm           | 240 x 700 x 700   | 240 x 700 x 700   | 240 x 700 x 700   | 240 x 1,000 x 700 | 240 x 1,000 x 700 |
|                                       | Outdoor                         | mm           | 541 x 663 x 290   | 542 x 799 x 290   | 542 x 799 x 290   | 632 x 799 x 290   | 632 x 799 x 290   |
| Weight                                | Indoor                          | kg           | 24                | 24                | 24                | 31                | 31                |
|                                       | Outdoor                         | kg           | 25                | 32                | 33                | 36                | 38                |
| Connection Pipe Diameter (Liquid/Gas) |                                 | mm           | 6.35 / 9.52       | 6.35 / 9.52       | 6.35 / 12.7       | 6.35 / 12.70      | 6.35 / 12.70      |
| Drain Hose Diameter (I.D./O.D.)       |                                 | mm           | 25 / 32           | 25 / 32           | 25 / 32           | 25 / 32           | 25 / 32           |
| Max. Pipe Length (Pre-Charge)         |                                 | m            | 15 (15)           | 20 (15)           | 20 (15)           | 25 (15)           | 25 (20)           |
| Max. Height Difference                |                                 | m            | 15                | 15                | 15                | 20                | 20                |
| Operating Range                       | Cooling                         | °CDB         | -10 to 46         | -10 to 46         | -10 to 46         | -10 to 46         | -10 to 46         |
|                                       | Heating                         | °CDB         | -15 to 24         | -15 to 24         | -15 to 24         | -15 to 24         | -15 to 24         |
| Refrigerant                           | Type (Global Warming Potential) |              | R32 (675)         | R32 (675)         | R32 (675)         | R32 (675)         | R32 (675)         |
|                                       | Charge                          | kg (CO2eq-T) | 0.70 (0.473)      | 0.85 (0.574)      | 0.90 (0.608)      | 1.10 (0.743)      | 1.25 (0.844)      |

Medium Static Pressure Duct (High-Efficiency & Comfort)



| Model name                            | Indoor unit                     |              | ARXH30KMTAP       | ARXH36KMTAP       | ARXH45KMTAP            | ARXH36KMTAP       | ARXH45KMTAP       |
|---------------------------------------|---------------------------------|--------------|-------------------|-------------------|------------------------|-------------------|-------------------|
|                                       | Outdoor unit                    |              | AOEG30KATA        | AOEG36KATA        | AOEG45KATA             | AOEG36KQTA        | AOEG45KQTA        |
| Power Source                          | Single phase, ~230 V, 50 Hz     |              |                   |                   | 3-phase, ~400 V, 50 Hz |                   |                   |
| Capacity                              | Cooling                         | Rated        | 8.5               | 9.5               | 12.1                   | 9.5               | 12.1              |
|                                       |                                 | Min.-Max.    | 2.8-9.6           | 2.8-10.6          | 4.0-12.6               | 2.8-10.6          | 4.0-12.6          |
|                                       | Heating                         | Rated        | 10.0              | 10.8              | 13.5                   | 10.8              | 13.5              |
|                                       |                                 | Min.-Max.    | 2.7-10.8          | 2.7-12.5          | 4.2-15.0               | 2.7-12.5          | 4.2-15.0          |
| Input Power                           | Cooling/Heating                 | kW           | 2.69 / 2.63       | 3.13 / 2.88       | 4.84 / 4.18            | 3.13 / 2.88       | 4.84 / 4.18       |
| EER                                   | Cooling                         | W/W          | 3.16              | 3.04              | 2.50                   | 3.04              | 2.50              |
| COP                                   | Heating                         | W/W          | 3.80              | 3.75              | 3.23                   | 3.75              | 3.23              |
| Pdesign                               | Cooling/Heating (-10°C)         | kW           | 8.5 / 8.0         | 9.5 / 8.7         | -                      | 9.5 / 8.7         | -                 |
| SEER                                  | Cooling                         | W/W          | 5.80              | 5.60              | -                      | 5.60              | -                 |
| SCOP                                  | Heating (Average)               | W/W          | 3.90              | 3.90              | -                      | 3.90              | -                 |
| Energy Efficiency Class               | Cooling                         |              | A+                | A+                | -                      | A+                | -                 |
|                                       | Heating (Average)               |              | A                 | A                 | -                      | A                 | -                 |
| Max. Operating Current                | Cooling/Heating                 | A            | 22.5 / 22.5       | 22.5 / 22.5       | 28.1 / 28.1            | 10.5 / 10.5       | 13.6 / 13.6       |
| Annual Energy Consumption             | Cooling                         | kWh/a        | 520               | 601               | -                      | 601               | -                 |
|                                       | Heating                         | kWh/a        | 2,867             | 3,118             | -                      | 3,118             | -                 |
| Moisture Removal                      |                                 | l/h          | 1.8               | 2.0               | 4.0                    | 2.0               | 4.0               |
| Sound Pressure Level                  | Indoor (Cooling)                | H/M/L/Q      | 38 / 34 / 31 / 28 | 38 / 34 / 31 / 28 | 40 / 36 / 32 / 29      | 38 / 34 / 31 / 28 | 40 / 36 / 32 / 29 |
|                                       | Indoor (Heating)                | H/M/L/Q      | 38 / 34 / 31 / 28 | 38 / 34 / 31 / 28 | 40 / 36 / 32 / 29      | 38 / 34 / 31 / 28 | 40 / 36 / 32 / 29 |
| Sound Power Level                     | Outdoor (Cooling/Heating)       | High         | 53 / 55           | 55 / 55           | 58 / 59                | 55 / 55           | 58 / 59           |
|                                       | Indoor (Cooling/Heating)        | High         | 64 / 64           | 65 / 65           | 67 / 67                | 65 / 65           | 67 / 67           |
| Airflow Rate                          | Indoor/Outdoor (Cooling)        | High         | 1,950 / 3,750     | 2,070 / 3,750     | 2,160 / 4,450          | 2,070 / 3,750     | 2,160 / 4,450     |
|                                       | Indoor/Outdoor (Heating)        | High         | 1,950 / 3,750     | 2,070 / 3,750     | 2,160 / 4,450          | 2,070 / 3,750     | 2,160 / 4,450     |
| Static pressure range (Standard)      |                                 | Pa           | 30 to 150 (50)    | 30 to 150 (50)    | 30 to 150 (60)         | 30 to 150 (50)    | 30 to 150 (60)    |
| Net Dimensions H x W x D              | Indoor                          | mm           | 240 x 1,400 x 700 | 240 x 1,400 x 700 | 240 x 1,400 x 700      | 240 x 1,400 x 700 | 240 x 1,400 x 700 |
|                                       | Outdoor                         | mm           | 788 x 940 x 320   | 788 x 940 x 320   | 998 x 940 x 320        | 788 x 940 x 320   | 998 x 940 x 320   |
| Weight                                | Indoor                          | kg           | 42                | 42                | 42                     | 53                | 62                |
|                                       | Outdoor                         | kg           | 52                | 52                | 61                     | 53                | 62                |
| Connection Pipe Diameter (Liquid/Gas) |                                 | mm           | 9.52 / 15.88      | 9.52 / 15.88      | 9.52 / 15.88           | 9.52 / 15.88      | 9.52 / 15.88      |
| Drain Hose Diameter (I.D./O.D.)       |                                 | mm           | 25 / 32           | 25 / 32           | 25 / 32                | 25 / 32           | 25 / 32           |
| Max. Pipe Length (Pre-Charge)         |                                 | m            | 30 (30)           | 30 (30)           | 30 (30)                | 30 (30)           | 30 (30)           |
| Max. Height Difference                |                                 | m            | 30                | 30                | 30                     | 30                | 30                |
| Operating Range                       | Cooling                         | °CDB         | -10 to 46         | -10 to 46         | -10 to 46              | -10 to 46         | -10 to 46         |
|                                       | Heating                         | °CDB         | -15 to 24         | -15 to 24         | -15 to 24              | -15 to 24         | -15 to 24         |
| Refrigerant                           | Type (Global Warming Potential) |              | R32 (675)         | R32 (675)         | R32 (675)              | R32 (675)         | R32 (675)         |
|                                       | Charge                          | kg (CO2eq-T) | 1.90 (1.283)      | 1.90 (1.283)      | 2.40 (1.620)           | 1.90 (1.283)      | 2.40 (1.620)      |

Medium Static Pressure Duct (Standard)




























































| Model name                            | Indoor unit                     |              | ARXG22KMLB        | ARXG24KMLA        | ARXG30KMLA        | ARXG36KMLA        | ARXG45KMLA        | ARXG36KMLA             | ARXG45KMLA        |
|---------------------------------------|---------------------------------|--------------|-------------------|-------------------|-------------------|-------------------|-------------------|------------------------|-------------------|
|                                       | Outdoor unit                    |              | AOEG22KATA        | AOEG24KATA        | AOEG30KATA        | AOEG36KATA        | AOEG45KATA        | AOEG36KQTA             | AOEG45KQTA        |
| Power Source                          | Single phase, ~230 V, 50 Hz     |              |                   |                   |                   |                   |                   | 3-phase, ~400 V, 50 Hz |                   |
| Capacity                              | Cooling                         | Rated        | 6.0               | 6.8               | 8.5               | 9.5               | 12.1              | 9.5                    | 12.1              |
|                                       |                                 | Min.-Max.    | 0.9-6.3           | 0.9-7.4           | 2.8-9.6           | 2.8-10.6          | 4.0-12.6          | 2.8-10.6               | 4.0-12.6          |
|                                       | Heating                         | Rated        | 7.0               | 7.5               | 10.0              | 10.8              | 13.5              | 10.8                   | 13.5              |
|                                       |                                 | Min.-Max.    | 0.9-7.4           | 0.9-8.6           | 2.7-10.8          | 2.7-12.5          | 4.2-15.0          | 2.7-12.5               | 4.2-15.0          |
| Input Power                           | Cooling/Heating                 | kW           | 1.92/2.00         | 2.19/2.00         | 2.78/2.77         | 3.13/3.03         | 4.84/4.18         | 3.13/3.03              | 4.84/4.18         |
| EER                                   | Cooling                         | W/W          | 3.13              | 3.11              | 3.06              | 3.04              | 2.50              | 3.04                   | 2.50              |
| COP                                   | Heating                         | W/W          | 3.50              | 3.75              | 3.61              | 3.56              | 3.23              | 3.56                   | 3.23              |
| Pdesign                               | Cooling/Heating (-10°C)         | kW           | 6.0/4.4           | 6.8/5.4           | 8.5/8.0           | 9.5/8.7           | -                 | 9.5/8.7                | -                 |
| SEER                                  | Cooling                         | W/W          | 5.8               | 5.9               | 5.8               | 5.6               | -                 | 5.6                    | -                 |
| SCOP                                  | Heating (Average)               | W/W          | 3.8               | 3.9               | 3.9               | 3.9               | -                 | 3.9                    | -                 |
| Energy Efficiency Class               | Cooling                         |              | A+                | A+                | A+                | A+                | -                 | A+                     | -                 |
|                                       | Heating                         |              | A                 | A                 | A                 | A                 | -                 | A                      | -                 |
| Max. Operating Current                | Cooling/Heating                 | A            | 11.6/11.6         | 12.6/12.6         | 22.5/22.5         | 22.5/22.5         | 28.1/28.1         | 10.5/10.5              | 13.6/13.6         |
| Annual Energy Consumption             | Cooling                         | kWh/a        | 362               | 403               | 513               | 594               | -                 | 594                    | -                 |
|                                       | Heating                         | kWh/a        | 1,620             | 1,935             | 2,871             | 3,122             | -                 | 3,122                  | -                 |
| Moisture Removal                      |                                 | l/h          | 2.1               | 2.5               | 2.5               | 3.0               | 4.0               | 3.0                    | 4.0               |
| Sound Pressure Level                  | Indoor (Cooling)                | H/M/L/Q      | 31/29/27/25       | 31/29/27/25       | 39/35/30/26       | 39/35/30/26       | 42/38/32/28       | 39/35/30/26            | 42/38/32/28       |
|                                       | Indoor (Heating)                | H/M/L/Q      | 31/29/27/25       | 31/29/27/25       | 42/35/30/26       | 42/35/30/26       | 42/38/32/28       | 42/35/30/26            | 42/38/32/28       |
| Sound Power Level                     | Outdoor (Cooling/Heating)       | High         | 52/53             | 54/55             | 53/55             | 55/55             | 58/59             | 55/55                  | 58/59             |
|                                       | Indoor (Cooling/Heating)        | High         | 60/62             | 60/62             | 65/69             | 65/70             | 68/70             | 65/70                  | 68/70             |
| Airflow Rate                          | Indoor/Outdoor (Cooling)        | High         | 1,100/2,240       | 1,100/2,885       | 1,900/3,750       | 1,900/3,750       | 2,100/4,450       | 1,900/3,750            | 2,100/4,450       |
|                                       | Indoor/Outdoor (Heating)        | High         | 1,100/2,240       | 1,100/2,350       | 2,100/3,750       | 2,100/3,750       | 2,100/4,450       | 2,100/3,750            | 2,100/4,450       |
| Static pressure range (Standard)      |                                 | Pa           | 30 - 150 (35)     | 30 - 150 (35)     | 30 - 150 (47)     | 30 - 150 (47)     | 30 - 150 (60)     | 30 - 150 (47)          | 30 - 150 (60)     |
| Net Dimensions H x W x D              | Indoor                          | mm           | 270 x 1,135 x 700 | 270 x 1,135 x 700 | 270 x 1,135 x 700 | 270 x 1,135 x 700 | 270 x 1,135 x 700 | 270 x 1,135 x 700      | 270 x 1,135 x 700 |
|                                       | Outdoor                         | mm           | 632 x 799 x 290   | 632 x 799 x 290   | 788 x 940 x 320   | 788 x 940 x 320   | 998 x 940 x 320   | 788 x 940 x 320        | 998 x 940 x 320   |
| Weight                                | Indoor                          | kg           | 35                | 35                | 38                | 38                | 39                | 38                     | 39                |
|                                       | Outdoor                         | kg           | 36                | 38                | 52                | 52                | 61                | 53                     | 62                |
| Connection Pipe Diameter (Liquid/Gas) |                                 | mm           | 6.35/12.70        | 6.35/12.70        | 9.52/15.88        | 9.52/15.88        | 9.52/15.88        | 9.52/15.88             | 9.52/15.88        |
| Drain port Diameter (I.D./O.D.)       |                                 | mm           | 25/32             | 25/32             | 25/32             | 25/32             | 25/32             | 35/38.1                | 35/38.1           |
| Max. Pipe Length (Pre-Charge)         |                                 | m            | 25 (15)           | 25 (20)           | 30 (30)           | 30 (30)           | 30 (30)           | 30 (30)                | 30 (30)           |
| Max. Height Difference                |                                 | m            | 20                | 20                | 30                | 30                | 30                | 30                     | 30                |
| Operating Range                       | Cooling                         | °CDB         | -10 to 46         | -10 to 46         | -10 to 46         | -10 to 46         | -10 to 46         | -10 to 46              | -10 to 46         |
|                                       | Heating                         | °CDB         | -15 to 24         | -15 to 24         | -15 to 24         | -15 to 24         | -15 to 24         | -15 to 24              | -15 to 24         |
| Refrigerant                           | Type (Global Warming Potential) |              | R32 (675)         | R32 (675)         | R32 (675)         | R32 (675)         | R32 (675)         | R32 (675)              | R32 (675)         |
|                                       | Charge                          | kg (CO2eq-T) | 1.1 (0.743)       | 1.25 (0.844)      | 1.90 (1.283)      | 1.90 (1.283)      | 2.4 (1.620)       | 1.9 (1.283)            | 2.4 (1.620)       |

Ceiling



| Model name   | Indoor unit                 |           | ABEG18KRTA | ABEG22KRTA | ABEG24KRTA | ABEG30KRTA | ABEG36KRTA | ABEG45KRTA             | ABEG36KRTA | ABEG45KRTA |
|--------------|-----------------------------|-----------|------------|------------|------------|------------|------------|------------------------|------------|------------|
|              | Outdoor unit                |           | AOEG18KATA | AOEG22KATA | AOEG24KATA | AOEG30KATA | AOEG36KATA | AOEG45KATA             | AOEG36KQTA | AOEG45KQTA |
| Power Source | Single phase, ~230 V, 50 Hz |           |            |            |            |            |            | 3-phase, ~400 V, 50 Hz |            |            |
| Capacity     | Cooling                     | Rated     | 5.2        | 6.0        | 6.8        | 8.5        | 9.5        | 12.1                   | 9.5        | 12.1       |
|              |                             | Min.-Max. | 0.9-5.4    |            |            |            |            |                        |            |            |

# Feature Summary

| Type                   | Wall-mounted type  |   |   |   | Wall-mounted type   |   |   |   |   |   |   |
|------------------------|--|---|---|---|---|---|---|---|---|---|---|
| Series                 | Designer Range   |   | Standard Range  |   | Standard Range  |   | ECO Range   |   |   |   |   |
| Model name             |   |             |            |  |  |  |  |  |  |  |   |
|                        | ASEH07/09/12/14KGTG,<br>ASYG07/09/12/14KGTG,<br>ASYG07/09/12/14KGTG  | ASEG07/09/12/14KETF<br>ASEG07/09/12/14KETF-B,<br>ASYG07/09/12/14KETE<br>ASYG07/09/12/14KETE-B | ASEH07/09/12/14KMCG,<br>ASEH07/09/12/14KMCG-B,<br>ASYG07/09/12/14KMCF,<br>ASYG07/09/12/14KMCE |   | ASEG18/24KMTE   | ASEH30/36KMTB   | ASEH07/09/12KNCA  | ASEG07/09/12KPCE  | ASEG18/24KLCA   | ASEH07/09/12KLTA  |   |
|                        |   |              |            |   |  |  |  |  |  |  |   |
| Energy-Saving Features |  Save Human sensor                      | ●   |   |   |   | ●   |   |   |   |   |   |
|                        |  Human sensor control                   |   |   |   |   |   |   |   |   |   |   |
|                        |  Economy operation                      | ●   | ●   | ●   |   | ●   | ●   | ●   | ●   | ●   |   |
|                        |  Setting temperature range limitation   | ○   | ○   | ○   |   | ○   | ○   |   |   |   |   |
|                        |  Set temperature auto return            | ○   | ○   | ○   |   | ○   | ○   |   |   |   |   |
| Features for Comfort   |  Power diffuser                         |   |   |   |   |   |   |   |   |   |   |
|                        |  Powerful operation                     | ●   | ●   | ●   |   | ●   | ●   | ●   | ●   | ●   |   |
|                        |  10°C Heat                              | ●   | ●   | ●   |   | ●   | ●   | ●   |   |   |   |
|                        |  Outdoor unit low noise operation       | ●   | ●   | ●   |   | ●   | ●   |   |   |   |   |
|                        |  Auto changeover                        | ●   | ●   | ●   |   | ●   | ●   | ●   | ●   | ●   |   |
|                        |  UP/DOWN swing louver                   | ●   | ●   | ●   |   | ●   | ●   | ●   | ●   | ●   |   |
|                        |  Double swing automatic                 |   |   |   |   | ●   | ●   |   |   |   |   |
|                        |  Automatic fan speed                   | ●   | ●   | ●   |   | ●   | ●   | ●   | ●   | ●   |   |
|                        |  Auto restart                         | ●   | ●   | ●   |   | ●   | ●   | ●   | ●   | ●   |   |
|                        |  Connectable fresh air duct           |   |   |   |   |   |   |   |   |   |   |
|                        |  Fresh air intake                     |   |   |   |   |   |   |   |   |   |   |
|                        |  Connectable distributing duct        |   |   |   |   |   |   |   |   |   |   |
|                        |  Individual airflow direction control |   |   |   |   |   |   |   |   |   |   |
| Convenience Features   |  Auto-off timer                       | ○   | ○   | ○   |   | ○   | ○   |   |   |   |   |
|                        |  Sleep timer                          | ●   | ●   | ●   |   | ●   | ●   | ●   | ●   | ●   |   |
|                        |  Program timer                        | ●   | ●   | ●   |   | ●   | ●   | ●   | ●   | ●   |   |
|                        |  Weekly timer                         | ●   | ●   | ○   |   | ●   | ●   | ● <sup>*3</sup>   |   |   |   |
|                        |  Weekly & Temperature setback timer   | ○   | ○   | ○   |   | ○   | ○   |   |   |   |   |
|                        |  Filter sign                          | ●   | ●   | ●   |   | ●   | ●   | ●   | ●   | ●   |   |
|                        |  External error output                | ○   | ○   | ○   |   | ○   | ○   |   |   |   |   |
|                        |  External ON/OFF input                | ○   | ○   | ○   |   | ○   | ○   |   |   |   |   |
|                        |  Wireless LAN control                 | ● (KGTG, KGTG) ○ (KGTG)   | ● (KETF, KETF-B) ○ (KETE, KETE-B)   | ● (KMCF, KMCG, KMCG-B) ○ (KMCE)   |   | ○   | ○   | ●   | ○   |   | ○ |
|                        |  Multi system control                 |   |   |   |   |   | ○   |   |   |   |   |
|                        |  Special cooling                      |   |   |   |   |   | ● <sup>+2</sup>   |   |   |   |   |
| Clean Features         |  Ion deodorization filter             | ●   | ●   | ●   |   | ●   | ●   |   |   |   |   |
|                        |  Apple-catechin filter                | ●   | ●   | ●   |   | ●   | ●   |   |   |   |   |
|                        |  Long-life filter                     |   |   |   |   |   |   |   |   |   |   |
|                        |  Washable panel                       | ●   | ●   | ●   |   | ●   | ●   | ●   | ●   | ●   |   |
|                        |  Silver Ion Filter                    | ○   | ○   | ○   |   | ○   | ○   | ○   | ○   | ○   |   |
| Installation / Support |  Automatic airflow adjustment         |   |   |   |   |   |   |   |   |   |   |
|                        |  Drain pump as standard               |   |   |   |   |   |   |   |   |   |   |
|                        |  Blue fin                             |   |   |   |   | ●   | ●   |   |   | ●   |   |
|                        |  Refrigerant cycle monitor            | ○ (KGTG)  |   | ○ (KMCG, KMCG-B)  |   | ○   | ○   | ○   |   | ○   |   |

\*1 For details of Multi System Control function, refer to C-013.

\*2 Wired remote controller (UTY-RNRYZ5) is required to use Special Cooling function.

\*3: It is only available on the AIRSTAGE Mobile application and wired remote controller. It can not be used via wireless remote controller.

○: Optional function

# Feature Summary

| Type                   | Cassette                             |                                | Duct                   |  |                                       | Duct                              |                      |            |               | Floor            | Ceiling                        |
|------------------------|--------------------------------------|--------------------------------|------------------------|--|---------------------------------------|-----------------------------------|----------------------|------------|---------------|------------------|--------------------------------|
| Series                 | Compact 4-way Flow Series            | Circular Flow Series           | Slim (With drain pump) | Medium Static Pressure (High-Efficiency & Comfort) | Medium Static Pressure (Compact size) | Medium Static Pressure (Standard) | High Static Pressure |            | Big           |                  |                                |
| Model name             | AUXG 09/12/14/18/22/24 KVLA          | AUXG 18/22/24/30/36/45/54 KRLB | ARXG 09/12/14/18 KLLAP | ARXH 12/14/18/22/24/30/36/45/54 KMTAP              | ARXG 12/14/18/22/24/30/36/45/54 KHTAP | ARXG22KMLB<br>ARXG24/30/36/45KMLA | ARXG45/54KHTB        | ARYG60LHTA | ARYG72/90LHTA | AGEG09/12/14KVCA | ABEG 18/22/24/30/36/45/54 KRTA |
|                        |                                      |                                |                        |  |                                       |                                   |                      |            |               |                  |                                |
| Energy-Saving Features | Save Human sensor                    |                                |                        |  |                                       |                                   |                      |            |               |                  |                                |
|                        | Human sensor control                 |                                | ○                      |  |                                       |                                   |                      |            |               |                  |                                |
|                        | Economy operation                    | ●                              | ●                      | ●  | ○                                     | ●                                 | ●                    | ●          | ●             | ●                | ●                              |
|                        | Setting temperature range limitation | ○                              | ●                      | ○  | ○                                     | ●                                 | ○                    | ○          | ○             | ●                | ●                              |
|                        | Set temperature auto return          | ●                              | ●                      | ●  | ○                                     | ●                                 | ●                    | ○          | ○             | ●                | ●                              |
| Features for Comfort   | Power diffuser                       |                                |                        |  |                                       |                                   |                      |            |               |                  |                                |
|                        | Powerful operation                   |                                |                        |  |                                       |                                   |                      |            |               | ●                |                                |
|                        | 10°C Heat                            | ●                              | ○                      | ○  | ○                                     | ○                                 | ○                    | ○          | ○             | ●                | ○                              |
|                        | Outdoor unit low noise operation     |                                | ○ (45/54)              |  |                                       | ○ (45/54)                         | ○ (45) (36/45/54)    | ○          | ○             | ●                | ○                              |
|                        | Auto changeover                      | ●                              | ●                      | ●  | ●                                     | ●                                 | ●                    | ●          | ●             | ●                | ●                              |
|                        | UP/DOWN swing louver                 | ●                              | ●                      | ○  |                                       |                                   |                      |            |               | ●                | ●                              |
|                        | Double swing automatic               |                                |                        |  |                                       |                                   |                      |            |               |                  |                                |
|                        | Automatic fan speed                  | ●                              | ●                      | ●  | ●                                     | ●                                 | ●                    | ●          | ●             | ●                | ●                              |
|                        | Auto restart                         | ●                              | ●                      | ●  | ●                                     | ●                                 | ●                    | ●          | ●             | ●                | ●                              |
|                        | Connectable fresh air duct           |                                | ●                      |  | ●                                     | ●                                 | ●                    |            |               |                  | ●                              |
|                        | Fresh air intake                     | ○                              | ○                      | ○  | ○                                     | ○                                 | ○                    | ○          | ○             | ○                | ○                              |
|                        | Connectable distributing duct        |                                | ●                      |  |                                       |                                   | ●                    |            |               |                  |                                |
|                        | Individual airflow direction control |                                | ●                      |  |                                       |                                   |                      |            |               |                  |                                |
| Convenience Features   | Auto-off timer                       | ●                              | ●                      | ●  | ●                                     | ●                                 | ●                    | ○          | ●             | ○                | ●                              |
|                        | Sleep timer                          | ●                              | ○                      | ○  | ○                                     | ○                                 | ○                    | ○          | ○             | ●                | ○                              |
|                        | Program timer                        | ●                              | ○                      | ○  | ●                                     | ○                                 | ○                    | ○          | ○             | ●                | ○                              |
|                        | Weekly timer                         | ●                              | ●                      | ●  | ○                                     | ●                                 | ●                    | ●          | ●             | ●                | ●                              |
|                        | Weekly & Temperature setback timer   | ○                              |                        | ●  |                                       |                                   | ●                    | ●          | ●             |                  |                                |
|                        | Filter sign                          | ●                              | ●                      | ●  | ●                                     | ●                                 | ●                    | ●          | ●             | ●                | ●                              |
|                        | External error output                |                                | ○                      |  | ●                                     | ○                                 |                      | ○          | ○             | ○                | ○                              |
|                        | External ON/OFF input                | ●                              | ●                      | ●  | ●                                     | ●                                 | ●                    | ○          | ●             | ○                | ●                              |
|                        | Wireless LAN control                 | ○                              | ○                      | ○  | ○                                     | ○                                 | ○                    | ○          | ○             | ○                | ○                              |
|                        | Multi system control                 |                                |                        |  |                                       |                                   |                      |            |               |                  |                                |
| Clean Features         | Special cooling                      |                                |                        |  |                                       |                                   |                      |            |               |                  |                                |
|                        | Ion deodorization filter             |                                |                        |  |                                       |                                   |                      |            |               | ●                |                                |
|                        | Apple-catechin filter                |                                |                        |  |                                       |                                   |                      |            |               | ●                |                                |
|                        | Long-life filter                     |                                |                        |  | ○                                     | ○                                 | ○                    | ○          | ○             |                  |                                |
|                        | Washable panel                       |                                |                        |  |                                       |                                   |                      |            |               |                  |                                |
| Installation / Support | Silver Ion Filter                    | ○                              | ○                      | ○  | ○                                     | ○                                 | ○                    | ○          | ○             | ○                |                                |
|                        | Automatic airflow adjustment         |                                |                        |  | ●                                     | ●                                 |                      |            | ●             |                  |                                |
|                        | Drain pump as standard               | ●                              | ●                      | ●  | ●                                     | ●                                 | ○                    |            | ○             |                  | ○                              |
|                        | Blue fin                             |                                | ● (30/36/45/54)        |  | ● (30/36/45/54)                       | ● (30/36/45/54)                   | ● (30/36/45)         | ●          | ●             |                  | ● (30/36/45/54)                |
|                        | Refrigerant cycle monitor            |                                |                        |  | ○                                     |                                   |                      |            |               |                  |                                |

\*1 For details of Multi System Control function, refer to C-013.

\*2 Wired remote controller (UTY-RNRYZ5) is required to use Special Cooling function.

\*3: It is only available on the AIRSTAGE Mobile application and wired remote controller. It can not be used via wireless remote controller.

○: Optional function



## Light Commercial & Residential MULTI-SPLIT

- M-002 Multi-split Overview
- M-004 Multi-split Outdoor Units Lineup
- M-006 2-unit to 5-unit Multi-split Connectable Indoor Units
- M-008 6-unit Multi-split Connectable Indoor Units
- M-010 Simultaneous Multi-split Connectable Indoor Units
- M-044 Feature Summary



### Refrigerant type R32 models

- M-012 2-unit to 5-unit Multi-split
- M-018 Simultaneous Multi-split Twin/Triple

---

- M-022 2-unit to 5-unit Multi-split Indoor Units Specifications

---

- M-028 2-unit to 5-unit Multi-split Combination Table



### Refrigerant type R410A models

- M-016 6-unit Multi-split
- M-020 Simultaneous Multi-split Twin/Triple/Double Twin

---

- M-026 6-unit Multi-split Indoor Units Specifications

---

- M-038 6-unit Multi-split Combination Table



A single outdoor unit drives multiple indoor units, offering greater flexibility in system configuration.

If you wish to keep an entire floor or two or more rooms comfortable, we recommend you choose a multi-split air conditioning system with a single outdoor unit. Choose one that meets your air conditioning requirements from the variety of models we offer. You can mix and match indoor and outdoor units as you wish to build the system that best suits your needs.

# Multi-split Overview

Multi-split's space-saving outdoor unit allows for connections of up to eight indoor units for multiple rooms. Added to the lineup are models compatible with the new R32 refrigerant, offering environmentally friendly comfort in homes, offices, stores, and various other settings.



## 3-unit, 4-unit, 5-unit Multi-split Types



## 2-unit Multi-split



## 2-unit to 6-unit Multi-split

Recommended for residences, offices, and other situations where multiple rooms require air conditioning. Each of the 2 to 6 connected indoor units can also be operated individually. Operation control, time scheduling for each room, and energy-saving options can be set on both individual and central remote controllers. The outdoor unit is designed to save space and is flexible enough to be installed on a balcony or underneath a waist-high window.

## 6-unit Multi-split



## Twin / Triple



## Twin / Triple / Double Twin



## Simultaneous Multi-split Type

Suitable for a small building, the entrance hall of a small office, meeting rooms, educational facilities, and other roomy areas where multiple indoor units need to be operated simultaneously. Up to 4 indoor units can be operated simultaneously, making the system perfect for air conditioning not only offices with large spaces, but also spaces with atypical layouts.

# Multi-split Outdoor Units Lineup



FUJITSU GENERAL (Euro) GmbH participates in the ECP program for AC. Check ongoing validity of certificate: www.eurovent-certification.com \*Models so marked are not ECC certified.

|  |                                  | Class                       | 14          | 18          | 18          | 24          | 30         | 36           | 45          | 54   | 72         | 90         |            |
|--|----------------------------------|-----------------------------|-------------|-------------|-------------|-------------|------------|--------------|-------------|------|------------|------------|------------|
|  |                                  | Cooling rated capacity (kW) | 4.0         | 5.0         | 5.4         | 6.8         | 8.0        | 10.0         | 12.5        | 14.0 | 14.0       | 19.0       | 22.0       |
| 2-unit, 3-unit, 4-unit, 5-unit Multi-split | 2-unit Multi-split Up to 2 units |                             | AOEG14KBCA2 | AOEG18KBCA2 |             |             |            |              |             |      |            |            |            |
|  | 3-unit Multi-split Up to 3 units |                             |             |             | AOEG18KBCA3 | AOEG24KBCA3 |            |              |             |      |            |            |            |
|  | 4-unit Multi-split Up to 4 units |                             |             |             |             |             | AOEG30KBT4 |              |             |      |            |            |            |
|  | 5-unit Multi-split Up to 5 units |                             |             |             |             |             |            | AOEG36KBT5*1 |             |      |            |            |            |
| 6-unit Multi-split                         | 6-unit Multi-split Up to 6 units |                             |             |             |             |             |            |              | AOYG45LBA6* |      |            |            |            |
| Simultaneous Multi-split                   | Twin Single-phase                |                             |             |             |             |             |            | AOEG36KBTB   | AOEG45KBTB  |      |            |            |            |
|  | Twin 3-phase                     |                             |             |             |             |             |            | AOEG36KRTA   | AOEG45KRTA  |      |            |            |            |
|  | Twin/Triple Single-phase         |                             |             |             |             |             |            |              |             |      | AOEG54KBTB |            |            |
|  | Twin/Triple 3-phase              |                             |             |             |             |             |            |              |             |      | AOEG54KRTA |            |            |
|  | Twin/Triple/Double Twin 3-phase  |                             |             |             |             |             |            |              |             |      |            | AOYG72LRLA | AOYG90LRLA |

Notes: **1. 2-unit Multi-split:** Connectable indoor units are 2 units.  
 AOEG14KBCA2: Total capacity of indoor units connected must be between 4.0 kW and 6.0 kW.  
 AOEG18KBCA2: Total capacity of indoor units connected must be between 4.0 kW and 7.5 kW.  
**2. 3-unit Multi-split:** Connectable indoor units are 2 to 3 units.  
 AOEG18KBCA3: Total capacity of indoor units connected must be between 4.0 kW and 8.5 kW.  
 AOEG24KBCA3: Total capacity of indoor units connected must be between 4.0 kW and 10.5 kW.

**3. 4-unit Multi-split:** Connectable indoor units are 2 to 4 units.  
 AOEG30KBT4: Total capacity of indoor units connected must be between 7.5 kW and 14.0 kW.  
**4. 5-unit Multi-split:** Connectable indoor units are 2 to 5 units.  
 AOEG36KBT5: Total capacity of indoor units connected must be between 7.5 kW and 15.5 kW.

**5. 6-unit Multi-split:** Connectable indoor units are 2 to 6 units.  
 AOYG45LBA6: Total capacity of indoor units connected must be between 9.5 kW and 18.0 kW.

Cooling rated capacity: \*1: 9.5 kW

# 2-unit to 5-unit Multi-split Connectable Indoor Units



| Type                          | 2-unit      |             | 3-unit      |             | 4-unit     | 5-unit     |      |
|-------------------------------|-------------|-------------|-------------|-------------|------------|------------|------|
| Model name                    | AOEG14KBCA2 | AOEG18KBCA2 | AOEG18KBCA3 | AOEG24KBCA3 | AOEG30KBT4 | AOEG36KBT5 |      |
| Multi-split Type Outdoor Unit |             |             |             |             |            |            |      |
| Capacity (kW)                 | Cooling     | 4.0         | 5.0         | 5.4         | 6.8        | 8.0        | 9.5  |
|                               | Heating     | 4.4         | 5.6         | 6.8         | 8.0        | 9.6        | 10.6 |

| Indoor Unit  | BTU    | kW Class | 2-unit | 3-unit | 4-unit | 5-unit |
|--|--------|----------|--------|--------|--------|--------|
| <br>ASEH07/09/12/14KGTG<br>ASYG07/09/12/14KGTG   | 7,000  | 2.0      | ●      | ●      | ●      | ●      |
|  | 9,000  | 2.5      | ●      | ●      | ●      | ●      |
|  | 12,000 | 3.5      | ●      | ●      | ●      | ●      |
|  | 14,000 | 4.0      | —      | ●      | ●      | ●      |
| <br>ASEG07/09/12/14KETF ASEG07/09/12/14KETF-B<br>ASYG07/09/12/14KETE ASYG07/09/12/14KETE-B | 7,000  | 2.0      | ●      | ●      | ●      | ●      |
|  | 9,000  | 2.5      | ●      | ●      | ●      | ●      |
|  | 12,000 | 3.5      | ●      | ●      | ●      | ●      |
|  | 14,000 | 4.0      | —      | ●      | ●      | ●      |
| <br>ASEH07/09/12/14KMG ASEG07/09/12/14KMG-B<br>ASYG07/09/12/14KMCE ASYG07/09/12/14KMCE     | 7,000  | 2.0      | ●      | ●      | ●      | ●      |
|  | 9,000  | 2.5      | ●      | ●      | ●      | ●      |
|  | 12,000 | 3.5      | ●      | ●      | ●      | ●      |
|  | 14,000 | 4.0      | —      | ●      | ●      | ●      |
| <br>ASEH05/07/09/12KNCA  | 5,000  | 1.5      | ●*     | ●*     | ●*     | ●*     |
|  | 7,000  | 2.0      | ●      | ●      | ●      | ●      |
|  | 9,000  | 2.5      | ●      | ●      | ●      | ●      |
|  | 12,000 | 3.5      | ●      | ●      | ●      | ●      |
| <br>ASEG18/22/24KMTE   | 18,000 | 5.0      | —      | —      | ●      | ●      |
|  | 22,000 | 6.0      | —      | —      | —      | ●      |
|  | 24,000 | 7.0      | —      | —      | —      | ●      |
| <br>AGEG09/12/14KVCA   | 9,000  | 2.5      | ●      | ●      | ●      | ●      |
|  | 12,000 | 3.5      | ●      | ●      | ●      | ●      |
|  | 14,000 | 4.0      | —      | ●      | ●      | ●      |
| <br>AUXG07/09/12/14/18/22KVLA  | 7,000  | 2.0      | ●      | ●      | ●      | ●      |
|  | 9,000  | 2.5      | ●      | ●      | ●      | ●      |
|  | 12,000 | 3.5      | ●      | ●      | ●      | ●      |
|  | 14,000 | 4.0      | —      | ●      | ●      | ●      |
|  | 18,000 | 5.0      | —      | —      | ●      | ●      |
|  | 22,000 | 6.0      | —      | —      | —      | ●      |

\*Please consult your dealer for compatible outdoor units with 5kW models.



| Type                          | 2-unit      |             | 3-unit      |             | 4-unit     | 5-unit     |      |
|-------------------------------|-------------|-------------|-------------|-------------|------------|------------|------|
| Model name                    | AOEG14KBCA2 | AOEG18KBCA2 | AOEG18KBCA3 | AOEG24KBCA3 | AOEG30KBT4 | AOEG36KBT5 |      |
| Multi-split Type Outdoor Unit |             |             |             |             |            |            |      |
| Capacity (kW)                 | Cooling     | 4.0         | 5.0         | 5.4         | 6.8        | 8.0        | 9.5  |
|                               | Heating     | 4.4         | 5.6         | 6.8         | 8.0        | 9.6        | 10.6 |

| Indoor Unit                 | BTU    | kW Class | 2-unit | 3-unit | 4-unit | 5-unit |
|-----------------------------|--------|----------|--------|--------|--------|--------|
| <br>ARXG07/09/12/14/18KSLAP | 7,000  | 2.0      | ●      | ●      | ●      | ●      |
|                             | 9,000  | 2.5      | ●      | ●      | ●      | ●      |
|                             | 12,000 | 3.5      | ●      | ●      | ●      | ●      |
|                             | 14,000 | 4.0      | —      | ●      | ●      | ●      |
| <br>ARXG07/09/12/14/18KLLAP | 7,000  | 2.0      | ●      | ●      | ●      | ●      |
|                             | 9,000  | 2.5      | ●      | ●      | ●      | ●      |
|                             | 12,000 | 3.5      | ●      | ●      | ●      | ●      |
|                             | 14,000 | 4.0      | —      | ●      | ●      | ●      |
| <br>ARXH12/14/18/22KMTAP    | 12,000 | 3.5      | ●      | ●      | ●      | ●      |
|                             | 14,000 | 4.0      | —      | ●      | ●      | ●      |
|                             | 18,000 | 5.0      | —      | —      | ●      | ●      |
|                             | 22,000 | 6.0      | —      | —      | —      | ●      |
| <br>ARXG22KMLB              | 22,000 | 6.0      | —      | —      | —      | ●      |
| <br>ABEG18/22KRTA           | 18,000 | 5.0      | —      | —      | ●      | ●      |
|                             | 22,000 | 6.0      | —      | —      | —      | ●      |



# 6-unit Multi-split Connectable Indoor Units



|                               |  |      |
|-------------------------------|--|------|
| Type                          | 6-unit   |      |
| Model name                    | AOYG45LBLA6  |      |
| Multi-split Type Outdoor Unit |  |      |
| Capacity (kW)                 | Cooling  | 12.5 |
|                               | Heating  | 13.5 |




| Indoor Unit   | BTU    | kW Class |   |
|---|--------|----------|---|
| <br>ASYG07/09/12/14LMCE        | 7,000  | 2.0      | ● |
|   | 9,000  | 2.5      | ● |
| <br>ASYG07/09/12/14LUCA        | 12,000 | 3.5      | ● |
|   | 14,000 | 4.0      | ● |
| <br>ASYG18/24LF                | 18,000 | 5.0      | ● |
|   | 24,000 | 7.0      | ● |
| <br>AGYG09/12/14LV           | 9,000  | 2.5      | ● |
|   | 12,000 | 3.5      | ● |
|   | 14,000 | 4.0      | ● |
| <br>AUYG07/09/12/14/18LV     | 7,000  | 2.0      | ● |
|   | 9,000  | 2.5      | ● |
|   | 12,000 | 3.5      | ● |
|   | 14,000 | 4.0      | ● |
| <br>ABYG14LVTA<br>ABYG18LVTB | 14,000 | 4.0      | ● |
|   | 18,000 | 5.0      | ● |
| <br>ARYG07/09/12/14/18SLAP   | 7,000  | 2.0      | ● |
|   | 9,000  | 2.5      | ● |
|   | 12,000 | 3.5      | ● |
|   | 14,000 | 4.0      | ● |
| <br>ARYG07/09/12/14/18LL     | 18,000 | 5.0      | ● |
|   | 7,000  | 2.0      | ● |
|   | 9,000  | 2.5      | ● |
|   | 12,000 | 3.5      | ● |
| <br>ARYG07/09/12/14/18LL     | 14,000 | 4.0      | ● |
|   | 18,000 | 5.0      | ● |



# Simultaneous Multi-split Connectable Indoor Units






| Type                                       | 4HP        |            | 5HP        |            | 6HP        |            |
|--|------------|------------|------------|------------|------------|------------|
| Model name                                 | AOEG36KBTB | AOEG36KRTA | AOEG45KBTB | AOEG45KRTA | AOEG54KBTB | AOEG54KRTA |
| Simultaneous Multi-split Type Outdoor Unit |            |            |            |            |            |            |
| Capacity (kW)                              | Cooling    | 9.5        | 12.1       | 13.4       | 13.4       |            |
|  | Heating    | 10.8       | 13.5       | 15.5       | 15.5       |            |

| Indoor Unit   | BTU             | kW Class | Twin  |                       |       | Triple |
|---|-----------------|----------|-------|-----------------------|-------|--------|
|   |                 |          | ● × 2 | ● × 2                 | ● × 2 | ● × 3  |
| <br>AUXG18/22/24KVL A         | 18,000          | 5.0      | ● × 2 | –                     | –     | ● × 3  |
|   | 22,000          | 6.5      | –     | ● × 2                 | –     | –      |
|   | 24,000          | 7.0      | –     | –                     | ● × 2 | –      |
| <br>ARXG18KLLAP              | 18,000          | 5.0      | ● × 2 | –                     | –     | ● × 3  |
|   | 22,000          | 6.5      | –     | ● × 2                 | –     | –      |
|   | 24,000          | 7.0      | –     | –                     | ● × 2 | –      |
| <br>ARXG22KMLB<br>ARXG24KMLA | 22,000          | 6.5      | –     | ● × 2                 | –     | –      |
|   | 24,000          | 7.0      | –     | –                     | ● × 2 | –      |
|   | Separation tube |          |       | UTP-SX236A (18/22/24) |       |        |

Note : Please be aware that 2-wired group control is not possible with Simultaneous Multi-split.



| Type                                  | 8HP        | 10HP |
|---------------------------------------|------------|------|
| Model name                            | AOYG72LRLA |      |
| Simultaneous Multi-split Outdoor Unit |            |      |
| Capacity (kW)                         | Cooling    | 19.0 |
|                                       | Heating    | 22.4 |



| Indoor Unit   | BTU             | kW Class | Twin  | Triple         | Double Twin    | Twin                              | Triple         | Double Twin    |
|---|-----------------|----------|-------|----------------|----------------|-----------------------------------|----------------|----------------|
|   |                 |          | –     | –              | ● × 4          | –                                 | –              | –              |
| <br>AUYG18/22/24LV             | 18,000          | 5.0      | –     | –              | ● × 4          | –                                 | –              | –              |
|   | 22,000          | 6.5      | –     | –              | –              | –                                 | –              | ● × 4          |
|   | 24,000          | 7.0      | –     | ● × 3          | –              | –                                 | –              | –              |
| <br>AUYG30/36/45LR            | 30,000          | 8.8      | –     | –              | –              | –                                 | ● × 3          | –              |
|   | 36,000          | 10.6     | ● × 2 | –              | –              | –                                 | –              | –              |
|   | 45,000          | 12.5     | –     | –              | –              | ● × 2                             | –              | –              |
| <br>ARYG18LLTB               | 18,000          | 5.0      | –     | –              | ● × 4          | –                                 | –              | –              |
|   | 22,000          | 6.5      | –     | –              | –              | –                                 | –              | ● × 4          |
|   | 24,000          | 7.0      | –     | ● × 3          | –              | –                                 | –              | –              |
| <br>ARYG22/24/<br>30/36/45LM | 30,000          | 8.8      | –     | –              | –              | –                                 | ● × 3          | –              |
|   | 36,000          | 10.6     | ● × 2 | –              | –              | –                                 | –              | –              |
|   | 45,000          | 12.5     | –     | –              | –              | ● × 2                             | –              | –              |
|   | Separation tube |          |       | UTP-SX272A × 1 | UTP-SX372A × 1 | UTP-SX272A × 1,<br>UTP-SX236A × 2 | UTP-SX272A × 1 | UTP-SX372A × 1 |
| <br>ABYG18/22/24LV           | 18,000          | 5.0      | –     | –              | ● × 4          | –                                 | –              | –              |
|   | 22,000          | 6.5      | –     | –              | –              | –                                 | –              | ● × 4          |
|   | 24,000          | 7.0      | –     | ● × 3          | –              | –                                 | –              | –              |
| <br>ABYG30/36/45LR           | 30,000          | 8.8      | –     | –              | –              | –                                 | ● × 3          | –              |
|   | 36,000          | 10.6     | ● × 2 | –              | –              | –                                 | –              | –              |
|   | 45,000          | 12.5     | –     | –              | –              | ● × 2                             | –              | –              |

2-unit,  
3-unit,  
4-unit,  
5-unit,  
Multi-split



### High energy saving

With the adoption of a high-efficiency DC twin-rotary compressor, all models achieved an energy efficiency scale of A+++ for cooling and A++ for heating.

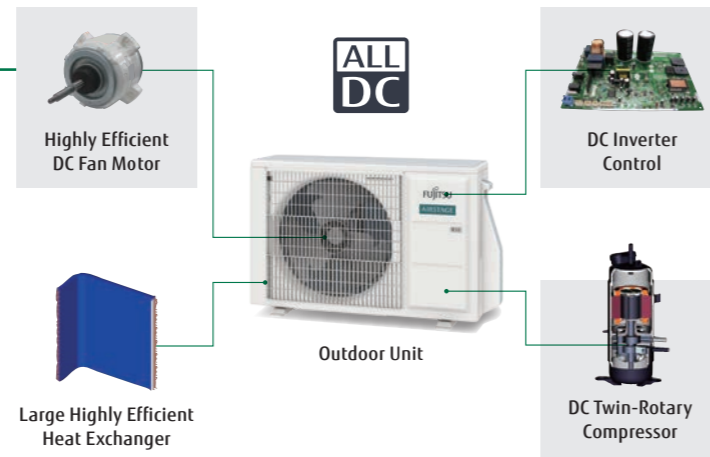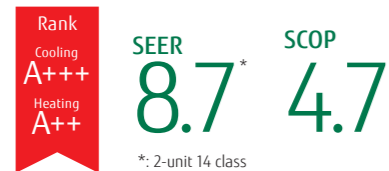


### R32 refrigerant model

In addition to its high energy efficiency, the R32 refrigerant has a larger volumetric capacity than the R410A refrigerant, which means the R32 refrigerant models require less refrigerant charge than the R410A models.

|                 | Pre-charge refrigerant amount (kg) |       |
|-----------------|------------------------------------|-------|
|                 | R32                                | R410A |
| 2-unit 14 class | 0.9                                | 1.25  |
| 2-unit 18 class | 1.02                               | 1.30  |
| 3-unit 18 class | 1.8                                | 2.2   |
| 3-unit 24 class | 1.8                                | 2.2   |
| 4-unit 30 class | 2.2                                | 3.3   |
| 5-unit 36 class | 2.5                                | 4.0   |


### Quiet operation

The sound power level is reduced by up to 7 dB compared to the current R410 models.

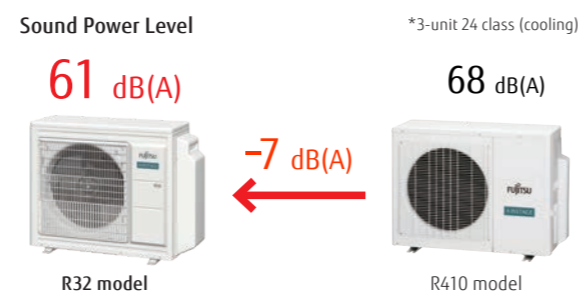


### Space-saving installation

Multiple indoor units can be connected to 1 outdoor unit by long piping as well. Unlike a single type, the outdoor unit can be installed in the most space-saving location.

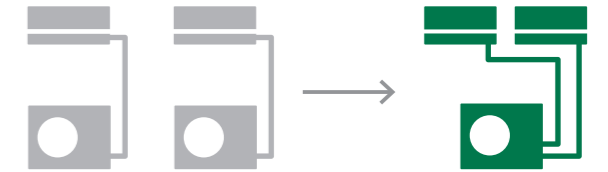

### Compact design


Unlike a single type, the outdoor unit can be installed in the most space-saving location.

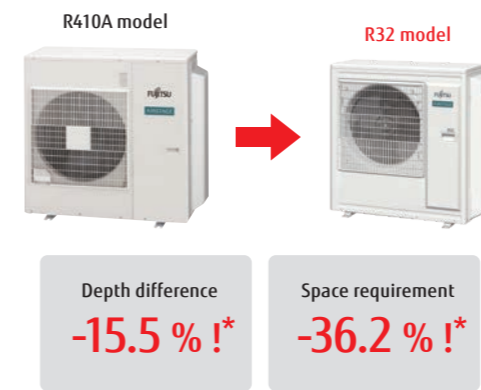

\*: Compared with current 5-unit multi models

### Easy evacuation

All connected pipes and indoor units can be evacuated quickly via our centralized valve method. Requires evacuation only once.

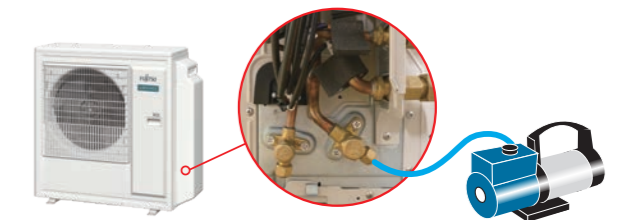

### Wide range of indoor units with various models

We offer 41 models in 5 types in a capacity range from 2.0 kW to 6.0 kW. Wide range of requirements can be realized from private homes through to large shops and hotels



### Models equipped with the New R32 Refrigerant

Wall-mounted type with sophisticated design



Middle and small capacity models are available. This makes installation easier in small spaces.



2-unit: A0EG14KBCA2 / A0EG18KBCA2  
 3-unit: A0EG18KBCA3 / A0EG24KBCA3  
 4-unit: A0EG30KBT4  
 5-unit: A0EG36KBT5



Specifications (2-unit)

| Model name                  |   | A0EG14KBCA2               |                 | A0EG18KBCA2     |         |
|-----------------------------|---|---------------------------|-----------------|-----------------|---------|
| Power Source                |   |                           |                 |                 |         |
| Single phase, ~230 V, 50 Hz |   |                           |                 |                 |         |
| Rated Capacity              | Cooling                                   | Rated Min.-Max.           | kW              | 4.0             | 5.0     |
|                             | Heating                                   | Rated Min.-Max.           |                 | 1.4-4.6         | 1.7-5.8 |
| EER                         | Cooling                                   | Rated                     | W/W             | 4.4             | 4.03    |
|                             | Heating                                   | Rated                     |                 | 1.1-5.5         | 1.8-6.6 |
| COP                         | Cooling                                   | Rated                     | W/W             | 4.12            | 4.63    |
|                             | Heating                                   | Rated                     |                 | 4.7             | 4.59    |
| Sound Pressure Level (High) | Cooling                                   | Rated                     | dB(A)           | 47              | 47      |
|                             | Heating                                   | Rated                     |                 | 49              | 50      |
| Sound Power Level (High)    | Cooling                                   | Rated                     | dB(A)           | 60              | 60      |
|                             | Heating                                   | Rated                     |                 | 62              | 62      |
| Airflow Rate                | Cooling/Heating                           | m <sup>3</sup> /h         | 1,670/1,670     | 1,960/2,020     |         |
| Net Dimensions H × W × D    |   | mm                        | 542 × 799 × 290 | 632 × 799 × 290 |         |
| Weight                      |   | kg                        | 33              | 37              |         |
| Connection Pipe Diameter    | Liquid                                    | mm                        | 6.35 × 2        | 6.35 × 2        |         |
|                             | Gas                                       | mm                        | 9.52 × 2        | 9.52 × 2        |         |
| Max. Pipe Length            |   | Total/Each                | 30/20           | 30/20           |         |
| Max. Height Difference      | Between Outdoor Unit and Each Indoor Unit | m                         | 15              | 15              |         |
|                             | Between Indoor Units                      | m                         | 10              | 10              |         |
| Operating Range             | Cooling                                   | °CDB                      | -10 to 46       | -10 to 46       |         |
|                             | Heating                                   | °CDB                      | -15 to 24       | -15 to 24       |         |
| Refrigerant                 | Type (Global Warming Potential)           |                           | R32 (675)       | R32 (675)       |         |
|                             | Charge                                    | kg (CO <sub>2</sub> eq-T) | 0.9 (0.608)     | 1.02 (0.689)    |         |

Specifications (3-unit)

| Model name                  |   | A0EG18KBCA3               |                 | A0EG24KBCA3                                    |         |
|-----------------------------|---|---------------------------|-----------------|--|---------|
| Power Source                |   |                           |                 |  |         |
| Single phase, ~230 V, 50 Hz |   |                           |                 |  |         |
| Rated Capacity              | Cooling                                   | Rated Min.-Max.           | kW              | 5.4  | 6.8     |
|                             | Heating                                   | Rated Min.-Max.           |                 | 1.8-7.0  | 1.8-8.5 |
| EER                         | Cooling                                   | Rated                     | W/W             | 6.8  | 8.0     |
|                             | Heating                                   | Rated                     |                 | 2.0-8.0  | 2.0-9.2 |
| COP                         | Cooling                                   | Rated                     | W/W             | 4.78   | 3.90    |
|                             | Heating                                   | Rated                     |                 | 4.89   | 4.40    |
| Sound Pressure Level (High) | Cooling                                   | Rated                     | dB(A)           | 46   | 48      |
|                             | Heating                                   | Rated                     |                 | 49   | 53      |
| Sound Power Level (High)    | Cooling                                   | Rated                     | dB(A)           | 59   | 61      |
|                             | Heating                                   | Rated                     |                 | 61   | 67      |
| Airflow Rate                | Cooling/Heating                           | m <sup>3</sup> /h         | 2,220/2,160     | 2,270/2,730                                    |         |
| Net Dimensions H × W × D    |   | mm                        | 716 × 820 × 315 | 716 × 820 × 315                                |         |
| Weight                      |   | kg                        | 46              | 46   |         |
| Connection Pipe Diameter    | Liquid                                    | mm                        | 6.35 × 3        | 6.35 × 3                                       |         |
|                             | Gas                                       | mm                        | 9.52 × 3        | 9.52 × 2, 12.70 × 1 adapter [12.70 → 9.52] × 1 |         |
| Max. Pipe Length            |   | Total/Each                | 50/25           | 50/25  |         |
| Max. Height Difference      | Between Outdoor Unit and Each Indoor Unit | m                         | 15              | 15   |         |
|                             | Between Indoor Units                      | m                         | 10              | 10   |         |
| Operating Range             | Cooling                                   | °CDB                      | -10 to 46       | -10 to 46                                      |         |
|                             | Heating                                   | °CDB                      | -15 to 24       | -15 to 24                                      |         |
| Refrigerant                 | Type (Global Warming Potential)           |                           | R32 (675)       | R32 (675)                                      |         |
|                             | Charge                                    | kg (CO <sub>2</sub> eq-T) | 1.8 (1.215)     | 1.8 (1.215)                                    |         |

Specifications (4-unit, 5-unit)


| Model name                  |   | A0EG30KBT4                |  | A0EG36KBT5  |          |
|-----------------------------|---|---------------------------|--|---|----------|
| Power Source                |   |                           |  |   |          |
| Single phase, ~230 V, 50 Hz |   |                           |  |   |          |
| Rated Capacity              | Cooling                                   | Rated Min.-Max.           | kW   | 8.0   | 9.5      |
|                             | Heating                                   | Rated Min.-Max.           |  | 2.4-10.1  | 3.0-11.0 |
| EER                         | Cooling                                   | Rated                     | W/W  | 9.6   | 10.6     |
|                             | Heating                                   | Rated                     |  | 3.0-11.2  | 3.5-12.0 |
| COP                         | Cooling                                   | Rated                     | W/W  | 3.90  | 3.80     |
|                             | Heating                                   | Rated                     |  | 4.55  | 4.50     |
| Sound Pressure Level (High) | Cooling                                   | Rated                     | dB(A)  | 50  | 52       |
|                             | Heating                                   | Rated                     |  | 54  | 55       |
| Sound Power Level (High)    | Cooling                                   | Rated                     | dB(A)  | 63  | 65       |
|                             | Heating                                   | Rated                     |  | 66  | 68       |
| Airflow Rate                | Cooling/Heating                           | m <sup>3</sup> /h         | 2,400/2,950                                    | 2,450/2,900   |          |
| Net Dimensions H × W × D    |   | mm                        | 884 × 820 × 315                                | 884 × 820 × 315   |          |
| Weight                      |   | kg                        | 55   | 59  |          |
| Connection Pipe Diameter    | Liquid                                    | mm                        | 6.35 × 4                                       | 6.35 × 5  |          |
|                             | Gas                                       | mm                        | 9.52 × 2, 12.70 × 2 adapter [12.70 → 9.52] × 2 | 9.52 × 3, 12.70 × 2 adapter [12.70 → 9.52] × 2 adapter [9.52 → 12.70] × 1 |          |
| Max. Pipe Length*           |   | Total/Each                | 70/25  | 75/25   |          |
| Max. Height Difference      | Between Outdoor Unit and Each Indoor Unit | m                         | 15   | 15  |          |
|                             | Between Indoor Units                      | m                         | 10   | 10  |          |
| Operating Range             | Cooling                                   | °CDB                      | -10 to 46                                      | -10 to 46   |          |
|                             | Heating                                   | °CDB                      | -15 to 24                                      | -15 to 24   |          |
| Refrigerant                 | Type (Global Warming Potential)           |                           | R32 (675)                                      | R32 (675)   |          |
|                             | Charge                                    | kg (CO <sub>2</sub> eq-T) | 2.2 (1.485)                                    | 2.5 (1.688)   |          |

\*Length not applicable when floor units are connected. For details, refer to the installation manual.


Dimensions

(Unit: mm)


2-unit: A0EG14KBCA2

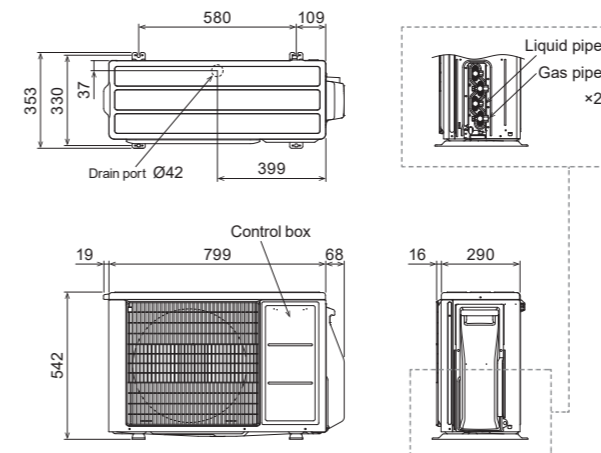


2-unit: A0EG18KBCA2

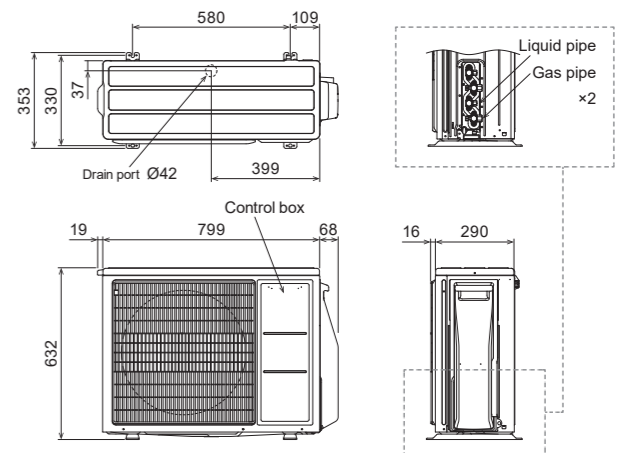

3-unit: A0EG18KBCA3 / A0EG24KBCA3

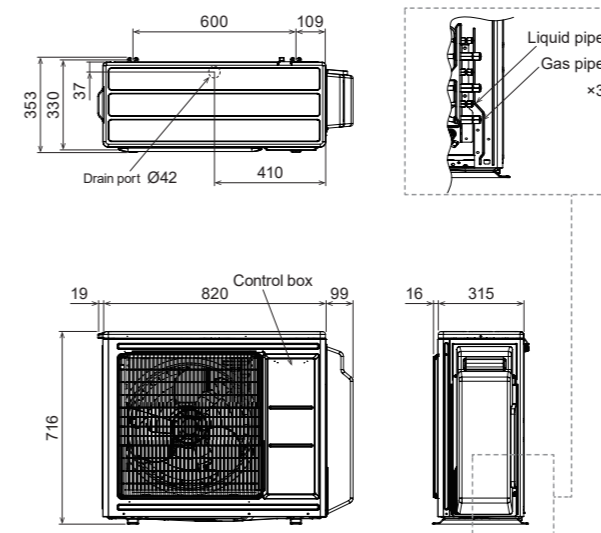

4-unit: A0EG30KBT4  
5-unit: A0EG36KBT5

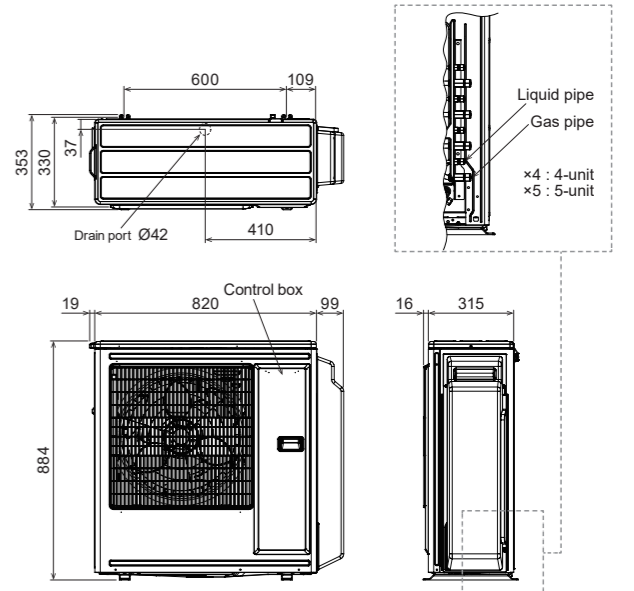

# 6-unit Multi-split



## 6-unit: AOYG45LBLA6



### Specifications

| Model name                  |  |           | AOYG45LBLA6                 |                     |
|-----------------------------|--|-----------|-----------------------------|---------------------|
| Power Source                |  |           | Single phase, ~230 V, 50 Hz |                     |
| Rated Capacity              | Cooling                                    | Rated     | kW                          | 12.5                |
|                             |  | Min.-Max. |                             | 3.5-14.0            |
| Rated Capacity              | Heating                                    | Rated     | kW                          | 13.5                |
|                             |  | Min.-Max. |                             | 3.5-16.0            |
| EER                         | Cooling                                    |           | W/W                         | 3.50                |
| COP                         | Heating                                    |           | W/W                         | 4.00                |
| Sound Pressure Level (High) | Cooling                                    |           | dB(A)                       | 53                  |
|                             | Heating                                    |           |                             | 55                  |
| Sound Power Level (High)    | Cooling                                    |           | dB(A)                       | -                   |
|                             | Heating                                    |           |                             | -                   |
| Airflow Rate                | Cooling/Heating                            |           | m <sup>3</sup> /h           | 4,200/4,200         |
| Net Dimensions H × W × D    |  |           | mm                          | 998 × 970 × 370     |
| Weight                      |  |           | kg                          | 94                  |
| Connection Pipe Diameter    | Liquid                                     |           | mm                          | 6.35 × 6            |
|                             | Gas  |           |                             | 9.52 × 4, 12.70 × 2 |
| Max. Pipe Length            | Total/Each                                 |           | m                           | 80/25               |
|                             | Between Outdoor Unit and Each Indoor Unit. |           |                             | 15                  |
| Max. Height Difference      | Between Indoor Units.                      |           | m                           | 10                  |
|                             |  |           |                             | 10                  |
| Operating Range             | Cooling                                    |           | °CDB                        | -10 to 46           |
|                             | Heating                                    |           |                             | -15 to 24           |
| Refrigerant                 | Type (Global Warming Potential)            |           | kg (CO <sub>2</sub> eq-T)   | R410A (2,088)       |
|                             | Charge                                     |           |                             | 4.00 (8.352)        |

### A wide variety of models to choose from

We offer 26 models in 5 types in a capacity range from 2.0 kW to 7.0 kW. Wide range of requirements can be realized from private homes through to large shops and hotels.




### Compact design

Multiple indoor units can be connected to 1 outdoor unit by long piping as well. Unlike a single type, the outdoor unit can be installed in the most space-saving location.



### Easy installation

All connected pipes and indoor units can be evacuated quickly via our centralized valve method. Requires evacuation only once.

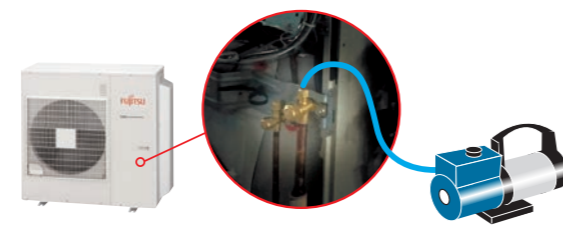

### Central & Individual control

- Batched control of up to 6 indoor units. Unified setting of room temperature, airflow volume, and local control restrictions across units.
- Language can be selected from English, French, German, Greek, Italian, Portuguese, Russian, Spanish, or Turkish.
- Large backlit LED screen
- Large easy-to-see operation panel





Max. Controllable  
**1 multi-system**

Max. Controllable  
**6 indoor units**



### Dimensions

(Unit: mm)

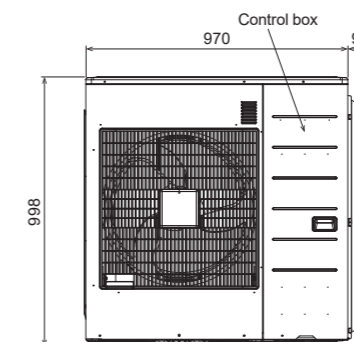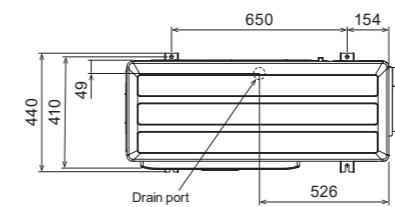




# Simultaneous Multi-split Type

Twin / Triple / Double Twin




## Meets a variety of installation needs from an open-plan office to a retail store, with up to 4 indoor units connected to an outdoor unit.

Select indoor units according to floor layout and heat load estimated by the number of people working in the room and the direction and intensity of sunlight entering the room. Perfect airflow distribution can be achieved for optimum comfort.

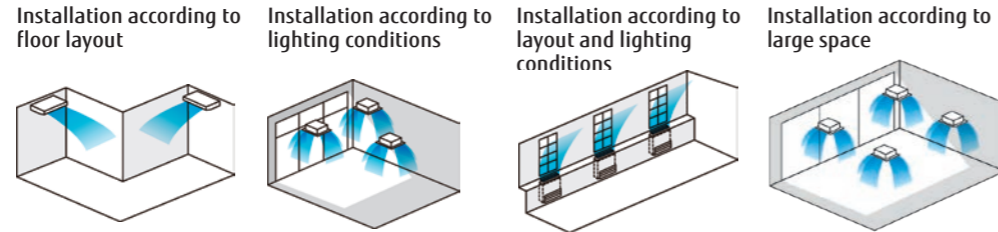

## Simultaneous control

Up to 16 indoor units can be controlled simultaneously with a wired remote controller.

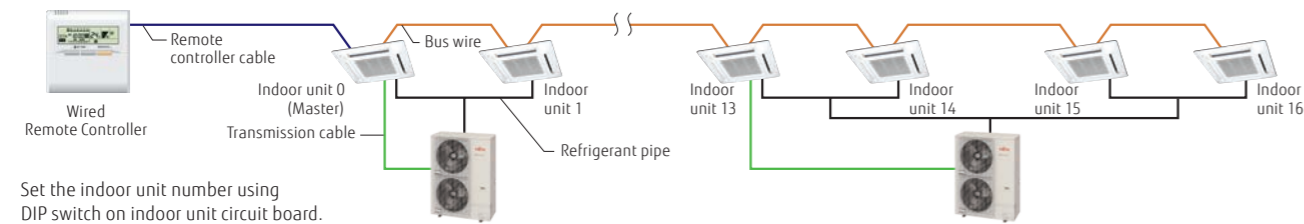


Set the indoor unit number using DIP switch on indoor unit circuit board.

\*The following functions are not provided by a wireless remote controller: Timer operation, Sleep Timer operation, 10°C Heat operation

## Indoor unit lineup

The indoor units, available in 18 models of 6 types, can be selected according to room size and conditions.

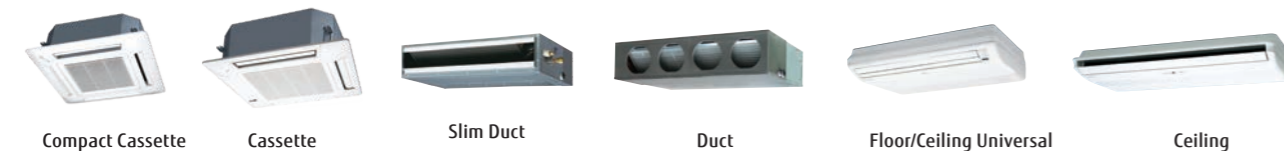

Model: AOYG72LRLA [3-phase] / AOYG90LRLA [3-phase]



### Specifications (Indoor units/Outdoor units)

| Indoor Units Model name  |         | Compact Cassette, Cassette  |                   |                 |                 |                 |                         |                         |                         |
|--------------------------|---------|-----------------------------|-------------------|-----------------|-----------------|-----------------|-------------------------|-------------------------|-------------------------|
|                          |         | AUYG18LVLB                  | AUYG22LVLA        | AUYG24LVLA      | AUYG30LRLE      | AUYG36LRLE      | AUYG45LRLA              |                         |                         |
| Power Source             |         | Single phase, ~230 V, 50 Hz |                   |                 |                 |                 |                         |                         |                         |
| Airflow Rate             | Cooling | H/M/L/Q                     | m <sup>3</sup> /h | 750/610/520/410 | 930/830/600/450 | 930/830/600/450 | 1,600/1,400/1,270/1,150 | 1,800/1,400/1,270/1,150 | 1,900/1,640/1,460/1,250 |
|                          | Heating | H/M/L/Q                     | m <sup>3</sup> /h | 800/710/600/450 | 930/860/700/530 | 930/830/600/450 | 1,800/1,400/1,270/1,150 | 1,800/1,400/1,270/1,150 | 1,900/1,640/1,460/1,250 |
| Net Dimensions H × W × D |         | mm                          |                   | 245 × 570 × 570 | 245 × 570 × 570 | 245 × 570 × 570 | 288 × 840 × 840         | 288 × 840 × 840         | 288 × 840 × 840         |
| Weight                   |         | kg                          |                   | 15              | 16              | 16              | 26                      | 26                      | 26                      |
| Cassette Grille          |         | UTG-UFYD-W                  |                   |                 |                 |                 |                         | UTG-UGYA-W              |                         |

| Indoor Units Model name  |         | Duct                        |                   |                 |                   |                   |                       |                       |                         |
|--------------------------|---------|-----------------------------|-------------------|-----------------|-------------------|-------------------|-----------------------|-----------------------|-------------------------|
|                          |         | ARYG18LTLB                  | ARYG22LMLA        | ARYG24LMLA      | ARYG30LMLE        | ARYG36LMLE        | ARYG45LMLA            |                       |                         |
| Power Source             |         | Single phase, ~230 V, 50 Hz |                   |                 |                   |                   |                       |                       |                         |
| Airflow Rate             | Cooling | H/M/L/Q                     | m <sup>3</sup> /h | 940/880/820/750 | 1,100/910/750/580 | 1,100/910/750/580 | 1,900/1,620/1,270/980 | 1,900/1,620/1,270/980 | 2,100/1,750/1,350/1,070 |
|                          | Heating | H/M/L/Q                     | m <sup>3</sup> /h | 940/880/820/750 | 1,100/910/750/580 | 1,100/910/750/580 | 2,100/1,620/1,270/980 | 2,100/1,620/1,270/980 | 2,100/1,750/1,350/1,070 |
| Net Dimensions H × W × D |         | mm                          |                   | 198 × 900 × 620 | 270 × 1135 × 700  | 270 × 1135 × 700  | 270 × 1135 × 700      | 270 × 1135 × 700      | 270 × 1135 × 700        |
| Weight                   |         | kg                          |                   | 23              | 38                | 40                | 40                    | 40                    | 40 (88)                 |

| Indoor Units Model name  |         | Floor/Ceiling, Ceiling      |                   |                 |                 |                 |                         |                         |                         |
|--------------------------|---------|-----------------------------|-------------------|-----------------|-----------------|-----------------|-------------------------|-------------------------|-------------------------|
|                          |         | ABYG18LVTB                  | ABYG22LVTA        | ABYG24LVTA      | ABYG30LRTE      | ABYG36LRTE      | ABYG45LRTA              |                         |                         |
| Power Source             |         | Single phase, ~230 V, 50 Hz |                   |                 |                 |                 |                         |                         |                         |
| Airflow Rate             | Cooling | H/M/L/Q                     | m <sup>3</sup> /h | 780/700/560/500 | 980/820/680/540 | 980/820/680/540 | 1,660/1,500/1,200/1,000 | 1,900/1,500/1,200/1,000 | 2,100/1,700/1,400/1,100 |
|                          | Heating | H/M/L/Q                     | m <sup>3</sup> /h | 780/700/560/500 | 980/820/680/540 | 980/820/680/540 | 1,660/1,500/1,200/1,000 | 1,900/1,500/1,200/1,000 | 2,100/1,700/1,400/1,100 |
| Net Dimensions H × W × D |         | mm                          |                   | 199 × 990 × 655 | 199 × 990 × 655 | 199 × 990 × 655 | 240 × 1660 × 700        | 240 × 1660 × 700        | 240 × 1660 × 700        |
| Weight                   |         | kg                          |                   | 27              | 27              | 27              | 46                      | 46                      | 46                      |


| Outdoor Units Model name              |  |                                 |         | AOYG72LRLA              |  | AOYG90LRLA              |  |
|---------------------------------------|--|---------------------------------|---------|-------------------------|--|-------------------------|--|
|                                       |  | Cooling                         | Heating | kW                      |  | kW                      |  |
| Capacity                              |  |                                 |         | 19.0                    |  | 22.0                    |  |
|                                       |  |                                 |         | 22.4                    |  | 27.0                    |  |
| Power Source                          |  | 3-phase, ~400 V, 50 Hz          |         |                         |  |                         |  |
| Sound Pressure Level (High)           |  | Cooling/Heating                 |         | dB(A)                   |  | 55/57                   |  |
| Airflow Rate                          |  | Cooling/Heating                 |         | m <sup>3</sup> /h       |  | 8,400/8,400             |  |
| Net Dimensions H × W × D              |  |                                 |         | mm                      |  | 1,428 × 1,080 × 480     |  |
| Weight                                |  |                                 |         | kg                      |  | 172                     |  |
| Connection Pipe Diameter (Liquid/Gas) |  |                                 |         | mm                      |  | 12.7/25.4               |  |
| Max. Pipe Length (Pre-Charge)         |  |                                 |         | m                       |  | 100 (30)                |  |
| Max. Height Difference                |  |                                 |         | m                       |  | 30                      |  |
| Operating Range                       |  | Cooling                         |         | °CDB                    |  | -15 to 46               |  |
|                                       |  | Heating                         |         | °CDB                    |  | -20 to 24               |  |
| Refrigerant                           |  | Type (Global Warming Potential) |         | R410A (2,088)           |  | R410A (2,088)           |  |
|                                       |  | Charge                          |         | kg (CO2eq-T)            |  | 5.6 (11.693)            |  |
| Separation tube                       |  | UTP-SX272A × 1 (Twin)           |         | UTP-SX372A × 1 (Triple) |  | UTP-SX272A × 1 (Twin)   |  |
|                                       |  | UTP-SX236A × 2 (Double Twin)    |         | UTP-SX272A × 1 (Twin)   |  | UTP-SX372A × 1 (Triple) |  |
|                                       |  | UTP-SX254A × 2 (Double Twin)    |         | UTP-SX272A × 1 (Twin)   |  | UTP-SX372A × 1 (Triple) |  |

\*: That specification is not fixed yet.

• Indoor units of different types and capacity cannot be connected.  
• The above specifications apply when used with a cassette type indoor unit.

### Dimensions

(Unit: mm)

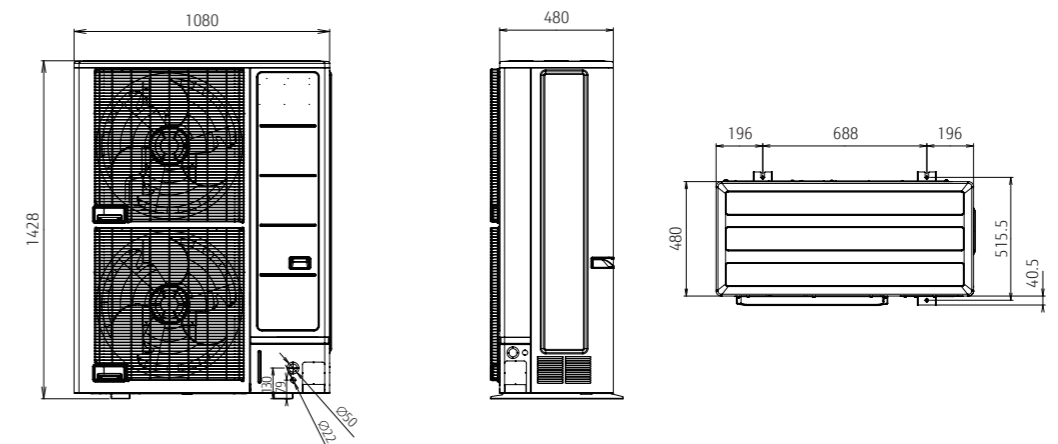

# 2-unit to 5-unit Multi-split Indoor Units Specifications



## Wall-mounted type

| Model name               | Indoor unit                 |         | ASEH07KGTG<br>ASYG07KGTE | ASEH09KGTG<br>ASYG09KGTE | ASEH12KGTG<br>ASYG12KGTE | ASEH14KGTG<br>ASYG14KGTE |
|--------------------------|-----------------------------|---------|--------------------------|--------------------------|--------------------------|--------------------------|
| kW Class                 | kW                          |         | 2.0                      | 2.5                      | 3.5                      | 4.0                      |
| Power Source             | Single phase, ~230 V, 50 Hz |         |                          |                          |                          |                          |
| Sound Pressure Level     | Cooling                     | H/M/L/Q | 38/33/29/21              | 40/34/29/21              | 40/35/30/21              | 43/36/30/21              |
|                          | Heating                     |         | 41/35/31/22              | 42/36/31/22              | 42/38/33/22              | 44/39/33/24              |
| Sound Power Level        | Cooling                     | H       | 54                       | 55                       | 56                       | 57                       |
|                          | Heating                     |         | 56                       | 57                       | 58                       | 59                       |
| Airflow Rate             | Cooling                     | H/M/L/Q | 650/540/430/270          | 700/560/430/270          | 700/560/430/270          | 770/600/450/280          |
|                          | Heating                     |         | 720/580/460/330          | 750/610/470/330          | 770/640/520/330          | 800/660/520/340          |
| Net Dimensions           | mm                          |         | 270 × 834 × 215          | 270 × 834 × 215          | 270 × 834 × 215          | 270 × 834 × 215          |
| Weight                   | kg                          |         | 10                       | 10                       | 10                       | 10                       |
| Connection Pipe Diameter | Liquid/Gas                  | mm      | 6.35/9.52                | 6.35/9.52                | 6.35/9.52                | 6.35/9.52                |



## Wall-mounted type

| Model name               | Indoor unit                 |         | ASEH07KETF<br>ASEH07KETF-B<br>ASYG07KETE<br>ASYG07KETE-B | ASEH09KETF<br>ASEH09KETF-B<br>ASYG09KETE<br>ASYG09KETE-B | ASEH12KETF<br>ASEH12KETF-B<br>ASYG12KETE<br>ASYG12KETE-B | ASEH14KETF<br>ASEH14KETF-B<br>ASYG14KETE<br>ASYG14KETE-B |
|--------------------------|-----------------------------|---------|--|--|--|--|
| kW Class                 | kW                          |         | 2.0  | 2.5  | 3.5  | 4.0  |
| Power Source             | Single phase, ~230 V, 50 Hz |         |  |  |  |  |
| Sound Pressure Level     | Cooling                     | H/M/L/Q | 38/33/29/21  | 40/34/29/21  | 40/35/30/21  | 43/36/30/21  |
|                          | Heating                     |         | 41/35/31/22  | 42/36/31/22  | 42/38/33/22  | 44/39/33/24  |
| Sound Power Level        | Cooling                     | H       | 54   | 55   | 55   | 57   |
|                          | Heating                     |         | 56   | 57   | 58   | 59   |
| Airflow Rate             | Cooling                     | H/M/L/Q | 650/540/430/270  | 700/560/430/270  | 700/560/430/270  | 770/600/450/280  |
|                          | Heating                     |         | 720/580/460/330  | 750/610/470/330  | 770/640/520/330  | 800/660/520/340  |
| Net Dimensions           | mm                          |         | 295 × 950 (wall side: 840) × 230                         | 295 × 950 (wall side: 840) × 230                         | 295 × 950 (wall side: 840) × 230                         | 295 × 950 (wall side: 840) × 230                         |
| Weight                   | kg                          |         | 11   | 11   | 11   | 11.5   |
| Connection Pipe Diameter | Liquid/Gas                  | mm      | 6.35/9.52  | 6.35/9.52  | 6.35/9.52  | 6.35/9.52  |



## Wall-mounted type

| Model name               | Indoor unit                 |         | ASEH07KMCG<br>ASEH07KMCG-B<br>ASYG07KMCE | ASEH09KMCG<br>ASEH09KMCG-B<br>ASYG09KMCE | ASEH12KMCG<br>ASEH12KMCG-B<br>ASYG12KMCE | ASEH14KMCG<br>ASEH14KMCG-B<br>ASYG14KMCE |
|--------------------------|-----------------------------|---------|--|--|--|--|
| kW Class                 | kW                          |         | 2.0                                      | 2.5                                      | 3.5                                      | 4.0                                      |
| Power Source             | Single phase, ~230 V, 50 Hz |         |  |  |  |  |
| Sound Pressure Level     | Cooling                     | H/M/L/Q | 38/33/29/21                              | 40/34/29/21                              | 40/35/30/21                              | 43/36/30/21                              |
|                          | Heating                     |         | 41/35/31/22                              | 42/36/31/22                              | 42/38/33/22                              | 44/39/33/24                              |
| Sound Power Level        | Cooling                     | H       | 54                                       | 55                                       | 55                                       | 57                                       |
|                          | Heating                     |         | 56                                       | 57                                       | 58                                       | 59                                       |
| Airflow Rate             | Cooling                     | H/M/L/Q | 650/540/430/320                          | 700/560/430/320                          | 700/560/430/320                          | 770/600/450/310                          |
|                          | Heating                     |         | 720/580/460/330                          | 750/610/470/330                          | 780/640/520/330                          | 820/660/520/340                          |
| Net Dimensions           | mm                          |         | 270 × 834 × 222                          | 270 × 834 × 222                          | 270 × 834 × 222                          | 270 × 834 × 222                          |
| Weight                   | kg                          |         | 10                                       | 10                                       | 10                                       | 10                                       |
| Connection Pipe Diameter | Liquid/Gas                  | mm      | 6.35/9.52                                | 6.35/9.52                                | 6.35/9.52                                | 6.35/9.52                                |



## Wall-mounted type

| Model name               | Indoor unit                 |         | ASEH05KNCA            | ASEH07KNCA            | ASEH09KNCA            | ASEH12KNCA            |
|--------------------------|-----------------------------|---------|-----------------------|-----------------------|-----------------------|-----------------------|
| kW Class                 | kW                          |         | 1.5                   | 2.0                   | 2.5                   | 3.5                   |
| Power Source             | Single phase, ~230 V, 50 Hz |         |                       |                       |                       |                       |
| Sound Pressure Level     | Cooling                     | H/M/L/Q | 34 / 33 / 29 / 21     | 36 / 33 / 29 / 21     | 41 / 35 / 29 / 21     | 42 / 36 / 32 / 21     |
|                          | Heating                     |         | 34 / 32 / 30 / 22     | 36 / 33 / 30 / 22     | 41 / 34 / 30 / 22     | 42 / 35 / 31 / 22     |
| Sound Power Level        | Cooling                     | H       | 50                    | 51                    | 56                    | 57                    |
|                          | Heating                     |         | 50                    | 51                    | 56                    | 57                    |
| Airflow Rate             | Cooling                     | H/M/L/Q | 500 / 450 / 390 / 250 | 530 / 460 / 390 / 250 | 640 / 500 / 390 / 250 | 660 / 520 / 440 / 250 |
|                          | Heating                     |         | 500 / 450 / 420 / 280 | 530 / 460 / 420 / 280 | 640 / 500 / 420 / 280 | 660 / 520 / 440 / 280 |
| Net Dimensions           | mm                          |         | 270 × 784 × 222       | 270 × 784 × 222       | 270 × 784 × 222       | 270 × 784 × 222       |
| Weight                   | kg                          |         | 9                     | 9                     | 9                     | 9                     |
| Connection Pipe Diameter | Liquid/Gas                  | mm      | 6.35 / 9.52           | 6.35 / 9.52           | 6.35 / 9.52           | 6.35 / 9.52           |



## Wall-mounted type

| Model name               | Indoor unit                 |         | ASEG18KMTE        | ASEG22KMTE        | ASEG24KMTE        |
|--------------------------|-----------------------------|---------|-------------------|-------------------|-------------------|
| kW Class                 | kW                          |         | 5.0               | 6.0               | 7.0               |
| Power Source             | Single phase, ~230 V, 50 Hz |         |                   |                   |                   |
| Sound Pressure Level     | Cooling                     | H/M/L/Q | 45/40/35/29       | 48/40/35/29       | 49/40/35/29       |
|                          | Heating                     |         | 46/40/35/29       | 48/40/35/29       | 49/40/35/29       |
| Sound Power Level        | Cooling                     | H       | 60                | 62                | 65                |
|                          | Heating                     |         | 61                | 62                | 65                |
| Airflow Rate             | Cooling                     | H/M/L/Q | 980/810/640/510   | 1,060/810/640/510 | 1,170/850/640/510 |
|                          | Heating                     |         | 1,020/850/640/510 | 1,060/850/640/510 | 1,170/850/640/510 |
| Net Dimensions           | mm                          |         | 280 × 980 × 240   | 280 × 980 × 240   | 280 × 980 × 240   |
| Weight                   | kg                          |         | 12.5              | 12.5              | 12.5              |
| Connection Pipe Diameter | Liquid/Gas                  | mm      | 6.35/12.70        | 6.35/12.70        | 6.35/12.70        |



## Floor

| Model name               | Indoor unit                 |         | AGEG09KVCA      | AGEG12KVCA      | AGEG14KVCA      |
|--------------------------|-----------------------------|---------|-----------------|-----------------|-----------------|
| kW Class                 | kW                          |         | 2.5             | 3.5             | 4.0             |
| Power Source             | Single phase, ~230 V, 50 Hz |         |                 |                 |                 |
| Sound Pressure Level     | Cooling                     | H/M/L/Q | 39/34/28/22     | 42/36/30/22     | 44/38/31/22     |
|                          | Heating                     |         | 39/35/30/22     | 42/38/32/22     | 44/39/33/22     |
| Sound Power Level        | Cooling                     | H       | 52              | 55              | 56              |
|                          | Heating                     |         | 52              | 55              | 56              |
| Airflow Rate             | Cooling                     | H/M/L/Q | 530/440/360/270 | 600/490/380/270 | 650/520/400/270 |
|                          | Heating                     |         | 530/460/380/270 | 600/510/410/270 | 650/540/430/270 |
| Net Dimensions           | mm                          |         | 600 × 740 × 200 | 600 × 740 × 200 | 600 × 740 × 200 |
| Weight                   | kg                          |         | 14              | 14              | 14              |
| Connection Pipe Diameter | Liquid/Gas                  | mm      | 6.35/9.52       | 6.35/9.52       | 6.35/9.52       |





# 2-unit to 5-unit Multi-split Indoor Units Specifications

## Ceiling



| Model name               | Indoor unit                 |         | ABEG18KRTA        |                 | ABEG22KRTA        |                 |  |
|--------------------------|-----------------------------|---------|-------------------|-----------------|-------------------|-----------------|--|
| kW Class                 | kW                          |         | 5.0               |                 | 6.0               |                 |  |
| Power Source             | Single phase, ~230 V, 50 Hz |         |                   |                 |                   |                 |  |
| Sound Pressure Level     | Cooling                     | H/M/L/Q | dB(A)             | 38/36/33/31     |                   | 42/37/34/31     |  |
|                          | Heating                     |         |                   | 38/36/33/31     |                   | 42/37/34/31     |  |
| Sound Power Level        | Cooling                     | H       | dB(A)             | 53              |                   | 57              |  |
|                          | Heating                     |         |                   | 53              |                   | 57              |  |
| Airflow Rate             | Cooling                     | H/M/L/Q | m³/h              | 840/790/710/650 |                   | 900/790/710/650 |  |
|                          | Heating                     |         |                   | 840/790/710/650 |                   | 900/790/710/650 |  |
| Net Dimensions           | mm                          |         | 235 × 1,080 × 705 |                 | 235 × 1,080 × 705 |                 |  |
| Weight                   | kg                          |         | 24                |                 | 24                |                 |  |
| Connection Pipe Diameter | Liquid/Gas                  | mm      |                   | 6.35/12.70      |                   | 6.35/12.70      |  |

## Compact Cassette Grid Type



| Model name               | Indoor unit                 |         | AUXG07KVLA      | AUXG09KVLA      | AUXG12KVLA      | AUXG14KVLA      | AUXG18KVLA      | AUXG22KVLA      |  |
|--------------------------|-----------------------------|---------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|--|
| kW Class                 | kW                          |         | 2.0             | 2.5             | 3.5             | 4.0             | 5.0             | 6.0             |  |
| Power Source             | Single phase, ~230 V, 50 Hz |         |                 |                 |                 |                 |                 |                 |  |
| Sound Pressure Level     | Cooling                     | H/M/L/Q | dB(A)           | 33/31/29/27     |                 | 37/34/31/28     |                 | 38/35/32/29     |  |
|                          | Heating                     |         |                 | 34/32/29/27     |                 | 43/38/34/30     |                 | 45/43/40/33     |  |
| Sound Power Level        | Cooling                     | H       | dB(A)           | 46              |                 | 49              |                 | 50              |  |
|                          | Heating                     |         |                 | 47              |                 | 55              |                 | 57              |  |
| Airflow Rate             | Cooling                     | H/M/L/Q | m³/h            | 540/490/440/390 |                 | 610/530/470/410 |                 | 680/580/490/410 |  |
|                          | Heating                     |         |                 | 540/490/440/390 |                 | 790/680/580/450 |                 | 860/760/700/530 |  |
| Net Dimensions           | mm                          |         | 245 × 570 × 570 |                 | 245 × 570 × 570 |                 | 245 × 570 × 570 |                 |  |
| Weight                   | kg                          |         | 15              |                 | 15              |                 | 16              |                 |  |
| Panel                    |                             |         | UTG-UFYF-W      |                 | UTG-UFYF-W      |                 | UTG-UFYF-W      |                 |  |
| Connection Pipe Diameter | Liquid/Gas                  | mm      |                 | 6.35/9.52       |                 | 6.35/9.52       |                 | 6.35/12.70      |  |

## Mini duct




| Model name               | Indoor unit                 |         | ARXG07KSLAP     | ARXG09KSLAP     | ARXG12KSLAP     | ARXG14KSLAP     | ARXG18KSLAP     |                 |  |
|--------------------------|-----------------------------|---------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|--|
| kW Class                 | kW                          |         | 2.0             | 2.5             | 3.5             | 4.0             | 5.0             |                 |  |
| Power Source             | Single phase, ~230 V, 50 Hz |         |                 |                 |                 |                 |                 |                 |  |
| Sound Pressure Level     | Cooling                     | H/M/L/Q | dB(A)           | 29/26/24/23     |                 | 31/27/25/23     |                 | 35/30/27/23     |  |
|                          | Heating                     |         |                 | 29/26/24/23     |                 | 31/27/25/23     |                 | 33/29/26/23     |  |
| Sound Power Level        | Cooling                     | H       | dB(A)           | 52              |                 | 55              |                 | 60              |  |
|                          | Heating                     |         |                 | 53              |                 | 62              |                 | 59              |  |
| Airflow Rate             | Cooling                     | H/M/L/Q | m³/h            | 550/440/390/360 |                 | 650/490/430/360 |                 | 800/640/530/360 |  |
|                          | Heating                     |         |                 | 550/440/390/360 |                 | 650/490/430/360 |                 | 940/750/540/480 |  |
| Net Dimensions           | mm                          |         | 198 × 700 × 450 |                 | 198 × 700 × 450 |                 | 198 × 700 × 450 |                 |  |
| Weight                   | kg                          |         | 15.5            |                 | 15.5            |                 | 18.5            |                 |  |
| Connection Pipe Diameter | Liquid/Gas                  | mm      |                 | 6.35/9.52       |                 | 6.35/9.52       |                 | 6.35/12.70      |  |
| External static pressure | Pa                          |         | 0 to 30         |                 | 0 to 30         |                 | 0 to 50         |                 |  |
| Drain pump               |                             |         | Standard        |                 | Standard        |                 | Standard        |                 |  |

## Slim duct



| Model name               | Indoor unit                 |         | ARXG07KLLAP     | ARXG09KLLAP     | ARXG12KLLAP     | ARXG14KLLAP     | ARXG18KLLAP     |                 |  |
|--------------------------|-----------------------------|---------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|--|
| kW Class                 | kW                          |         | 2.0             | 2.5             | 3.5             | 4.0             | 5.0             |                 |  |
| Power Source             | Single phase, ~230 V, 50 Hz |         |                 |                 |                 |                 |                 |                 |  |
| Sound Pressure Level     | Cooling                     | H/M/L/Q | dB(A)           | 28/27/26/25     |                 | 29/28/27/26     |                 | 32/30/28/26     |  |
|                          | Heating                     |         |                 | 28/26/25/24     |                 | 29/28/27/24     |                 | 32/30/28/25     |  |
| Sound Power Level        | Cooling                     | H       | dB(A)           | 57              |                 | 58              |                 | 60              |  |
|                          | Heating                     |         |                 | 57              |                 | 58              |                 | 58              |  |
| Airflow Rate             | Cooling                     | H/M/L/Q | m³/h            | 550/490/470/440 |                 | 650/600/550/480 |                 | 800/700/600/480 |  |
|                          | Heating                     |         |                 | 550/490/470/440 |                 | 650/600/550/480 |                 | 940/880/820/750 |  |
| Net Dimensions           | mm                          |         | 198 × 700 × 620 |                 | 198 × 700 × 620 |                 | 198 × 700 × 620 |                 |  |
| Weight                   | kg                          |         | 16              |                 | 17              |                 | 20              |                 |  |
| Connection Pipe Diameter | Liquid/Gas                  | mm      |                 | 6.35/9.52       |                 | 6.35/9.52       |                 | 6.35/12.70      |  |
| External static pressure | Pa                          |         | 0 to 90         |                 | 0 to 90         |                 | 0 to 90         |                 |  |
| Drain pump               |                             |         | Standard        |                 | Standard        |                 | Standard        |                 |  |

## Medium Static Pressure Duct



| Model name               | Indoor unit               |         | ARXH12KMTAP     | ARXH14KMTAP           | ARXH18KMTAP     | ARXH22KMTAP           |  |
|--------------------------|---------------------------|---------|-----------------|-----------------------|-----------------|-----------------------|--|
| kW Class                 | kW                        |         | 3.5             | 4.0                   | 5.0             | 6.0                   |  |
| Power Source             | Single-phase, ~230V, 50Hz |         |                 |                       |                 |                       |  |
| Sound Pressure Level     | Cooling                   | H/M/L/Q | dB(A)           | 29 / 27 / 25 / 23     |                 | 32 / 29 / 27 / 25     |  |
|                          | Heating                   |         |                 | 29 / 27 / 25 / 23     |                 | 33 / 30 / 28 / 26     |  |
| Sound Power Level        | Cooling                   | H       | dB(A)           | 58                    |                 | 59                    |  |
|                          | Heating                   |         |                 | 58                    |                 | 60                    |  |
| Airflow Rate             | Cooling                   | H/M/L/Q | m³/h            | 650 / 520 / 460 / 390 |                 | 800 / 640 / 560 / 480 |  |
|                          | Heating                   |         |                 | 650 / 520 / 460 / 390 |                 | 840 / 720 / 630 / 540 |  |
| Net Dimensions           | mm                        |         | 240 × 700 × 700 |                       | 240 × 700 × 700 |                       |  |
| Weight                   | kg                        |         | 24              |                       | 24              |                       |  |
| Connection Pipe Diameter | Liquid/Gas                | mm      |                 | 6.35 / 9.52           |                 | 6.35 / 12.7           |  |
| External static pressure | Pa                        |         | 30 to 150       |                       | 30 to 150       |                       |  |
| Drain pump               |                           |         | Standard        |                       | Standard        |                       |  |

## Medium Static Pressure Duct



| Model name               | Indoor unit                 |         | ARXG22KMLB        |                   |  |  |
|--------------------------|-----------------------------|---------|-------------------|-------------------|--|--|
| kW Class                 | kW                          |         | 6.0               |                   |  |  |
| Power Source             | Single phase, ~230 V, 50 Hz |         |                   |                   |  |  |
| Sound Pressure Level     | Cooling                     | H/M/L/Q | dB(A)             | 31/29/27/25       |  |  |
|                          | Heating                     |         |                   | 31/29/27/25       |  |  |
| Sound Power Level        | Cooling                     | H       | dB(A)             | 60                |  |  |
|                          | Heating                     |         |                   | 62                |  |  |
| Airflow Rate             | Cooling                     | H/M/L/Q | m³/h              | 1,100/910/750/580 |  |  |
|                          | Heating                     |         |                   | 1,100/910/750/580 |  |  |
| Net Dimensions           | mm                          |         | 270 × 1,135 × 700 |                   |  |  |
| Weight                   | kg                          |         | 35                |                   |  |  |
| Connection Pipe Diameter | Liquid/Gas                  | mm      |                   | 6.35/12.70        |  |  |
| External static pressure | Pa                          |         | 30 to 150         |                   |  |  |
| Drain pump               |                             |         | Option            |                   |  |  |

# 6-unit Multi-split Indoor Units Specifications

## Compact wall-mounted



| Model name               | Indoor unit                 |         |       | ASYG07LUCA      | ASYG09LUCA      | ASYG12LUCA      | ASYG14LUCA      |
|--------------------------|-----------------------------|---------|-------|-----------------|-----------------|-----------------|-----------------|
| kW Class                 | kW                          |         |       | 2.0             | 2.5             | 3.5             | 4.0             |
| Power Source             | Single phase, ~230 V, 50 Hz |         |       |                 |                 |                 |                 |
| Sound Pressure Level     | Cooling                     | H/M/L/Q | dB(A) | 35/30/28/21     | 36/32/28/21     | 37/34/31/21     | 41/36/33/25     |
|                          | Heating                     |         |       | 35/30/28/21     | 36/32/28/21     | 37/34/31/21     | 41/36/34/27     |
| Sound Power Level        | Cooling                     | H       | dB(A) | 53              | 54              | 55              | 59              |
|                          | Heating                     |         |       | 53              | 54              | 55              | 59              |
| Airflow Rate             | Cooling                     | H/M/L/Q | m³/h  | 570/520/470/330 | 600/550/470/330 | 660/600/530/330 | 710/640/570/390 |
|                          | Heating                     |         |       | 570/520/470/330 | 600/550/470/330 | 660/600/530/330 | 710/640/590/430 |
| Net Dimensions           | mm                          |         |       | 282 × 870 × 185 | 282 × 870 × 185 | 282 × 870 × 185 | 282 × 870 × 185 |
| Weight                   | kg                          |         |       | 9.5             | 9.5             | 9.5             | 9.5             |
| Connection Pipe Diameter | Liquid/Gas                  | mm      |       | 6.35/9.52       | 6.35/9.52       | 6.35/9.52       | 6.35/12.70      |

## Wall-mounted type



| Model name               | Indoor unit                 |         |       | ASYG18LFCA      | ASYG24LFCC        |
|--------------------------|-----------------------------|---------|-------|-----------------|-------------------|
| kW Class                 | kW                          |         |       | 5.0             | 7.0               |
| Power Source             | Single phase, ~230 V, 50 Hz |         |       |                 |                   |
| Sound Pressure Level     | Cooling                     | H/M/L/Q | dB(A) | 43/37/33/26     | 49/42/37/33       |
|                          | Heating                     |         |       | 42/37/33/25     | 48/42/37/33       |
| Sound Power Level        | Cooling                     | H       | dB(A) | 58              | 64                |
|                          | Heating                     |         |       | 58              | 64                |
| Airflow Rate             | Cooling                     | H/M/L/Q | m³/h  | 900/740/620/550 | 1,120/900/740/620 |
|                          | Heating                     |         |       | 900/740/620/550 | 1,100/900/740/620 |
| Net Dimensions           | mm                          |         |       | 320 × 998 × 238 | 320 × 998 × 238   |
| Weight                   | kg                          |         |       | 14              | 14                |
| Connection Pipe Diameter | Liquid/Gas                  | mm      |       | 6.35/12.70      | 6.35/15.88        |

## Compact wall-mounted



| Model name               | Indoor unit                 |         |       | ASYG07LMCE      | ASYG09LMCE      | ASYG12LMCE      | ASYG14LMCE      |
|--------------------------|-----------------------------|---------|-------|-----------------|-----------------|-----------------|-----------------|
| kW Class                 | kW                          |         |       | 2.0             | 2.5             | 3.5             | 4.0             |
| Power Source             | Single phase, ~230 V, 50 Hz |         |       |                 |                 |                 |                 |
| Sound Pressure Level     | Cooling                     | H/M/L/Q | dB(A) | 36/32/29/21     | 37/33/29/21     | 40/36/30/21     | 42/38/33/25     |
|                          | Heating                     |         |       | 36/32/29/22     | 37/33/29/22     | 40/36/31/22     | 42/38/35/27     |
| Sound Power Level        | Cooling                     | H       | dB(A) | 51              | 52              | 54              | 56              |
|                          | Heating                     |         |       | 51              | 52              | 55              | 57              |
| Airflow Rate             | Cooling                     | H/M/L/Q | m³/h  | 560/500/430/310 | 600/520/430/310 | 660/560/450/310 | 730/600/530/360 |
|                          | Heating                     |         |       | 560/500/430/330 | 600/520/430/330 | 660/560/470/330 | 730/615/560/375 |
| Net Dimensions           | mm                          |         |       | 270 × 870 × 204 | 270 × 870 × 204 | 270 × 870 × 204 | 270 × 870 × 204 |
| Weight                   | kg                          |         |       | 8.5             | 8.5             | 8.5             | 8.5             |
| Connection Pipe Diameter | Liquid/Gas                  | mm      |       | 6.35/9.52       | 6.35/9.52       | 6.35/9.52       | 6.35/12.70      |

## Floor



| Model name               | Indoor unit                 |         |       | AGYG09LVCA      | AGYG12LVCA      | AGYG14LVCA      |
|--------------------------|-----------------------------|---------|-------|-----------------|-----------------|-----------------|
| kW Class                 | kW                          |         |       | 2.5             | 3.5             | 4.0             |
| Power Source             | Single phase, ~230 V, 50 Hz |         |       |                 |                 |                 |
| Sound Pressure Level     | Cooling                     | H/M/L/Q | dB(A) | 39/34/28/22     | 42/36/30/22     | 44/38/31/22     |
|                          | Heating                     |         |       | 39/35/30/22     | 42/38/32/22     | 44/39/33/22     |
| Sound Power Level        | Cooling                     | H       | dB(A) | 52              | 55              | 56              |
|                          | Heating                     |         |       | 52              | 55              | 56              |
| Airflow Rate             | Cooling                     | H/M/L/Q | m³/h  | 530/440/360/270 | 600/490/380/270 | 650/520/400/270 |
|                          | Heating                     |         |       | 530/460/380/270 | 600/510/410/270 | 650/540/430/270 |
| Net Dimensions           | mm                          |         |       | 600 × 740 × 200 | 600 × 740 × 200 | 600 × 740 × 200 |
| Weight                   | kg                          |         |       | 14              | 14              | 14              |
| Connection Pipe Diameter | Liquid/Gas                  | mm      |       | 6.35/9.52       | 6.35/9.52       | 6.35/12.70      |

## Floor ceiling



| Model name               | Indoor unit                 |         |       | ABYG14LVTA   | ABYG18LVTB   |
|--------------------------|-----------------------------|---------|-------|--|--|
| kW Class                 | kW                          |         |       | 4.0  | 5.0  |
| Power Source             | Single phase, ~230 V, 50 Hz |         |       |  |  |
| Sound Pressure Level     | Cooling                     | H/M/L/Q | dB(A) | 36/34/33/29 (Under ceiling)<br>39/37/36/32 (Floor console) | 41/38/34/32 (Under ceiling)<br>44/41/37/35 (Floor console) |
|                          | Heating                     |         |       | 36/34/33/29 (Under ceiling)<br>39/37/36/32 (Floor console) | 41/38/34/32 (Under ceiling)<br>44/41/37/35 (Floor console) |
| Sound Power Level        | Cooling                     | H       | dB(A) | 51   | 55   |
|                          | Heating                     |         |       | 51   | 55   |
| Airflow Rate             | Cooling                     | H/M/L/Q | m³/h  | 640/590/540/480  | 780/700/560/500  |
|                          | Heating                     |         |       | 640/590/540/480  | 780/700/560/500  |
| Net Dimensions           | mm                          |         |       | 199 × 990 × 655  | 199 × 990 × 655  |
| Weight                   | kg                          |         |       | 27   | 27   |
| Connection Pipe Diameter | Liquid/Gas                  | mm      |       | 6.35/12.70   | 6.35/12.70   |

## Compact cassette



| Model name               | Indoor unit                 |         |       | AUYG07LVLA      | AUYG09LVLA      | AUYG12LVLB      | AUYG14LVLB      | AUYG18LVLB      |
|--------------------------|-----------------------------|---------|-------|-----------------|-----------------|-----------------|-----------------|-----------------|
| kW Class                 | kW                          |         |       | 2.0             | 2.5             | 3.5             | 4.0             | 5.0             |
| Power Source             | Single phase, ~230 V, 50 Hz |         |       |                 |                 |                 |                 |                 |
| Sound Pressure Level     | Cooling                     | H/M/L/Q | dB(A) | 33/31/29/27     | 33/31/29/27     | 37/33/31/28     | 40/35/32/29     | 42/37/33/29     |
|                          | Heating                     |         |       | 34/32/29/27     | 34/32/29/27     | 37/33/31/28     | 40/37/34/29     | 44/40/37/30     |
| Sound Power Level        | Cooling                     | H       | dB(A) | 46              | 46              | 49              | 52              | 54              |
|                          | Heating                     |         |       | 47              | 47              | 49              | 52              | 56              |
| Airflow Rate             | Cooling                     | H/M/L/Q | m³/h  | 540/490/440/390 | 540/490/440/390 | 610/530/470/410 | 680/580/490/410 | 750/610/520/410 |
|                          | Heating                     |         |       | 540/490/440/390 | 540/490/440/390 | 610/530/470/410 | 700/620/550/430 | 800/710/600/450 |
| Net Dimensions           | mm                          |         |       | 245 × 570 × 570 | 245 × 570 × 570 | 245 × 570 × 570 | 245 × 570 × 570 | 245 × 570 × 570 |
| Weight                   | kg                          |         |       | 15              | 15              | 15              | 15              | 15              |
| Panel                    |                             |         |       | UTG-UFYD-W      |                 |                 |                 |                 |
| Connection Pipe Diameter | Liquid/Gas                  | mm      |       | 6.35/9.52       | 6.35/9.52       | 6.35/9.52       | 6.35/12.70      | 6.35/12.70      |

## Mini duct



| Model name               | Indoor unit                 |         |       | ARYG07LSLAP     | ARYG09LSLAP     | ARYG12LSLAP     | ARYG14LSLAP     | ARYG18LSLAP     |
|--------------------------|-----------------------------|---------|-------|-----------------|-----------------|-----------------|-----------------|-----------------|
| kW Class                 | kW                          |         |       | 2.0             | 2.5             | 3.5             | 4.0             | 5.0             |
| Power Source             | Single phase, ~230 V, 50 Hz |         |       |                 |                 |                 |                 |                 |
| Sound Pressure Level     | Cooling                     | H/M/L/Q | dB(A) | 29/26/24/23     | 29/26/24/23     | 31/27/25/23     | 35/30/27/23     | 33/29/26/23     |
|                          | Heating                     |         |       | 29/26/24/23     | 29/26/24/23     | 31/27/25/23     | 35/30/27/23     | 33/29/26/23     |
| Sound Power Level        | Cooling                     | H       | dB(A) | 52              | 54              | 55              | 60              | 58              |
|                          | Heating                     |         |       | 53              | 56              | 57              | 62              | 59              |
| Airflow Rate             | Cooling                     | H/M/L/Q | m³/h  | 550/440/390/360 | 600/450/400/360 | 650/490/430/360 | 800/640/530/360 | 940/750/540/480 |
|                          | Heating                     |         |       | 550/440/390/360 | 600/450/400/360 | 650/490/430/360 | 800/640/530/360 | 940/750/540/480 |
| Net Dimensions           | mm                          |         |       | 198 × 700 × 450 | 198 × 700 × 450 | 198 × 700 × 450 | 198 × 700 × 450 | 198 × 900 × 450 |
| Weight                   | kg                          |         |       | 15.5            |                 |                 |                 |                 |
| Connection Pipe Diameter | Liquid/Gas                  | mm      |       | 6.35/9.52       |                 |                 | 6.35/12.70      |                 |
| External static pressure | Pa                          |         |       | 0 to 30         |                 |                 | 0 to 50         |                 |
| Drain pump               | Standard                    |         |       |                 |                 |                 |                 |                 |

## Slim duct



| Model name               | Indoor unit                 |         |       | ARYG07LLTA      | ARYG09LLTA      | ARYG12LLTB      | ARYG14LLTB      | ARYG18LLTB      |
|--------------------------|-----------------------------|---------|-------|-----------------|-----------------|-----------------|-----------------|-----------------|
| kW Class                 | kW                          |         |       | 2.0             | 2.5             | 3.5             | 4.0             | 5.0             |
| Power Source             | Single phase, ~230 V, 50 Hz |         |       |                 |                 |                 |                 |                 |
| Sound Pressure Level     | Cooling                     | H/M/L/Q | dB(A) | 28/26/25/24     | 28/27/26/25     | 29/28/27/26     | 32/30/28/26     | 32/31/30/29     |
|                          | Heating                     |         |       | 28/26/25/24     | 28/26/25/24     | 29/28/27/24     | 33/30/28/25     | 33/32/31/29     |
| Sound Power Level        | Cooling                     | H       | dB(A) | 57              | 57              | 58              | 60              | 58              |
|                          | Heating                     |         |       | 57              | 57              | 58              | 61              | 59              |
| Airflow Rate             | Cooling                     | H/M/L/Q | m³/h  | 550/490/470/440 | 600/550/500/450 | 650/600/550/480 | 800/700/600/480 | 940/880/820/750 |
|                          | Heating                     |         |       | 550/490/470/440 | 600/550/500/450 | 650/600/550/480 | 800/700/600/480 | 940/880/820/750 |
| Net Dimensions           | mm                          |         |       | 198 × 700 × 620 | 198 × 700 × 620 | 198 × 700 × 620 | 198 × 700 × 620 | 198 × 900 × 620 |
| Weight                   | kg                          |         |       | 17              | 19              | 19              | 19              | 23              |
| Connection Pipe Diameter | Liquid/Gas                  | mm      |       | 6.35/9.52       | 6.35/9.52       | 6.35/9.52       | 6.35/12.7       | 6.35/12.70      |
| External static pressure | Pa                          |         |       | 0 to 90         |                 |                 |                 |                 |
| Drain pump               | Standard                    |         |       |                 |                 |                 |                 |                 |

# 2-unit Multi-split Combination Table-Cooling/Heating

## 2-unit Multi-split cooling

| AOEG14KBCA2       | Combination of Indoor Units |    | Cooling Operation |           |                                 |                              | Seasonal Data |            |      |                         |
|-------------------|-----------------------------|----|-------------------|-----------|---------------------------------|------------------------------|---------------|------------|------|-------------------------|
|                   |                             |    | Cooling Capacity  |           |                                 | Input Power (Min. - Max.) kW | EER           | Pdesign kW | SEER | Energy efficiency class |
|                   |                             |    | Unit 1 kW         | Unit 2 kW | Total Capacity (Min. - Max.) kW |                              |               |            |      |                         |
| 2-unit connection | 7                           | 7  | 2.00              | 2.00      | 4.00 (1.4-4.6)                  | 0.97 (0.25-1.20)             | 4.12          | 4.0        | 8.7  | A+++                    |
|                   | 7                           | 9  | 1.75              | 2.25      | 4.00 (1.4-4.6)                  | 0.97 (0.25-1.20)             | 4.12          | 4.0        | 8.7  | A+++                    |
|                   | 7                           | 12 | 1.47              | 2.53      | 4.00 (1.4-4.6)                  | 0.97 (0.25-1.20)             | 4.12          | 4.0        | 8.7  | A+++                    |
|                   | 9                           | 9  | 2.00              | 2.00      | 4.00 (1.4-4.6)                  | 0.97 (0.25-1.20)             | 4.12          | 4.0        | 8.7  | A+++                    |
|                   | 9                           | 12 | 1.71              | 2.29      | 4.00 (1.4-4.6)                  | 0.97 (0.25-1.20)             | 4.12          | 4.0        | 8.7  | A+++                    |

Notes: •7: 7000 Btu/h/9: 9000 Btu/h/12: 12000 Btu/h models  
 •The above specifications apply when connected with a wall-mounted [KG/KM] unit.  
 •2 or more indoor units should be connected.  
 •Cooling capacity is determined based on 27°CDB/19°CWB (indoor temperature) and 35°CDB (outdoor temperature).  
 •Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)  
 •Total capacity of indoor units connected must be between 4.0 kW and 6.0 kW.  
 •Please refer to the Design & Technical manual for the combination tables with 5kW model.

| AOEG18KBCA2       | Combination of Indoor Units |    | Cooling Operation |           |                                 |                              | Seasonal Data |            |      |                         |
|-------------------|-----------------------------|----|-------------------|-----------|---------------------------------|------------------------------|---------------|------------|------|-------------------------|
|                   |                             |    | Cooling Capacity  |           |                                 | Input Power (Min. - Max.) kW | EER           | Pdesign kW | SEER | Energy efficiency class |
|                   |                             |    | Unit 1 kW         | Unit 2 kW | Total Capacity (Min. - Max.) kW |                              |               |            |      |                         |
| 2-unit connection | 7                           | 7  | 2.00              | 2.00      | 4.00 (1.7-5.0)                  | 0.92 (0.25-1.23)             | 4.35          | 4.0        | 8.8  | A+++                    |
|                   | 7                           | 9  | 2.00              | 2.50      | 4.50 (1.7-5.7)                  | 1.07 (0.25-1.45)             | 4.22          | 4.5        | 8.7  | A+++                    |
|                   | 7                           | 12 | 1.84              | 3.16      | 5.00 (1.7-5.8)                  | 1.24 (0.25-1.55)             | 4.03          | 5.0        | 8.6  | A+++                    |
|                   | 7                           | 14 | 1.67              | 3.33      | 5.00 (1.7-5.8)                  | 1.24 (0.25-1.55)             | 4.03          | 5.0        | 8.6  | A+++                    |
|                   | 9                           | 9  | 2.50              | 2.50      | 5.00 (1.7-5.8)                  | 1.24 (0.25-1.55)             | 4.03          | 5.0        | 8.6  | A+++                    |
|                   | 9                           | 12 | 2.14              | 2.86      | 5.00 (1.7-5.8)                  | 1.24 (0.25-1.55)             | 4.03          | 5.0        | 8.6  | A+++                    |
|                   | 9                           | 14 | 1.96              | 3.04      | 5.00 (1.7-5.8)                  | 1.24 (0.25-1.55)             | 4.03          | 5.0        | 8.6  | A+++                    |
|                   | 12                          | 12 | 2.50              | 2.50      | 5.00 (1.7-5.8)                  | 1.24 (0.25-1.55)             | 4.03          | 5.0        | 8.6  | A+++                    |
|                   | 12                          | 14 | 2.31              | 2.69      | 5.00 (1.7-5.8)                  | 1.24 (0.25-1.55)             | 4.03          | 5.0        | 8.6  | A+++                    |

Notes: •7: 7000 Btu/h/9: 9000 Btu/h/12: 12000 Btu/h/14: 14000 Btu/h models  
 •The above specifications apply when connected with a wall-mounted [KG/KM] unit.  
 •2 or more indoor units should be connected.  
 •Cooling capacity is determined based on 27°CDB/19°CWB (indoor temperature) and 35°CDB (outdoor temperature).  
 •Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)  
 •Total capacity of indoor units connected must be between 4.0 kW and 7.5 kW.  
 •Please refer to the Design & Technical manual for the combination tables with 5kW model.

## 2-unit Multi-split heating

| AOEG14KBCA2       | Combination of Indoor Units |    | Heating Operation |           |                                 |                              | Seasonal Data |            |      |                         |
|-------------------|-----------------------------|----|-------------------|-----------|---------------------------------|------------------------------|---------------|------------|------|-------------------------|
|                   |                             |    | Heating Capacity  |           |                                 | Input Power (Min. - Max.) kW | COP           | Pdesign kW | SCOP | Energy efficiency class |
|                   |                             |    | Unit 1 kW         | Unit 2 kW | Total Capacity (Min. - Max.) kW |                              |               |            |      |                         |
| 2-unit connection | 7                           | 7  | 2.20              | 2.20      | 4.40 (1.1-5.5)                  | 0.95 (0.25-1.65)             | 4.63          | 3.5        | 4.7  | A++                     |
|                   | 7                           | 9  | 1.92              | 2.48      | 4.40 (1.1-5.5)                  | 0.95 (0.25-1.65)             | 4.63          | 3.5        | 4.7  | A++                     |
|                   | 7                           | 12 | 1.62              | 2.78      | 4.40 (1.1-5.5)                  | 0.95 (0.25-1.65)             | 4.63          | 3.5        | 4.7  | A++                     |
|                   | 9                           | 9  | 2.20              | 2.20      | 4.40 (1.1-5.5)                  | 0.95 (0.25-1.65)             | 4.63          | 3.5        | 4.7  | A++                     |
|                   | 9                           | 12 | 1.89              | 2.51      | 4.40 (1.1-5.5)                  | 0.95 (0.25-1.65)             | 4.63          | 3.5        | 4.7  | A++                     |

Notes: •7: 7000 Btu/h/9: 9000 Btu/h/12: 12000 Btu/h models  
 •The above specifications apply when connected with a wall-mounted [KG/KM] unit.  
 •2 or more indoor units should be connected.  
 •Heating capacity is determined based on 20°CDB (indoor temperature) and 7°CDB/6°CWB (outdoor temperature).  
 •Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)  
 •Total capacity of indoor units connected must be between 4.0 kW and 6.0 kW.  
 •Please refer to the Design & Technical manual for the combination tables with 5kW model.

| AOEG18KBCA2       | Combination of Indoor Units |    | Heating Operation |           |                                 |                              | Seasonal Data |            |      |                         |
|-------------------|-----------------------------|----|-------------------|-----------|---------------------------------|------------------------------|---------------|------------|------|-------------------------|
|                   |                             |    | Heating Capacity  |           |                                 | Input Power (Min. - Max.) kW | COP           | Pdesign kW | SCOP | Energy efficiency class |
|                   |                             |    | Unit 1 kW         | Unit 2 kW | Total Capacity (Min. - Max.) kW |                              |               |            |      |                         |
| 2-unit connection | 7                           | 7  | 2.40              | 2.40      | 4.80 (1.7-5.6)                  | 0.99 (0.25-1.35)             | 4.85          | 3.8        | 4.7  | A++                     |
|                   | 7                           | 9  | 2.40              | 3.00      | 5.40 (1.7-6.4)                  | 1.15 (0.25-1.60)             | 4.70          | 4.0        | 4.7  | A++                     |
|                   | 7                           | 12 | 2.06              | 3.54      | 5.60 (1.7-7.0)                  | 1.22 (0.25-1.80)             | 4.59          | 4.2        | 4.7  | A++                     |
|                   | 7                           | 14 | 1.87              | 3.73      | 5.60 (1.7-7.0)                  | 1.22 (0.25-1.80)             | 4.59          | 4.2        | 4.7  | A++                     |
|                   | 9                           | 9  | 2.80              | 2.80      | 5.60 (1.7-7.0)                  | 1.22 (0.25-1.80)             | 4.59          | 4.2        | 4.7  | A++                     |
|                   | 9                           | 12 | 2.40              | 3.20      | 5.60 (1.7-7.0)                  | 1.22 (0.25-1.80)             | 4.59          | 4.2        | 4.7  | A++                     |
|                   | 9                           | 14 | 2.19              | 3.41      | 5.60 (1.7-7.0)                  | 1.22 (0.25-1.80)             | 4.59          | 4.2        | 4.7  | A++                     |
|                   | 12                          | 12 | 2.80              | 2.80      | 5.60 (1.7-7.0)                  | 1.22 (0.25-1.80)             | 4.59          | 4.2        | 4.7  | A++                     |
|                   | 12                          | 14 | 2.58              | 3.02      | 5.60 (1.7-7.0)                  | 1.22 (0.25-1.80)             | 4.59          | 4.2        | 4.7  | A++                     |

Notes: •7: 7000 Btu/h/9: 9000 Btu/h/12: 12000 Btu/h/14: 14000 Btu/h models  
 •The above specifications apply when connected with a wall-mounted [KG/KM] unit.  
 •2 or more indoor units should be connected.  
 •Heating capacity is determined based on 20°CDB (indoor temperature) and 7°CDB/6°CWB (outdoor temperature).  
 •Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)  
 •Total capacity of indoor units connected must be between 4.0 kW and 7.5 kW.  
 •Please refer to the Design & Technical manual for the combination tables with 5kW model.

# 3-unit Multi-split Combination Table-Cooling/Heating

## 3-unit Multi-split cooling

| AOEG18KBCA3       | Combination of Indoor Units |    |    | Cooling Operation |           |           |                              |                  | Seasonal Data |      |                   |                                 |
|-------------------|-----------------------------|----|----|-------------------|-----------|-----------|------------------------------|------------------|---------------|------|-------------------|---------------------------------|
|                   |                             |    |    | Cooling Capacity  |           |           | Input Power (Min. - Max.) kW | EER              | Pdesign kW    | SEER | Energy efficiency |                                 |
|                   |                             |    |    | Unit 1 kW         | Unit 2 kW | Unit 3 kW |                              |                  |               |      |                   | Total Capacity (Min. - Max.) kW |
| 2-unit connection | 7                           | 7  | -  | 2.00              | 2.00      | -         | 4.00 (1.8-5.0)               | 0.86 (0.35-1.35) | 4.65          | 4.0  | 8.3               | A++                             |
|                   | 7                           | 9  | -  | 2.00              | 2.50      | -         | 4.50 (1.8-5.7)               | 1.03 (0.35-1.50) | 4.36          | 4.5  | 8.2               | A++                             |
|                   | 7                           | 12 | -  | 1.99              | 3.41      | -         | 5.40 (1.8-6.8)               | 1.41 (0.35-1.81) | 3.83          | 5.4  | 8.0               | A++                             |
|                   | 7                           | 14 | -  | 1.80              | 3.60      | -         | 5.40 (1.8-7.0)               | 1.41 (0.35-1.90) | 3.83          | 5.4  | 8.0               | A++                             |
|                   | 9                           | 9  | -  | 2.50              | 2.50      | -         | 5.00 (1.8-6.4)               | 1.23 (0.35-1.70) | 4.06          | 5.0  | 8.1               | A++                             |
|                   | 9                           | 12 | -  | 2.31              | 3.09      | -         | 5.40 (1.8-7.0)               | 1.41 (0.35-1.90) | 3.83          | 5.4  | 8.0               | A++                             |
|                   | 9                           | 14 | -  | 2.11              | 3.29      | -         | 5.40 (1.8-7.0)               | 1.41 (0.35-1.90) | 3.83          | 5.4  | 8.0               | A++                             |
|                   | 12                          | 12 | -  | 2.70              | 2.70      | -         | 5.40 (1.8-7.0)               | 1.41 (0.35-1.90) | 3.83          | 5.4  | 8.0               | A++                             |
|                   | 12                          | 14 | -  | 2.49              | 2.91      | -         | 5.40 (1.8-7.0)               | 1.41 (0.35-1.90) | 3.83          | 5.4  | 8.0               | A++                             |
|                   | 14                          | 14 | -  | 2.70              | 2.70      | -         | 5.40 (1.8-7.0)               | 1.41 (0.35-1.90) | 3.83          | 5.4  | 8.0               | A++                             |
| 3-unit connection | 7                           | 7  | 7  | 1.80              | 1.80      | 1.80      | 5.40 (1.8-7.0)               | 1.13 (0.35-1.90) | 4.78          | 5.4  | 8.6               | A+++                            |
|                   | 7                           | 7  | 9  | 1.64              | 1.64      | 2.12      | 5.40 (1.8-7.0)               | 1.13 (0.35-1.90) | 4.78          | 5.4  | 8.6               | A+++                            |
|                   | 7                           | 7  | 12 | 1.45              | 1.45      | 2.50      | 5.40 (1.8-7.0)               | 1.13 (0.35-1.90) | 4.78          | 5.4  | 8.6               | A+++                            |
|                   | 7                           | 7  | 14 | 1.35              | 1.35      | 2.70      | 5.40 (1.8-7.0)               | 1.13 (0.35-1.90) | 4.78          | 5.4  | 8.6               | A+++                            |
|                   | 7                           | 9  | 9  | 1.52              | 1.94      | 1.94      | 5.40 (1.8-7.0)               | 1.13 (0.35-1.90) | 4.78          | 5.4  | 8.6               | A+++                            |
|                   | 7                           | 9  | 12 | 1.35              | 1.74      | 2.31      | 5.40 (1.8-7.0)               | 1.13 (0.35-1.90) | 4.78          | 5.4  | 8.6               | A+++                            |
|                   | 7                           | 9  | 14 | 1.26              | 1.62      | 2.52      | 5.40 (1.8-7.0)               | 1.13 (0.35-1.90) | 4.78          | 5.4  | 8.6               | A+++                            |
|                   | 9                           | 9  | 9  | 1.80              | 1.80      | 1.80      | 5.40 (1.8-7.0)               | 1.13 (0.35-1.90) | 4.78          | 5.4  | 8.6               | A+++                            |
|                   | 9                           | 9  | 12 | 1.62              | 1.62      | 2.16      | 5.40 (1.8-7.0)               | 1.13 (0.35-1.90) | 4.78          | 5.4  | 8.6               | A+++                            |

| AOEG24KBCA3       | Combination of Indoor Units |    |      | Cooling Operation |           |                |                              |                  | Seasonal Data |      |                   |                                 |
|-------------------|-----------------------------|----|------|-------------------|-----------|----------------|------------------------------|------------------|---------------|------|-------------------|---------------------------------|
|                   |                             |    |      | Cooling Capacity  |           |                | Input Power (Min. - Max.) kW | EER              | Pdesign kW    | SEER | Energy efficiency |                                 |
|                   |                             |    |      | Unit 1 kW         | Unit 2 kW | Unit 3 kW      |                              |                  |               |      |                   | Total Capacity (Min. - Max.) kW |
| 2-unit connection | 7                           | 7  | -    | 2.00              | 2.00      | -              | 4.00 (1.8-5.0)               | 0.86 (0.35-1.35) | 4.65          | 4.0  | 8.3               | A++                             |
|                   | 7                           | 9  | -    | 2.00              | 2.50      | -              | 4.50 (1.8-5.7)               | 1.03 (0.35-1.50) | 4.36          | 4.5  | 8.2               | A++                             |
|                   | 7                           | 12 | -    | 2.00              | 3.50      | -              | 5.50 (1.8-6.8)               | 1.46 (0.35-1.85) | 3.77          | 5.5  | 8.0               | A++                             |
|                   | 7                           | 14 | -    | 2.00              | 4.00      | -              | 6.00 (1.8-7.5)               | 1.73 (0.35-2.20) | 3.48          | 6.0  | 7.6               | A++                             |
|                   | 7                           | 18 | -    | 1.90              | 4.90      | -              | 6.80 (1.8-8.5)               | 2.26 (0.35-2.65) | 3.01          | 6.8  | 6.9               | A++                             |
|                   | 9                           | 9  | -    | 2.50              | 2.50      | -              | 5.00 (1.8-6.4)               | 1.23 (0.35-1.74) | 4.06          | 5.0  | 8.1               | A++                             |
|                   | 9                           | 12 | -    | 2.50              | 3.50      | -              | 6.00 (1.8-7.5)               | 1.73 (0.35-2.20) | 3.48          | 6.0  | 7.6               | A++                             |
|                   | 9                           | 14 | -    | 2.50              | 4.00      | -              | 6.50 (1.8-8.2)               | 2.04 (0.35-2.46) | 3.19          | 6.5  | 7.2               | A++                             |
|                   | 9                           | 18 | -    | 2.27              | 4.53      | -              | 6.80 (1.8-8.5)               | 2.26 (0.35-2.65) | 3.01          | 6.8  | 6.9               | A++                             |
|                   | 12                          | 12 | -    | 3.40              | 3.40      | -              | 6.80 (1.8-8.5)               | 2.26 (0.35-2.65) | 3.01          | 6.8  | 6.9               | A++                             |
|                   | 12                          | 14 | -    | 3.14              | 3.66      | -              | 6.80 (1.8-8.5)               | 2.26 (0.35-2.65) | 3.01          | 6.8  | 6.9               | A++                             |
|                   | 12                          | 18 | -    | 2.72              | 4.08      | -              | 6.80 (1.8-8.5)               | 2.26 (0.35-2.65) | 3.01          | 6.8  | 6.9               | A++                             |
|                   | 14                          | 14 | -    | 3.40              | 3.40      | -              | 6.80 (1.8-8.5)               | 2.26 (0.35-2.65) | 3.01          | 6.8  | 6.9               | A++                             |
|                   | 14                          | 18 | -    | 2.98              | 3.82      | -              | 6.80 (1.8-8.5)               | 2.26 (0.35-2.65) | 3.01          | 6.8  | 6.9               | A++                             |
| 3-unit connection | 7                           | 7  | 7    | 2.00              | 2.00      | 2.00           | 6.00 (1.8-7.5)               | 1.37 (0.35-2.20) | 4.37          | 6.0  | 8.6               | A+++                            |
|                   | 7                           | 7  | 9    | 2.00              | 2.00      | 2.50           | 6.50 (1.8-8.2)               | 1.59 (0.35-2.46) | 4.08          | 6.5  | 8.5               | A+++                            |
|                   | 7                           | 7  | 12   | 1.83              | 1.83      | 3.14           | 6.80 (1.8-8.5)               | 1.74 (0.35-2.65) | 3.90          | 6.8  | 8.5               | A+++                            |
|                   | 7                           | 7  | 14   | 1.70              | 1.70      | 3.40           | 6.80 (1.8-8.5)               | 1.74 (0.35-2.65) | 3.90          | 6.8  | 8.5               | A+++                            |
|                   | 7                           | 7  | 18   | 1.49              | 1.49      | 3.82           | 6.80 (1.8-8.5)               | 1.74 (0.35-2.65) | 3.90          | 6.8  | 8.5               | A+++                            |
|                   | 7                           | 9  | 9    | 1.90              | 2.45      | 2.45           | 6.80 (1.8-8.5)               | 1.74 (0.35-2.65) | 3.90          | 6.8  | 8.5               | A+++                            |
|                   | 7                           | 9  | 12   | 1.70              | 2.19      | 2.91           | 6.80 (1.8-8.5)               | 1.74 (0.35-2.65) | 3.90          | 6.8  | 8.5               | A+++                            |
|                   | 7                           | 9  | 14   | 1.59              | 2.04      | 3.17           | 6.80 (1.8-8.5)               | 1.74 (0.35-2.65) | 3.90          | 6.8  | 8.5               | A+++                            |
|                   | 7                           | 9  | 18   | 1.40              | 1.80      | 3.60           | 6.80 (1.8-8.5)               | 1.74 (0.35-2.65) | 3.90          | 6.8  | 8.5               | A+++                            |
|                   | 7                           | 12 | 12   | 1.54              | 2.63      | 2.63           | 6.80 (1.8-8.5)               | 1.74 (0.35-2.65) | 3.90          | 6.8  | 8.5               | A+++                            |
|                   | 7                           | 12 | 14   | 1.44              | 2.47      | 2.89           | 6.80 (1.8-8.5)               | 1.74 (0.35-2.65) | 3.90          | 6.8  | 8.5               | A+++                            |
|                   | 7                           | 14 | 14   | 1.36              | 2.72      | 2.72           | 6.80 (1.8-8.5)               | 1.74 (0.35-2.65) | 3.90          | 6.8  | 8.5               | A+++                            |
|                   | 9                           | 9  | 9    | 2.27              | 2.27      | 2.27           | 6.80 (1.8-8.5)               | 1.74 (0.35-2.65) | 3.90          | 6.8  | 8.5               | A+++                            |
|                   | 9                           | 9  | 12   | 2.04              | 2.04      | 2.72           | 6.80 (1.8-8.5)               | 1.74 (0.35-2.65) | 3.90          | 6.8  | 8.5               | A+++                            |
|                   | 9                           | 9  | 14   | 1.91              | 1.91      | 2.98           | 6.80 (1.8-8.5)               | 1.74 (0.35-2.65) | 3.90          | 6.8  | 8.5               | A+++                            |
|                   | 9                           | 9  | 18   | 1.70              | 1.70      | 3.40           | 6.80 (1.8-8.5)               | 1.74 (0.35-2.65) | 3.90          | 6.8  | 8.5               | A+++                            |
|                   | 9                           | 12 | 12   | 1.86              | 2.47      | 2.47           | 6.80 (1.8-8.5)               | 1.74 (0.35-2.65) | 3.90          | 6.8  | 8.5               | A+++                            |
|                   | 9                           | 12 | 14   | 1.75              | 2.33      | 2.72           | 6.80 (1.8-8.5)               | 1.74 (0.35-2.65) | 3.90          | 6.8  | 8.5               | A+++                            |
| 12                | 12                          | 12 | 2.27 | 2.27              | 2.27      | 6.80 (1.8-8.5) | 1.74 (0.35-2.65)             | 3.90             | 6.8           | 8.5  | A+++              |                                 |

Notes: •7: 7000 Btu/h/9: 9000 Btu/h/12: 12000 Btu/h/14: 14000 Btu/h/18: 18000 Btu/h models  
 •The above specifications apply when connected with a wall-mounted [KG/KM] unit.  
 •2 or more indoor units should be connected.  
 •Cooling capacity is determined based on 27°CDB/19°CWB (indoor temperature) and 35°CDB (outdoor temperature).  
 •Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)  
 •Total capacity of indoor units connected must be between 4.0 kW and 10.5 kW.  
 •Please refer to the Design & Technical manual for the combination tables with 5kW model.

## 3-unit Multi-split heating

| AOEG18KBCA3       | Combination of Indoor Units |    |    | Heating Operation |           |           |                              |                  | Seasonal Data |      |                   |                                 |
|-------------------|-----------------------------|----|----|-------------------|-----------|-----------|------------------------------|------------------|---------------|------|-------------------|---------------------------------|
|                   |                             |    |    | Heating Capacity  |           |           | Input Power (Min. - Max.) kW | COP              | Pdesign kW    | SCOP | Energy efficiency |                                 |
|                   |                             |    |    | Unit 1 kW         | Unit 2 kW | Unit 3 kW |                              |                  |               |      |                   | Total Capacity (Min. - Max.) kW |
| 2-unit connection | 7                           | 7  | -  | 2.40              | 2.40      | -         | 4.80 (2.0-5.6)               | 1.00 (0.25-1.30) | 4.80          | 4.0  | 4.2               | A+                              |
|                   | 7                           | 9  | -  | 2.40              | 3.00      | -         | 5.40 (2.0-6.4)               | 1.21 (0.25-1.48) | 4.45          | 4.0  | 4.2               | A+                              |
|                   | 7                           | 12 | -  | 2.40              | 4.20      | -         | 6.60 (2.0-7.6)               | 1.66 (0.25-1.76) | 3.98          | 5.0  | 4.0               | A+                              |
|                   | 7                           | 14 | -  | 2.27              | 4.53      | -         | 6.80 (2.0-8.0)               | 1.77 (0.25-1.85) | 3.84          | 5.0  | 4.0               | A+                              |
|                   | 9                           | 9  | -  | 3.00              | 3.00      | -         | 6.00 (2.0-7.2)               | 1.44 (0.25-1.67) | 4.17          | 4.5  | 4.1               | A+                              |
|                   | 9                           | 12 | -  | 2.91              | 3.89      | -         | 6.80 (2.0-8.0)               | 1.77 (0.25-1.85) | 3.84          | 5.0  | 4.0               | A+                              |
|                   | 9                           | 14 | -  | 2.66              | 4.14      | -         | 6.80 (2.0-8.0)               | 1.77 (0.25-1.85) | 3.84          | 5.0  | 4.0               | A+                              |
|                   | 12                          | 12 | -  | 3.40              | 3.40      | -         | 6.80 (2.0-8.0)               | 1.77 (0.25-1.85) | 3.84          | 5.0  | 4.0               | A+                              |
|                   | 12                          | 14 | -  | 3.14              | 3.66      | -         | 6.80 (2.0-8.0)               | 1.77 (0.25-1.85) | 3.84          | 5.0  | 4.0               | A+                              |
|                   | 14                          | 14 | -  | 3.40              | 3.40      | -         | 6.80 (2.0-8.0)               | 1.77 (0.25-1.85) | 3.84          | 5.0  | 4.0               | A+                              |
| 3-unit connection | 7                           | 7  | 7  | 2.27              | 2.27      | 2.27      | 6.80 (2.0-8.0)               | 1.39 (0.25-1.85) | 4.89          | 5.0  | 4.7               | A++                             |
|                   | 7                           | 7  | 9  | 2.07              | 2.07      | 2.66      | 6.80 (2.0-8.0)               | 1.39 (0.25-1.85) | 4.89          | 5.0  | 4.7               | A++                             |
|                   | 7                           | 7  | 12 | 1.83              | 1.83      | 3.14      | 6.80 (2.0-8.0)               | 1.39 (0.25-1.85) | 4.89          | 5.0  | 4.7               | A++                             |
|                   | 7                           | 7  | 14 | 1.70              | 1.70      | 3.40      | 6.80 (2.0-8.0)               | 1.39 (0.25-1.85) | 4.89          | 5.0  | 4.7               | A++                             |
|                   | 7                           | 9  | 9  | 1.90              | 2.45      | 2.45      | 6.80 (2.0-8.0)               | 1.39 (0.25-1.85) | 4.89          | 5.0  | 4.7               | A++                             |
|                   | 7                           | 9  | 12 | 1.70              | 2.19      | 2.91      | 6.80 (2.0-8.0)               | 1.39 (0.25-1.85) | 4.89          | 5.0  | 4.7               | A++                             |
|                   | 7                           | 9  | 14 | 1.59              | 2.04      | 3.17      | 6.80 (2.0-8.0)               | 1.39 (0.25-1.85) | 4.89          | 5.0  | 4.7               | A++                             |
|                   | 9                           | 9  | 9  | 2.27              | 2.27      | 2.27      | 6.80 (2.0-8.0)               | 1.39 (0.25-1.85) | 4.89          | 5.0  | 4.7               | A++                             |
|                   | 9                           | 9  | 12 | 2.04              | 2.04      | 2.72      | 6.80 (2.0-8.0)               | 1.39 (0.25-1.85) | 4.89          | 5.0  | 4.7               | A++                             |

| AOEG24KBCA3       | Combination of Indoor Units |    |    | Heating Operation |           |           |                              |                  | Seasonal Data |      |                   |                                 |
|-------------------|-----------------------------|----|----|-------------------|-----------|-----------|------------------------------|------------------|---------------|------|-------------------|---------------------------------|
|                   |                             |    |    | Heating Capacity  |           |           | Input Power (Min. - Max.) kW | COP              | Pdesign kW    | SCOP | Energy efficiency |                                 |
|                   |                             |    |    | Unit 1 kW         | Unit 2 kW | Unit 3 kW |                              |                  |               |      |                   | Total Capacity (Min. - Max.) kW |
| 2-unit connection | 7                           | 7  | -  | 2.40              | 2.40      | -         | 4.80 (2.0-5.6)               | 1.00 (0.25-1.30) | 4.80          | 4.0  | 4.2               | A+                              |
|                   | 7                           | 9  | -  | 2.40              | 3.00      | -         | 5.40 (2.0-6.4)               | 1.21 (0.25-1.48) | 4.45          | 4.0  | 4.2               | A+                              |
|                   | 7                           | 12 | -  | 2.40              | 4.20      | -         | 6.60 (2.0-7.6)               | 1.66 (0.25-1.76) | 3.98          | 5.0  | 4.0               | A+                              |
|                   | 7                           | 14 | -  | 2.40              | 4.80      | -         | 7.20 (2.0-8.4)               | 1.86 (0.25-2.07) | 3.87          | 5.4  | 4.0               | A+                              |
|                   | 7                           | 18 | -  | 2.16              | 5.54      | -         | 7.70 (2.0-9.2)               | 2.01 (0.25-2.35) | 3.83          | 5.8  | 4.0               | A+                              |
|                   | 9                           | 9  | -  | 3.00              | 3.00      | -         | 6.00 (2.0-7.2)               | 1.44 (0.25-1.67) | 4.17          | 4.5  | 4.1               | A+                              |
|                   | 9                           | 12 | -  | 3.00              | 4.20      | -         | 7.20 (2.0-8.4)               | 1.86 (0.25-2.07) | 3.87          | 5.4  | 4.0               | A+                              |
|                   | 9                           | 14 | -  | 2.96              | 4.74      | -         | 7.70 (2.0-9.2)               | 2.01 (0.25-2.35) | 3.83          | 5.8  | 4.0               | A+                              |
|                   | 9                           | 18 | -  | 2.57              | 5.13      | -         | 7.70 (2.0-9.2)               | 2.01 (0.25-2.35) | 3.83          | 5.8  | 4.0               | A+                              |
|                   | 12                          | 12 | -  | 3.85              | 3.85      | -         | 7.70 (2.0-9.2)               | 2.01 (0.25-2.35) | 3.83          | 5.8  | 4.0               | A+                              |
|                   | 12                          | 14 | -  | 3.55              | 4.15      | -         | 7.70 (2.0-9.2)               | 2.01 (0.25-2.35) | 3.83          | 5.8  | 4.0               | A+                              |
|                   | 12                          | 18 | -  | 3.08              | 4.62      | -         | 7.70 (2.0-9.2)               | 2.01 (0.25-2.35) | 3.83          | 5.8  | 4.0               | A+                              |
|                   | 14                          | 14 | -  | 3.85              | 3.85      | -         | 7.70 (2.0-9.2)               | 2.01 (0.25-2.35) | 3.83          | 5.8  | 4.0               | A+                              |
|                   | 14                          | 18 | -  | 3.37              | 4.33      | -         | 7.70 (2.0-9.2)               | 2.01 (0.25-2.35) | 3.83          | 5.8  | 4.0               | A+                              |
| 3-unit connection | 7                           | 7  | 7  | 2.40              | 2.40      | 2.40      | 7.20 (2.0-8.4)               | 1.61 (0.25-2.07) | 4.48          | 5.4  | 4.7               | A++                             |
|                   | 7                           | 7  | 9  | 2.40              | 2.40      | 3.00      | 7.80 (2.0-9.2)               | 1.76 (0.25-2.35) | 4.42          | 5.8  | 4.6               | A++                             |
|                   | 7                           | 7  | 12 | 2.15              | 2.15      | 3.70      | 8.00 (2.0-9.2)               | 1.82 (0.25-2.35) | 4.40          | 6.0  | 4.6               | A++                             |
|                   | 7                           | 7  | 14 | 2.00              | 2.00      | 4.00      | 8.00 (2.0-9.2)               | 1.82 (0.25-2.35) | 4.40          | 6.0  | 4.6               | A++                             |
|                   | 7                           | 7  | 18 | 1.75              | 1.75      | 4.50      | 8.00 (2.0-9.2)               | 1.82 (0.25-2.35) | 4.40          | 6.0  | 4.6               | A++                             |
|                   | 7                           | 9  | 9  | 2.24              | 2.88      | 2.88      | 8.00 (2.0-9.2)               | 1.82 (0.25-2.35) | 4.40          | 6.0  | 4.6               | A++                             |
|                   | 7                           | 9  | 12 | 2.00              | 2.57      | 3.43      | 8.00 (2.0-9.2)               | 1.82 (0.25-2.35) | 4.40          | 6.0  | 4.6               | A++                             |
|                   | 7                           | 9  | 14 | 1.87              | 2.40      | 3.73      | 8.00 (2.0-9.2)               | 1.82 (0.25-2.35) | 4.40          | 6.0  | 4.6               | A++                             |
|                   | 7                           | 9  | 18 | 1.65              | 2.12      | 4.23      | 8.00 (2.0-9.2)               | 1.82 (0.25-2.35) | 4.40          | 6.0  |                   |                                 |





# 5-unit Multi-split Combination Table-Cooling

## 5-unit Multi-split cooling

| AOEG36K8TA5       | Combination of Indoor Units |    |    |    |      | Cooling Operation |        |        |        |                 |                           | Seasonal Data    |                  |      |                   |                              |     |
|-------------------|-----------------------------|----|----|----|------|-------------------|--------|--------|--------|-----------------|---------------------------|------------------|------------------|------|-------------------|------------------------------|-----|
|                   |                             |    |    |    |      | Cooling Capacity  |        |        |        |                 | Input Power (Min. - Max.) | EER              | Pdesign kW       | SEER | Energy efficiency |                              |     |
|                   |                             |    |    |    |      | Unit 1            | Unit 2 | Unit 3 | Unit 4 | Unit 5          |                           |                  |                  |      |                   | Total Capacity (Min. - Max.) |     |
| 2-unit connection | 7                           | 24 | -  | -  | -    | 2.00              | 7.00   | -      | -      | -               | 9.00 (3.0-11.0)           | 2.91 (0.30-3.45) | 3.09             | 9.0  | 7.9               | A++                          |     |
|                   | 9                           | 22 | -  | -  | -    | 2.50              | 6.00   | -      | -      | -               | 8.50 (3.0-11.0)           | 2.67 (0.30-3.45) | 3.18             | 8.5  | 7.9               | A++                          |     |
|                   | 9                           | 24 | -  | -  | -    | 2.50              | 7.00   | -      | -      | -               | 9.50 (3.0-11.0)           | 3.17 (0.30-3.45) | 3.00             | 9.5  | 7.8               | A++                          |     |
|                   | 12                          | 22 | -  | -  | -    | 3.50              | 6.00   | -      | -      | -               | 9.50 (3.0-11.0)           | 3.17 (0.30-3.45) | 3.00             | 9.5  | 7.8               | A++                          |     |
|                   | 12                          | 24 | -  | -  | -    | 3.17              | 6.33   | -      | -      | -               | 9.50 (3.0-11.0)           | 3.17 (0.30-3.45) | 3.00             | 9.5  | 7.8               | A++                          |     |
|                   | 14                          | 22 | -  | -  | -    | 3.69              | 5.81   | -      | -      | -               | 9.50 (3.0-11.0)           | 3.17 (0.30-3.45) | 3.00             | 9.5  | 7.8               | A++                          |     |
|                   | 14                          | 24 | -  | -  | -    | 3.50              | 6.00   | -      | -      | -               | 9.50 (3.0-11.0)           | 3.17 (0.30-3.45) | 3.00             | 9.5  | 7.8               | A++                          |     |
|                   | 18                          | 18 | -  | -  | -    | 4.75              | 4.75   | -      | -      | -               | 9.50 (3.0-11.0)           | 3.17 (0.30-3.45) | 3.00             | 9.5  | 7.8               | A++                          |     |
|                   | 18                          | 22 | -  | -  | -    | 4.27              | 5.23   | -      | -      | -               | 9.50 (3.0-11.0)           | 3.17 (0.30-3.45) | 3.00             | 9.5  | 7.8               | A++                          |     |
|                   | 18                          | 24 | -  | -  | -    | 4.07              | 5.43   | -      | -      | -               | 9.50 (3.0-11.0)           | 3.17 (0.30-3.45) | 3.00             | 9.5  | 7.8               | A++                          |     |
|                   | 22                          | 22 | -  | -  | -    | 4.75              | 4.75   | -      | -      | -               | 9.50 (3.0-11.0)           | 3.17 (0.30-3.45) | 3.00             | 9.5  | 7.8               | A++                          |     |
|                   | 22                          | 24 | -  | -  | -    | 4.54              | 4.96   | -      | -      | -               | 9.50 (3.0-11.0)           | 3.17 (0.30-3.45) | 3.00             | 9.5  | 7.8               | A++                          |     |
|                   | 24                          | 24 | -  | -  | -    | 4.75              | 4.75   | -      | -      | -               | 9.50 (3.0-11.0)           | 3.17 (0.30-3.45) | 3.00             | 9.5  | 7.8               | A++                          |     |
|                   | 3-unit connection           | 7  | 7  | 14 | -    | -                 | 2.00   | 2.00   | 4.00   | -               | -                         | 8.00 (3.0-10.0)  | 2.26 (0.30-2.88) | 3.54 | 8.0               | 8.2                          | A++ |
|                   |                             | 7  | 7  | 18 | -    | -                 | 2.00   | 2.00   | 5.00   | -               | -                         | 9.00 (3.0-11.0)  | 2.68 (0.30-3.45) | 3.36 | 9.0               | 8.1                          | A++ |
|                   |                             | 7  | 7  | 22 | -    | -                 | 1.85   | 1.85   | 5.80   | -               | -                         | 9.50 (3.0-11.0)  | 2.91 (0.30-3.45) | 3.27 | 9.5               | 8.0                          | A++ |
|                   |                             | 7  | 7  | 24 | -    | -                 | 1.75   | 1.75   | 6.00   | -               | -                         | 9.50 (3.0-11.0)  | 2.91 (0.30-3.45) | 3.27 | 9.5               | 8.0                          | A++ |
|                   |                             | 7  | 9  | 12 | -    | -                 | 2.00   | 2.50   | 3.50   | -               | -                         | 8.00 (3.0-10.0)  | 2.26 (0.30-2.88) | 3.54 | 8.0               | 8.2                          | A++ |
|                   |                             | 7  | 9  | 14 | -    | -                 | 2.00   | 2.50   | 4.00   | -               | -                         | 8.50 (3.0-10.7)  | 2.46 (0.30-3.27) | 3.45 | 8.5               | 8.1                          | A++ |
|                   |                             | 7  | 9  | 18 | -    | -                 | 2.00   | 2.50   | 5.00   | -               | -                         | 9.50 (3.0-11.0)  | 2.91 (0.30-3.45) | 3.27 | 9.5               | 8.0                          | A++ |
|                   |                             | 7  | 9  | 22 | -    | -                 | 1.75   | 2.25   | 5.50   | -               | -                         | 9.50 (3.0-11.0)  | 2.91 (0.30-3.45) | 3.27 | 9.5               | 8.0                          | A++ |
|                   |                             | 7  | 9  | 24 | -    | -                 | 1.66   | 2.14   | 5.70   | -               | -                         | 9.50 (3.0-11.0)  | 2.91 (0.30-3.45) | 3.27 | 9.5               | 8.0                          | A++ |
|                   |                             | 7  | 12 | 12 | -    | -                 | 3.50   | 3.50   | 3.50   | -               | -                         | 9.50 (3.0-11.0)  | 2.68 (0.30-3.45) | 3.36 | 9.0               | 8.1                          | A++ |
|                   |                             | 7  | 12 | 14 | -    | -                 | 2.00   | 3.50   | 4.00   | -               | -                         | 9.50 (3.0-11.0)  | 2.91 (0.30-3.45) | 3.27 | 9.5               | 8.0                          | A++ |
| 7                 |                             | 12 | 18 | -  | -    | 1.80              | 3.08   | 4.62   | -      | -               | 9.50 (3.0-11.0)           | 2.91 (0.30-3.45) | 3.27             | 9.5  | 8.0               | A++                          |     |
| 7                 |                             | 12 | 22 | -  | -    | 1.62              | 2.78   | 5.10   | -      | -               | 9.50 (3.0-11.0)           | 2.91 (0.30-3.45) | 3.27             | 9.5  | 8.0               | A++                          |     |
| 7                 |                             | 12 | 24 | -  | -    | 1.55              | 2.65   | 5.30   | -      | -               | 9.50 (3.0-11.0)           | 2.91 (0.30-3.45) | 3.27             | 9.5  | 8.0               | A++                          |     |
| 7                 |                             | 14 | 14 | -  | -    | 1.90              | 3.80   | 3.80   | -      | -               | 9.50 (3.0-11.0)           | 2.91 (0.30-3.45) | 3.27             | 9.5  | 8.0               | A++                          |     |
| 7                 |                             | 14 | 18 | -  | -    | 1.71              | 3.41   | 4.38   | -      | -               | 9.50 (3.0-11.0)           | 2.91 (0.30-3.45) | 3.27             | 9.5  | 8.0               | A++                          |     |
| 7                 |                             | 14 | 22 | -  | -    | 1.55              | 3.09   | 4.86   | -      | -               | 9.50 (3.0-11.0)           | 2.91 (0.30-3.45) | 3.27             | 9.5  | 8.0               | A++                          |     |
| 7                 |                             | 14 | 24 | -  | -    | 1.47              | 2.96   | 5.07   | -      | -               | 9.50 (3.0-11.0)           | 2.91 (0.30-3.45) | 3.27             | 9.5  | 8.0               | A++                          |     |
| 7                 |                             | 18 | 18 | -  | -    | 1.54              | 3.98   | 3.98   | -      | -               | 9.50 (3.0-11.0)           | 2.91 (0.30-3.45) | 3.27             | 9.5  | 8.0               | A++                          |     |
| 7                 |                             | 18 | 22 | -  | -    | 1.41              | 3.64   | 4.45   | -      | -               | 9.50 (3.0-11.0)           | 2.91 (0.30-3.45) | 3.27             | 9.5  | 8.0               | A++                          |     |
| 7                 |                             | 18 | 24 | -  | -    | 1.36              | 3.49   | 4.65   | -      | -               | 9.50 (3.0-11.0)           | 2.91 (0.30-3.45) | 3.27             | 9.5  | 8.0               | A++                          |     |
| 9                 |                             | 9  | 9  | -  | -    | 2.50              | 2.50   | 2.50   | -      | -               | 7.50 (3.0-9.6)            | 2.07 (0.30-2.70) | 3.63             | 7.5  | 8.2               | A++                          |     |
| 9                 |                             | 9  | 12 | -  | -    | 2.50              | 2.50   | 3.50   | -      | -               | 8.50 (3.0-10.7)           | 2.46 (0.30-3.27) | 3.45             | 8.5  | 8.1               | A++                          |     |
| 9                 |                             | 9  | 14 | -  | -    | 2.50              | 2.50   | 4.00   | -      | -               | 9.00 (3.0-11.0)           | 2.68 (0.30-3.45) | 3.36             | 9.0  | 8.1               | A++                          |     |
| 9                 | 9                           | 18 | -  | -  | 2.38 | 2.38              | 4.74   | -      | -      | 9.50 (3.0-11.0) | 2.91 (0.30-3.45)          | 3.27             | 9.5              | 8.0  | A++               |                              |     |
| 9                 | 9                           | 22 | -  | -  | 2.14 | 2.14              | 5.22   | -      | -      | 9.50 (3.0-11.0) | 2.91 (0.30-3.45)          | 3.27             | 9.5              | 8.0  | A++               |                              |     |
| 9                 | 9                           | 24 | -  | -  | 2.04 | 2.04              | 5.42   | -      | -      | 9.50 (3.0-11.0) | 2.91 (0.30-3.45)          | 3.27             | 9.5              | 8.0  | A++               |                              |     |
| 9                 | 12                          | 12 | -  | -  | 3.50 | 3.50              | 3.50   | -      | -      | 9.50 (3.0-11.0) | 2.91 (0.30-3.45)          | 3.27             | 9.5              | 8.0  | A++               |                              |     |
| 9                 | 12                          | 14 | -  | -  | 2.44 | 3.26              | 3.80   | -      | -      | 9.50 (3.0-11.0) | 2.91 (0.30-3.45)          | 3.27             | 9.5              | 8.0  | A++               |                              |     |
| 9                 | 12                          | 18 | -  | -  | 2.19 | 2.92              | 4.39   | -      | -      | 9.50 (3.0-11.0) | 2.91 (0.30-3.45)          | 3.27             | 9.5              | 8.0  | A++               |                              |     |
| 9                 | 12                          | 22 | -  | -  | 1.99 | 2.65              | 4.86   | -      | -      | 9.50 (3.0-11.0) | 2.91 (0.30-3.45)          | 3.27             | 9.5              | 8.0  | A++               |                              |     |
| 9                 | 12                          | 24 | -  | -  | 1.90 | 2.53              | 5.07   | -      | -      | 9.50 (3.0-11.0) | 2.91 (0.30-3.45)          | 3.27             | 9.5              | 8.0  | A++               |                              |     |
| 9                 | 14                          | 14 | -  | -  | 2.32 | 3.59              | 3.59   | -      | -      | 9.50 (3.0-11.0) | 2.91 (0.30-3.45)          | 3.27             | 9.5              | 8.0  | A++               |                              |     |
| 9                 | 14                          | 18 | -  | -  | 2.09 | 3.24              | 4.17   | -      | -      | 9.50 (3.0-11.0) | 2.91 (0.30-3.45)          | 3.27             | 9.5              | 8.0  | A++               |                              |     |
| 9                 | 14                          | 22 | -  | -  | 1.90 | 2.96              | 4.64   | -      | -      | 9.50 (3.0-11.0) | 2.91 (0.30-3.45)          | 3.27             | 9.5              | 8.0  | A++               |                              |     |
| 9                 | 14                          | 24 | -  | -  | 1.82 | 2.83              | 4.85   | -      | -      | 9.50 (3.0-11.0) | 2.91 (0.30-3.45)          | 3.27             | 9.5              | 8.0  | A++               |                              |     |
| 9                 | 18                          | 18 | -  | -  | 2.00 | 3.80              | 3.80   | -      | -      | 9.50 (3.0-11.0) | 2.91 (0.30-3.45)          | 3.27             | 9.5              | 8.0  | A++               |                              |     |
| 9                 | 18                          | 22 | -  | -  | 1.74 | 3.49              | 4.27   | -      | -      | 9.50 (3.0-11.0) | 2.91 (0.30-3.45)          | 3.27             | 9.5              | 8.0  | A++               |                              |     |
| 9                 | 18                          | 24 | -  | -  | 1.68 | 3.35              | 4.47   | -      | -      | 9.50 (3.0-11.0) | 2.91 (0.30-3.45)          | 3.27             | 9.5              | 8.0  | A++               |                              |     |
| 12                | 12                          | 12 | -  | -  | 3.17 | 3.17              | 3.17   | -      | -      | 9.50 (3.0-11.0) | 2.91 (0.30-3.45)          | 3.27             | 9.5              | 8.0  | A++               |                              |     |
| 12                | 12                          | 14 | -  | -  | 3.00 | 3.00              | 3.50   | -      | -      | 9.50 (3.0-11.0) | 2.91 (0.30-3.45)          | 3.27             | 9.5              | 8.0  | A++               |                              |     |
| 12                | 12                          | 18 | -  | -  | 2.71 | 2.71              | 4.08   | -      | -      | 9.50 (3.0-11.0) | 2.91 (0.30-3.45)          | 3.27             | 9.5              | 8.0  | A++               |                              |     |
| 12                | 12                          | 22 | -  | -  | 2.48 | 2.48              | 4.54   | -      | -      | 9.50 (3.0-11.0) | 2.91 (0.30-3.45)          | 3.27             | 9.5              | 8.0  | A++               |                              |     |
| 12                | 12                          | 24 | -  | -  | 2.38 | 2.38              | 4.74   | -      | -      | 9.50 (3.0-11.0) | 2.91 (0.30-3.45)          | 3.27             | 9.5              | 8.0  | A++               |                              |     |
| 12                | 14                          | 14 | -  | -  | 2.84 | 3.33              | 3.33   | -      | -      | 9.50 (3.0-11.0) | 2.91 (0.30-3.45)          | 3.27             | 9.5              | 8.0  | A++               |                              |     |
| 12                | 14                          | 18 | -  | -  | 2.59 | 3.02              | 3.89   | -      | -      | 9.50 (3.0-11.0) | 2.91 (0.30-3.45)          | 3.27             | 9.5              | 8.0  | A++               |                              |     |
| 12                | 14                          | 22 | -  | -  | 2.38 | 2.77              | 4.35   | -      | -      | 9.50 (3.0-11.0) | 2.91 (0.30-3.45)          | 3.27             | 9.5              | 8.0  | A++               |                              |     |
| 12                | 14                          | 24 | -  | -  | 2.28 | 2.66              | 4.56   | -      | -      | 9.50 (3.0-11.0) | 2.91 (0.30-3.45)          | 3.27             | 9.5              | 8.0  | A++               |                              |     |
| 12                | 18                          | 18 | -  | -  | 2.38 | 3.56              | 3.56   | -      | -      | 9.50 (3.0-11.0) | 2.91 (0.30-3.45)          | 3.27             | 9.5              | 8.0  | A++               |                              |     |
| 12                | 18                          | 22 | -  | -  | 2.19 | 3.29              | 4.02   | -      | -      | 9.50 (3.0-11.0) | 2.91 (0.30-3.45)          | 3.27             | 9.5              | 8.0  | A++               |                              |     |
| 12                | 18                          | 24 | -  | -  | 2.11 | 3.17              | 4.22   | -      | -      | 9.50 (3.0-11.0) | 2.91 (0.30-3.45)          | 3.27             | 9.5              | 8.0  | A++               |                              |     |
| 14                | 14                          | 14 | -  | -  | 3.17 | 3.17              | 3.17   | -      | -      | 9.50 (3.0-11.0) | 2.91 (0.30-3.45)          | 3.27             | 9.5              | 8.0  | A++               |                              |     |
| 14                | 14                          | 18 | -  | -  | 2.89 | 2.89              | 3.72   | -      | -      | 9.50 (3.0-11.0) | 2.91 (0.30-3.45)          | 3.27             | 9.5              | 8.0  | A++               |                              |     |
| 14                | 14                          | 22 | -  | -  | 2.66 | 2.66              | 4.18   | -      | -      | 9.50 (3.0-11.0) | 2.91 (0.30-3.45)          | 3.27             | 9.5              | 8.0  | A++               |                              |     |
| 14                | 14                          | 24 | -  | -  | 2.56 | 2.56              | 4.38   | -      | -      | 9.50 (3.0-11.0) | 2.91 (0.30-3.45)          | 3.27             | 9.5              | 8.0  | A++               |                              |     |
| 14                | 18                          | 18 | -  | -  | 2.66 | 3.42              | 3.42   | -      | -      | 9.50 (3.0-11.0) | 2.91 (0.30-3.45)          | 3.27             | 9.5              | 8.0  | A++               |                              |     |
| 18                | 18                          | 18 | -  | -  | 3.17 | 3.17              | 3.17   | -      | -      | 9.50 (3.0-11.0) | 2.91 (0.30-3.45)          | 3.27             | 9.5              | 8.0  | A++               |                              |     |
| 4-unit connection | 7                           | 7  | 7  | 7  | -    | 2.00              | 2.00   | 2.00   | 2.00   | -               | 8.00 (3.0-10.0)           | 2.11 (0.30-2.88) | 3.80             | 8.0  | 8.5               | A++                          |     |
|                   | 7                           | 7  | 7  | 9  | -    | 2.00              | 2.00   | 2.00   | 2.50   | -               | 8.50 (3.0-10.7)           | 2.29 (0.30-3.27) | 3.71             | 8.5  | 8.4               | A++                          |     |
|                   | 7                           | 7  | 7  | 12 | -    | 2.00              | 2.00   | 2.00   | 3.50   | -               | 9.50 (3.0-11.0)           | 2.69 (0.30-3.45) | 3.53             | 9.5  | 8.3               | A++                          |     |
|                   | 7                           | 7  | 7  | 14 | -    | 1.90              | 1.90   | 1.90   | 3.80   | -               | 9.50 (3.0-11.0)           | 2.69 (0.30-3.45) | 3.53             | 9.5  | 8.3               | A++                          |     |
|                   | 7                           | 7  | 7  | 18 | -    | 1.71              | 1.71   | 1.71   | 4.37   | -               | 9.50 (3.0-11.0)           | 2.69 (0.30-3.45) | 3.53             | 9.5  | 8.3               | A++                          |     |
|                   | 7                           | 7  | 7  | 22 | -    | 1.55              | 1.55   | 1.55   | 4.85   | -               | 9.50 (3.0-11.0)           | 2.69 (0.30-3.45) | 3.53             | 9.5  | 8.3               | A++                          |     |
|                   | 7                           | 7  | 7  | 24 | -    | 1.48              | 1.48   | 1.48   | 5.06   | -               | 9.50 (3.0-11.0)           | 2.69 (0.30-3.45) | 3.53             | 9.5  | 8.3               | A++                          |     |
|                   | 7                           | 7  | 9  | 9  | -    | 2.00              | 2.00   | 2.50   | 2.50   | -               | 9.00 (3.0-11.0)           | 2.49 (0.30-3.45) | 3.62             | 9.0  | 8.4               | A++                          |     |
|                   | 7                           | 7  | 9  | 12 | -    | 1.90              | 1.90   | 2.44   | 3.26   | -               | 9.50 (3.0-11.0)           | 2.69 (0.30-3.45) | 3.53             | 9.5  | 8.3               | A++                          |     |
|                   | 7                           | 7  | 9  | 14 | -    | 1.80              | 1.80   | 2.31   | 3.59   | -               | 9.50 (3.0-11.0)           |                  |                  |      |                   |                              |     |



# 5-unit Multi-split Combination Table-Heating

## 5-unit Multi-split heating

| AOEG36K8TA5       | Combination of Indoor Units |    |    |    |      | Heating Operation |        |        |        |                  |                           | Seasonal Data    |                  |      |                   |                              |    |
|-------------------|-----------------------------|----|----|----|------|-------------------|--------|--------|--------|------------------|---------------------------|------------------|------------------|------|-------------------|------------------------------|----|
|                   |                             |    |    |    |      | Heating Capacity  |        |        |        |                  | Input Power (Min. - Max.) | COP              | Pdesign kW       | SCOP | Energy efficiency |                              |    |
|                   |                             |    |    |    |      | Unit 1            | Unit 2 | Unit 3 | Unit 4 | Unit 5           |                           |                  |                  |      |                   | Total Capacity (Min. - Max.) |    |
| 2-unit connection | 7                           | 24 | -  | -  | -    | 2.39              | 8.21   | -      | -      | -                | 10.60 (3.5-12.0)          | 2.65 (0.25-3.25) | 4.00             | 7.0  | 4.3               | A+                           |    |
|                   | 9                           | 22 | -  | -  | -    | 3.00              | 7.20   | -      | -      | -                | 10.20 (3.5-12.0)          | 2.52 (0.25-3.25) | 4.04             | 6.8  | 4.3               | A+                           |    |
|                   | 9                           | 24 | -  | -  | -    | 2.89              | 7.71   | -      | -      | -                | 10.60 (3.5-12.0)          | 2.65 (0.25-3.25) | 4.00             | 7.0  | 4.3               | A+                           |    |
|                   | 12                          | 22 | -  | -  | -    | 3.74              | 6.86   | -      | -      | -                | 10.60 (3.5-12.0)          | 2.65 (0.25-3.25) | 4.00             | 7.0  | 4.3               | A+                           |    |
|                   | 12                          | 24 | -  | -  | -    | 3.53              | 7.07   | -      | -      | -                | 10.60 (3.5-12.0)          | 2.65 (0.25-3.25) | 4.00             | 7.0  | 4.3               | A+                           |    |
|                   | 14                          | 24 | -  | -  | -    | 4.12              | 6.48   | -      | -      | -                | 10.60 (3.5-12.0)          | 2.65 (0.25-3.25) | 4.00             | 7.0  | 4.3               | A+                           |    |
|                   | 14                          | 24 | -  | -  | -    | 3.91              | 6.69   | -      | -      | -                | 10.60 (3.5-12.0)          | 2.65 (0.25-3.25) | 4.00             | 7.0  | 4.3               | A+                           |    |
|                   | 18                          | 18 | -  | -  | -    | 5.30              | 5.30   | -      | -      | -                | 10.60 (3.5-12.0)          | 2.65 (0.25-3.25) | 4.00             | 7.0  | 4.3               | A+                           |    |
|                   | 18                          | 22 | -  | -  | -    | 4.77              | 5.83   | -      | -      | -                | 10.60 (3.5-12.0)          | 2.65 (0.25-3.25) | 4.00             | 7.0  | 4.3               | A+                           |    |
|                   | 18                          | 24 | -  | -  | -    | 4.54              | 6.06   | -      | -      | -                | 10.60 (3.5-12.0)          | 2.65 (0.25-3.25) | 4.00             | 7.0  | 4.3               | A+                           |    |
|                   | 22                          | 22 | -  | -  | -    | 5.30              | 5.30   | -      | -      | -                | 10.60 (3.5-12.0)          | 2.65 (0.25-3.25) | 4.00             | 7.0  | 4.3               | A+                           |    |
|                   | 22                          | 24 | -  | -  | -    | 5.07              | 5.53   | -      | -      | -                | 10.60 (3.5-12.0)          | 2.65 (0.25-3.25) | 4.00             | 7.0  | 4.3               | A+                           |    |
|                   | 24                          | 24 | -  | -  | -    | 5.30              | 5.30   | -      | -      | -                | 10.60 (3.5-12.0)          | 2.65 (0.25-3.25) | 4.00             | 7.0  | 4.3               | A+                           |    |
|                   | 3-unit connection           | 7  | 7  | 14 | -    | -                 | 2.40   | 2.40   | 4.80   | -                | -                         | 9.60 (3.5-11.2)  | 2.25 (0.25-2.87) | 4.26 | 6.5               | 4.5                          | A+ |
|                   |                             | 7  | 7  | 18 | -    | -                 | 2.32   | 2.32   | 4.64   | -                | -                         | 10.60 (3.5-12.0) | 2.54 (0.25-3.25) | 4.18 | 7.0               | 4.4                          | A+ |
|                   |                             | 7  | 7  | 22 | -    | -                 | 2.06   | 2.06   | 4.12   | -                | -                         | 10.60 (3.5-12.0) | 2.54 (0.25-3.25) | 4.18 | 7.0               | 4.4                          | A+ |
|                   |                             | 7  | 7  | 24 | -    | -                 | 1.95   | 1.95   | 3.90   | -                | -                         | 10.60 (3.5-12.0) | 2.54 (0.25-3.25) | 4.18 | 7.0               | 4.4                          | A+ |
|                   |                             | 7  | 9  | 12 | -    | -                 | 2.40   | 3.00   | 4.20   | -                | -                         | 9.60 (3.5-11.2)  | 2.25 (0.25-2.87) | 4.26 | 6.5               | 4.5                          | A+ |
|                   |                             | 7  | 9  | 14 | -    | -                 | 2.40   | 3.00   | 4.80   | -                | -                         | 10.20 (3.5-12.0) | 2.42 (0.25-3.25) | 4.21 | 6.8               | 4.4                          | A+ |
|                   |                             | 7  | 9  | 18 | -    | -                 | 2.18   | 2.81   | 5.61   | -                | -                         | 10.60 (3.5-12.0) | 2.54 (0.25-3.25) | 4.18 | 7.0               | 4.4                          | A+ |
|                   |                             | 7  | 9  | 22 | -    | -                 | 1.95   | 2.51   | 6.14   | -                | -                         | 10.60 (3.5-12.0) | 2.54 (0.25-3.25) | 4.18 | 7.0               | 4.4                          | A+ |
|                   |                             | 7  | 9  | 24 | -    | -                 | 1.85   | 2.39   | 6.36   | -                | -                         | 10.60 (3.5-12.0) | 2.54 (0.25-3.25) | 4.18 | 7.0               | 4.4                          | A+ |
|                   |                             | 7  | 12 | 12 | -    | -                 | 2.40   | 4.10   | 4.10   | -                | -                         | 10.60 (3.5-12.0) | 2.54 (0.25-3.25) | 4.18 | 7.0               | 4.4                          | A+ |
|                   |                             | 7  | 12 | 14 | -    | -                 | 2.25   | 3.85   | 4.50   | -                | -                         | 10.60 (3.5-12.0) | 2.54 (0.25-3.25) | 4.18 | 7.0               | 4.4                          | A+ |
| 7                 |                             | 12 | 18 | -  | -    | 2.00              | 3.44   | 5.16   | -      | -                | 10.60 (3.5-12.0)          | 2.54 (0.25-3.25) | 4.18             | 7.0  | 4.4               | A+                           |    |
| 7                 |                             | 12 | 22 | -  | -    | 1.81              | 3.10   | 5.69   | -      | -                | 10.60 (3.5-12.0)          | 2.54 (0.25-3.25) | 4.18             | 7.0  | 4.4               | A+                           |    |
| 7                 |                             | 12 | 24 | -  | -    | 1.72              | 2.96   | 5.92   | -      | -                | 10.60 (3.5-12.0)          | 2.54 (0.25-3.25) | 4.18             | 7.0  | 4.4               | A+                           |    |
| 7                 |                             | 14 | 14 | -  | -    | 2.12              | 4.24   | 4.24   | -      | -                | 10.60 (3.5-12.0)          | 2.54 (0.25-3.25) | 4.18             | 7.0  | 4.4               | A+                           |    |
| 7                 |                             | 14 | 18 | -  | -    | 1.90              | 3.81   | 4.89   | -      | -                | 10.60 (3.5-12.0)          | 2.54 (0.25-3.25) | 4.18             | 7.0  | 4.4               | A+                           |    |
| 7                 |                             | 14 | 22 | -  | -    | 1.73              | 3.45   | 5.42   | -      | -                | 10.60 (3.5-12.0)          | 2.54 (0.25-3.25) | 4.18             | 7.0  | 4.4               | A+                           |    |
| 7                 |                             | 14 | 24 | -  | -    | 1.65              | 3.30   | 5.65   | -      | -                | 10.60 (3.5-12.0)          | 2.54 (0.25-3.25) | 4.18             | 7.0  | 4.4               | A+                           |    |
| 7                 |                             | 18 | 18 | -  | -    | 1.72              | 4.44   | 4.44   | -      | -                | 10.60 (3.5-12.0)          | 2.54 (0.25-3.25) | 4.18             | 7.0  | 4.4               | A+                           |    |
| 7                 |                             | 18 | 22 | -  | -    | 1.58              | 4.06   | 4.96   | -      | -                | 10.60 (3.5-12.0)          | 2.54 (0.25-3.25) | 4.18             | 7.0  | 4.4               | A+                           |    |
| 7                 |                             | 18 | 24 | -  | -    | 1.51              | 3.89   | 5.20   | -      | -                | 10.60 (3.5-12.0)          | 2.54 (0.25-3.25) | 4.18             | 7.0  | 4.4               | A+                           |    |
| 9                 |                             | 9  | 9  | -  | -    | 3.00              | 3.00   | 3.00   | -      | -                | 9.00 (3.5-10.8)           | 2.09 (0.25-2.70) | 4.31             | 6.0  | 4.5               | A+                           |    |
| 9                 |                             | 9  | 12 | -  | -    | 3.00              | 3.00   | 4.20   | -      | -                | 10.20 (3.5-12.0)          | 2.42 (0.25-3.25) | 4.21             | 6.8  | 4.4               | A+                           |    |
| 9                 |                             | 9  | 14 | -  | -    | 2.98              | 2.98   | 4.64   | -      | -                | 10.60 (3.5-12.0)          | 2.54 (0.25-3.25) | 4.18             | 7.0  | 4.4               | A+                           |    |
| 9                 | 9                           | 18 | -  | -  | 2.65 | 2.65              | 5.30   | -      | -      | 10.60 (3.5-12.0) | 2.54 (0.25-3.25)          | 4.18             | 7.0              | 4.4  | A+                |                              |    |
| 9                 | 9                           | 22 | -  | -  | 2.39 | 2.39              | 5.82   | -      | -      | 10.60 (3.5-12.0) | 2.54 (0.25-3.25)          | 4.18             | 7.0              | 4.4  | A+                |                              |    |
| 9                 | 9                           | 24 | -  | -  | 2.27 | 2.27              | 6.06   | -      | -      | 10.60 (3.5-12.0) | 2.54 (0.25-3.25)          | 4.18             | 7.0              | 4.4  | A+                |                              |    |
| 9                 | 12                          | 12 | -  | -  | 2.80 | 3.85              | 3.85   | -      | -      | 10.60 (3.5-12.0) | 2.54 (0.25-3.25)          | 4.18             | 7.0              | 4.4  | A+                |                              |    |
| 9                 | 12                          | 14 | -  | -  | 2.73 | 3.63              | 4.24   | -      | -      | 10.60 (3.5-12.0) | 2.54 (0.25-3.25)          | 4.18             | 7.0              | 4.4  | A+                |                              |    |
| 9                 | 12                          | 18 | -  | -  | 2.45 | 3.26              | 4.89   | -      | -      | 10.60 (3.5-12.0) | 2.54 (0.25-3.25)          | 4.18             | 7.0              | 4.4  | A+                |                              |    |
| 9                 | 12                          | 22 | -  | -  | 2.22 | 2.96              | 5.42   | -      | -      | 10.60 (3.5-12.0) | 2.54 (0.25-3.25)          | 4.18             | 7.0              | 4.4  | A+                |                              |    |
| 9                 | 12                          | 24 | -  | -  | 2.12 | 2.83              | 5.65   | -      | -      | 10.60 (3.5-12.0) | 2.54 (0.25-3.25)          | 4.18             | 7.0              | 4.4  | A+                |                              |    |
| 9                 | 14                          | 14 | -  | -  | 2.58 | 4.01              | 4.01   | -      | -      | 10.60 (3.5-12.0) | 2.54 (0.25-3.25)          | 4.18             | 7.0              | 4.4  | A+                |                              |    |
| 9                 | 14                          | 18 | -  | -  | 2.33 | 3.62              | 4.65   | -      | -      | 10.60 (3.5-12.0) | 2.54 (0.25-3.25)          | 4.18             | 7.0              | 4.4  | A+                |                              |    |
| 9                 | 14                          | 22 | -  | -  | 2.12 | 3.30              | 5.18   | -      | -      | 10.60 (3.5-12.0) | 2.54 (0.25-3.25)          | 4.18             | 7.0              | 4.4  | A+                |                              |    |
| 9                 | 14                          | 24 | -  | -  | 2.03 | 3.16              | 5.41   | -      | -      | 10.60 (3.5-12.0) | 2.54 (0.25-3.25)          | 4.18             | 7.0              | 4.4  | A+                |                              |    |
| 9                 | 18                          | 18 | -  | -  | 2.12 | 4.24              | 4.24   | -      | -      | 10.60 (3.5-12.0) | 2.54 (0.25-3.25)          | 4.18             | 7.0              | 4.4  | A+                |                              |    |
| 9                 | 18                          | 22 | -  | -  | 1.95 | 3.89              | 4.76   | -      | -      | 10.60 (3.5-12.0) | 2.54 (0.25-3.25)          | 4.18             | 7.0              | 4.4  | A+                |                              |    |
| 9                 | 18                          | 24 | -  | -  | 1.87 | 3.74              | 4.99   | -      | -      | 10.60 (3.5-12.0) | 2.54 (0.25-3.25)          | 4.18             | 7.0              | 4.4  | A+                |                              |    |
| 12                | 12                          | 12 | -  | -  | 3.53 | 3.53              | 3.53   | -      | -      | 10.60 (3.5-12.0) | 2.54 (0.25-3.25)          | 4.18             | 7.0              | 4.4  | A+                |                              |    |
| 12                | 12                          | 14 | -  | -  | 3.35 | 3.35              | 3.90   | -      | -      | 10.60 (3.5-12.0) | 2.54 (0.25-3.25)          | 4.18             | 7.0              | 4.4  | A+                |                              |    |
| 12                | 12                          | 18 | -  | -  | 3.03 | 3.03              | 4.54   | -      | -      | 10.60 (3.5-12.0) | 2.54 (0.25-3.25)          | 4.18             | 7.0              | 4.4  | A+                |                              |    |
| 12                | 12                          | 22 | -  | -  | 2.77 | 2.77              | 5.06   | -      | -      | 10.60 (3.5-12.0) | 2.54 (0.25-3.25)          | 4.18             | 7.0              | 4.4  | A+                |                              |    |
| 12                | 12                          | 24 | -  | -  | 2.65 | 2.65              | 5.30   | -      | -      | 10.60 (3.5-12.0) | 2.54 (0.25-3.25)          | 4.18             | 7.0              | 4.4  | A+                |                              |    |
| 12                | 14                          | 14 | -  | -  | 3.18 | 3.71              | 3.71   | -      | -      | 10.60 (3.5-12.0) | 2.54 (0.25-3.25)          | 4.18             | 7.0              | 4.4  | A+                |                              |    |
| 12                | 14                          | 18 | -  | -  | 2.89 | 3.37              | 4.34   | -      | -      | 10.60 (3.5-12.0) | 2.54 (0.25-3.25)          | 4.18             | 7.0              | 4.4  | A+                |                              |    |
| 12                | 14                          | 22 | -  | -  | 2.65 | 3.09              | 4.86   | -      | -      | 10.60 (3.5-12.0) | 2.54 (0.25-3.25)          | 4.18             | 7.0              | 4.4  | A+                |                              |    |
| 12                | 14                          | 24 | -  | -  | 2.54 | 2.97              | 5.09   | -      | -      | 10.60 (3.5-12.0) | 2.54 (0.25-3.25)          | 4.18             | 7.0              | 4.4  | A+                |                              |    |
| 12                | 18                          | 18 | -  | -  | 2.64 | 3.98              | 3.98   | -      | -      | 10.60 (3.5-12.0) | 2.54 (0.25-3.25)          | 4.18             | 7.0              | 4.4  | A+                |                              |    |
| 12                | 18                          | 22 | -  | -  | 2.45 | 3.67              | 4.48   | -      | -      | 10.60 (3.5-12.0) | 2.54 (0.25-3.25)          | 4.18             | 7.0              | 4.4  | A+                |                              |    |
| 12                | 18                          | 24 | -  | -  | 2.36 | 3.53              | 4.71   | -      | -      | 10.60 (3.5-12.0) | 2.54 (0.25-3.25)          | 4.18             | 7.0              | 4.4  | A+                |                              |    |
| 14                | 14                          | 14 | -  | -  | 3.53 | 3.53              | 3.53   | -      | -      | 10.60 (3.5-12.0) | 2.54 (0.25-3.25)          | 4.18             | 7.0              | 4.4  | A+                |                              |    |
| 14                | 14                          | 18 | -  | -  | 3.23 | 3.23              | 4.14   | -      | -      | 10.60 (3.5-12.0) | 2.54 (0.25-3.25)          | 4.18             | 7.0              | 4.4  | A+                |                              |    |
| 14                | 14                          | 22 | -  | -  | 2.97 | 2.97              | 4.66   | -      | -      | 10.60 (3.5-12.0) | 2.54 (0.25-3.25)          | 4.18             | 7.0              | 4.4  | A+                |                              |    |
| 14                | 14                          | 24 | -  | -  | 2.89 | 2.85              | 4.90   | -      | -      | 10.60 (3.5-12.0) | 2.54 (0.25-3.25)          | 4.18             | 7.0              | 4.4  | A+                |                              |    |
| 14                | 18                          | 18 | -  | -  | 2.98 | 3.82              | 3.82   | -      | -      | 10.60 (3.5-12.0) | 2.54 (0.25-3.25)          | 4.18             | 7.0              | 4.4  | A+                |                              |    |
| 18                | 18                          | 18 | -  | -  | 3.53 | 3.53              | 3.53   | -      | -      | 10.60 (3.5-12.0) | 2.54 (0.25-3.25)          | 4.18             | 7.0              | 4.4  | A+                |                              |    |
| 4-unit connection | 7                           | 7  | 7  | 7  | -    | 2.40              | 2.40   | 2.40   | 2.40   | -                | 9.60 (3.5-11.2)           | 2.17 (0.25-2.87) | 4.42             | 6.5  | 4.6               | A++                          |    |
|                   | 7                           | 7  | 7  | 9  | -    | 2.40              | 2.40   | 2.40   | 3.00   | -                | 10.20 (3.5-12.0)          | 2.33 (0.25-3.25) | 4.37             | 6.8  | 4.5               | A+                           |    |
|                   | 7                           | 7  | 7  | 12 | -    | 2.25              | 2.25   | 2.25   | 3.85   | -                | 10.60 (3.5-12.0)          | 2.44 (0.25-3.25) | 4.34             | 7.0  | 4.5               | A+                           |    |
|                   | 7                           | 7  | 7  | 14 | -    | 2.12              | 2.12   | 2.12   | 4.24   | -                | 10.60 (3.5-12.0)          | 2.44 (0.25-3.25) | 4.34             | 7.0  | 4.5               | A+                           |    |
|                   | 7                           | 7  | 7  | 18 | -    | 1.90              | 1.90   | 1.90   | 4.90   | -                | 10.60 (3.5-12.0)          | 2.44 (0.25-3.25) | 4.34             | 7.0  | 4.5               | A+                           |    |
|                   | 7                           | 7  | 7  | 22 | -    | 1.73              | 1.73   | 1.73   | 5.41   | -                | 10.60 (3.5-12.0)          | 2.44 (0.25-3.25) | 4.34             | 7.0  | 4.5               | A+                           |    |
|                   | 7                           | 7  | 7  | 24 | -    | 1.65              | 1.65   | 1.65   | 5.65   | -                | 10.60 (3.5-12.0)          | 2.44 (0.25-3.25) | 4.34             | 7.0  | 4.5               | A+                           |    |
|                   | 7                           | 7  | 9  | 9  | -    | 2.32              | 2.32   | 2.98   | 2.98   | -                | 10.60 (3.5-12.0)          | 2.40 (0.25-3.25) | 4.34             | 7.0  | 4.5               | A+                           |    |
|                   | 7                           | 7  | 9  | 12 | -    | 2.12              | 2.12   | 2.73   | 3.63   | -                | 10.60 (3.5-12.0)          | 2.44 (0.25-3.25) | 4.34             | 7.0  | 4.5               | A+                           |    |
|                   | 7                           | 7  | 9  | 14 | -    | 2.01              | 2.01   | 2.57   | 4.01   | -                | 10.60 (3.5-12.0)          |                  |                  |      |                   |                              |    |





# 6-unit Multi-split Multi Combination Table-Cooling/Heating

## 6-unit Multi-split cooling

| AOYG45LBLA6 | Combination of Indoor Units |   | Cooling Operation |        |        |        |        |                 | Input Power (Min. - Max.) | EER  |
|-------------|-----------------------------|---|-------------------|--------|--------|--------|--------|-----------------|---------------------------|------|
|             |                             |   | Cooling Capacity  |        |        |        |        |                 |                           |      |
|             |                             |   | Unit 1            | Unit 2 | Unit 3 | Unit 4 | Unit 5 | Unit 6          |                           |      |
|             |                             |   | kW                | kW     | kW     | kW     | kW     | kW              | kW                        |      |
|             | 7                           | 7 | 2.00              | 2.00   | 2.00   | 2.00   | 2.00   | 12.0 (3.5-13.4) | 3.32 (0.8-4.46)           | 3.61 |
|             | 7                           | 7 | 2.00              | 2.00   | 2.00   | 2.00   | 2.50   | 12.5 (3.5-14.0) | 3.57 (0.8-4.84)           | 3.50 |
|             | 7                           | 7 | 1.86              | 1.86   | 1.86   | 1.86   | 3.20   | 12.5 (3.5-14.0) | 3.55 (0.8-4.84)           | 3.52 |
|             | 7                           | 7 | 1.79              | 1.79   | 1.79   | 1.79   | 3.55   | 12.5 (3.5-14.0) | 3.54 (0.8-4.84)           | 3.53 |
|             | 7                           | 7 | 1.65              | 1.65   | 1.65   | 1.65   | 4.25   | 12.5 (3.5-14.0) | 3.51 (0.8-4.84)           | 3.56 |
|             | 7                           | 7 | 1.48              | 1.48   | 1.48   | 1.48   | 5.10   | 12.5 (3.5-14.0) | 3.48 (0.8-4.84)           | 3.59 |
|             | 7                           | 7 | 1.90              | 1.90   | 1.90   | 2.45   | 2.45   | 12.5 (3.5-14.0) | 3.56 (0.8-4.84)           | 3.51 |
|             | 7                           | 7 | 1.79              | 1.79   | 1.79   | 2.29   | 3.05   | 12.5 (3.5-14.0) | 3.54 (0.8-4.84)           | 3.53 |
|             | 7                           | 7 | 1.72              | 1.72   | 1.72   | 2.20   | 3.42   | 12.5 (3.5-14.0) | 3.53 (0.8-4.84)           | 3.54 |
|             | 7                           | 7 | 1.59              | 1.59   | 1.59   | 2.05   | 4.09   | 12.5 (3.5-14.0) | 3.50 (0.8-4.84)           | 3.57 |
|             | 7                           | 7 | 1.43              | 1.43   | 1.43   | 1.85   | 4.93   | 12.5 (3.5-14.0) | 3.47 (0.8-4.84)           | 3.60 |
|             | 7                           | 7 | 1.68              | 1.68   | 1.68   | 2.89   | 2.89   | 12.5 (3.5-14.0) | 3.52 (0.8-4.84)           | 3.55 |
|             | 7                           | 7 | 1.62              | 1.62   | 1.62   | 2.78   | 3.24   | 12.5 (3.5-14.0) | 3.51 (0.8-4.84)           | 3.56 |
|             | 7                           | 7 | 1.51              | 1.51   | 1.51   | 3.87   | 3.87   | 12.5 (3.5-14.0) | 3.48 (0.8-4.84)           | 3.60 |
|             | 7                           | 7 | 1.56              | 1.56   | 1.56   | 3.13   | 3.13   | 12.5 (3.5-14.0) | 3.50 (0.8-4.84)           | 3.57 |
|             | 7                           | 7 | 1.46              | 1.46   | 1.46   | 2.92   | 3.74   | 12.5 (3.5-14.0) | 3.47 (0.8-4.84)           | 3.60 |
|             | 7                           | 7 | 1.82              | 1.82   | 1.82   | 2.34   | 2.34   | 12.5 (3.5-14.0) | 3.55 (0.8-4.84)           | 3.52 |
|             | 7                           | 7 | 1.72              | 1.72   | 1.72   | 2.21   | 2.21   | 12.5 (3.5-14.0) | 3.53 (0.8-4.84)           | 3.54 |
|             | 7                           | 7 | 1.65              | 1.65   | 1.65   | 2.12   | 2.12   | 12.5 (3.5-14.0) | 3.51 (0.8-4.84)           | 3.56 |
|             | 7                           | 7 | 1.54              | 1.54   | 1.54   | 1.97   | 1.97   | 12.5 (3.5-14.0) | 3.49 (0.8-4.84)           | 3.58 |
|             | 7                           | 7 | 1.62              | 1.62   | 1.62   | 2.08   | 2.78   | 12.5 (3.5-14.0) | 3.51 (0.8-4.84)           | 3.56 |
|             | 7                           | 7 | 1.56              | 1.56   | 1.56   | 2.01   | 2.68   | 12.5 (3.5-14.0) | 3.50 (0.8-4.84)           | 3.57 |
|             | 7                           | 7 | 1.46              | 1.46   | 1.46   | 1.88   | 2.50   | 12.5 (3.5-14.0) | 3.47 (0.8-4.84)           | 3.60 |
|             | 7                           | 7 | 1.51              | 1.51   | 1.51   | 1.93   | 3.02   | 12.5 (3.5-14.0) | 3.48 (0.8-4.84)           | 3.59 |
|             | 7                           | 7 | 1.54              | 1.54   | 1.54   | 2.63   | 2.63   | 12.5 (3.5-14.0) | 3.49 (0.8-4.84)           | 3.58 |
|             | 7                           | 7 | 1.48              | 1.48   | 1.48   | 2.54   | 2.54   | 12.5 (3.5-14.0) | 3.48 (0.8-4.84)           | 3.59 |
|             | 7                           | 7 | 1.43              | 1.43   | 1.43   | 2.47   | 2.87   | 12.5 (3.5-14.0) | 3.47 (0.8-4.84)           | 3.60 |
|             | 7                           | 7 | 1.75              | 1.75   | 1.75   | 2.25   | 2.25   | 12.5 (3.5-14.0) | 3.53 (0.8-4.84)           | 3.54 |
|             | 7                           | 7 | 1.65              | 1.65   | 1.65   | 2.12   | 2.12   | 12.5 (3.5-14.0) | 3.51 (0.8-4.84)           | 3.56 |
|             | 7                           | 7 | 1.59              | 1.59   | 1.59   | 2.05   | 2.05   | 12.5 (3.5-14.0) | 3.50 (0.8-4.84)           | 3.57 |
|             | 7                           | 7 | 1.48              | 1.48   | 1.48   | 1.91   | 1.91   | 12.5 (3.5-14.0) | 3.48 (0.8-4.84)           | 3.59 |
|             | 7                           | 7 | 1.46              | 1.46   | 1.46   | 2.01   | 2.68   | 12.5 (3.5-14.0) | 3.50 (0.8-4.84)           | 3.57 |
|             | 7                           | 7 | 1.51              | 1.51   | 1.51   | 1.94   | 2.59   | 12.5 (3.5-14.0) | 3.48 (0.8-4.84)           | 3.59 |
|             | 7                           | 7 | 1.41              | 1.41   | 1.41   | 1.81   | 2.42   | 12.5 (3.5-14.0) | 3.46 (0.8-4.84)           | 3.61 |
|             | 7                           | 7 | 1.46              | 1.46   | 1.46   | 1.88   | 2.91   | 12.5 (3.5-14.0) | 3.47 (0.8-4.84)           | 3.60 |
|             | 7                           | 7 | 1.48              | 1.48   | 1.48   | 1.92   | 2.54   | 12.5 (3.5-14.0) | 3.48 (0.8-4.84)           | 3.59 |
|             | 7                           | 7 | 1.43              | 1.43   | 1.43   | 1.85   | 2.46   | 12.5 (3.5-14.0) | 3.47 (0.8-4.84)           | 3.60 |
|             | 7                           | 7 | 1.41              | 1.41   | 1.41   | 2.42   | 2.42   | 12.5 (3.5-14.0) | 3.46 (0.8-4.84)           | 3.61 |
|             | 7                           | 7 | 1.70              | 1.70   | 1.70   | 2.16   | 2.16   | 12.5 (3.5-14.0) | 3.52 (0.8-4.84)           | 3.55 |
|             | 7                           | 7 | 1.59              | 1.59   | 1.59   | 2.05   | 2.05   | 12.5 (3.5-14.0) | 3.50 (0.8-4.84)           | 3.57 |
|             | 7                           | 7 | 1.56              | 1.56   | 1.56   | 2.01   | 2.68   | 12.5 (3.5-14.0) | 3.50 (0.8-4.84)           | 3.57 |
|             | 7                           | 7 | 1.54              | 1.54   | 1.54   | 1.97   | 1.97   | 12.5 (3.5-14.0) | 3.49 (0.8-4.84)           | 3.58 |
|             | 7                           | 7 | 1.50              | 1.50   | 1.50   | 1.94   | 2.59   | 12.5 (3.5-14.0) | 3.48 (0.8-4.84)           | 3.59 |
|             | 7                           | 7 | 1.46              | 1.46   | 1.46   | 1.88   | 2.50   | 12.5 (3.5-14.0) | 3.47 (0.8-4.84)           | 3.60 |
|             | 7                           | 7 | 1.44              | 1.44   | 1.44   | 1.84   | 2.46   | 12.5 (3.5-14.0) | 3.47 (0.8-4.84)           | 3.60 |
|             | 9                           | 9 | 2.08              | 2.08   | 2.08   | 2.08   | 2.08   | 12.5 (3.5-14.0) | 3.51 (0.8-4.84)           | 3.56 |
|             | 9                           | 9 | 1.97              | 1.97   | 1.97   | 1.97   | 2.65   | 12.5 (3.5-14.0) | 3.49 (0.8-4.84)           | 3.58 |
|             | 9                           | 9 | 1.88              | 1.88   | 1.88   | 1.88   | 2.49   | 12.5 (3.5-14.0) | 3.47 (0.8-4.84)           | 3.60 |

- Notes: •7: 7000 Btu/h/9: 9000 Btu/h/12: 12000 Btu/h/14: 14000 Btu/h/18: 18000 Btu/h/24: 24000 Btu/h models  
 •The above specifications apply when connected with a wall-mounted unit.  
 •2 or more indoor units should be connected.  
 •Cooling capacity is determined based on 27°CDB/19°CWB (indoor temperature) and 35°CDB (outdoor temperature).  
 •Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)  
 •Total capacity of indoor units connected must be between 9.5 kW and 18.0 kW.

## 6-unit Multi-split heating














































| AOYG45LBLA6 | Combination of Indoor Units |       | Heating Operation |        |        |        |        |        | Input Power (Min. - Max.) | COP  |                              |   |   |                 |                 |                 |      |
|-------------|-----------------------------|-------|-------------------|--------|--------|--------|--------|--------|---------------------------|------|------------------------------|---|---|-----------------|-----------------|-----------------|------|
|             |                             |       | Heating Capacity  |        |        |        |        |        |                           |      |                              |   |   |                 |                 |                 |      |
|             |                             |       | Unit 1            | Unit 2 | Unit 3 | Unit 4 | Unit 5 | Unit 6 |                           |      | Total Capacity (Min. - Max.) |   |   |                 |                 |                 |      |
|             |                             |       | kW                | kW     | kW     | kW     | kW     | kW     | kW                        |      |                              |   |   |                 |                 |                 |      |
|             | 2                           | Units | 12                | 24     | -      | -      | -      | -      | 4.07                      | 8.13 | -                            | - | - | 12.2 (3.5-13.1) | 3.41 (0.7-3.54) | 3.58            |      |
|             | 14                          | 24    | -                 | -      | -      | -      | -      | 4.61   | 7.89                      | -    | -                            | - | - | -               | 12.5 (3.5-13.8) | 3.56 (0.7-3.76) | 3.51 |
|             | 18                          | 18    | -                 | -      | -      | -      | -      | 6.10   | 6.10                      | -    | -                            | - | - | -               | 12.2 (3.5-13.1) | 3.41 (0.7-3.54) | 3.58 |
|             | 18                          | 24    | -                 | -      | -      | -      | -      | 5.66   | 7.54                      | -    | -                            | - | - | -               | 13.2 (3.5-15.3) | 3.78 (0.7-4.20) | 3.49 |
|             | 24                          | 24    | -                 | -      | -      | -      | -      | 6.75   | 6.75                      | -    | -                            | - | - | -               | 13.5 (3.5-16.0) | 3.89 (0.7-4.41) | 3.47 |
|             | 7                           | 7     | 2.4               | -      | -      | -      | -      | 2.30   | 2.30                      | 7.90 | -                            | - | - | -               | 12.5 (3.5-13.8) | 3.43 (0.7-3.76) | 3.64 |
|             | 7                           | 9     | 1.8               | -      | -      | -      | -      | 2.35   | 3.02                      | 6.03 | -                            | - | - | -               | 11.4 (3.5-12.4) | 2.98 (0.7-3.33) | 3.83 |
|             | 7                           | 9     | 2.4               | -      | -      | -      | -      | 2.24   | 2.88                      | 7.68 | -                            | - | - | -               | 12.8 (3.5-14.5) | 3.54 (0.7-3.98) | 3.62 |
|             | 7                           | 12    | 1.8               | -      | -      | -      | -      | 2.33   | 3.99                      | 5.98 | -                            | - | - | -               | 12.3 (3.5-13.5) | 3.35 (0.7-3.65) | 3.67 |
|             | 7                           | 12    | 2.4               | -      | -      | -      | -      | 2.17   | 3.71                      | 7.42 | -                            | - | - | -               | 13.3 (3.5-15.6) | 3.69 (0.7-4.30) | 3.60 |
|             | 7                           | 14    | 1.4               | -      | -      | -      | -      | 2.40   | 4.80                      | 4.80 | -                            | - | - | -               | 12.0 (3.5-12.7) | 3.15 (0.7-3.44) | 3.81 |
|             | 7                           | 14    | 1.8               | -      | -      | -      | -      | 2.28   | 4.56                      | 5.86 | -                            | - | - | -               | 12.7 (3.5-14.2) | 3.49 (0.7-3.87) | 3.64 |
|             | 7                           | 14    | 2.4               | -      | -      | -      | -      | 2.10   | 4.20                      | 7.20 | -                            | - | - | -               | 13.5 (3.5-16.0) | 3.75 (0.7-4.41) | 3.60 |
|             | 7                           | 18    | 1.8               | -      | -      | -      | -      | 2.16   | 5.57                      | 5.57 | -                            | - | - | -               | 13.3 (3.5-15.6) | 3.60 (0.7-4.30) | 3.60 |
|             | 7                           | 18    | 2.4               | -      | -      | -      | -      | 1.93   | 4.96                      | 6.61 | -                            | - | - | -               | 13.5 (3.5-16.0) | 3.74 (0.7-4.41) | 3.61 |
|             | 7                           | 24    | 2.4               | -      | -      | -      | -      | 1.72   | 5.89                      | 5.89 | -                            | - | - | -               | 13.5 (3.5-16.0) | 3.72 (0.7-4.41) | 3.63 |
|             | 9                           | 9     | 1.8               | -      | -      | -      | -      | 3.05   | 3.05                      | 6.10 | -                            | - | - | -               | 12.2 (3.5-13.1) | 3.28 (0.7-3.54) | 3.72 |
|             | 9                           | 9     | 2.4               | -      | -      | -      | -      | 2.83   | 2.83                      | 7.54 | -                            | - | - | -               | 13.2 (3.5-15.3) | 3.64 (0.7-4.20) | 3.63 |
|             | 9                           | 12    | 1.4               | -      | -      | -      | -      | 3.09   | 4.11                      | 4.80 | -                            | - | - | -               | 12.0 (3.5-12.7) | 3.15 (0.7-3.44) | 3.81 |
|             | 9                           | 12    | 1.8               | -      | -      | -      | -      | 2.93   | 3.91                      | 5.86 | -                            | - | - | -               | 12.7 (3.5-14.2) | 3.49 (0.7-3.87) | 3.64 |
|             | 9                           | 12    | 2.4               | -      | -      | -      | -      | 2.70   | 3.60                      | 7.20 | -                            | - | - | -               | 13.5 (3.5-16.0) | 3.75 (0.7-4.41) | 3.60 |
|             | 9                           | 14    | 1.4               | -      | -      | -      | -      | 3.00   | 4.65                      | 4.65 | -                            | - | - | -               | 12.3 (3.5-13.5) | 3.35 (0.7-3.65) | 3.67 |
|             | 9                           | 14    | 1.8               | -      | -      | -      | -      | 2.85   | 4.44                      | 5.71 | -                            | - | - | -               | 13.0 (3.5-14.9) | 3.59 (0.7-4.09) | 3.62 |
|             | 9                           | 14    | 2.4               | -      | -      | -      | -      | 2.59   | 4.02                      | 6.89 | -                            | - | - | -               | 13.5 (3.5-16.0) | 3.74 (0.7-4.41) | 3.61 |
|             | 9                           | 18    | 1.8               | -      | -      | -      | -      | 2.70   | 5.40                      | 5.40 | -                            | - | - | -               | 13.5 (3.5-16.0) | 3.75 (0.7-4.41) | 3.60 |
|             | 9                           | 18    | 2.4               | -      | -      | -      | -      | 2.38   | 4.76                      | 6.36 | -                            | - | - | -               | 13.5 (3.5-16.0) | 3.73 (0.7-4.41) | 3.62 |
|             | 9                           | 24    | 2.4               | -      | -      | -      | -      | 2.14   | 5.68                      | 5.68 | -                            | - | - | -               | 13.5 (3.5-16.0) | 3.71 (0.7-4.41) | 3.64 |
|             | 12                          | 12    | 1.2               | -      | -      | -      | -      | 4.07   | 4.07                      | 4.07 | -                            | - | - | -               | 12.2 (3.5-13.1) | 3.28 (0.7-3.54) | 3.72 |
|             | 12                          | 12    | 1.4               | -      | -      | -      | -      | 3.94   | 3.95                      | 4.61 | -                            | - | - | -               | 12.5 (3.5-13.8) | 3.43 (0.7-3.76) | 3.64 |
|             | 12                          | 12    | 1.8               | -      | -      | -      | -      | 3.77   | 3.77                      | 5.66 | -                            | - | - | -               | 13.2 (3.5-15.3) | 3.64 (0.7-4.20) | 3.63 |
|             | 12                          | 14    | 1.4               | -      | -      | -      | -      | 3.38   | 3.38                      | 6.74 | -                            | - | - | -               | 13.5 (3.5-16.0) | 3.74 (0.7-4.41) | 3.61 |
|             | 12                          | 14    | 1.8               | -      | -      | -      | -      | 3.84   | 4.48                      | 4.48 | -                            | - | - | -               | 12.8 (3.5-14.5) | 3.54 (0.7-3.98) | 3.62 |
|             | 12                          | 14    | 2.4               | -      | -      | -      | -      | 3.68   | 4.30                      | 5.52 | -                            | - | - | -               | 13.5 (3.5-16.0) | 3.75 (0.7-4.41) | 3.60 |
|             | 12                          | 14    | 2.4               | -      | -      | -      |        |        |                           |      |                              |   |   |                 |                 |                 |      |

# 6-unit Multi-split Combination Table-Heating

## 6-unit Multi-split heating

| AOYG45LBLA6       | Combination of Indoor Units |    | Heating Operation |        |        |        |        |        | Input Power (Min. - Max.) | COP  |                              |      |                 |                 |                 |
|-------------------|-----------------------------|----|-------------------|--------|--------|--------|--------|--------|---------------------------|------|------------------------------|------|-----------------|-----------------|-----------------|
|                   |                             |    | Heating Capacity  |        |        |        |        |        |                           |      |                              |      |                 |                 |                 |
|                   |                             |    | Unit 1            | Unit 2 | Unit 3 | Unit 4 | Unit 5 | Unit 6 |                           |      | Total Capacity (Min. - Max.) |      |                 |                 |                 |
| kW                |                             | kW |                   | kW     |        | kW     |        | kW     |                           |      |                              |      |                 |                 |                 |
| 4-unit connection | 12                          | 12 | 12                | 12     | -      | -      | 3.38   | 3.38   | 3.38                      | 3.38 | -                            | -    | 13.5 (3.5-16.0) | 3.60 (0.7-4.4)  | 3.75            |
|                   | 12                          | 12 | 12                | 14     | -      | -      | 3.24   | 3.24   | 3.24                      | 3.78 | -                            | -    | 13.5 (3.5-16.0) | 3.60 (0.7-4.4)  | 3.75            |
|                   | 12                          | 12 | 12                | 18     | -      | -      | 3.00   | 3.00   | 3.00                      | 4.50 | -                            | -    | 13.5 (3.5-16.0) | 3.58 (0.7-4.4)  | 3.77            |
|                   | 12                          | 12 | 12                | 24     | -      | -      | 2.70   | 2.70   | 2.70                      | 5.40 | -                            | -    | 13.5 (3.5-16.0) | 3.57 (0.7-4.4)  | 3.78            |
|                   | 12                          | 12 | 14                | 14     | -      | -      | 3.12   | 3.12   | 3.63                      | 3.63 | -                            | -    | 13.5 (3.5-16.0) | 3.59 (0.7-4.4)  | 3.76            |
|                   | 12                          | 12 | 14                | 18     | -      | -      | 2.89   | 2.89   | 3.38                      | 4.34 | -                            | -    | 13.5 (3.5-16.0) | 3.58 (0.7-4.4)  | 3.77            |
|                   | 12                          | 12 | 14                | 24     | -      | -      | 2.61   | 2.61   | 3.05                      | 5.23 | -                            | -    | 13.5 (3.5-16.0) | 3.56 (0.7-4.4)  | 3.79            |
|                   | 12                          | 12 | 18                | 18     | -      | -      | 2.70   | 2.70   | 4.05                      | 4.05 | -                            | -    | 13.5 (3.5-16.0) | 3.57 (0.7-4.4)  | 3.78            |
|                   | 12                          | 14 | 14                | 14     | -      | -      | 3.00   | 3.50   | 3.50                      | 3.50 | -                            | -    | 13.5 (3.5-16.0) | 3.58 (0.7-4.4)  | 3.77            |
|                   | 12                          | 14 | 14                | 18     | -      | -      | 2.79   | 3.26   | 3.26                      | 4.19 | -                            | -    | 13.5 (3.5-16.0) | 3.57 (0.7-4.4)  | 3.78            |
|                   | 12                          | 14 | 18                | 18     | -      | -      | 2.61   | 3.05   | 3.92                      | 3.92 | -                            | -    | 13.5 (3.5-16.0) | 3.56 (0.7-4.4)  | 3.79            |
|                   | 7                           | 7  | 7                 | 7      | 7      | 7      | 7      | 2.40   | 2.40                      | 2.40 | 2.40                         | 2.40 | -               | 12.0 (3.5-12.7) | 2.82 (0.7-3.44) |
| 7                 | 7                           | 7  | 7                 | 9      | 9      | 9      | 2.33   | 2.33   | 2.33                      | 2.98 | -                            | -    | 12.3 (3.5-13.5) | 3.03 (0.7-3.65) | 4.06            |
| 7                 | 7                           | 7  | 7                 | 12     | 12     | 12     | 2.10   | 2.10   | 2.10                      | 3.60 | -                            | -    | 12.8 (3.5-14.5) | 3.29 (0.7-3.98) | 3.89            |
| 7                 | 7                           | 7  | 7                 | 14     | 14     | 14     | 2.20   | 2.20   | 2.20                      | 4.40 | -                            | -    | 13.2 (3.5-15.3) | 3.40 (0.7-4.20) | 3.88            |
| 7                 | 7                           | 7  | 7                 | 18     | 18     | 18     | 2.05   | 2.05   | 2.05                      | 5.30 | -                            | -    | 13.5 (3.5-16.0) | 3.49 (0.7-4.4)  | 3.87            |
| 7                 | 7                           | 7  | 7                 | 24     | 24     | 24     | 1.82   | 1.82   | 1.82                      | 6.22 | -                            | -    | 13.5 (3.5-16.0) | 3.47 (0.7-4.4)  | 3.89            |
| 7                 | 7                           | 7  | 9                 | 9      | 9      | 9      | 2.28   | 2.28   | 2.28                      | 2.93 | -                            | -    | 12.7 (3.5-14.2) | 3.23 (0.7-3.87) | 3.93            |
| 7                 | 7                           | 7  | 9                 | 12     | 12     | 12     | 2.20   | 2.20   | 2.20                      | 2.83 | -                            | -    | 13.2 (3.5-15.3) | 3.40 (0.7-4.20) | 3.88            |
| 7                 | 7                           | 7  | 9                 | 14     | 14     | 14     | 2.15   | 2.15   | 2.15                      | 2.76 | -                            | -    | 13.5 (3.5-16.0) | 3.49 (0.7-4.4)  | 3.87            |
| 7                 | 7                           | 7  | 9                 | 18     | 18     | 18     | 1.97   | 1.97   | 1.97                      | 2.53 | -                            | -    | 13.5 (3.5-16.0) | 3.48 (0.7-4.4)  | 3.88            |
| 7                 | 7                           | 7  | 9                 | 24     | 24     | 24     | 1.75   | 1.75   | 1.75                      | 2.25 | -                            | -    | 13.5 (3.5-16.0) | 3.46 (0.7-4.4)  | 3.90            |
| 7                 | 7                           | 7  | 12                | 12     | 12     | 12     | 2.01   | 2.01   | 2.01                      | 3.60 | -                            | -    | 13.5 (3.5-16.0) | 3.49 (0.7-4.4)  | 3.87            |
| 7                 | 7                           | 7  | 12                | 14     | 14     | 14     | 2.01   | 2.01   | 3.45                      | 4.02 | -                            | -    | 13.5 (3.5-16.0) | 3.48 (0.7-4.4)  | 3.88            |
| 7                 | 7                           | 7  | 12                | 18     | 18     | 18     | 1.85   | 1.85   | 1.85                      | 3.18 | -                            | -    | 13.5 (3.5-16.0) | 3.47 (0.7-4.4)  | 3.89            |
| 7                 | 7                           | 7  | 12                | 24     | 24     | 24     | 1.66   | 1.66   | 1.66                      | 2.84 | -                            | -    | 13.5 (3.5-16.0) | 3.45 (0.7-4.4)  | 3.91            |
| 7                 | 7                           | 7  | 14                | 14     | 14     | 14     | 1.93   | 1.93   | 1.93                      | 3.86 | -                            | -    | 13.5 (3.5-16.0) | 3.48 (0.7-4.4)  | 3.88            |
| 7                 | 7                           | 7  | 14                | 18     | 18     | 18     | 1.78   | 1.78   | 1.78                      | 3.57 | -                            | -    | 13.5 (3.5-16.0) | 3.47 (0.7-4.4)  | 3.89            |
| 7                 | 7                           | 7  | 14                | 24     | 24     | 24     | 1.60   | 1.60   | 1.60                      | 3.20 | -                            | -    | 13.5 (3.5-16.0) | 3.45 (0.7-4.4)  | 3.91            |
| 7                 | 7                           | 7  | 18                | 18     | 18     | 18     | 1.66   | 1.66   | 1.66                      | 4.26 | -                            | -    | 13.5 (3.5-16.0) | 3.45 (0.7-4.4)  | 3.91            |
| 7                 | 7                           | 7  | 9                 | 9      | 9      | 9      | 2.22   | 2.22   | 2.85                      | 2.85 | -                            | -    | 13.0 (3.5-14.9) | 3.34 (0.7-4.09) | 3.89            |
| 7                 | 7                           | 7  | 9                 | 12     | 12     | 12     | 2.15   | 2.15   | 2.76                      | 3.68 | -                            | -    | 13.5 (3.5-16.0) | 3.49 (0.7-4.4)  | 3.87            |
| 7                 | 7                           | 7  | 9                 | 14     | 14     | 14     | 2.05   | 2.05   | 2.64                      | 4.12 | -                            | -    | 13.5 (3.5-16.0) | 3.49 (0.7-4.4)  | 3.87            |
| 7                 | 7                           | 7  | 9                 | 18     | 18     | 18     | 1.89   | 1.89   | 2.43                      | 4.86 | -                            | -    | 13.5 (3.5-16.0) | 3.48 (0.7-4.4)  | 3.88            |
| 7                 | 7                           | 7  | 9                 | 24     | 24     | 24     | 1.69   | 1.69   | 2.17                      | 5.78 | -                            | -    | 13.5 (3.5-16.0) | 3.46 (0.7-4.4)  | 3.90            |
| 7                 | 7                           | 7  | 9                 | 12     | 12     | 12     | 2.01   | 2.01   | 2.58                      | 3.45 | -                            | -    | 13.5 (3.5-16.0) | 3.48 (0.7-4.4)  | 3.88            |
| 7                 | 7                           | 7  | 9                 | 14     | 14     | 14     | 1.93   | 1.93   | 2.48                      | 3.31 | -                            | -    | 13.5 (3.5-16.0) | 3.48 (0.7-4.4)  | 3.88            |
| 7                 | 7                           | 7  | 9                 | 18     | 18     | 18     | 1.78   | 1.78   | 2.29                      | 3.06 | -                            | -    | 13.5 (3.5-16.0) | 3.47 (0.7-4.4)  | 3.89            |
| 7                 | 7                           | 7  | 9                 | 24     | 24     | 24     | 1.60   | 1.60   | 2.06                      | 2.75 | -                            | -    | 13.5 (3.5-16.0) | 3.45 (0.7-4.4)  | 3.91            |
| 7                 | 7                           | 7  | 9                 | 14     | 14     | 14     | 1.85   | 1.85   | 2.38                      | 3.71 | -                            | -    | 13.5 (3.5-16.0) | 3.47 (0.7-4.4)  | 3.89            |
| 7                 | 7                           | 7  | 9                 | 18     | 18     | 18     | 1.55   | 1.55   | 2.21                      | 3.44 | -                            | -    | 13.5 (3.5-16.0) | 3.46 (0.7-4.4)  | 3.90            |
| 7                 | 7                           | 7  | 9                 | 24     | 24     | 24     | 1.55   | 1.55   | 1.99                      | 3.10 | -                            | -    | 13.5 (3.5-16.0) | 3.44 (0.7-4.4)  | 3.92            |
| 7                 | 7                           | 7  | 9                 | 18     | 18     | 18     | 1.60   | 1.60   | 2.06                      | 4.12 | -                            | -    | 13.5 (3.5-16.0) | 3.45 (0.7-4.4)  | 3.91            |
| 7                 | 7                           | 7  | 12                | 12     | 12     | 12     | 1.89   | 1.89   | 3.24                      | 3.24 | -                            | -    | 13.5 (3.5-16.0) | 3.48 (0.7-4.4)  | 3.88            |
| 7                 | 7                           | 7  | 12                | 14     | 14     | 14     | 1.82   | 1.82   | 3.12                      | 3.62 | -                            | -    | 13.5 (3.5-16.0) | 3.47 (0.7-4.4)  | 3.89            |
| 7                 | 7                           | 7  | 12                | 18     | 18     | 18     | 1.69   | 1.69   | 2.89                      | 4.34 | -                            | -    | 13.5 (3.5-16.0) | 3.46 (0.7-4.4)  | 3.90            |
| 7                 | 7                           | 7  | 12                | 24     | 24     | 24     | 1.52   | 1.52   | 2.61                      | 5.24 | -                            | -    | 13.5 (3.5-16.0) | 3.44 (0.7-4.4)  | 3.92            |
| 7                 | 7                           | 7  | 12                | 14     | 14     | 14     | 1.75   | 1.75   | 3.00                      | 3.50 | -                            | -    | 13.5 (3.5-16.0) | 3.46 (0.7-4.4)  | 3.90            |
| 7                 | 7                           | 7  | 12                | 18     | 18     | 18     | 1.63   | 1.63   | 2.79                      | 3.26 | -                            | -    | 13.5 (3.5-16.0) | 3.45 (0.7-4.4)  | 3.91            |
| 7                 | 7                           | 7  | 12                | 24     | 24     | 24     | 1.52   | 1.52   | 2.62                      | 3.92 | -                            | -    | 13.5 (3.5-16.0) | 3.44 (0.7-4.4)  | 3.92            |
| 7                 | 7                           | 7  | 14                | 14     | 14     | 14     | 1.68   | 1.68   | 3.38                      | 3.38 | -                            | -    | 13.5 (3.5-16.0) | 3.46 (0.7-4.4)  | 3.90            |
| 7                 | 7                           | 7  | 14                | 18     | 18     | 18     | 1.58   | 1.58   | 3.15                      | 4.04 | -                            | -    | 13.5 (3.5-16.0) | 3.45 (0.7-4.4)  | 3.91            |
| 7                 | 7                           | 7  | 9                 | 9      | 9      | 9      | 2.18   | 2.18   | 2.78                      | 2.78 | -                            | -    | 13.3 (3.5-15.6) | 3.44 (0.7-4.30) | 3.87            |
| 7                 | 7                           | 7  | 9                 | 9      | 9      | 9      | 2.05   | 2.64   | 2.64                      | 2.64 | -                            | -    | 13.5 (3.5-16.0) | 3.49 (0.7-4.4)  | 3.87            |
| 7                 | 7                           | 7  | 9                 | 9      | 9      | 9      | 1.97   | 2.53   | 2.53                      | 2.53 | -                            | -    | 13.5 (3.5-16.0) | 3.48 (0.7-4.4)  | 3.88            |
| 7                 | 7                           | 7  | 9                 | 9      | 9      | 9      | 1.82   | 2.34   | 2.34                      | 2.34 | -                            | -    | 13.5 (3.5-16.0) | 3.47 (0.7-4.4)  | 3.89            |
| 7                 | 7                           | 7  | 9                 | 9      | 9      | 9      | 1.63   | 2.09   | 2.09                      | 2.09 | -                            | -    | 13.5 (3.5-16.0) | 3.45 (0.7-4.4)  | 3.91            |
| 7                 | 7                           | 7  | 9                 | 12     | 12     | 12     | 1.92   | 2.48   | 2.48                      | 3.31 | -                            | -    | 13.5 (3.5-16.0) | 3.48 (0.7-4.4)  | 3.88            |
| 7                 | 7                           | 7  | 9                 | 12     | 18     | 18     | 1.72   | 2.38   | 2.38                      | 3.71 | -                            | -    | 13.5 (3.5-16.0) | 3.47 (0.7-4.4)  | 3.89            |
| 7                 | 7                           | 7  | 9                 | 12     | 18     | 18     | 1.72   | 2.21   | 2.21                      | 4.41 | -                            | -    | 13.5 (3.5-16.0) | 3.46 (0.7-4.4)  | 3.90            |
| 7                 | 7                           | 7  | 9                 | 12     | 24     | 24     | 1.55   | 1.99   | 1.99                      | 2.66 | -                            | -    | 13.5 (3.5-16.0) | 3.44 (0.7-4.4)  | 3.92            |
| 7                 | 7                           | 7  | 9                 | 14     | 14     | 14     | 1.78   | 2.29   | 2.29                      | 3.57 | -                            | -    | 13.5 (3.5-16.0) | 3.47 (0.7-4.4)  | 3.89            |
| 7                 | 7                           | 7  | 9                 | 14     | 18     | 18     | 1.66   | 2.13   | 2.13                      | 3.32 | -                            | -    | 13.5 (3.5-16.0) | 3.45 (0.7-4.4)  | 3.91            |
| 7                 | 7                           | 7  | 9                 | 18     | 18     | 18     | 1.56   | 1.99   | 1.99                      | 3.98 | -                            | -    | 13.5 (3.5-16.0) | 3.44 (0.7-4.4)  | 3.92            |
| 7                 | 7                           | 7  | 12                | 12     | 12     | 12     | 1.82   | 2.32   | 3.12                      | 3.12 | -                            | -    | 13.5 (3.5-16.0) | 3.47 (0.7-4.4)  | 3.89            |
| 7                 | 7                           | 7  | 12                | 12     | 14     | 14     | 1.75   | 2.25   | 3.00                      | 3.50 | -                            | -    | 13.5 (3.5-16.0) | 3.46 (0.7-4.4)  | 3.90            |
| 7                 | 7                           | 7  | 12                | 12     | 18     | 18     | 1.63   | 2.09   | 2.79                      | 2.79 | -                            | -    | 13.5 (3.5-16.0) | 3.45 (0.7-4.4)  | 3.91            |
| 7                 | 7                           | 7  | 12                | 14     | 14     | 14     | 1.69   | 2.17   | 2.88                      | 3.38 | -                            | -    | 13.5 (3.5-16.0) | 3.46 (0.7-4.4)  | 3.90            |
| 7                 | 7                           | 7  | 12                | 14     | 18     | 18     | 1.58   | 2.03   | 2.70                      | 3.15 | -                            | -    | 13.5 (3.5-16.0) | 3.45 (0.7-4.4)  | 3.91            |
| 7                 | 7                           | 7  | 14                | 14     | 14     | 14     | 1.63   | 2.09   | 3.26                      | 3.26 | -                            | -    | 13.5 (3.5-16.0) | 3.45 (0.7-4.4)  | 3.91            |
| 7                 | 7                           | 7  | 14                | 14     | 18     | 18     | 1.52   | 1.96   | 3.05                      | 3.92 | -                            | -    | 13.5 (3.5-16.0) | 3.44 (0.7-4.4)  | 3.92            |
| 7                 | 7                           | 7  | 12                | 12     | 12     | 12     | 1.70   | 2.95   | 2.95                      | 2.95 | -                            | -    | 13.5 (3.5-16.0) | 3.46 (0.7-4.4)  | 3.90            |
| 7                 | 7                           | 7  | 12                | 12     | 14     | 14     | 1.66   | 2.84   | 2.84                      | 3.32 | -                            | -    | 13.5 (3.5-16.0) | 3.45 (0.7-4.4)  | 3.91            |
| 7                 | 7                           | 7  | 12                | 12     | 18     | 18     | 1.55   | 2.66   | 2.66                      | 2.66 | -                            | -    | 13.5 (3.5-16.0) | 3.44 (0.7-4.4)  | 3.92            |
| 7                 | 7                           | 7  | 12                | 12     | 14     | 14     | 1.60   | 2.75   | 2.75                      | 3.20 | -                            | -    | 13.5 (3.5-16.0) | 3.45 (0.7-4.4)  | 3.91            |
| 7                 | 7                           | 7  | 12                | 14     | 14     | 14     | 1.55   | 2.65   | 3.10                      | 3.10 | -                            | -    | 13.5 (3.5-16.0) | 3.44 (0.7-4.4)  | 3.92            |
| 9                 | 9                           | 9  | 9                 | 9      | 9      | 9      | 2.70   | 2.70   | 2.70                      | 2.70 | -                            | -    | 13.5 (3.5-16.0) | 3.49 (0.7-4.4)  | 3.87            |
| 9                 | 9                           | 9  | 9                 | 12     | 12     | 12     | 2.53   | 2.53   | 2.53                      | 2.53 | -                            | -    | 13.5 (3.5-16.0) | 3.48 (0.7-4.4)  | 3.88            |
| 9                 | 9                           | 9  | 9                 | 14     | 14     | 14     | 2.43   | 2.43   | 2.43                      | 3.78 | -                            | -    | 13.5 (3.5-16.0) | 3.48 (0.7-4.4)  | 3.88            |
| 9                 | 9                           | 9  | 9                 | 18     | 18     | 18     | 2.25   | 2.25   | 2.25                      | 4.50 | -                            | -    | 13.5 (3.5-16.0) | 3.46 (0.7-4.4)  | 3.90            |
| 9                 | 9                           | 9  | 9                 | 24     | 24     | 24     | 2.03   | 2.03   | 2.03                      | 5.38 | -                            | -    | 13.5 (3.5-16.0) | 3.45 (0.7-4.4)  | 3.91            |
| 9                 | 9                           | 9  | 12                | 12     | 12     | 12     | 2.38   | 2.38   | 3.18                      | 3.18 | -                            | -    | 13.5 (3.5-16.0) | 3.47 (0.7-4.4)  | 3.89            |
| 9                 | 9                           | 9  | 12                | 14     | 14     | 14     | 2.29   | 2.29   | 2.29                      | 3.06 | -                            | -    | 13.5 (3.5-16.0) | 3.47 (0.7-4.4)  | 3.89            |
| 9                 | 9                           | 9  | 12                | 18     | 18     | 18     | 2.13   | 2.13   | 2.84                      | 4.27 | -                            | -    | 13.5 (3.5-16.0) | 3.45 (0.7-4.4)  | 3.91            |
| 9                 | 9                           | 9  | 14                | 14     | 14     | 14     | 2.21   | 2.21   | 3.44                      | 3.44 | -                            | -    | 13.5 (3.5-16.0) | 3.46 (0.7-4.4)  | 3.90            |
| 9                 | 9                           | 9  | 14                | 18     | 18     | 18     | 2.06   | 2.06   | 3.20                      | 4    |                              |      |                 |                 |                 |

# Feature Summary

| Type   | Wall-mounted type   |   |  |  | Wall-mounted type   |  |  |  |
|--|---|---|--|--|---|--|--|--|
| Series   | Designer Series   |   | Standard Series  |  | Standard Series   |  | Designer Series  | Standard Series  |
| Model name   | <br>ASEH07/09/12/14KGTG<br>ASYG07/09/12/14KGTE | <br>ASEG07/09/12/14KETF,<br>ASEG07/09/12/14KETF-B,<br>ASYG07/09/12/14KETE,<br>ASYG07/09/12/14KETE-B | <br>ASEH07/09/12/14KMCG<br>ASEH07/09/12/14KMCG-B<br>ASYG07/09/12/14KMCE | <br>ASEH05/07/09/12KNCA | <br>ASEG18/22/24KMTE | <br>ASYG07/09/12/14LUCA | <br>ASYG07/09/12/14LMCE | <br>ASYG18LFCA,<br>ASYG24LFCC |
| Refrigerant  |    |   |  |  |                      |  |                         |  |
| Energy-saving Features   |  Save Occupancy sensor                         | ●   |  |  |   |  |  |  |
|  |  Economy operation                             | ●   | ●  | ●  | ●   | ●  | ●  | ●  |
|  |  Setting temperature range limitation          | ○   | ○  | ○  |   | ○  | ○  | ○  |
|  |  Set temperature auto return                   | ○   | ○  | ○  |   | ○  | ○  | ○  |
| Features for Comfort   |  Power diffuser                                |   |  |  |   |  | ●  | ●  |
|  |  Powerful operation                            | ●   | ●  | ●  | ●   | ●  |  |  |
|  |  10°C Heat                                     | ●   | ●  | ●  | ●   | ●  | ●  | ●  |
|  |  Outdoor unit low noise operation              | ●   | ●  | ●  | ●   | ●  |  |  |
|  |  Auto changeover                               | ●   | ●  | ●  | ●   | ●  | ●  | ●  |
|  |  UP/DOWN swing louver                          | ●   | ●  | ●  | ●   | ●  | ●  | ●  |
|  |  Double swing automatic                        |   |  |  | ●   | ●  |  | ●  |
|  |  Automatic fan speed                          | ●   | ●  | ●  | ●   | ●  | ●  | ●  |
|  |  Auto restart                                | ●   | ●  | ●  | ●   | ●  | ●  | ●  |
|  |  Connectable fresh air duct                  |   |  |  |   |  |  |  |
|  |  Fresh air intake                            |   |  |  |   |  |  |  |
|  |  Connectable distributing duct               |   |  |  |   |  |  |  |
|  | Convenience Features  |  Auto-off timer  | ○  | ○  | ○   | ●  | ○  | ○  |
|  Sleep timer                        |   | ●   | ●  | ●  | ●   | ●  | ●  | ●  |
|  Program timer                      |   | ●   | ●  | ●  | ●   | ●  | ●  | ●  |
|  Weekly timer                       |   | ●   | ●  | ○  | ○   | ●  | ●  |  |
|  Weekly & Temperature setback timer |   | ○   | ○  | ○  |   | ○  | ○  | ○  |
|  Filter sign                        |   | ●   | ●  | ●  | ●   | ●  | ●  | ●  |
|  External error output              |   | ○   | ○  | ○  |   | ○  | ○  | ○  |
|  External ON/OFF input              |   | ○   | ○  | ○  |   | ○  | ○  | ○  |
|  Wireless LAN control               |   | ● (KGTG), ○ (KGTE)  | ● (KETF, KETF-B), ○ (KETE, KETE-B)   | ● (KMCG, KMCG-B), ○ (KMCE)   | ●   | ○  | ○  | ○  |
|  Ion deodorization filter           |   | ●   | ●  | ●  |   | ●  | ●  | ●  |
| Clean Features   |  Apple-catechin filter                       | ●   | ●  | ●  |   | ●  | ●  | ●  |
|  |  Long-life filter                            |   |  |  |   |  |  |  |
|  |  Washable panel                              | ●   | ●  | ●  | ●   | ●  | ●  | ●  |
|  |  Silver Ion Filter                           | ○   | ○  | ○  | ○   | ○  | ○  | ○  |
|  | Installation / Support  |  Automatic airflow adjustment  |  |  |   |  |  |  |
|  Drain pump as standard             |   |   |  |  |   |  |  |  |
|  Blue fin                           |   |   |  |  | ●   |  |  | ●  |
|  Refrigerant cycle monitor          |   |   |  |  |   |  |  | ●  |

○ : Optional function

# Feature Summary

| Type                               | Cassette                             |  |                              | Duct                      |                           |                           | Duct                            |                        |                        | Floor                                 | Floor/Ceiling    | Ceiling          |                              |               |                              |
|------------------------------------|--------------------------------------|--|------------------------------|---------------------------|---------------------------|---------------------------|---------------------------------|------------------------|------------------------|---------------------------------------|------------------|------------------|------------------------------|---------------|------------------------------|
|                                    | Series                               | Compact 4-way Flow Grid type Series            | Compact 4-way Flow Series    | 4-way Flow Series         | Mini (With drain pump)    | Slim (With drain pump)    | Slim (With drain pump)          | Medium Static Pressure |                        |                                       |                  |                  |                              |               |                              |
| Model name                         |                                      |  |                              |                           |                           |                           |                                 |                        |                        |                                       |                  |                  |                              |               |                              |
| Refrigerant                        | AUXG 07/09/12/14/18/22/24 KVLA       | AUYG07/09LVLA, AUYG12/14/18LVLB, AUYG22/24LVLA | AUYG30/36LRLE, AUYG36/45LRLE | ARXG 07/09/12/14/18 KSLAP | ARYG 07/09/12/14/18 LSLAP | ARXG 07/09/12/14/18 KLLAP | ARYG07/09LLTA, ARYG12/14/18LLTB | ARXH 12/14/18/22 KMTAP | ARXG22KMLB, ARXG24KMLA | ARYG 22/24/36/45 LMLA, ARYG 30/36LMLE | AGEG09/12/14KVCA | AGYG09/12/14LVCA | ABYG14/22/24LVTA, ABYG18LVTB | ABEG18/22KRTA | ABYG30/36LRTE, ABYG36/45LRTA |
|                                    |                                      |  |                              |                           |                           |                           |                                 |                        |                        |                                       |                  |                  |                              |               |                              |
| Energy-saving Features             | Save Occupancy sensor                |  |                              |                           |                           |                           |                                 |                        |                        |                                       |                  |                  |                              |               |                              |
|                                    | Economy operation                    | ●  | ●                            | ●                         | ●                         | ●                         | ●                               | ○                      | ●                      | ●                                     | ●                | ●                | ●                            | ●             | ●                            |
|                                    | Setting temperature range limitation | ○  | ○                            | ○                         | ●                         | ●                         | ○                               | ○                      | ○                      | ○                                     | ○                | ○                | ○                            | ●             | ○                            |
|                                    | Set temperature auto return          | ●  | ○                            | ○                         | ●                         | ●                         | ●                               | ○                      | ○                      | ●                                     | ○                | ○                | ○                            | ●             | ○                            |
| Features for Comfort               | Power diffuser                       |  |                              |                           |                           |                           |                                 |                        |                        |                                       |                  |                  |                              |               |                              |
|                                    | Powerful operation                   |  |                              |                           |                           |                           |                                 |                        |                        |                                       | ●                |                  |                              |               |                              |
|                                    | 10°C Heat                            | ●  | ●                            | ○                         | ○                         | ○                         | ○                               | ○                      | ○                      | ○                                     | ●                | ●                | ●                            | ○             | ●                            |
|                                    | Outdoor unit low noise operation     |  |                              |                           |                           |                           |                                 |                        |                        |                                       | ●                |                  | ○                            | ○             | ○                            |
|                                    | Auto changeover                      | ●  | ●                            | ●                         | ●                         | ●                         | ●                               | ●                      | ●                      | ●                                     | ●                | ●                | ●                            | ●             | ●                            |
|                                    | UP/DOWN swing louver                 | ●  | ●                            | ●                         | ○                         | ○                         | ○                               | ○                      |                        |                                       | ●                | ●                |                              | ●             |                              |
|                                    | Double swing automatic               |  |                              |                           |                           |                           |                                 |                        |                        |                                       |                  |                  | ●                            |               | ●                            |
|                                    | Automatic fan speed                  | ●  | ●                            | ●                         | ●                         | ●                         | ●                               | ●                      | ●                      | ●                                     | ●                | ●                | ●                            | ●             | ●                            |
|                                    | Auto restart                         | ●  | ●                            | ●                         | ●                         | ●                         | ●                               | ●                      | ●                      | ●                                     | ●                | ●                | ●                            | ●             | ●                            |
|                                    | Connectable fresh air duct           |  | ○                            | ●                         |                           |                           |                                 |                        | ●                      | ●                                     | ●                |                  |                              | ●             | ●                            |
|                                    | Fresh air intake                     | ○  | ○                            | ○                         |                           |                           | ○                               | ○                      | ○                      | ○                                     |                  |                  |                              | ○             | ○                            |
|                                    | Connectable distributing duct        |  |                              |                           |                           |                           |                                 |                        | ●                      | ●                                     |                  |                  |                              |               |                              |
|                                    | Convenience Features                 | Auto-off timer                                 | ●                            | ○                         | ○                         | ●                         | ●                               | ●                      | ○                      | ●                                     | ●                | ○                | ○                            | ○             | ●                            |
| Sleep timer                        |                                      | ●  | ●                            | ○                         | ○                         | ○                         | ○                               | ○                      | ○                      | ○                                     | ○                | ○                | ○                            | ○             | ○                            |
| Program timer                      |                                      | ●  | ●                            | ○                         | ○                         | ○                         | ○                               | ○                      | ○                      | ○                                     | ○                | ○                | ○                            | ○             | ○                            |
| Weekly timer                       |                                      | ●  |                              |                           | ●                         | ●                         | ●                               |                        | ○                      | ●                                     |                  |                  | ●                            |               |                              |
| Weekly & Temperature setback timer |                                      | ○  | ○                            | ●                         |                           |                           | ●                               | ●                      | ●                      | ●                                     |                  | ○                | ○                            |               | ○                            |
| Filter sign                        |                                      | ●  | ●                            | ●                         | ●                         | ●                         | ●                               | ●                      | ●                      | ●                                     | ●                | ●                | ●                            | ●             | ●                            |
| External error output              |                                      |  |                              |                           | ○                         | ○                         |                                 |                        |                        |                                       | ○                |                  |                              | ○             |                              |
| External ON/OFF input              |                                      | ●  | ○                            | ○                         | ●                         | ●                         | ●                               | ○                      | ●                      | ●                                     | ○                | ○                | ○                            | ●             | ○                            |
| Wireless LAN control               |                                      | ○  | ○                            | ○                         | ○                         | ○                         | ○                               | ○                      | ○                      | ○                                     | ○                | ○                | ○                            | ○             | ○                            |
| Clean Features                     |                                      | Ion deodorization filter                       |                              |                           |                           |                           |                                 |                        |                        |                                       |                  | ●                | ●                            |               |                              |
|                                    | Apple-catechin filter                |  |                              |                           |                           |                           |                                 |                        |                        |                                       | ●                | ●                |                              |               |                              |
|                                    | Long-life filter                     |  |                              |                           |                           |                           |                                 |                        |                        | ○                                     | ○                | ○                | ●                            | ●             |                              |
|                                    | Washable panel                       |  |                              |                           |                           |                           |                                 |                        |                        |                                       |                  |                  |                              |               |                              |
|                                    | Silver Ion Filter                    | ○  | ○                            | ○                         | ○                         | ○                         | ○                               | ○                      | ○                      | ○                                     | ○                | ○                |                              |               |                              |
| Installation / Support             | Automatic airflow adjustment         |  |                              |                           |                           |                           |                                 |                        |                        | ●                                     |                  |                  |                              |               |                              |
|                                    | Drain pump as standard               | ●  | ●                            | ●                         | ●                         | ●                         | ●                               | ●                      | ○                      | ○                                     |                  |                  | ○                            | ○             |                              |
|                                    | Blue fin                             |  |                              | (45/54)                   |                           |                           |                                 |                        |                        |                                       |                  |                  | (30/36/45/54)                | (45)          |                              |
|                                    | Refrigerant cycle monitor            |  |                              |                           |                           |                           |                                 |                        | ○                      |                                       |                  |                  |                              |               |                              |

○ : Optional function

## Light Commercial & Commercial, Residential VRF

VRF systems provide air conditioning solutions that meet the requirements of a diverse range of buildings.

VRF systems provide air conditioning solutions for large residences as well as large commercial buildings.

V-002 VRF Series Overview  
V-004 VRF Outdoor Units Lineup  
V-006 Features

### VRF Outdoor Units



#### VRF J Series Heat Pump for Small-capacity type

V-020 VRF J-VS  
V-026 VRF J-IVS  
V-030 VRF J-IV  
V-034 VRF J-IVL



#### VRF V Series Heat Recovery Modular type

V-040 VRF VR-IV

#### Heat Pump Modular type

V-050 VRF V-IV

### VRF INDOOR UNITS

V-058 VRF Indoor Unit Lineup for J-VS  
V-066 VRF Indoor Unit Lineup for J-IVS, J-IV, J-IVL, VR-IV, V-IV



## VRF

Light Commercial  
& Commercial,  
Residential



FUJITSU GENERAL (Euro) GmbH participates in the ECP program for VRF. Check ongoing validity of certificate: [www.eurovent-certification.com](http://www.eurovent-certification.com)

FUJITSU GENERAL LIMITED

# VRF Series Overview

Recommended VRF products for various buildings



**NEW** VRF **J-VS**



**Maximum 6 HP Heat Pump**

This product uses R32, a new environmentally friendly refrigerant. With TOP-class energy efficiency and compact design, it can be installed in a limited and narrow space without being conspicuous. Indoor unit connectable up to 130%.

- Sustainable (R32)
- Saving CO2
- Small Body
- Situational Piping Design
- Sightliness installation



Page V-020

VRF **VR-IV**



**Maximum 48 HP Heat Recovery**

Smart, cutting-edge design Available in a wide range of models from 8 to 48 HP in 2 HP increments with the capacity ratio of indoor units connectable up to 150%.

- Excellent energy saving
- High design flexibility for placement in any building
- Easy installation and maintenance



Page V-040

VRF **J-IVS**



**Maximum 6 HP Heat Pump**

The 998 mm compact design does not obstruct the view even when installed underneath a waist-high window, ideal for large houses and retail stores. Indoor unit connectable up to 130%.

- Spaces saving and low sound level design
- Flexible system configuration for homes, stores, and small buildings



Page V-026

VRF **V-IV**



**Maximum 48 HP Heat Pump**

Smart, cutting-edge design Extensive lineup from 8 HP to 48 HP with the capacity ratio of indoor units connectable up to 150%.

- Simultaneous cooling and heating operation using a single refrigerant system
- Annual cooling operation
- Accommodating changes in temperature difference



Page V-050

VRF **J-IV**



**Maximum 6 HP Heat Pump**

J-IV is connectable with up to 14 indoor units (Indoor unit connectable up to 150%) making it suitable for commercial facilities housing a number of small stores.

- High energy efficiency
- Flexible system configuration for small and midsize buildings



Page V-030

VRF **J-IVL**



**Maximum 18 HP Heat Pump**

J-IVL is an outdoor unit with a slim design. Its flexibility in installation makes it ideal for midsize office buildings and hotels. With the newly added 14/16/18 HP models, up to 42 indoor units\* are connectable, making them ideal for hotels and educational facilities with many rooms.


- Slim Outdoor Unit
- Small room application
- Class-leading Low Operating Sound



Page V-034

**Design Simulator**



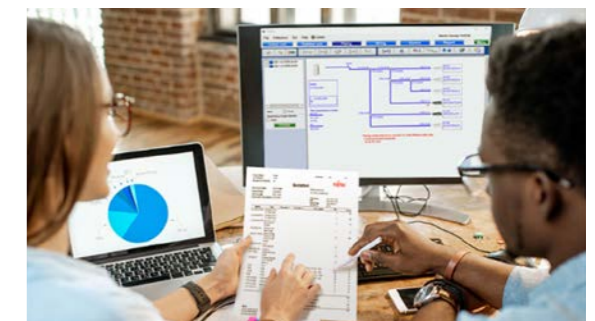
























































































When installing air conditioning equipment in each room of a building, it is necessary to select an indoor unit suitable for the heat load in the room and derive an outdoor unit that can cover the capacity of all indoor units. In addition, remote controls and converters are selected according to how the customer will manage the air conditioner, and in some cases, a design combined with options may be required to comply with established standards. The "Design Simulator" can be used to facilitate the selection of such complex equipment and the output of system drawings and estimates. (Software for PC)



For more information



# VRF Outdoor Units Lineup

| Capacity (kW)              |                   | Refrigerant   | 12.1  | 14.0  | 15.1-15.5   | 22.4  | 28.0  | 33.5  | 40.0  | 45.0  | 50.0-50.4   | 55.9  | 61.5  | 67.0  | 73.5  | 78.5  | 85.0  | 90.0  | 95.0  | 100.5   | 107.0   | 112.0   | 118.5   | 123.5   | 130.0   | 135.0   |  |
|----------------------------|-------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|
| HP                         |                   |   | 4   | 5   | 6   | 8   | 10  | 12  | 14  | 16  | 18  | 20  | 22  | 24  | 26  | 28  | 30  | 32  | 34  | 36  | 38  | 40  | 42  | 44  | 46  | 48  |  |
| NEW                        | J-VS Series       |    |  |  |  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
|                            | J-IVS Series      |    |  |  |  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
|                            | J-IV Series       |    |  |  |  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
|                            | J-IVL Series      |  |   |   |   |  |  |  |    |  |  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| VR-IV Series Heat Recovery | Space Saving      |  |   |   |   |  |  |  |    |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                            | Energy Efficiency |  |   |   |   |   |   |   |  |   |   |   |  |  |  |  |  |  |  |  |  |  |  |  |   |   |  |
| V-IV Series Heat Pump      | Space Saving      |  |   |   |   |  |  |  |    |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                            | Energy Efficiency |  |   |   |   |   |   |   |  |   |   |  |   |  |  |  |  |  |  |  |  |  |  |  |   |   |  |




# Features

## High-efficiency

High-efficiency is achieved significantly by the use of a DC twin-rotary compressor, inverter technology, and a large heat exchanger.



DC twin-rotary compressor

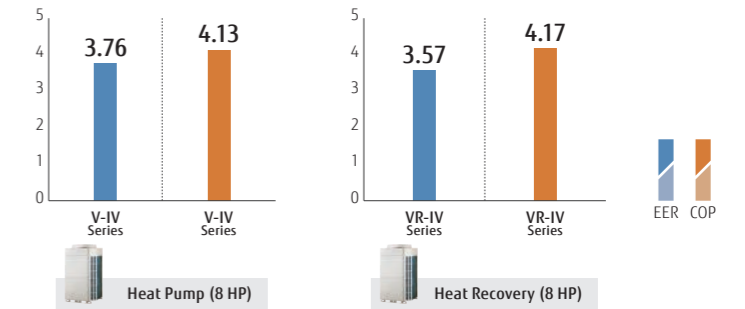

\* These specifications are determined by ducted combination.





### ALL DC High-efficiency design with top-class SEER/SCOP

All the VRF Series, including the J-IVL Series, have DC technology to achieve high-efficiency operation. This enhances the durability and reliability of the VRF Series.



|   |  |
|---|--|
| <br>1 DC fan motor          | <br>3 DC inverter control        |
| <br>2 Large heat exchanger | <br>4 Subcooling heat exchanger |




|   |  |
|---|--|
| <br>1 3-phase DC fan motor | <br>3 Sine-wave DC inverter control |
| <br>2 Large heat exchanger | <br>4 Subcooling heat exchanger     |



## Efficient control of operation


### Setting temperature range limitation

Sets the minimum and maximum limits on room temperature to establish an optimum balance between energy-saving performance and a comfortable environment.

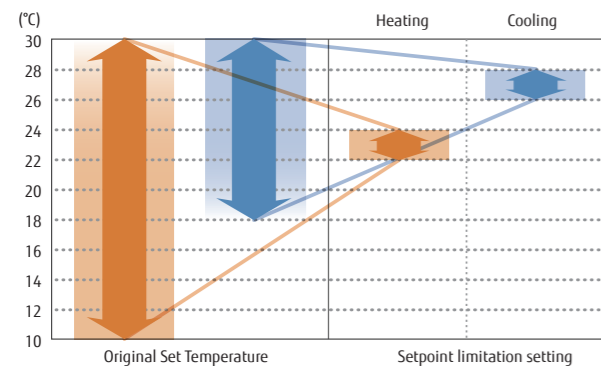


### Auto-off timer

The wired remote controller is equipped with an auto-off timer function that automatically stops operation after a fixed period of time has elapsed from the start of operation to avoid wasting energy. The function also allows you to set the interval for stopping operations.

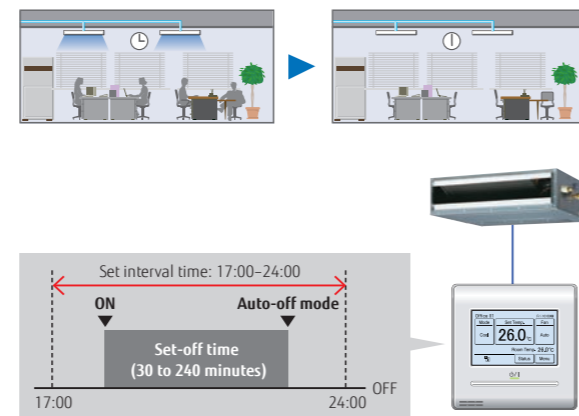


### Energy-saving management

A variety of energy-saving operations can be set and managed depending on the season, climate, and time period. Excellent energy-saving operation using the system controller.

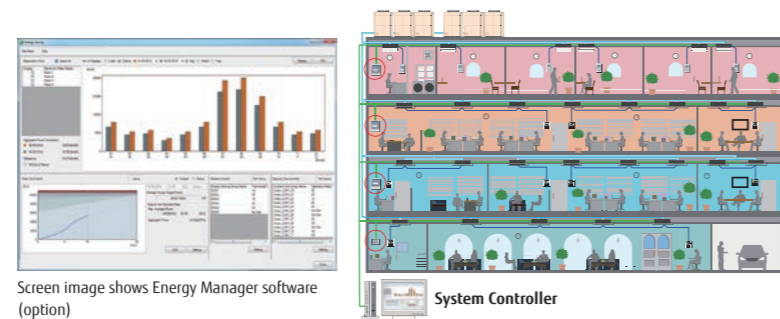


### Capacity-saving mode

Operation capacity can be reduced in 5 steps from the rated capacity. This mode cuts down on peak power consumption and eases the maximum load on the unit.

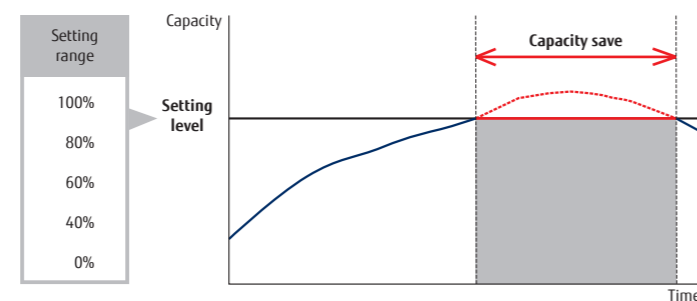

### Intelligent refrigerant control

Fujitsu General is proposing outdoor units equipped with refrigerant control function. The refrigerant control operates with subtle control corresponding to the heat load of the room and offers a more comfortable environment. The refrigerant control can also provide increased energy savings.

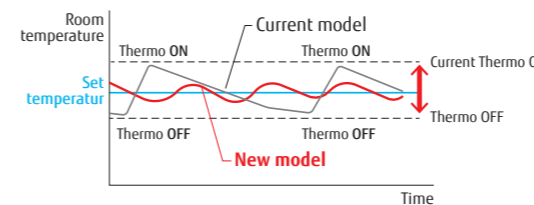


#### Current refrigerant control

Thermostat-ON/OFF occurs frequently. → Frequent changes in room temperature interfere with comfort. The compressor starts and stops repeatedly, wasting energy.

#### New refrigerant control

The thermostat is turned on and off less frequently than under current control to maintain the room temperature at the target temperature. Compared to current control, the compressor will run longer, thus saving energy.

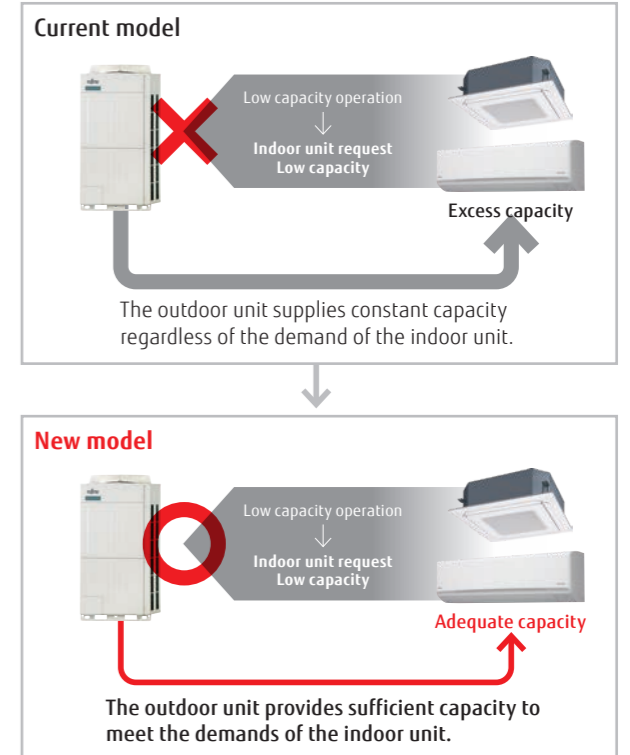


\* The improvements due to the control and the actual sine wave vary depending on the combination of the indoor unit and system operating conditions.

# More Comfort




## Auto changeover

In Auto setting, the air conditioner switches between cooling and heating modes automatically according to the set temperature and the room temperature.

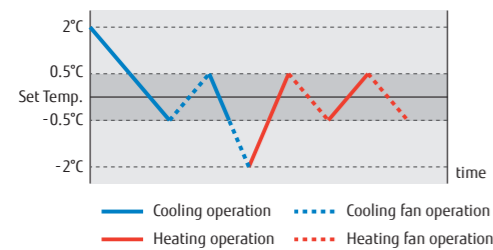


Auto changeover settings enable the indoor unit to easily switch between cooling and heating regardless of the operating mode of other indoor units. These settings can be made using a wired remote controller for a specific indoor unit. Provides a comfortable environment all year round.

## Automatic cooling/heating operation for each room is possible

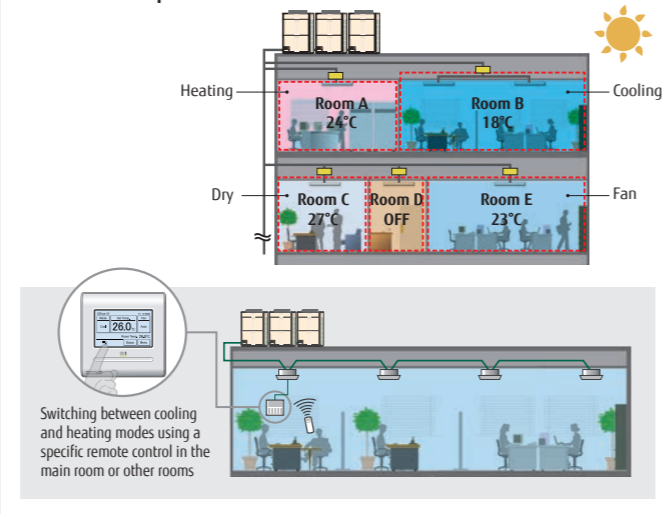

## Precise control of refrigerant flow


The combination of DC inverter control and individual control of electronic expansion valves of an indoor unit enables precise and smooth control of the refrigerant flow. This means the room temperature can be set in increments of 0.5°C.

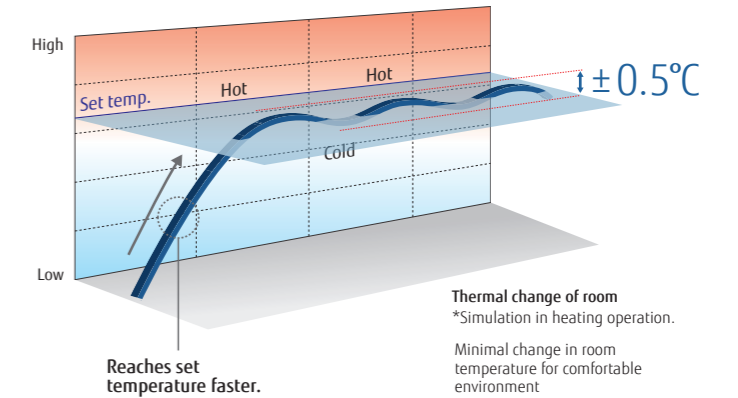

## Quiet operation


### Quiet operation

Two low noise modes can be switched over automatically between one in which low noise is prioritized over performance, and the other in which performance is prioritized over low noise, depending on the room temperature and outdoor temperature. This feature can be controlled by external input from the outdoor unit or a system controller.

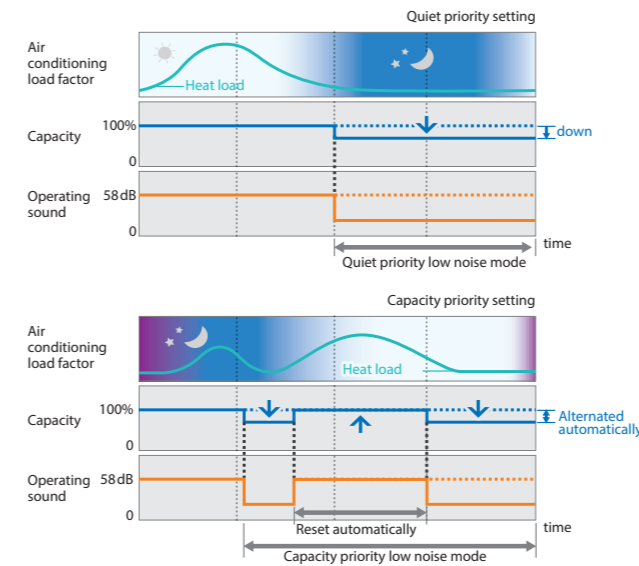


## Non-stop oil recovery operation

A comfortable room condition is maintained during oil recovery mode because the product continues to operate without stopping the cooling or heating operation.

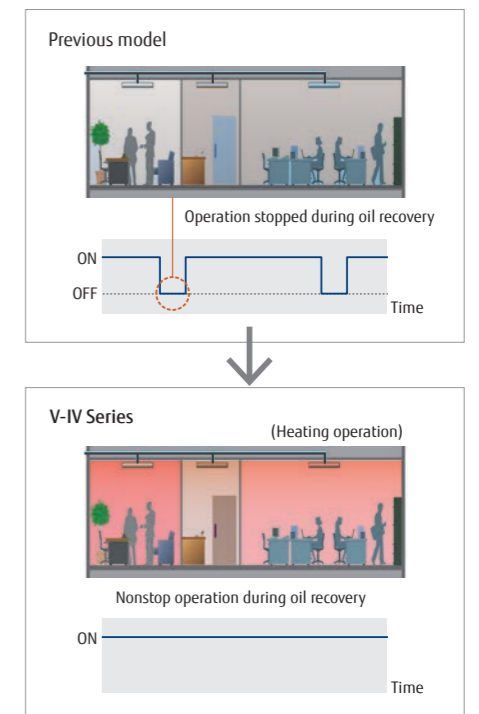

## NEW Switching room temperature sensing position for improved heating comfort (Option)


The optional remote sensor kit (UTY-XSZXZ1) can be connected to the indoor unit to improve comfort by installing the unit at a height appropriate for the living environment.

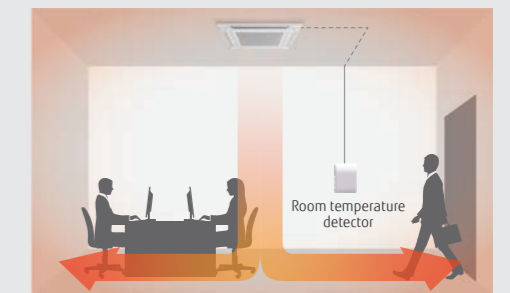

# High Reliability

## Outdoor unit rotation

The compressor starting order is rotated to equalize the cumulative running time of each unit.

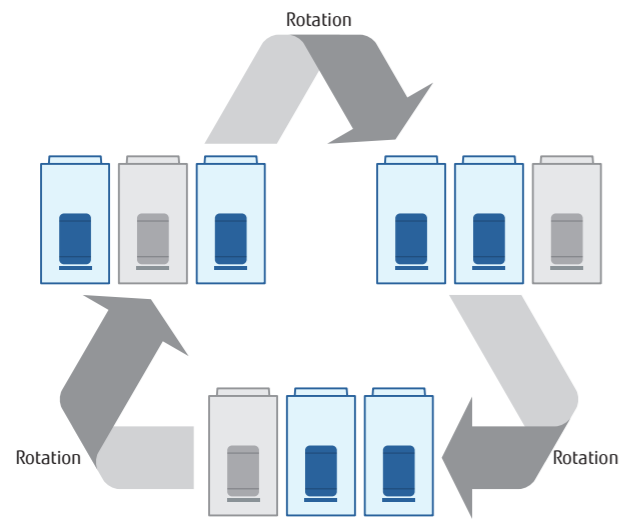


The start and stop timings are alternated among connected compressors.

## Backup operation


If one compressor fails, the other compressors will initiate backup operation\*.

Note: Backup operation may not be possible depending on the cause of failure.




## Advanced refrigerant control

Compressor control logic controls the inverter speed to balance the mass airflow rate of refrigerant in each outdoor unit.

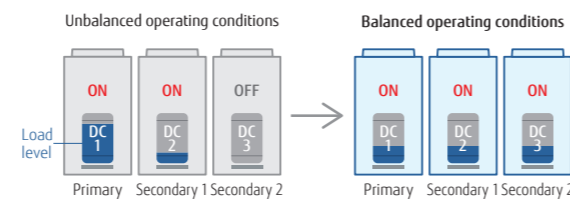



## Protection against liquid flowback

The use of a large accumulator means that refrigerant that has not been completely vaporized stays inside the accumulator to ensure no liquid refrigerant is fed into the compressor.

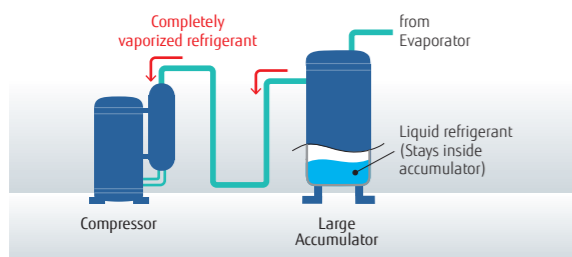

## Blue fin heat exchanger

The anti-corrosion blue fin treatment is applied to the heat exchanger of the outdoor unit.

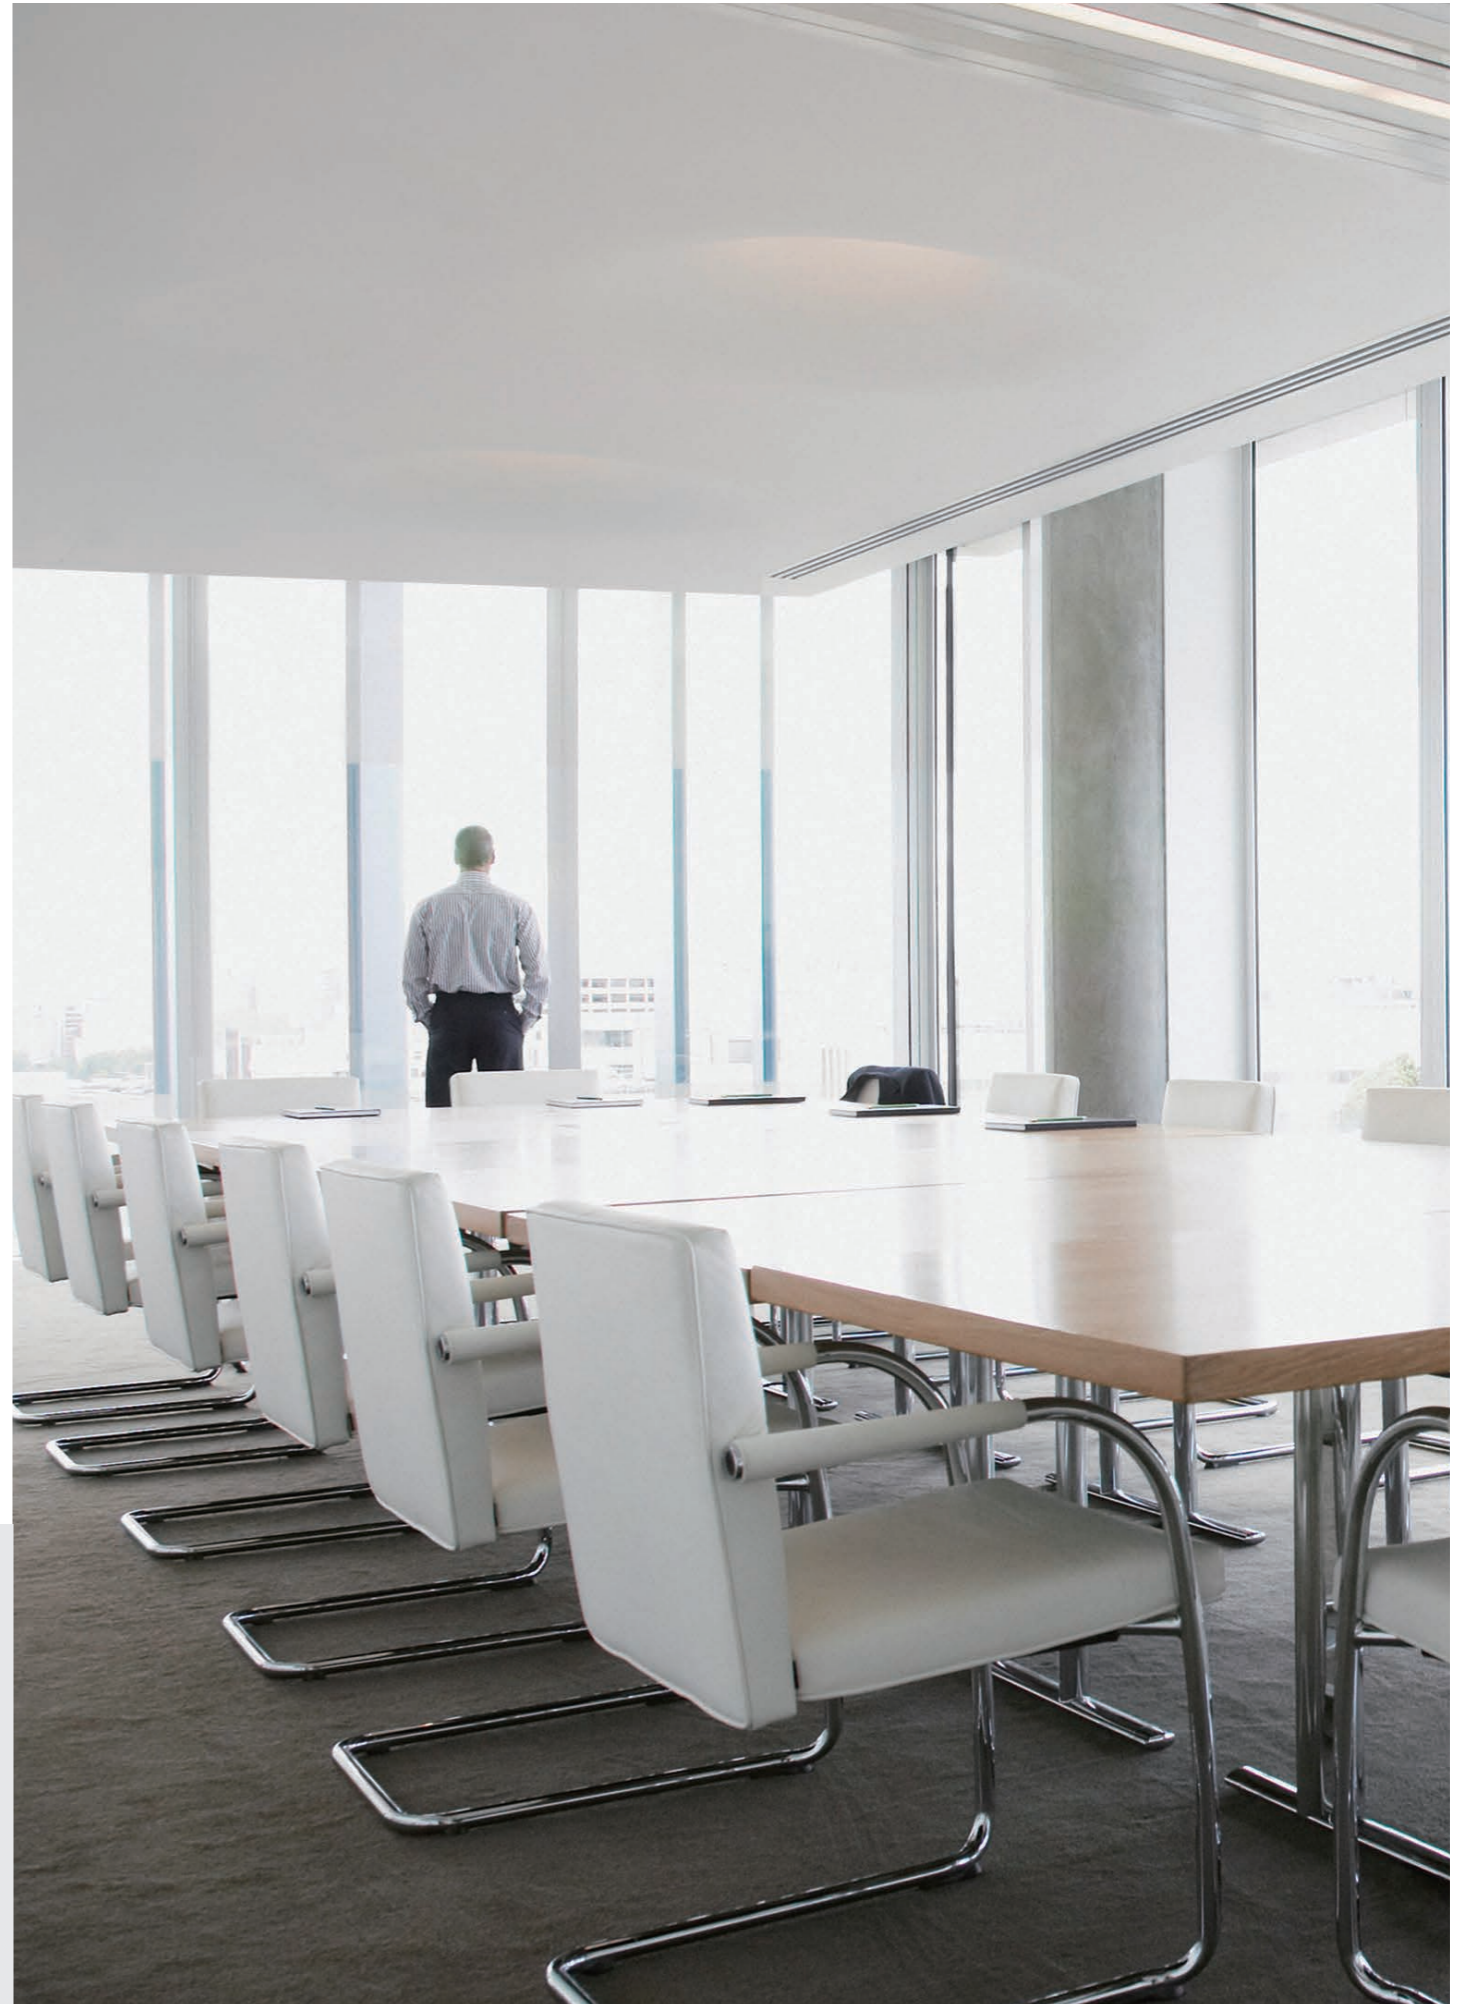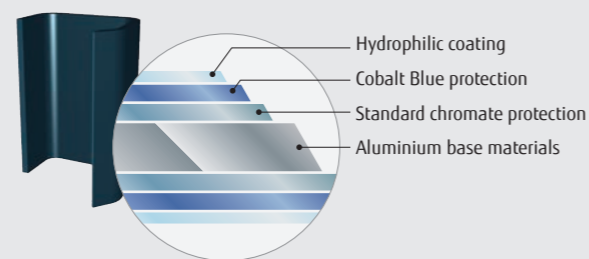

# Design Flexibility


## Class-leading compact design

An industry-leading compact outdoor unit with optimal airflow pattern design. (Up to 18 HP)




## Long pipe design

Pipe design suitable for long and narrow office buildings with elevation differences and low-rise stores with long distances (VRF J-IVL Series)

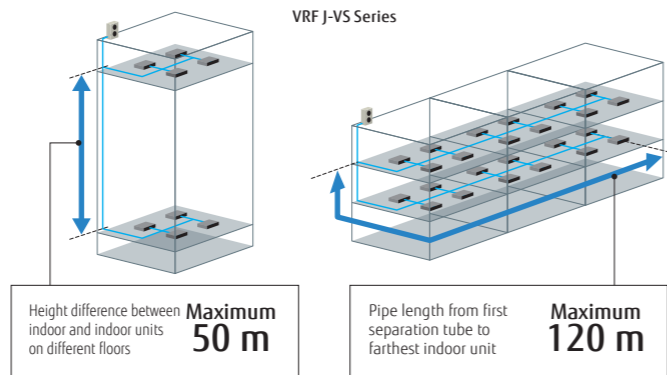

## Max. allowable overall pipe length: 1,000 m

The class-leading pipe length of 1,000 m increases flexibility of installation in a wide variety of buildings.

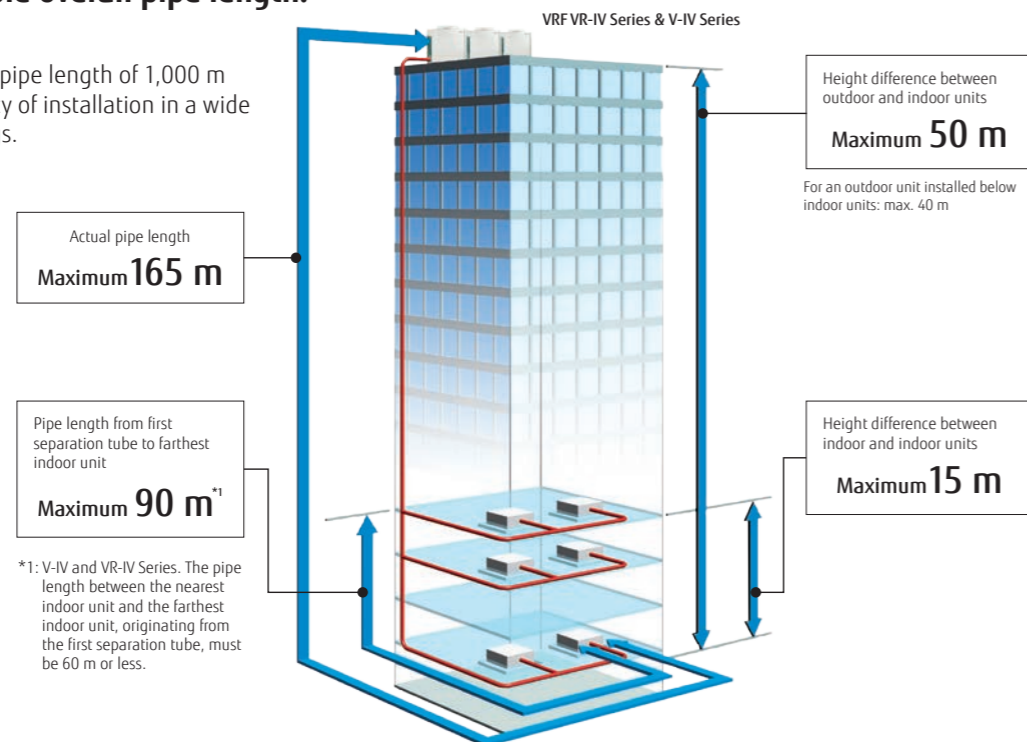

\*1: V-IV and VR-IV Series. The pipe length between the nearest indoor unit and the farthest indoor unit, originating from the first separation tube, must be 60 m or less.

## High-capacity connection

| Series                                      | Connectable indoor unit capacity range | Connectable indoor units |
|---|--|--------------------------|
| VRF J-VS Series Heat pump type              | 50% to 130%                            | up to 13 <sup>*5</sup>   |
| VRF J-IVS Series Heat pump type             | 50% to 130%                            | up to 13 <sup>*5</sup>   |
| VRF J-IV Series Heat pump type              | 50% to 150%                            | up to 14 <sup>*5</sup>   |
| VRF J-IVL Series 14/16/18 HP Heat pump type | 50% to 150%                            | up to 42 <sup>*3</sup>   |
| VRF J-IVL Series 8/10/12 HP Heat pump type  | 50% to 150%                            | up to 30 <sup>*4</sup>   |
| VRF VR-IV Series Heat Recovery Modular type | 25% <sup>*5</sup> to 150%              | up to 64                 |
| VRF V-IV Series Heat Pump Modular type      | 50% to 150% <sup>*2</sup>              | up to 64                 |

\*2: The maximum capacity of the combination that includes the 18-HP outdoor unit is below 150%.  
 \*3: J-IVL Series 18-HP model only.  
 \*4: J-IVL Series 12-HP model only.  
 \*5: 6-HP model only.


## Designed for low refrigerant charge

The optimal design of the indoor and outdoor units reduces the amount of refrigerant required and can be easily installed in a room as small as 15 m<sup>2</sup>.



## Various optional parts

- Fresh air intake kit to bring in fresh air
- Comfortable temperature control with a remote sensor
- DX kit links ventilation equipment and air handling units.

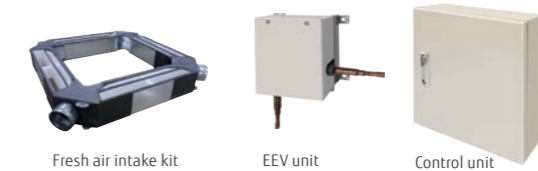

## Low ambient operation


Our refrigeration cycle technology enables cooling operation even at -15°C.



## Wide operating temperature range

All outdoor units have a wide operating temperature range and can operate in extreme temperature conditions.


\*6: When multiple outdoor units are connected, their operating temperature range is from -5°C to 46°C in cooling.  
 \*7: The operating range is -15°C to 46°C only for systems with all indoor units rated at 5.6 kW or more.

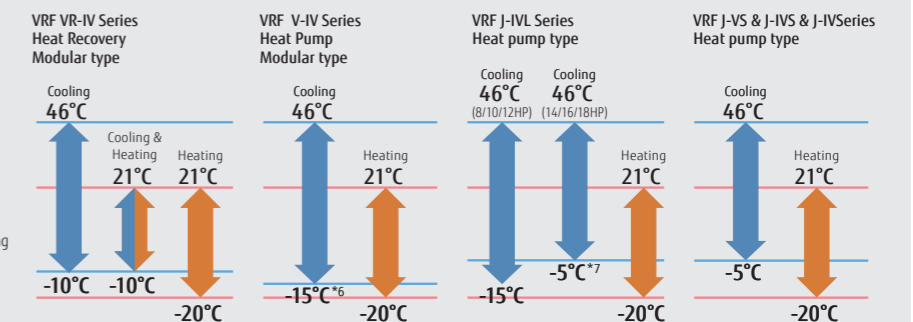


# Easy Installation




## Easily transported



**A lifting strap can be hooked onto an outdoor unit**  
Design of outdoor unit allows for lifting straps to be used




**Transportable by forklift**  
The outdoor unit can be lifted and transported by forklift.



**Fits into a small elevator.**

## Easy access

The removable L-shaped front panel provides more room for installation and service work. Multiple installations can be performed easily and efficiently even in tight spaces.

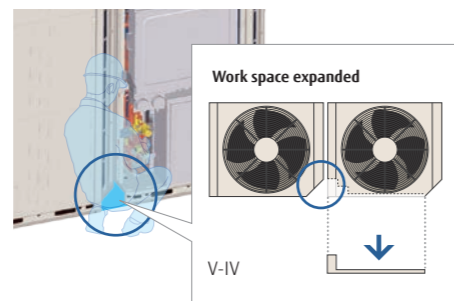

Front access reduces installation intervals


## Flexible pipe connection

Piping and wiring can be accessed from the front, left, right, and bottom.



## Simplified wiring work

The communication wiring can be installed seamlessly among indoor, outdoor, and RB units, which makes the installation of the wiring system easier.




Maximum wiring length: **3,600 m**

Note: The automatic address setting is not available on a serially connected multiple refrigerant system.


## Vacuum mode function for easy evacuation

The vacuum mode function enables all expansion valves of an indoor unit to be opened fully, allowing for easier evacuation of air inside pipe lines and indoor units.

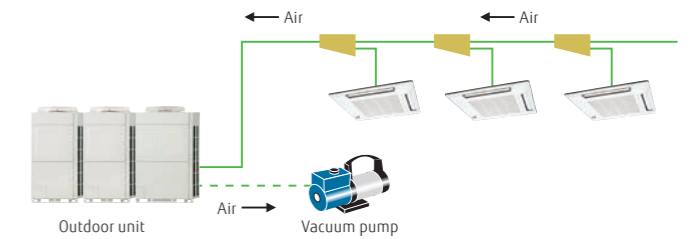

## Automatic address setting

Addresses of connected indoor units, RB units, and Signal amplifier can all be set automatically from the PCB in the outdoor unit.

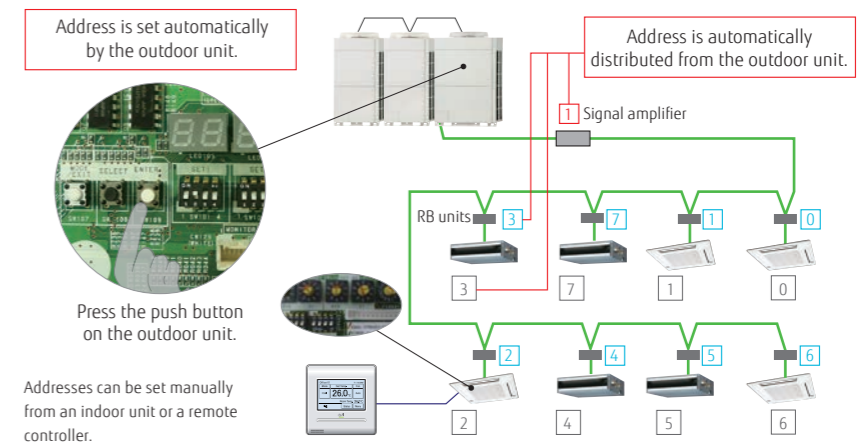


## Easy commissioning with Tools

### • Service Tool (UTY-ASGXZ1)

The Service Tool checks the refrigerant temperature and pressure, and the operating status of the electronic expansion valves, making it easy to determine if the units are connected properly.

### NEW • Central Remote Controller (UTY-DCGYZ3)


After the VRF system has been installed. Conveniently, the "test run" required to verify proper system operation can be performed from a nearby Central RC.

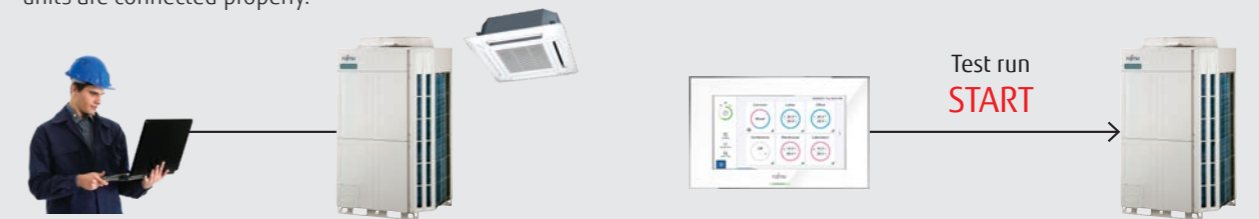

# Easy Service and Maintenance

## Designed for easy maintenance

A 7-segment indicator lamp panel provides detailed information on the function setting status, refrigerant temperature and pressure, compressor operation time, and other factors, facilitating self-diagnosis for each unit.

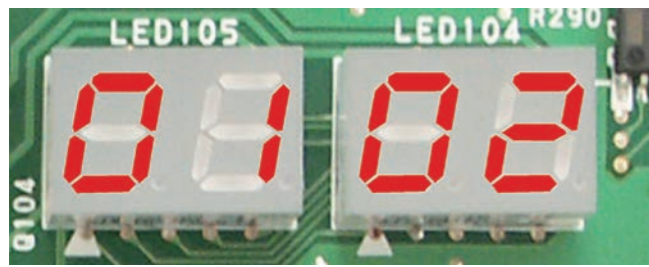


### Easy-to-read 7-segment indicator lamp

Shows the following detailed operation and error status without need of any special tools.

### Error status can be checked on an outdoor unit's display


- System operation mode
- Discharge temperature and pressure
- Compressor operation status
- Address, type, and number of outdoor unit



- Error status can easily be checked on an outdoor unit's display.


### Movable PCB panel

Enables easier access behind the PCB for maintenance work.

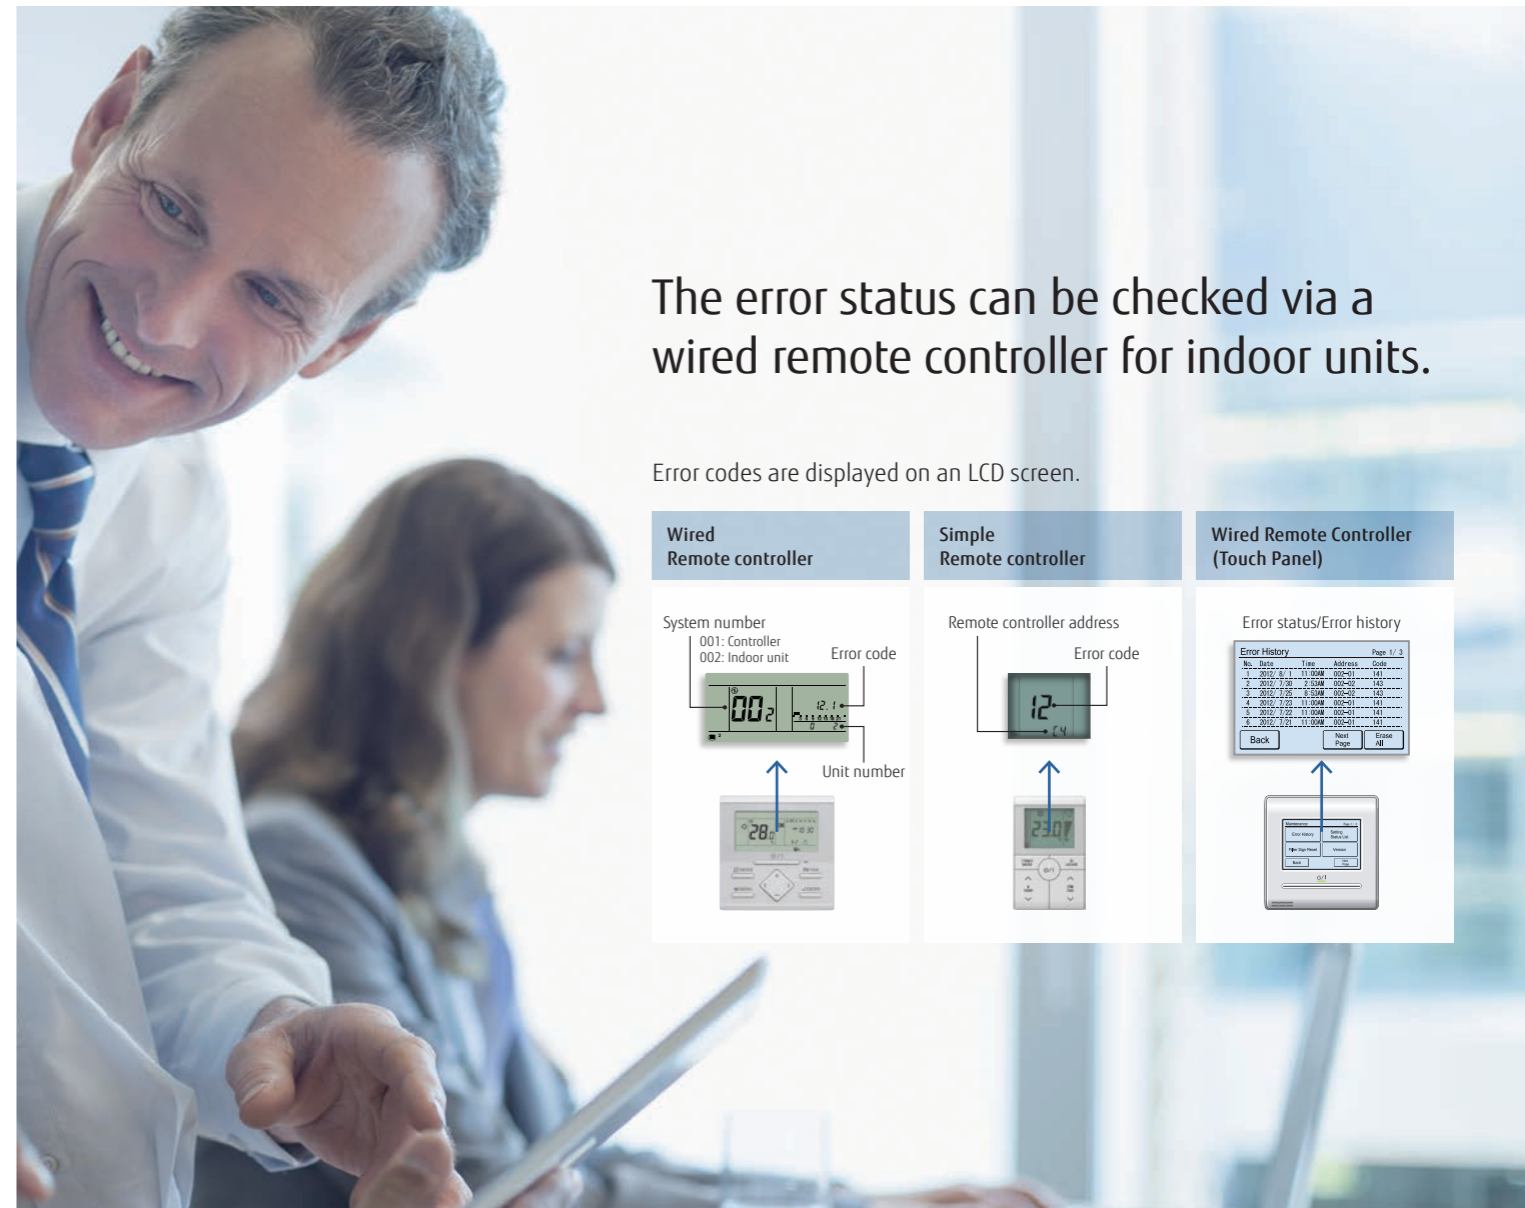

The error status can be checked via a wired remote controller for indoor units.


Error codes are displayed on an LCD screen.

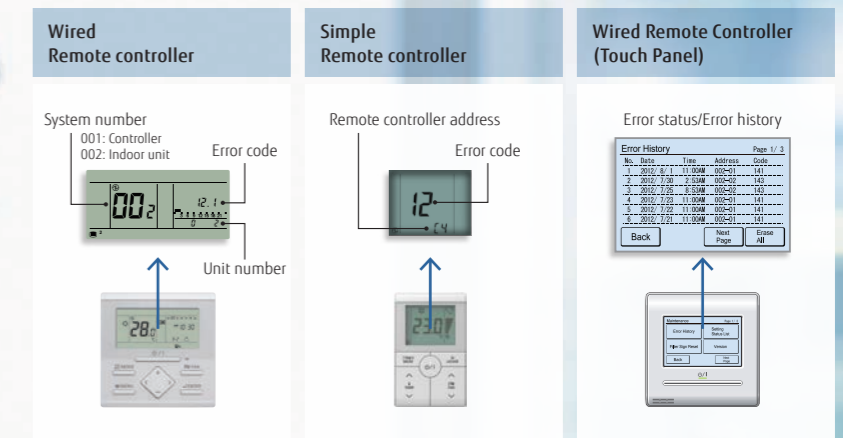

## Error diagnosis by Service tool


### Connection to Service tool

- A detailed operation status and recent error history can be checked and analyzed using Service tool.
- The last 5 minutes of operation status can be recorded continuously.

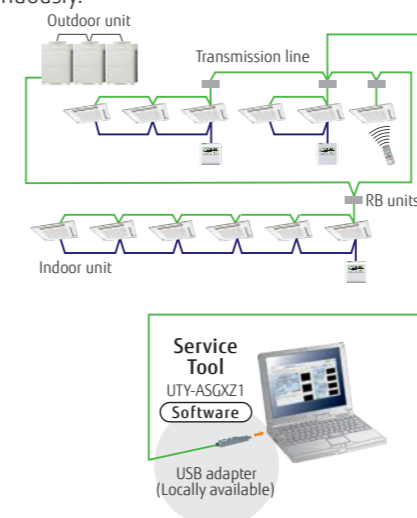

## Remote monitoring

The Web Monitoring system enables the monitoring of the system's operation status at any time via the internet to ensure trouble-free operation. The operating VRF network system in the building can be monitored real time over the internet.

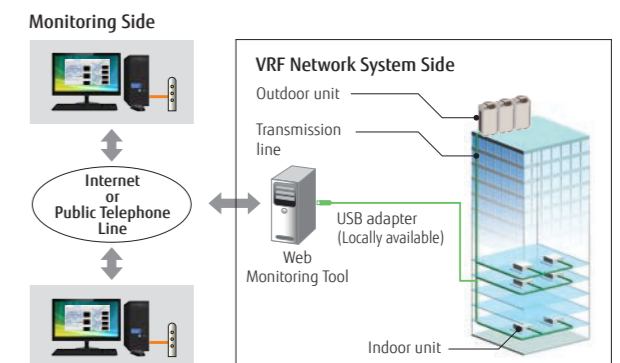




### Heat Pump

for Small-capacity type

VRF **J-VS**

#### System configuration example


- Suitable for air conditioning small and medium-size buildings. One refrigerant system is used for each outdoor unit.
- Multiple indoor units are connected with separation tubes and headers.

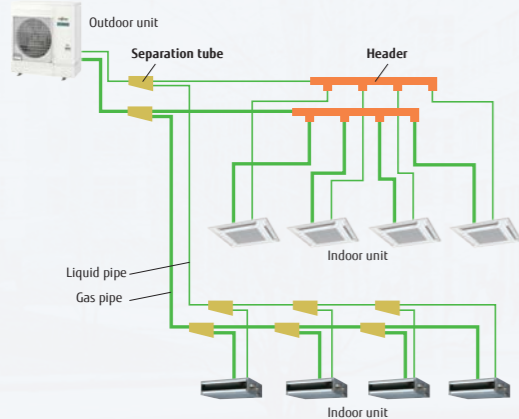

R32 refrigerant with reduced global warming potential

- **Zero** Ozone Depletion Potential (ODP<sup>\*1</sup>)
- High environmental properties
- High performance
- Economically efficient

GWP<sup>\*2</sup>



(Reference: IPCC 4th Report)

<sup>\*1</sup> ODP (Ozone Depleting Potential): a relative value that indicates the impact per unit weight of ozone-depleting substances released into the atmosphere when CFC-11 (trichlorofluoromethane, CCl<sub>3</sub>F) is fixed at 1.0

<sup>\*2</sup> GWP (Global Warming Potential): a measurement that indicates how much other greenhouse gases are capable of warming the Earth based on carbon dioxide. This is the integrated value of radiant energy given to the Earth (i.e., the estimated impact on global warming) expressed as a ratio to CO<sub>2</sub>.

This product uses R32, a new environmentally friendly refrigerant. With TOP-class energy efficiency and compact design, it can be installed in a limited and narrow space without being conspicuous.

for SHOP

for LARGE APARTMENT

for OFFICE

Saving CO2

Sustainable (R32)

Small Body

"5S" leading to the optimal solution

Situational Piping Design

Sightliness installation



Outdoor unit

# Sustainable

## European F-Gas Regulation Plan


The European Union has tightened F-gas rules as part of European Green Deal policy, which aims for Europe climate neutral by 2050. The F-gas Regulation mainly includes

- (1) Reducing the total volume of HFCs and phasing out HFC in 2050.
  - (2) The GWP limits for certain products are required to be strengthened.
- Fujitsu General as one of its proactive efforts to preserve the global environment, we are working on technological development to achieve the best balance between refrigerants with lower GWP and energy efficiency of equipment adopting safety measures.

| 2029   | 2033   | 2035                                | 2050  |
|--|--|-------------------------------------|---|
| Available at J-VS  |  |                                     |   |
| Split AC & HP<br>Over 12 kW:<br>GWP 750 and above prohibited<br>12 kW or less:<br>GWP 150 and above prohibited | Split AC & HP<br>Over 12 kW:<br>GWP 150 and above prohibited | Split AC & HP<br>HFC use prohibited | an economy with<br><b>net-zero</b> greenhouse<br>gas emissions. |


## Refrigerant saving design

Refrigerant saving design the compact indoor unit, piping design, and optimization of heat exchanger volume significantly reduce the system refrigerant volume.

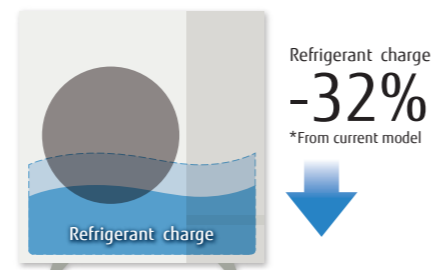

## Enhanced disaster safety measures

The system is designed to meet the environmental safety requirements specified in the IEC 603352-40 standard for the use of R32 refrigerant. The environment requiring safety measures is determined by the size of the room in relation to the amount of refrigerant required. For example, if the system is designed for maximum pipe length and the refrigerant charge is 6 kg, safety measures are required for rooms of 15 m<sup>2</sup> or less.

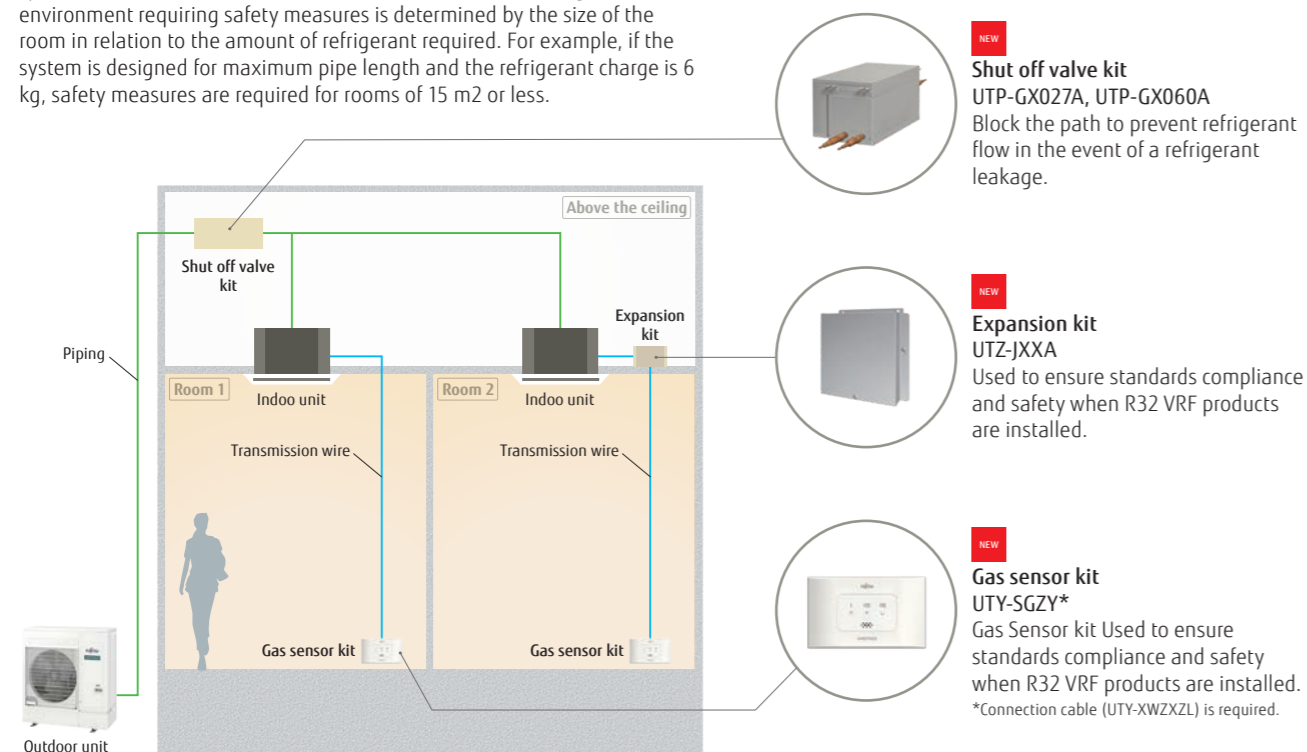


# Saving CO2

## TOP Class High Energy Saving


The use of large heat exchanger and a high-efficiency Rotary compressor achieves class-leading SEER/SCOP in all models.

SEER **8.27** \*045 model  
SCOP **5.37** \*040 model

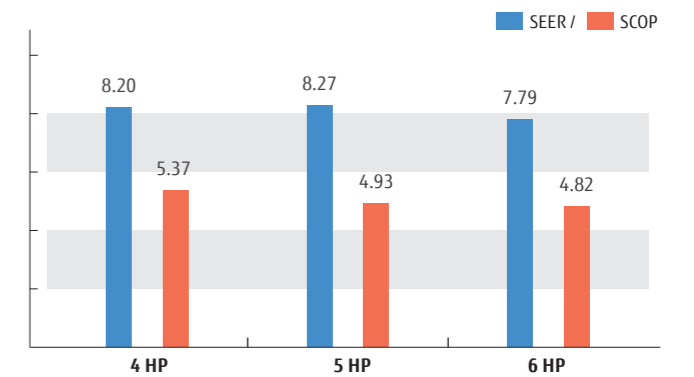


## More Energy-Saving compressor control

When the room temperature approaches the set temperature after the start of operation, the capacity required for the outdoor unit becomes lower. The minimum compressor speed at this time can now be controlled at a lower value than with conventional products, enabling more energy-efficient operation.

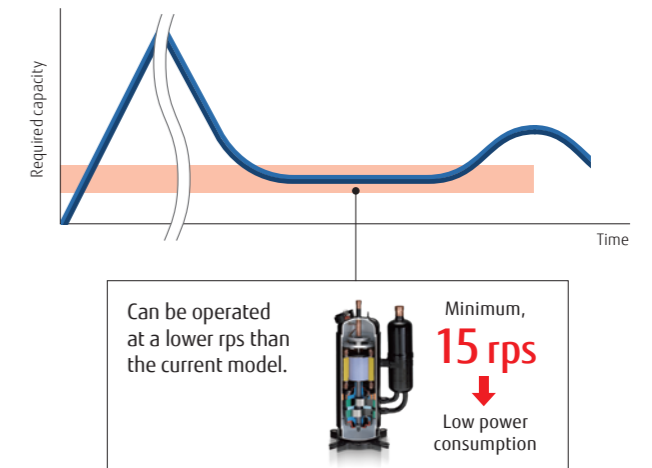


## Small Body

### Easy to carry, easy to install

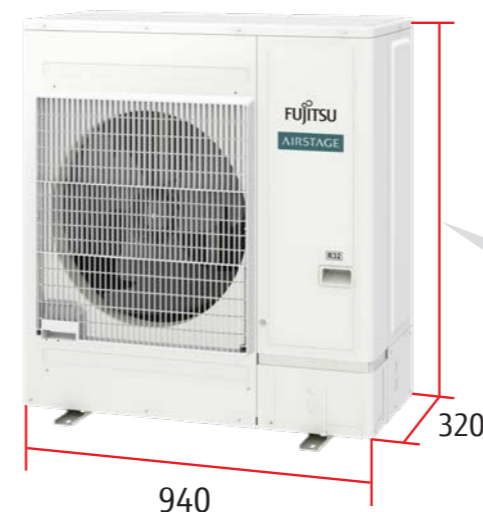

### Small, lightweight outdoor unit

The outdoor units in this series are much more compact than conventional outdoor units of comparable capacity. They can be installed on a balcony, fitting below the height of the railing. With a height of less than 1 m, they can be installed in tight spaces such as under windows.

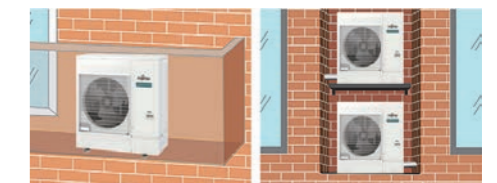

### Low noise design

Significantly low noise levels are achieved by the use of a DC twin-rotary compressor, inverter technology, and an advanced airflow pattern design.





## Situational Piping Design

### Long pipe length

Our advanced refrigerant control technology extends the maximum allowable length of refrigerant piping to 120 m. This provides high flexibility in system design.

Long piping lengths are achieved by installing a large-capacity accumulator. No liquid refrigerant is supplied to the compressor even when the required amount of refrigerant is charged in the long piping.

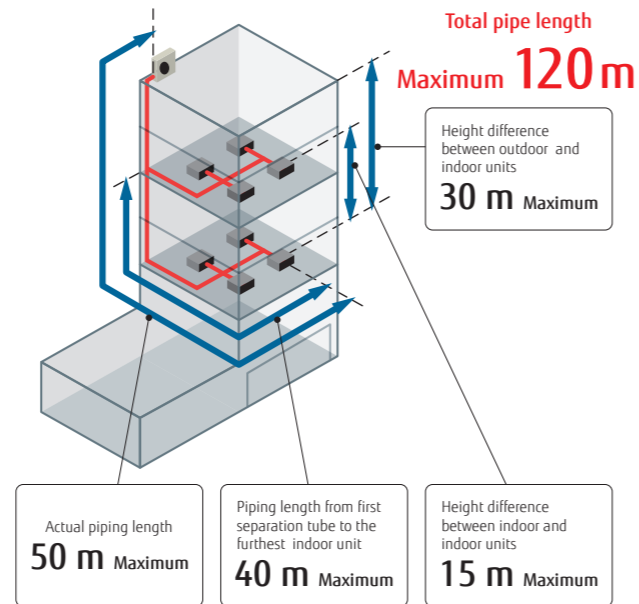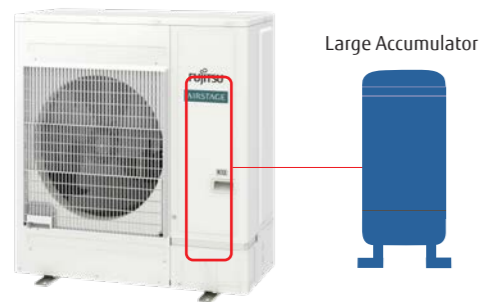

### Up to 13 indoor units\* can be connected

The combination of smaller but sufficiently powerful indoor units and a new outdoor unit with an optimized heat exchanging structure makes it possible to connect up to 13 indoor units, which is the best in its class.

\*: 6 HP model


|                              |      |      |      |
|------------------------------|------|------|------|
| Rating Capacity range (HP)   | 4    | 5    | 6    |
| Max. Connectable indoor unit | 1-11 | 1-12 | 1-13 |

## Sightliness installation

### External static pressure

External static pressure measures up to 30 Pa for 4/5/6 HP models.

Even if the outdoor unit is installed in a small space to hide it, the grille and duct airflow path required for exhaust air can be installed up to a static pressure value of 30 Pa.

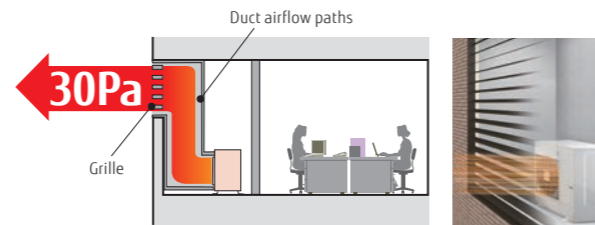

### Cooling piping system

New Heat Rejection Technology Cooling piping system "Cooling piping system" is adopted to ensure reliability in high outside air.

Even when the outdoor unit is installed in an environment where heat tends to stay (small space), the cooling system using refrigerant can reduce damage caused by heat from PCBs.




### Specifications

| Rated capacity range             | HP                              | 4                           | 5           | 6           |
|----------------------------------|---------------------------------|-----------------------------|-------------|-------------|
| Model name                       |                                 | AJY040KCTAH                 | AJY045KCTAH | AJY054KCTAH |
| Maximum connectable indoor units |                                 | 1-11                        | 1-12        | 1-13        |
| Power source                     |                                 | Single phase, ~230 V, 50 Hz |             |             |
| Capacity                         | Cooling                         | 14.0                        | 14.0        | 15.1        |
|                                  | Nominal Heating                 | 12.1                        | 14.0        | 15.1        |
|                                  | Max. Heating                    | 13.6                        | 16.0        | 16.5        |
| Input power                      | Cooling                         | 3.15                        | 3.82        | 4.48        |
|                                  | Nominal Heating                 | 2.55                        | 2.91        | 3.20        |
|                                  | Max. Heating                    | 3.09                        | 3.62        | 3.90        |
| EER                              | Cooling                         | 3.84                        | 3.66        | 3.37        |
|                                  | Nominal Heating                 | 4.74                        | 4.80        | 4.71        |
|                                  | Max. Heating                    | 4.40                        | 4.41        | 4.22        |
| SEER                             | Cooling                         | 8.20                        | 8.27        | 7.79        |
|                                  | Heating                         | 5.37                        | 4.93        | 4.82        |
| SCOP                             | Cooling                         | 8.20                        | 8.27        | 7.79        |
|                                  | Heating                         | 5.37                        | 4.93        | 4.82        |
| ηc                               | Cooling                         | 325.0                       | 328.0       | 308.6       |
|                                  | Heating                         | 212.0                       | 194.0       | 189.8       |
| ηh                               | Cooling                         | 325.0                       | 328.0       | 308.6       |
|                                  | Heating                         | 212.0                       | 194.0       | 189.8       |
| Airflow rate                     |                                 | 4,240                       | 4,450       | 4,450       |
| Sound pressure level/Power level | Cooling                         | 52 / 70                     | 53 / 71     | 54 / 72     |
|                                  | Heating                         | 54 / 71                     | 55 / 72     | 56 / 73     |
| Heat exchanger fin               |                                 | Blue fin                    | Blue fin    | Blue fin    |
| Net Dimensions                   | Height                          | 998                         | 998         | 998         |
|                                  | Width                           | 940                         | 940         | 940         |
|                                  | Depth                           | 320                         | 320         | 320         |
| Weight                           |                                 | 74                          | 74          | 74          |
|                                  |                                 | kg                          |             |             |
| Refrigerant                      | Type (Global Warming Potential) | R32 (675)                   | R32 (675)   | R32 (675)   |
|                                  | Charge                          | 2.7 (1.823)                 | 2.7 (1.823) | 2.7 (1.823) |
| Connection pipe diameter         | Liquid                          | 9.52                        | 9.52        | 9.52        |
|                                  | Gas                             | 15.88                       | 15.88       | 15.88       |
| Total pipe length                |                                 | 120                         | 120         | 120         |
| Max. height difference           |                                 | 30                          | 30          | 30          |
| Operating Range                  | Cooling                         | -5 to 46                    | -5 to 46    | -5 to 46    |
|                                  | Heating                         | -20 to 21                   | -20 to 21   | -20 to 21   |

Note: Specifications are based on the following conditions.  
 Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.  
 Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.  
 Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m.  
 The protective function may work when using it outside the operation range.

### Dimensions

(Unit: mm)

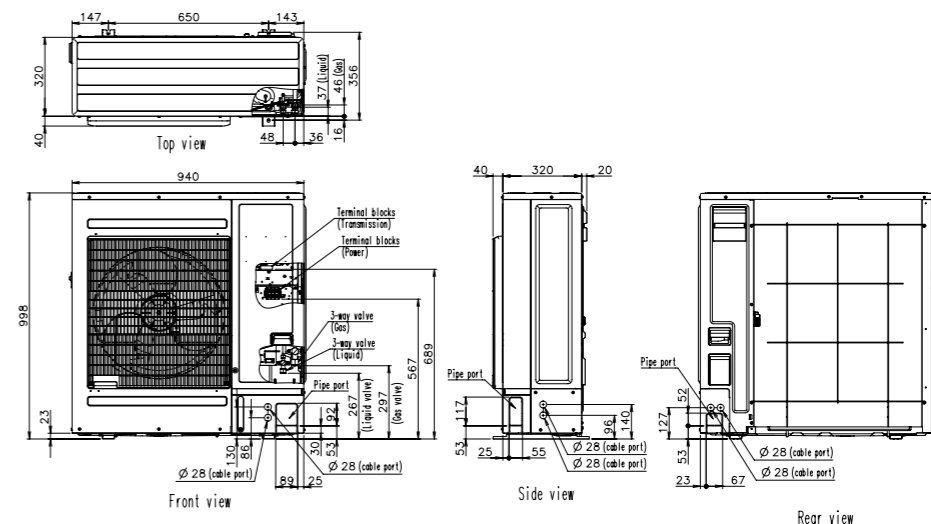




**Heat Pump**  
for Small-capacity type

VRF **J-IVS**


**System configuration example**

- Suitable for air conditioning small and medium-size buildings. One refrigerant system is used for each outdoor unit.
- Multiple indoor units are connected with separation tubes and headers.

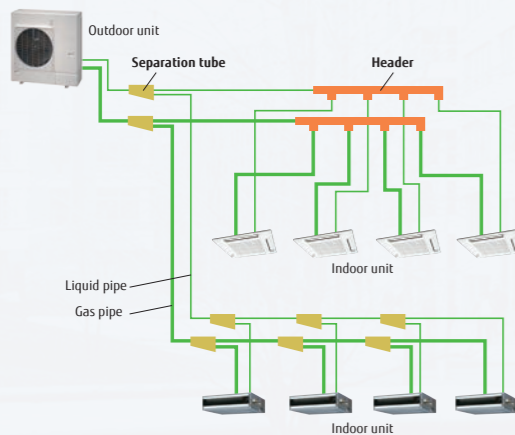

**New intelligent refrigerant control**

Fujitsu General is proposing outdoor units equipped with refrigerant control function. The refrigerant control operates with suitable control corresponding to the heat load of the room and offers a more comfortable environment. The refrigerant control can also provide increased energy savings.

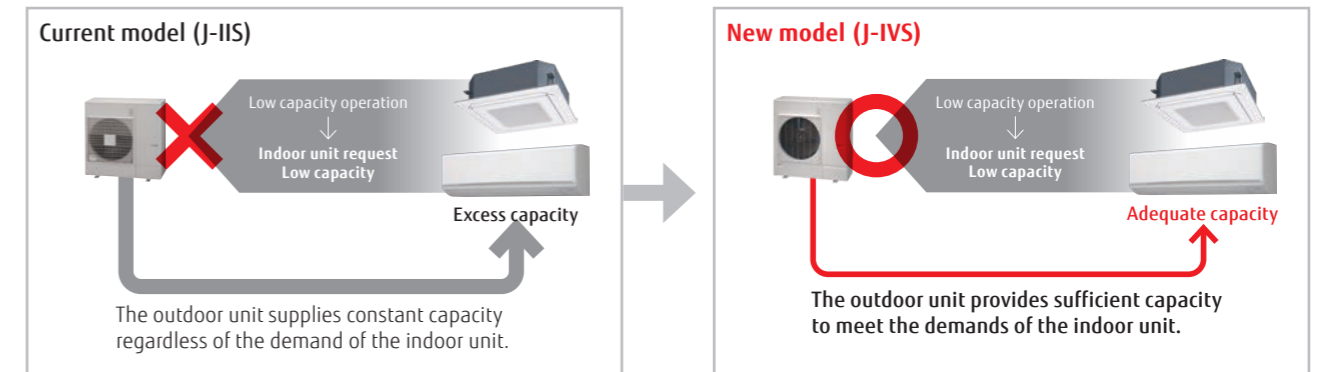

\* The improvements due to the control and the actual sine wave vary depending on the combination of the indoor unit and system operating conditions.

**External static pressure**

External static pressure measures up to 25 Pa for 4/5/6 HP models.



**Advanced high-efficiency technology**

**Large propeller fan**  
A large propeller fan with an optimized blade angle achieves both high performance and low noise operation.

**DC fan motor**  
A small, multi-stage DC fan motor provides high-efficiency and low noise operation.

**Large heat exchanger**  
The large 3-row heat exchanger substantially improves heat-exchanging performance.

**DC inverter control**  
The active filter module improves efficiency.


**Compact and high-performance DC twin-rotary compressor**  
High-efficiency is achieved across compressor loads. Especially good performance is achieved in the low- to medium-load range.

High heat-transfer copper tube (Improved lead angle)

Low noise rubber  
High-efficiency compressor motor  
Optimized refrigerant flow design  
Highly accurate parts


Compressor efficiency vs. Compressor capacity graph showing efficiency remains high up to 100% capacity.

### Easy to carry, easy to install

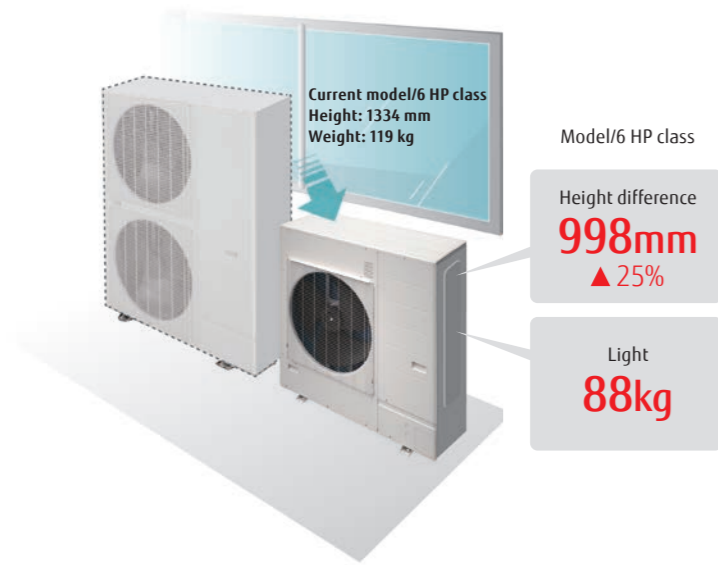

### Small, lightweight outdoor unit

The outdoor units in this series are much more compact than conventional outdoor units of comparable capacity. They can be installed on a balcony, fitting below the height of the railing. With a height of less than 1 m, they can be installed in tight spaces such as under windows.

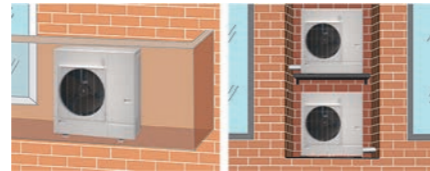


### Low noise design

Significantly low noise levels are achieved by the use of a DC twin-rotary compressor, inverter technology, and an advanced airflow pattern design.



### Long pipe length

Our advanced refrigerant control technology extends the maximum allowable length of refrigerant piping to 80 m. This provides high flexibility in system design.

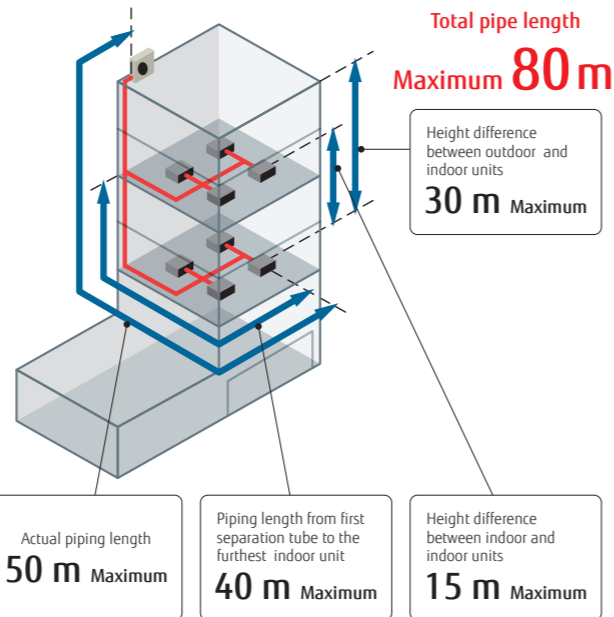

### Up to 13 indoor units\* can be connected


The combination of smaller but sufficiently powerful indoor units and a new outdoor unit with an optimized heat exchanging structure makes it possible to connect up to 13 indoor units, which is the best in its class.

\*: 6 HP model

| Model                        | Current model (J-IVS) |     |     | New model (J-IVS) |      |      |
|------------------------------|-----------------------|-----|-----|-------------------|------|------|
|                              | 4                     | 5   | 6   | 4                 | 5    | 6    |
| Rating Capacity range (HP)   | 4                     | 5   | 6   | 4                 | 5    | 6    |
| Max. Connectable indoor unit | 1-7                   | 1-8 | 1-8 | 1-11              | 1-12 | 1-13 |


### Non-stop oil recovery operation

A comfortable room condition is maintained during oil recovery mode because the product continues to operate without stopping the cooling or heating operation.

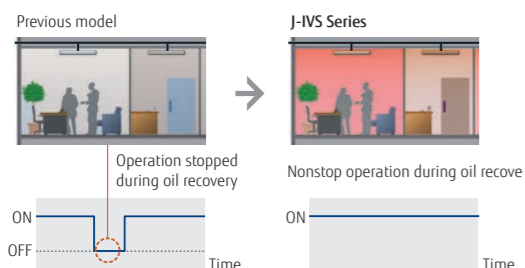

### Easier installation

**Connection check function:** Wiring connections and address settings can be checked thanks to the quick check run function.

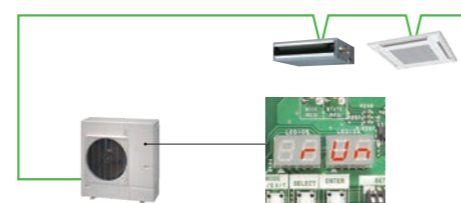

- Displays the number of each connected indoor unit.
- Displays the duplicate address number assigned to an indoor unit.


### Specifications

| Rated capacity range             | HP                              | 4                           | 5             | 6             |
|----------------------------------|---------------------------------|-----------------------------|---------------|---------------|
| Model name                       |                                 | AJY040LCLDH                 | AJY045LCLDH   | AJY054LCLDH   |
| Maximum connectable indoor units |                                 | 1-11                        | 1-12          | 1-13          |
| Power source                     |                                 | Single phase, ~230 V, 50 Hz |               |               |
| Capacity                         | Cooling                         | 12.1                        | 14.0          | 15.1          |
|                                  | Nominal Heating                 | 12.1                        | 14.0          | 15.1          |
|                                  | Max. Heating                    | 13.6                        | 16.0          | 16.5          |
| Input power                      | Cooling                         | 3.75                        | 4.71          | 5.55          |
|                                  | Nominal Heating                 | 3.22                        | 3.77          | 4.33          |
|                                  | Max. Heating                    | 3.99                        | 5.04          | 5.32          |
| EER                              | Cooling                         | 3.22                        | 2.97          | 2.72          |
| COP                              | Nominal Heating                 | 3.75                        | 3.71          | 3.48          |
|                                  | Max. Heating                    | 3.40                        | 3.17          | 3.10          |
| SEER                             | Cooling                         | 5.83                        | 5.58          | 5.47          |
| SCOP                             | Heating                         | 3.82                        | 3.96          | 3.99          |
| ηc                               | Cooling                         | 230.2                       | 220.2         | 215.8         |
| ηh                               | Heating                         | 149.8                       | 155.4         | 156.6         |
| Airflow rate                     |                                 | 4,240                       | 4,400         | 4,400         |
| Sound pressure level/Power level | Cooling                         | 53 / 67                     | 53 / 69       | 54 / 70       |
|                                  | Heating                         | 54 / 68                     | 56 / 69       | 56 / 70       |
| Heat exchanger fin               |                                 | Blue fin                    | Blue fin      | Blue fin      |
| Net Dimensions                   | Height                          | 998                         | 998           | 998           |
|                                  | Width                           | 970                         | 970           | 970           |
|                                  | Depth                           | 370                         | 370           | 370           |
| Weight                           |                                 | 88                          | 88            | 88            |
|                                  | Type (Global Warming Potential) | R410A (2,088)               | R410A (2,088) | R410A (2,088) |
| Refrigerant                      | Charge                          | 4.0 (8.4)                   | 4.0 (8.4)     | 4.0 (8.4)     |
|                                  | Liquid                          | 9.52                        | 9.52          | 9.52          |
| Connection pipe diameter         | Gas                             | 15.88                       | 15.88         | 15.88         |
|                                  | Total pipe length               | 80                          | 80            | 80            |
| Max. height difference           |                                 | 30                          | 30            | 30            |
|                                  | Operating Range                 | Cooling                     | -5 to 46      | -5 to 46      |
|                                  | Heating                         | -20 to 21                   | -20 to 21     | -20 to 21     |

Note: Specifications are based on the following conditions.  
Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.  
Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.  
Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m.  
The protective function may work when using it outside the operation range.

### Dimensions

(Unit: mm)

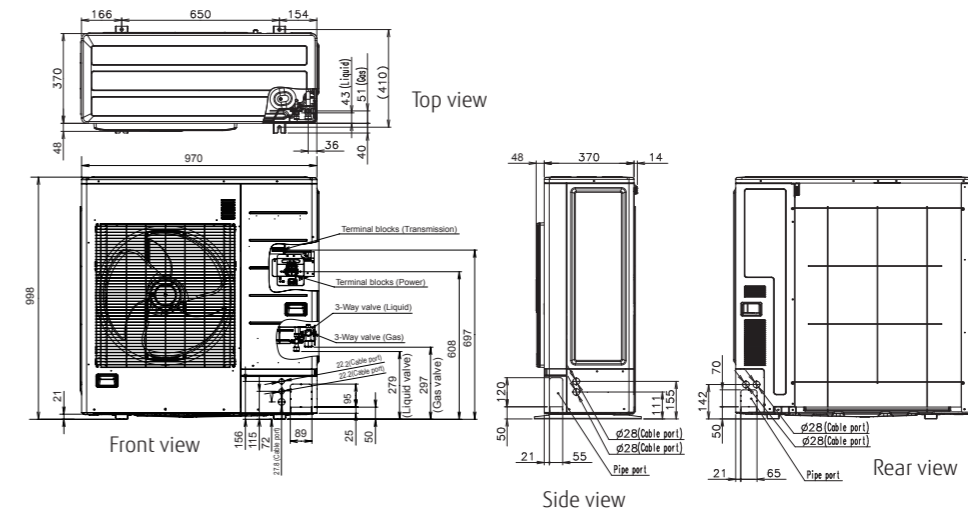




# Heat Pump

for Small-capacity type

# VRF J-IV


### System configuration example

- Suitable for air conditioning small and medium-size buildings. One refrigerant system is used for each outdoor unit.
- Multiple indoor units are connected with separation tubes and headers.

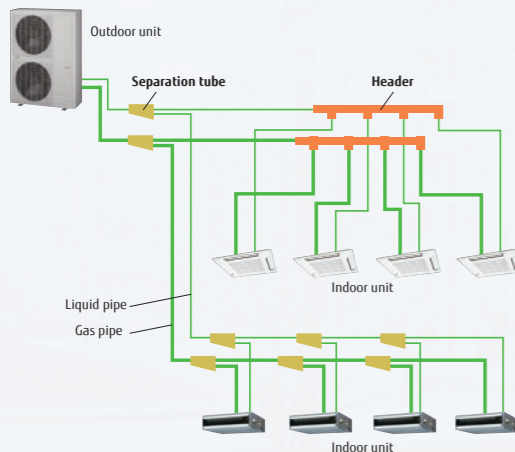

## New intelligent refrigerant control

Fujitsu General is proposing outdoor units equipped with refrigerant control function. The refrigerant control operates with suitable control corresponding to the heat load of the room and offers a more comfortable environment. The refrigerant control can also provide increased energy savings.

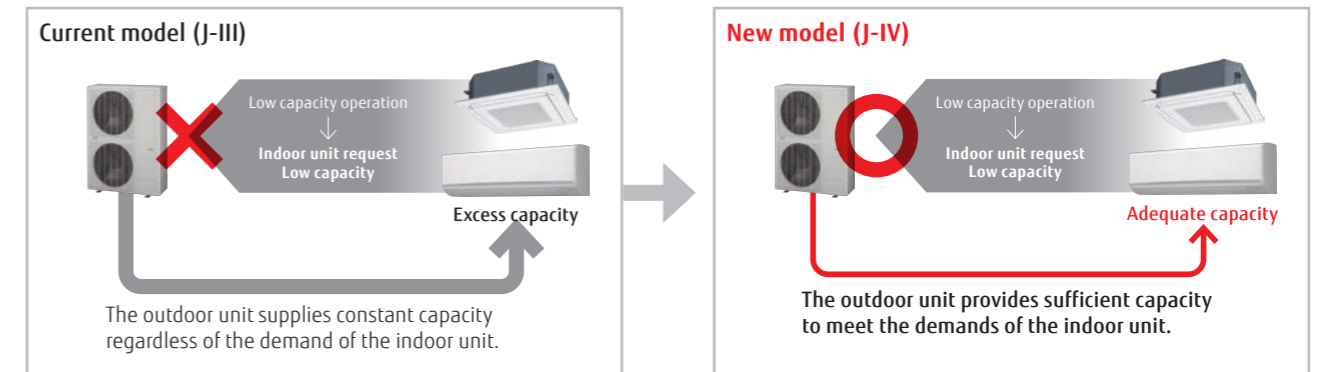

\* The improvements due to the control and the actual sine wave vary depending on the combination of the indoor unit and system operating conditions.

### External static pressure

External static pressure measures up to 30 Pa for 4/5/6 HP.



## Advanced high-efficiency technology

**Large propeller fan**  
A large propeller fan with an optimized blade angle achieves both high performance and low noise operation.

**DC fan motor**  
A small, multi-stage DC fan motor contributes to high-efficiency and low noise operation.

**Large heat exchanger**  
The large 3-row heat exchanger substantially improves heat-exchanging performance.

**DC twin-rotary compressor**  
High-efficiency is achieved across compressor loads. Especially good performance is achieved in the low- to medium-load range.

**Subcooling heat exchanger**  
The dual-tube heat exchanger improves cooling performance.

**DC inverter control**  
The active filter module improves efficiency.

**High-efficiency compressor motor**  
**Optimized refrigerant flow design**  
**Highly accurate parts**

**Pressure-Enthalpy graph:** Shows 'effect' and 'Cooling performance improved'.

**Compressor efficiency graph:** Shows 'DC Twin-Rotary Compressor' with high efficiency across capacity.






## Heat Pump for Small-capacity type

# VRF J-IVL


### System configuration example

- Suitable for air conditioning small and medium-size buildings. One refrigerant system is used for each outdoor unit.
- Multiple indoor units are connected with separation tubes and headers.

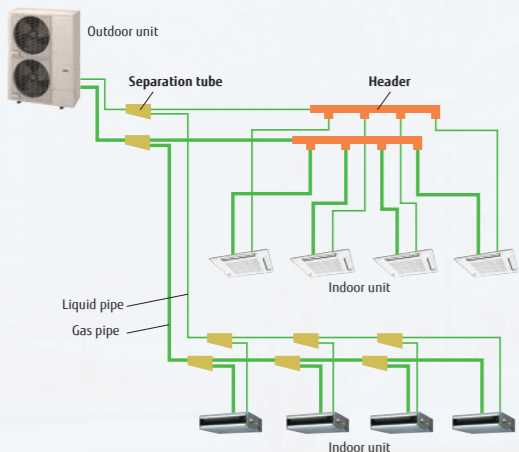

## New intelligent refrigerant control

Fujitsu General is proposing outdoor units equipped with refrigerant control function. The refrigerant control operates with suitable control corresponding to the heat load of the room and offers a more comfortable environment. The refrigerant control can also provide increased energy savings.

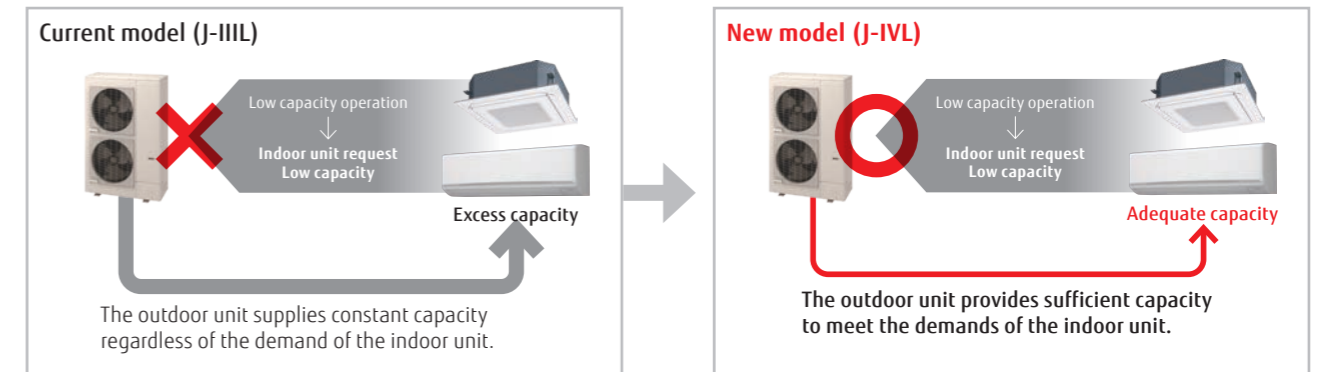

\* The improvements due to the control and the actual sine wave vary depending on the combination of the indoor unit and system operating conditions.

### External static pressure

External static pressure is available up to 60 Pa for 14/16/18 HP. (30 Pa for 8/10 HP, 40 Pa for 12 HP)

Capacities are slightly decreased relative to the rated values during high static pressure operations.



### Advanced high-efficiency technology

**Ø570 mm Large propeller fan**  
A large-diameter propeller fan with our proprietary blade design reduces draft loss, which results in high-efficiency and low noise operation.

**DC fan motor**  
A small, multi-stage DC fan motor provides high-efficiency and low noise operation.

**DC inverter control**  
The active filter module improves efficiency.

**Subcooling heat exchanger**  
The dual-tube heat exchanger improves cooling performance.

**Large heat exchanger**  
The large 2.6-row heat exchanger substantially improves heat-exchanging performance.

**Scroll compressor**  
The combination of a scroll compressor with a wide rotational frequency range from 15 to 130 rps and our proprietary sensorless sine-wave control that smoothly controls the input power into the motor achieves more energy-efficient and quieter operation.




Fujitsu General offers a perfect total air conditioning system for small office buildings with multiple small rooms, taking into consideration energy savings, low noise, comfortable air volume, usage and purpose, and centralized control.


# VRF J-IVL

Image: 8/10/12 HP models

## Slim & Compact design

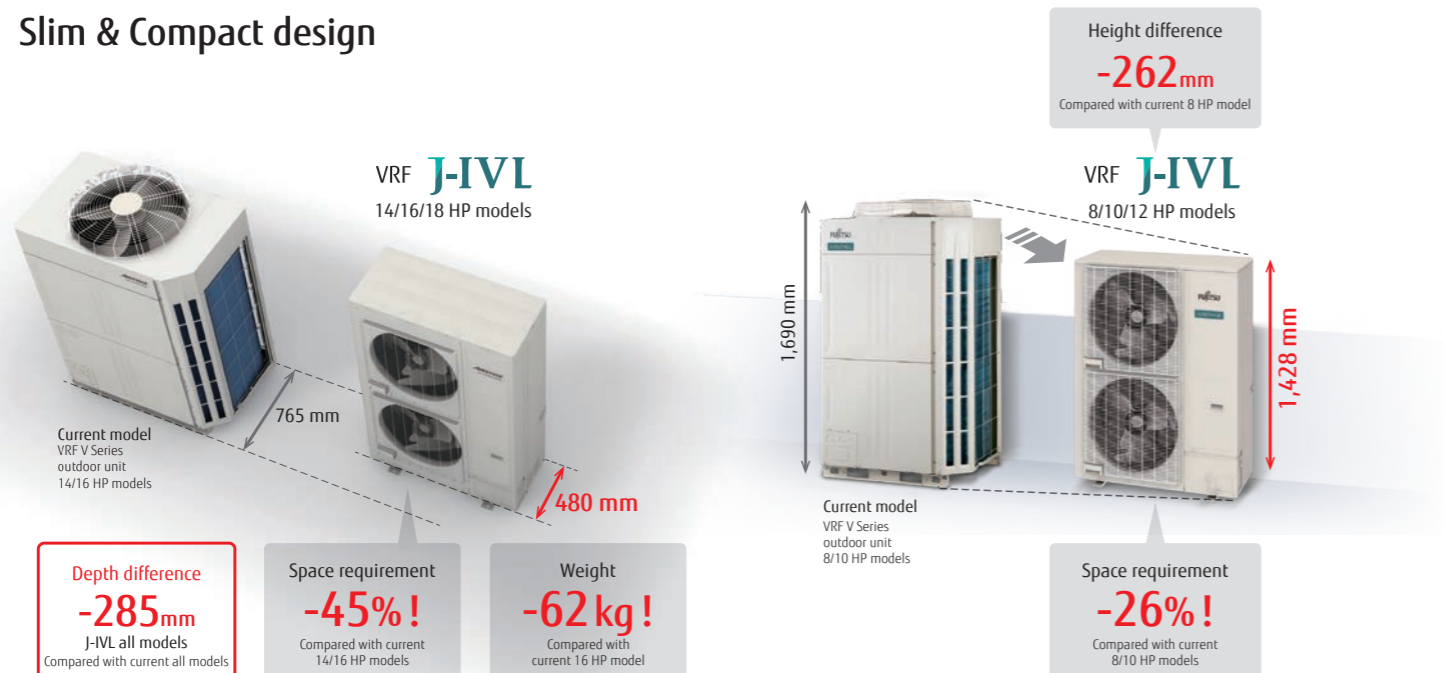


## Various installation methods

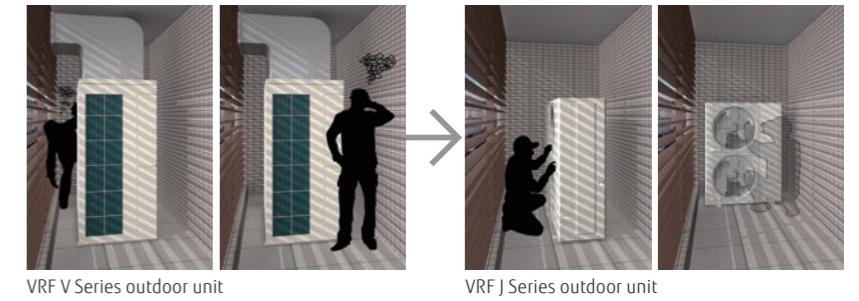

**Installation**  
Low noise level in consideration of nearby residents

Front air discharge type with a width of about 1,000 mm, allowing for flexible installation even in narrow spaces.

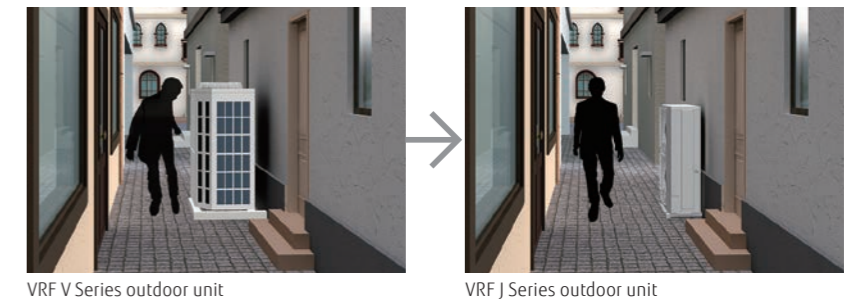

**Narrow space behind building**  
Space saving

Small and thin, allowing for direct ground or wall mounting installations even in narrow alleys.




**Installation on the back street of a building**  
Flexible installation

Slim, low-body front air discharge meets the requirements for installation even in tight spaces. Installation flexibility without blocking the windows of buildings contributes to substantial space savings, even when multiple units are installed.


### Efficiency in actual operating conditions

The use of a large heat exchanger and a high-efficiency Scroll compressor achieves class-leading EER/COP (Max. Heating) in all models.

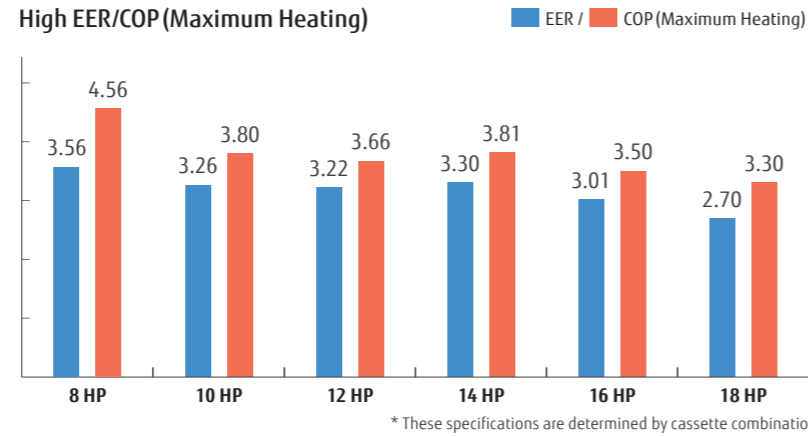


### Long pipe length

Our advanced refrigerant control technology extends the maximum allowable length of refrigerant piping to 400 m. This provides high flexibility in system design.

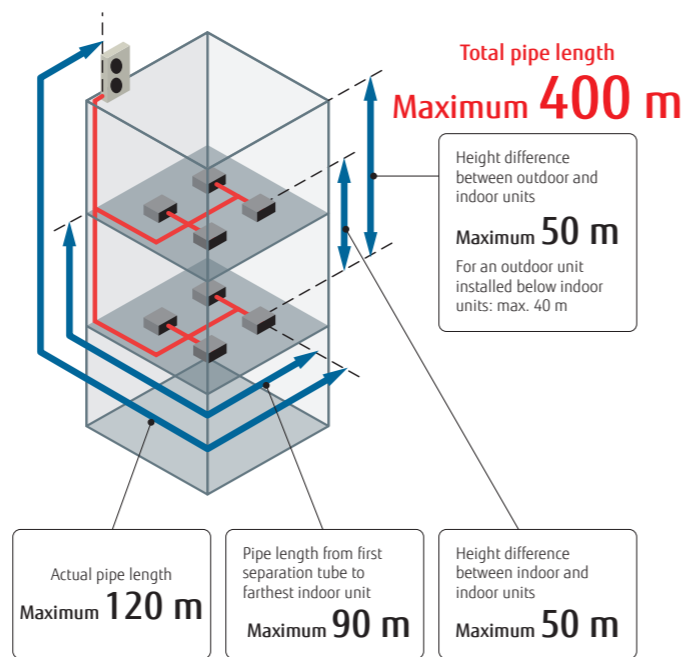


### Up to 42 indoor units\* can be connected.

The combination of smaller but sufficiently powerful indoor units and a new outdoor unit with an optimized heat exchanging structure makes it possible to connect up to 42 indoor units, which is the best in its class. \*: 18 HP model

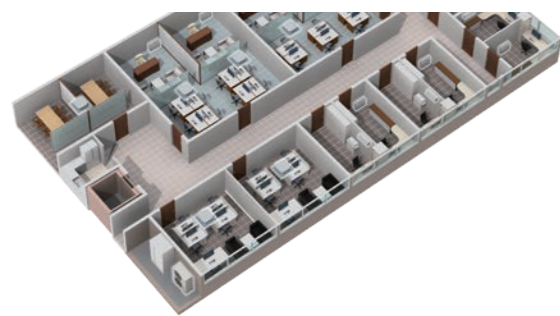

### Class-leading low operating sound

The top-class low operating noise makes it ideal for use in densely populated areas. These low operating sound models are ideal for installation in densely populated areas.

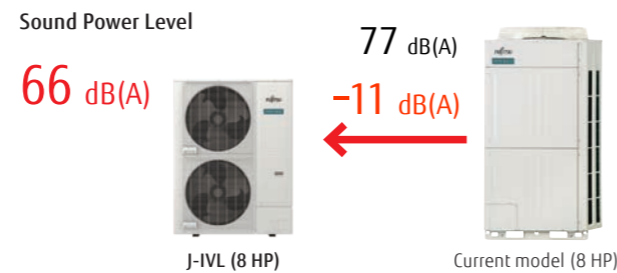

8,10,12 HP: AJY072LELDH / AJY090LELDH / AJY108LELDH  
14,16,18 HP: AJY126LELDH / AJY144LELDH / AJY162LELDH



### Specifications

| Rated capacity range              |                 | HP                              | 8                                 | 10            | 12            | 14            | 16            | 18            |
|-----------------------------------|-----------------|---------------------------------|-----------------------------------|---------------|---------------|---------------|---------------|---------------|
| Model name                        |                 |                                 | AJY072LELDH                       | AJY090LELDH   | AJY108LELDH   | AJY126LELDH   | AJY144LELDH   | AJY162LELDH   |
| Maximum connectable indoor units  |                 |                                 | 1-20                              | 1-25          | 1-30          | 1-36          | 1-40          | 1-42          |
| Power source                      |                 |                                 | 3-phase, ~400V, 50Hz              |               |               |               |               |               |
| Capacity                          | Cooling         | kW                              | 22.4                              | 28.0          | 33.5          | 40.0          | 45.0          | 50.0          |
|                                   | Nominal Heating | kW                              | 22.4                              | 28.0          | 33.5          | 40.0          | 45.0          | 50.0          |
|                                   | Max. Heating    | kW                              | 25.0                              | 31.5          | 37.5          | 45.0          | 50.0          | 55.0          |
| Input power                       | Cooling         | kW                              | 6.30                              | 8.59          | 10.42         | 12.12         | 14.96         | 18.52         |
|                                   | Nominal Heating | kW                              | 4.65                              | 6.61          | 8.18          | 9.71          | 11.81         | 13.66         |
|                                   | Max. Heating    | kW                              | 5.45                              | 8.29          | 10.25         | 11.81         | 14.29         | 16.66         |
| EER                               | Cooling         |                                 | 3.56                              | 3.26          | 3.22          | 3.30          | 3.01          | 2.70          |
| COP                               | Nominal Heating | W/W                             | 4.82                              | 4.24          | 4.10          | 4.12          | 3.81          | 3.66          |
|                                   | Max. Heating    | W/W                             | 4.56                              | 3.80          | 3.66          | 3.81          | 3.50          | 3.30          |
|                                   | SEER            | Cooling                         | 7.62                              | 7.50          | 7.27          | 7.27          | 7.00          | 6.29          |
| SCOP                              | Heating         |                                 | 3.89                              | 3.61          | 3.63          | 3.53          | 3.51          | 3.54          |
| ηc                                | Cooling         | %                               | 301.8                             | 297.0         | 287.8         | 287.8         | 277.0         | 248.6         |
|                                   | Heating         | %                               | 152.6                             | 141.4         | 142.2         | 138.2         | 137.4         | 138.6         |
| Airflow rate                      |                 | m³/h                            | 8,400                             | 9,000         | 11,000/12,100 | 13,000        | 14,000        | 14,800/15,300 |
| Sound pressure level/ Power level | Cooling         | dB(A)                           | 52/66                             | 54/69         | 59/73         | 62/75         | 64/77         | 65/79         |
|                                   | Heating         | dB(A)                           | 54/66                             | 57/70         | 62/75         | 63/76         | 65/78         | 68/82         |
| Net Dimensions                    | Height          | mm                              | 1,428                             | 1,428         | 1,428         | 1,638         | 1,638         | 1,638         |
|                                   | Width           | mm                              | 1,080                             | 1,080         | 1,080         | 1,080         | 1,080         | 1,080         |
|                                   | Depth           | mm                              | 480                               | 480           | 480           | 480           | 480           | 480           |
| Weight                            |                 | kg                              | 170                               | 177           | 178           | 213           | 213           | 217           |
|                                   | Refrigerant     | Type (Global Warming Potential) | R410A (2,088)                     | R410A (2,088) | R410A (2,088) | R410A (2,088) | R410A (2,088) | R410A (2,088) |
| Connection pipe diameter          | Charge          | kg (CO2eq-T)                    | 7.0 (14.6)                        | 7.5 (15.7)    | 7.5 (15.7)    | 11.0 (23.0)   | 11.0 (23.0)   | 11.8 (24.6)   |
|                                   | Liquid          | mm                              | 9.52                              | 9.52          | 12.70         | 12.70         | 12.70         | 12.70         |
| Total pipe length                 | Gas             | mm                              | 19.05                             | 22.20         | 28.58         | 28.58         | 28.58         | 28.58         |
|                                   |                 | m                               | 400                               | 400           | 400           | 400           | 400           | 400           |
| Max. height difference            |                 |                                 | 50/40 (Outdoor unit: Upper/Lower) |               |               |               |               |               |
|                                   | Cooling         | °C                              | -15 to 46                         | -15 to 46     | -15 to 46     | -5 to 46*     | -5 to 46*     | -5 to 46*     |
| Operating Range                   | Heating         | °C                              | -20 to 21                         | -20 to 21     | -20 to 21     | -20 to 21     | -20 to 21     | -20 to 21     |

Note: Specifications are based on the following conditions.

Cooling: Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.


Heating: Indoor temperature of 20°CDB / 15°CWB, and outdoor temperature of 7°CDB / 6°CWB.

Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m.

\* The cooling operation range of -15 to 46°C is allowed only when all of the indoor units connected to the system are higher than capacity of 5.6kW.

### Dimensions

(Unit: mm)

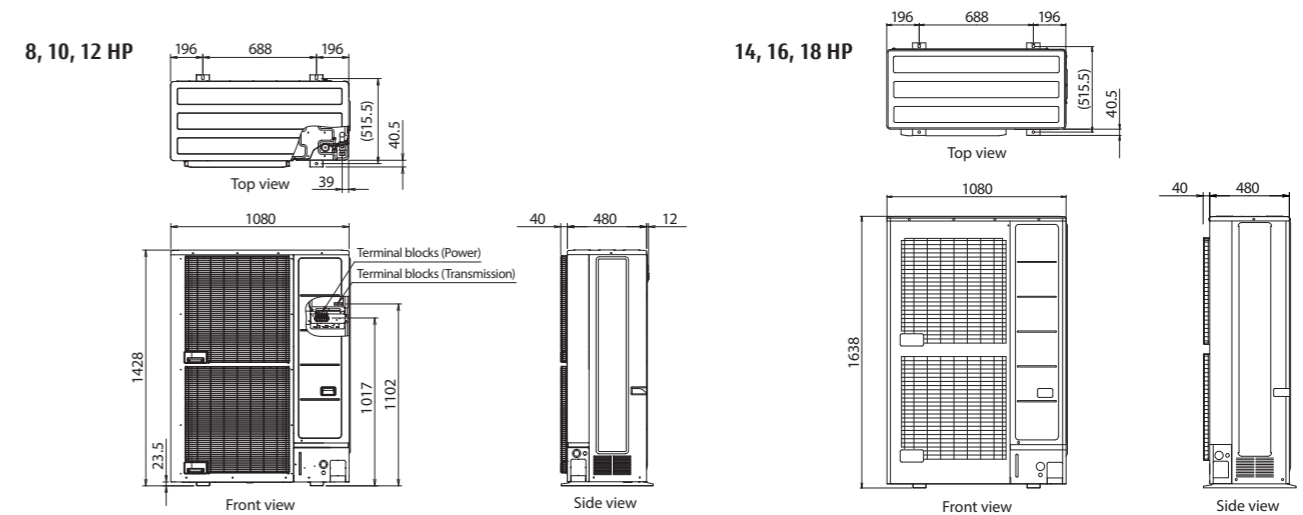







Heat Recovery  
Modular type

VRF VR-IV


Highly energy-efficient operation

Our heat recovery systems achieve high operating energy efficiency by drawing heat from the room to be cooled and transferring it as energy for rooms that are to be heated.

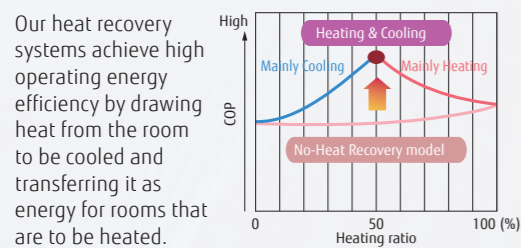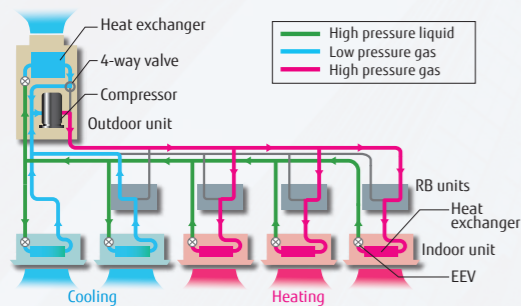

New intelligent refrigerant control

Fujitsu General is proposing outdoor units equipped with refrigerant control function. The refrigerant control operates with suitable control corresponding to the heat load of the room and offers a more comfortable environment. The refrigerant control can also provide increased energy savings.

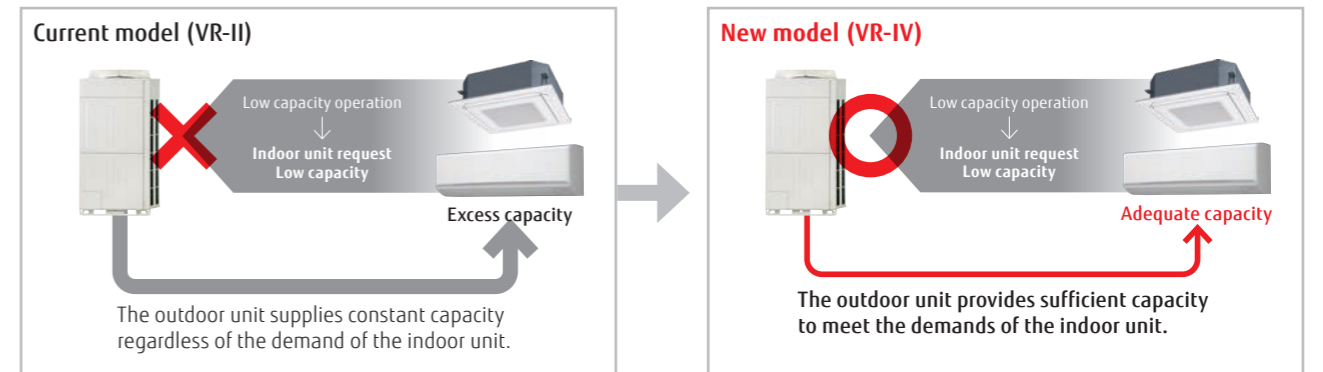

\* The improvements due to the control and the actual sine wave vary depending on the combination of the indoor unit and system operating conditions.

Increase in the number of connectable indoor units

Capacity range of connectable indoor units

|                       |              |
|-----------------------|--------------|
| New model (VR-IV)     | 25%* to 150% |
| Current model (VR-II) | 50% to 150%  |

\*: For modular type, 25% to 49.9% operation in the entire system is available. (by one unit operation)

Increased number of connectable indoor units and space saving combinations

| HP                    | 10 | 12 | 14 | 16 | ... | 28  | 30 | 32 | ... | 48  |    |
|-----------------------|----|----|----|----|-----|-----|----|----|-----|-----|----|
| New model (VR-IV)     | 21 | 26 | 30 | 34 | ... | 60  | 64 | 64 | ... | 64  |    |
| Current model (VR-II) | 15 | 16 | 17 | 21 | 24  | ... | 42 | 45 | 48  | ... | 64 |

The energy-saving technology that boosted operation efficiency

- Powerful large propeller fan**  
The fan uses CFD\* technology to achieve both high performance and low noise operation.  
\*CFD: Computational Fluid Dynamics
- 3-phase DC fan motor**  
The use of a DC fan motor with sophisticated driver control improves energy efficiency substantially. In addition, this motor operates quietly.
- Subcooling heat exchanger**  
High heat exchange efficiency is achieved by using an internal projection-shape double-pipe construction.
- High-efficient, large-capacity DC twin-rotary compressor**  
Large-capacity high-efficient DC twin-rotary compressor with excellent intermediate capability.
- Sine-wave DC inverter control**  
High-efficiency is realized by the adoption of reduced switching loss IPM.
- 4-face heat exchanger**  
The 4-face heat exchanger increases the effective surface area and significantly improves heat-exchanging efficiency.
- Front intake port (Corner cut air inlet structure)**  
In multiple outdoor unit installations, the unique front intake design improves airflow into the heat exchanger.

## Extended connection ratio (applicable to multiple tenants)


Especially useful when starting partial air conditioning in a building under construction  
Installation can be added flexibly for each tenant.



### Stand-alone

Current model (VR-II)


**Example**) 50% of 12HP minimum connected indoor unit capacity is required

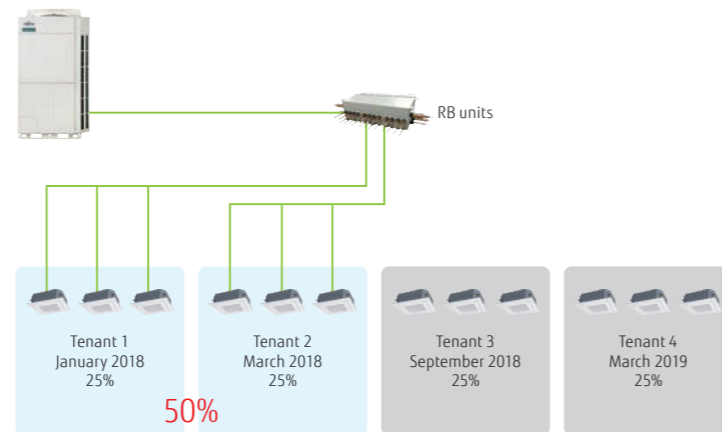

Installation is possible even for tenants who have not yet started operations.

### New model (VR-IV)

**Example**) 25% of 12HP minimum connected indoor unit capacity is required

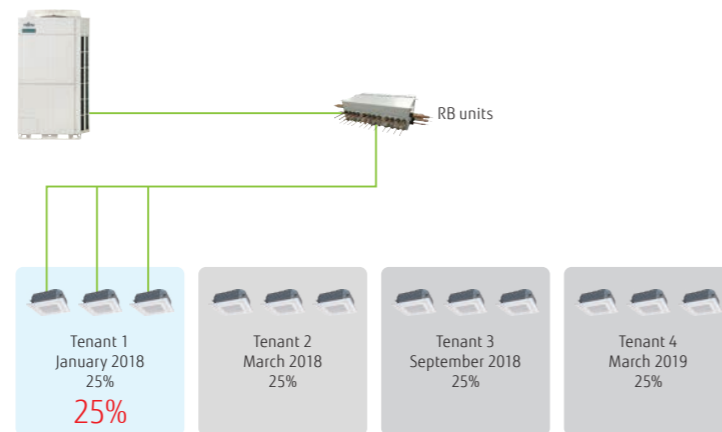


Installation and commissioning can be added flexibly to meet the opening dates of other tenants.

### Modular type


One outdoor unit operates effectively for the capacities of connectable indoor units in the entire system. (Each of the multiple outdoor units does not dare operate at 25% capacity: any one of the outdoor units will operate at 50% and the remaining units will each output 0%, i.e., stop operating.)

**Example:** One 10HP outdoor unit performs 25% of the total 20HP outdoor units system.  
One 10HP outdoor unit performs 50% of its capacity  
→ Two outdoor units do not perform 25% of the operation.

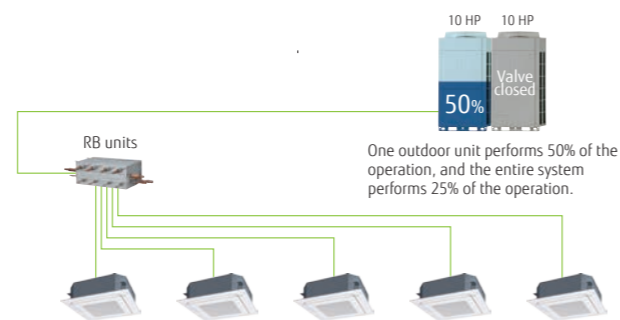

## Additional installation is possible without changing the main pipe.

A main pipe of a diameter that can be used for the final system is installed at the beginning of the installation.  
Duplication of the work will be avoided as there is no need to change the main pipe as in the previous model.

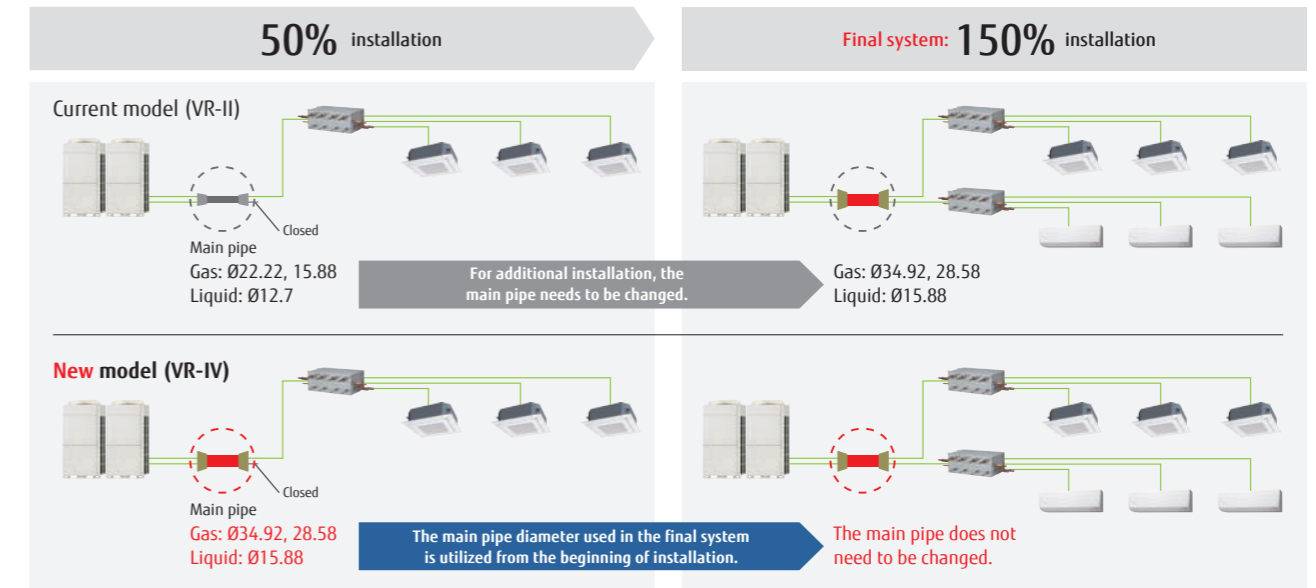

## All-inverter compressor


### Large-capacity DC inverter compressor

Large-capacity high-efficient DC twin-rotary compressor with excellent intermediate capability.




### High-efficiency compressor speed control

The compressor speed control in 0.1 Hz increments ensures a comfortable space with less change in room temperature and less energy loss.

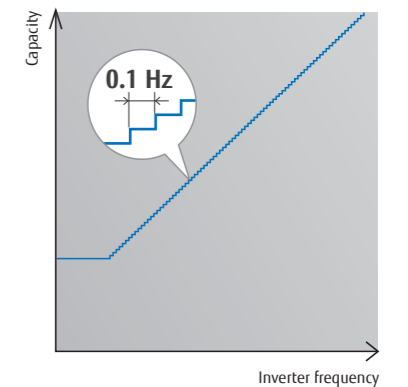


### Efficiency in actual operating conditions

Class-leading high COP (Maximum) The use of our proprietary heat exchanger structure and high-efficiency DC twin-rotary compressors achieves the class-leading coefficient of performance (COP) in every combination.

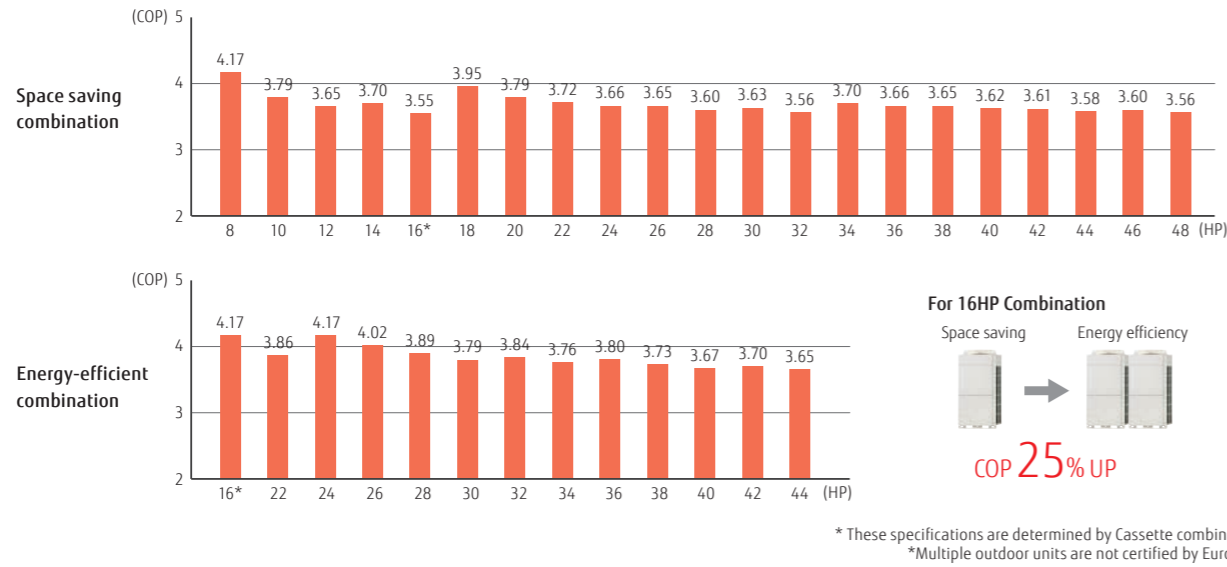


### Multiple outdoor operation control

When multiple outdoor units are connected, each compressor carries out sophisticated operation. Instead of operating one compressor at full load to distribute the refrigerant to one heat exchanger, all compressors operate at partial load to distribute the refrigerant to all heat exchangers, thereby improving the efficiency of the entire system.

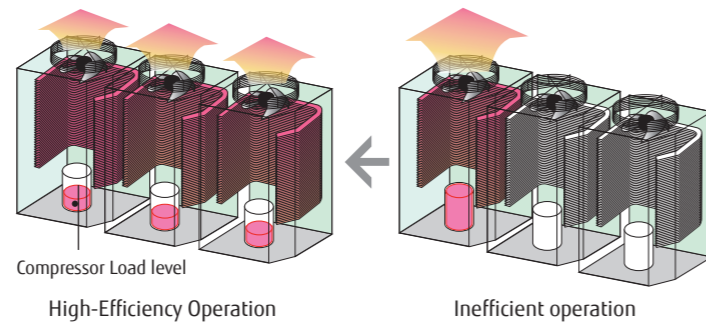


### Heat exchanger refrigerant control

The heat exchanger in the outdoor unit is divided into two parts, upper and lower. The efficiency of the heat exchanger has been improved by adopting an optimum refrigerant path control where the refrigerant is distributed more into the top heat exchanger as this is where there is a greater air flow intake.

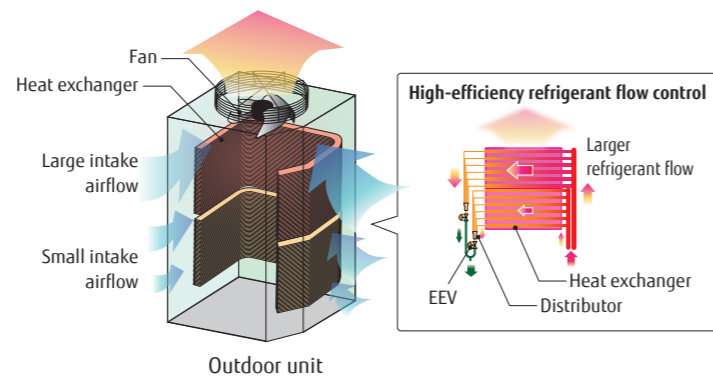

### Flexible pipe connection




More flexible refrigerant pipe work is possible due to the use of various piping and RB unit connections, for adjustments to the floor layout and building structure.

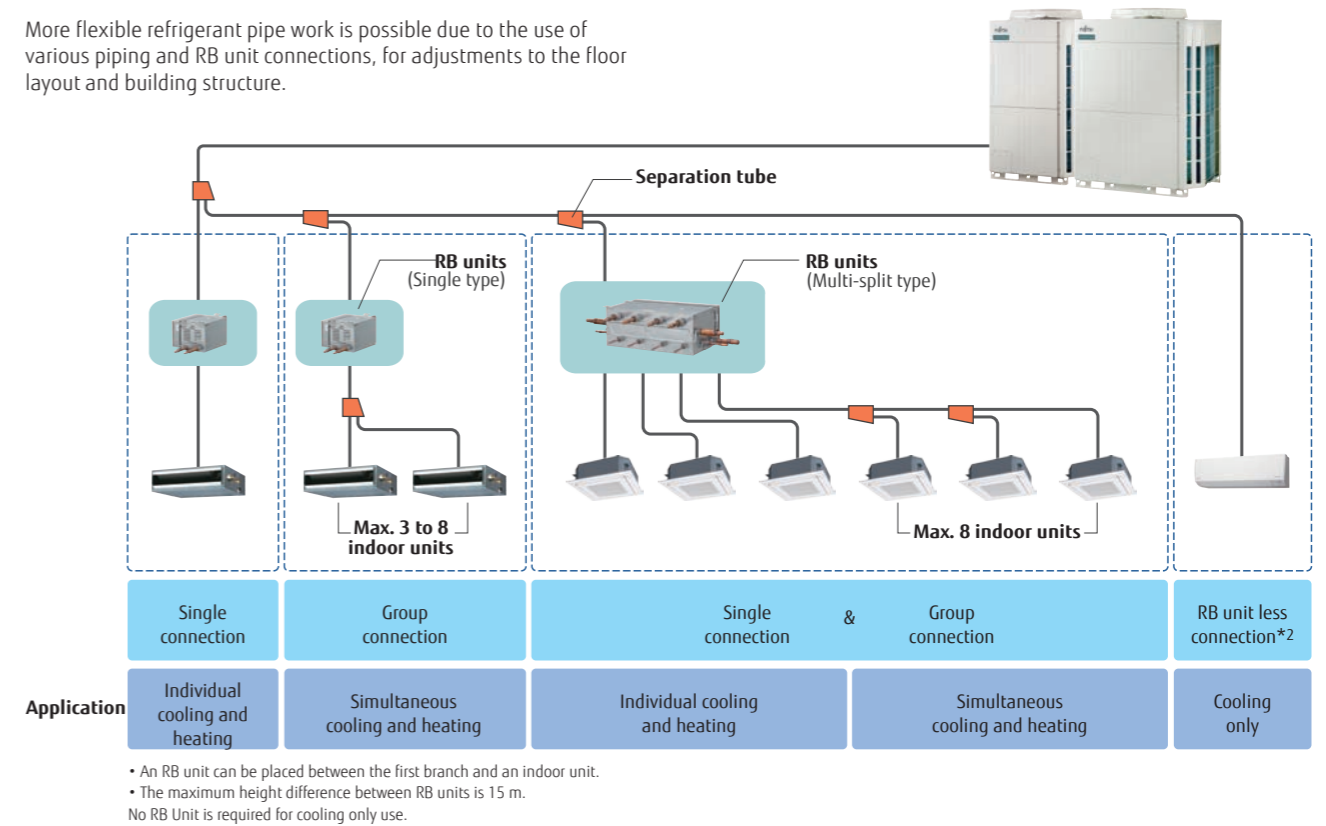


### Flexible installation of RB unit

Small and slim design with a height of 198 mm makes it easy to install in tight spaces with height constraints.

- A drain pipe is not required.
- Different positions of a control box can be chosen to accommodate installation conditions.
- Series connection for simplified installation

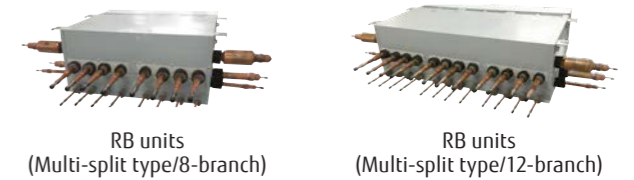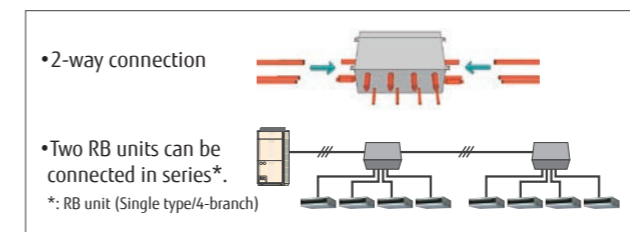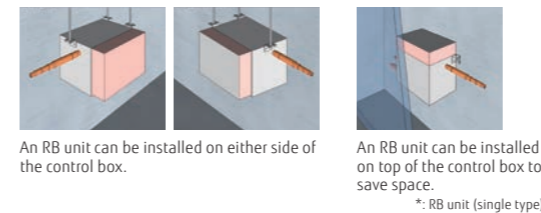

### Easy maintenance in tight spaces

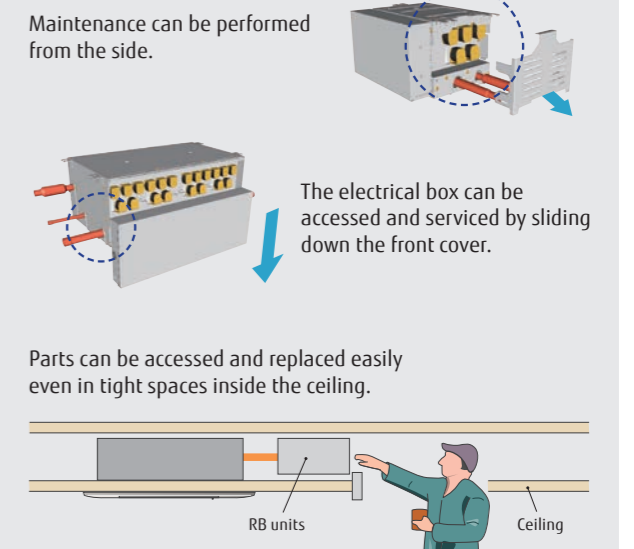

Outdoor units lineup • Combinations other than those listed below are not recommended.

Space saving combination

|   |   |   |   |   |
|---|---|---|---|---|
| 22.4kW (8HP)<br>AJY072GALDH<br>UNIT : AJY072GALDH           | 28.0kW (10HP)<br>AJY090GALDH<br>UNIT : AJY090GALDH          | 33.5kW (12HP)<br>AJY108GALDH<br>UNIT : AJY108GALDH          | 40.0kW (14HP)<br>AJY126GALDH<br>UNIT : AJY126GALDH          | 45.0kW (16HP)<br>AJY144GALDH<br>UNIT : AJY144GALDH          |
| 50.4kW (18HP)<br>AJY162GALDH<br>UNIT : AJY090/072GALDH      | 56.0kW (20HP)<br>AJY180GALDH<br>UNIT : AJY090/090GALDH      | 61.5kW (22HP)<br>AJY198GALDH<br>UNIT : AJY108/090GALDH      | 67.0kW (24HP)<br>AJY216GALDH<br>UNIT : AJY108/108GALDH      | 73.0kW (26HP)<br>AJY234GALDH<br>UNIT : AJY144/090GALDH      |
| 78.5kW (28HP)<br>AJY252GALDH<br>UNIT : AJY144/108GALDH      | 85.0kW (30HP)<br>AJY270GALDH<br>UNIT : AJY144/126GALDH      | 90.0kW (32HP)<br>AJY288GALDH<br>UNIT : AJY144/144GALDH      | 95.0kW (34HP)<br>AJY306GALDH<br>UNIT : AJY108/108/090GALDH  | 100.5kW (36HP)<br>AJY324GALDH<br>UNIT : AJY108/108/108GALDH |
| 106.5kW (38HP)<br>AJY342GALDH<br>UNIT : AJY144/108/090GALDH | 112.0kW (40HP)<br>AJY360GALDH<br>UNIT : AJY144/108/108GALDH | 118.0kW (42HP)<br>AJY378GALDH<br>UNIT : AJY144/144/090GALDH | 123.5kW (44HP)<br>AJY396GALDH<br>UNIT : AJY144/144/108GALDH | 130.0kW (46HP)<br>AJY414GALDH<br>UNIT : AJY144/144/126GALDH |
| 135.0kW (48HP)<br>AJY432GALDH<br>UNIT : AJY144/144/144GALDH |   |   |   |   |

Energy efficiency combination

|  |  |  |  |  |
|--|--|--|--|--|
| 44.8kW (16HP)<br>AJY144GALDHH<br>UNIT : AJY072/072GALDH      | 62.4kW (22HP)<br>AJY198GALDHH<br>UNIT : AJY126/072GALDH      | 67.2kW (24HP)<br>AJY216GALDHH<br>UNIT : AJY072/072/072GALDH  | 72.8kW (26HP)<br>AJY234GALDHH<br>UNIT : AJY090/072/072GALDH  | 78.4kW (28HP)<br>AJY252GALDHH<br>UNIT : AJY090/090/072GALDH  |
| 84.0kW (30HP)<br>AJY270GALDHH<br>UNIT : AJY090/090/090GALDH  | 90.4kW (32HP)<br>AJY288GALDHH<br>UNIT : AJY126/090/072GALDH  | 96.0kW (34HP)<br>AJY306GALDHH<br>UNIT : AJY126/090/090GALDH  | 102.4kW (36HP)<br>AJY324GALDHH<br>UNIT : AJY126/126/072GALDH | 108.0kW (38HP)<br>AJY342GALDHH<br>UNIT : AJY126/126/090GALDH |
| 113.0kW (40HP)<br>AJY360GALDHH<br>UNIT : AJY144/126/090GALDH | 120.0kW (42HP)<br>AJY378GALDHH<br>UNIT : AJY126/126/126GALDH | 125.0kW (44HP)<br>AJY396GALDHH<br>UNIT : AJY144/126/126GALDH |  |  |


8,10,12HP : AJY072GALDH / AJY090GALDH / AJY108GALDH  
14,16HP : AJY126GALDH / AJY144GALDH







Dimensions

(Unit: mm)

8, 10, 12 HP

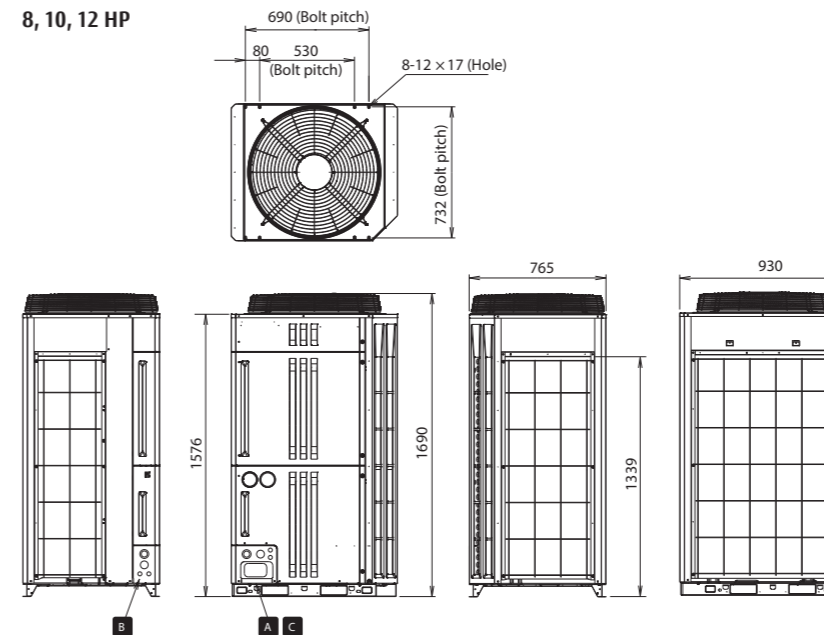

14, 16 HP

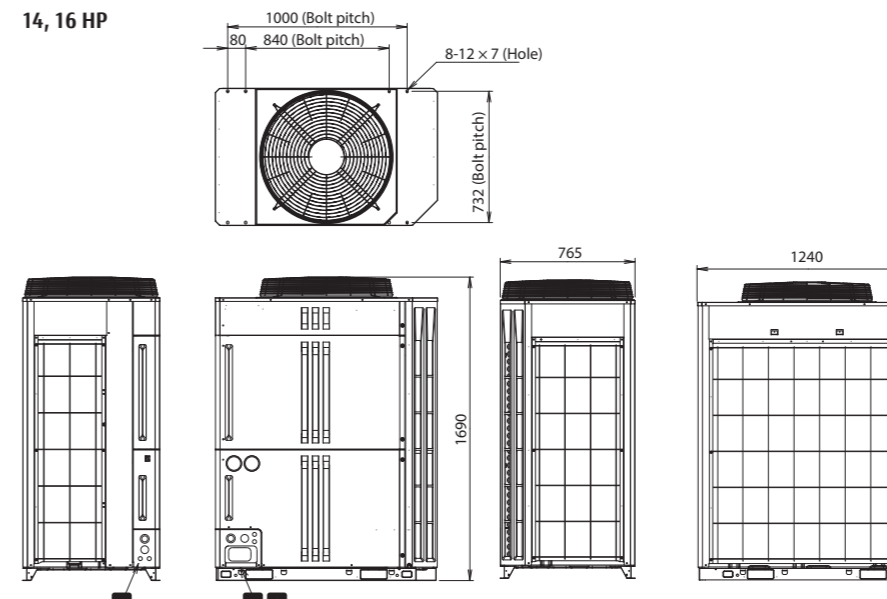

Outdoor units specifications

Space saving combination

| Rated capacity range                       |                                 | HP           | 8                            | 10            | 12            | 14            | 16            | 18                  | 20                  | 22                  | 24                  | 26                  | 28                           | 30                  | 32                  | 34                  | 36                  | 38                  | 40                  | 42                  | 44                  | 46                  | 48                  |           |
|--|---------------------------------|--------------|------------------------------|---------------|---------------|---------------|---------------|---------------------|---------------------|---------------------|---------------------|---------------------|------------------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|-----------|
| Model name                                 |                                 |              | AJY072GALDH                  | AJY090GALDH   | AJY108GALDH   | AJY126GALDH   | AJY144GALDH   | AJY162GALDH         | AJY180GALDH         | AJY198GALDH         | AJY216GALDH         | AJY234GALDH         | AJY252GALDH                  | AJY270GALDH         | AJY288GALDH         | AJY306GALDH         | AJY324GALDH         | AJY342GALDH         | AJY360GALDH         | AJY378GALDH         | AJY396GALDH         | AJY414GALDH         | AJY432GALDH         |           |
| Unit 1<br>Unit 2<br>Unit 3                 |                                 |              | AJY072GALDH                  | AJY090GALDH   | AJY108GALDH   | AJY126GALDH   | AJY144GALDH   | AJY162GALDH         | AJY180GALDH         | AJY198GALDH         | AJY216GALDH         | AJY234GALDH         | AJY252GALDH                  | AJY270GALDH         | AJY288GALDH         | AJY306GALDH         | AJY324GALDH         | AJY342GALDH         | AJY360GALDH         | AJY378GALDH         | AJY396GALDH         | AJY414GALDH         | AJY432GALDH         |           |
| Maximum connectable indoor units*          |                                 |              | 17                           | 21            | 26            | 30            | 34            | 39                  | 43                  | 47                  | 52                  | 56                  | 60                           | 64                  | 64                  | 64                  | 64                  | 64                  | 64                  | 64                  | 64                  | 64                  | 64                  |           |
| Connectable capacity range of indoor units |                                 | kW           | 5.6-33.6                     | 7.0-42.0      | 8.4-50.2      | 10.0-60.0     | 11.3-67.5     | 12.6-75.6*3         | 14.0-84.0*3         | 15.4-92.2*3         | 16.8-100.5*3        | 18.3-109.5*3        | 19.7-117.7*3                 | 21.3-127.5*3        | 22.5-135.0*3        | 23.8-142.5*3        | 25.2-150.7*3        | 26.7-159.7*3        | 28.0-168.0*3        | 29.5-177.0*3        | 30.9-185.2*3        | 32.5-195.0*3        | 33.8-202.5*3        |           |
| Power source                               |                                 |              | 3-phase, 4-wire, 400 V, 50Hz |               |               |               |               |                     |                     |                     |                     |                     | 3-phase, 4-wire, 400 V, 50Hz |                     |                     |                     |                     |                     |                     |                     |                     |                     |                     |           |
| Capacity                                   | Cooling                         | kW           | 22.4                         | 28.0          | 33.5          | 40.0          | 45.0          | 50.4                | 56.0                | 61.5                | 67.0                | 73.0                | 78.5                         | 85.0                | 90.0                | 95.0                | 100.5               | 106.5               | 112.0               | 118.0               | 123.5               | 130.0               | 135.0               |           |
|  | Nominal Heating                 |              | 22.4                         | 28.0          | 33.5          | 40.0          | 42.0          | 50.4                | 56.0                | 61.5                | 67.0                | 70.0                | 75.5                         | 82.0                | 84.0                | 95.0                | 100.5               | 103.5               | 109.0               | 112.0               | 117.5               | 124.0               | 126.0               |           |
|  | Max. Heating                    |              | 25.0                         | 31.5          | 37.5          | 45.0          | 48.0          | 56.5                | 63.0                | 69.0                | 75.0                | 79.5                | 85.5                         | 93.0                | 96.0                | 106.5               | 112.5               | 117.0               | 123.0               | 127.5               | 133.5               | 141.0               | 144.0               |           |
| Input power                                | Cooling                         | kW           | 6.26                         | 9.53          | 11.89         | 13.16         | 16.71         | 15.79               | 19.06               | 21.42               | 23.78               | 26.24               | 28.60                        | 29.87               | 33.42               | 33.31               | 35.67               | 38.13               | 40.49               | 42.95               | 45.31               | 46.58               | 50.13               |           |
|  | Nominal Heating                 |              | 5.37                         | 7.38          | 9.16          | 10.80         | 11.81         | 12.75               | 14.76               | 16.54               | 18.32               | 19.19               | 20.97                        | 22.61               | 23.62               | 25.70               | 27.48               | 28.35               | 30.13               | 31.00               | 32.78               | 34.42               | 35.43               |           |
|  | Max. Heating                    |              | 6.25                         | 8.96          | 11.61         | 13.95         | 14.98         | 15.21               | 17.92               | 20.44               | 22.96               | 23.94               | 26.46                        | 28.93               | 29.96               | 31.92               | 34.44               | 35.42               | 38.92               | 41.44               | 43.91               | 44.94               | 49.94               |           |
| EER  | Cooling                         | W/W          | 3.57                         | 2.93          | 2.81          | 3.03          | 2.69          | 3.19                | 2.94                | 2.87                | 2.82                | 2.78                | 2.74                         | 2.85                | 2.69                | 2.85                | 2.82                | 2.79                | 2.77                | 2.75                | 2.73                | 2.79                | 2.69                |           |
|  | Nominal Heating                 |              | 4.17                         | 3.79          | 3.65          | 3.70          | 3.55          | 3.95                | 3.79                | 3.72                | 3.66                | 3.65                | 3.60                         | 3.63                | 3.56                | 3.66                | 3.65                | 3.65                | 3.62                | 3.61                | 3.58                | 3.60                | 3.56                |           |
|  | Max. Heating                    |              | 4.00                         | 3.51          | 3.26          | 3.22          | 3.20          | 3.71                | 3.52                | 3.38                | 3.27                | 3.32                | 3.23                         | 3.21                | 3.20                | 3.34                | 3.27                | 3.30                | 3.24                | 3.28                | 3.22                | 3.21                | 3.20                |           |
| SEER                                       | Cooling                         |              | 7.16                         | 6.61          | 6.73          | 6.76          | 6.27          | 6.89                | 6.61                | 6.67                | 6.73                | 6.44                | 6.50                         | 6.52                | 6.27                | 6.69                | 6.73                | 6.54                | 6.58                | 6.38                | 6.42                | 6.43                | 6.27                |           |
|  | Heating                         |              | 3.78                         | 3.76          | 3.86          | 4.31          | 4.41          | 3.77                | 3.76                | 3.81                | 3.86                | 4.09                | 4.14                         | 4.36                | 4.41                | 3.83                | 3.86                | 4.01                | 4.04                | 4.19                | 4.23                | 4.38                | 4.41                |           |
| ηc   | Cooling                         | %            | 283.0                        | 261.0         | 266.0         | 267.0         | 248.0         | 272.0               | 261.0               | 263.5               | 266.0               | 254.5               | 257.0                        | 257.5               | 248.0               | 264.3               | 266.0               | 258.3               | 260.0               | 252.3               | 254.0               | 254.3               | 248.0               |           |
|  | Heating                         |              | 148.0                        | 147.0         | 151.0         | 169.0         | 173.0         | 147.5               | 147.0               | 149.0               | 151.0               | 160.0               | 162.0                        | 171.0               | 173.0               | 149.7               | 151.0               | 157.0               | 158.3               | 164.3               | 165.7               | 171.7               | 173.0               |           |
| Air flow rate                              | High                            | m³/h         | 11,100                       | 11,100        | 11,100        | 13,000        | 13,000        | 11,100*2            | 11,100*2            | 11,100*2            | 11,100*2            | 13,000+11,100       | 13,000+11,100                | 13,000*2            | 13,000*2            | 11,100*3            | 11,100*3            | 13,000+11,100*2     | 13,000+11,100*2     | 13,000*2+11,100     | 13,000*2+11,100     | 13,000*3            | 13,000*3            |           |
| Sound pressure level**/<br>Power level     | Cooling                         | dB(A)        | 56 / 77                      | 58 / 78       | 59 / 79       | 60 / 82       | 61 / 82       | 60 / 81             | 61 / 81             | 62 / 82             | 62 / 82             | 63 / 83             | 63 / 84                      | 64 / 85             | 64 / 85             | 63 / 83             | 64 / 84             | 64 / 85             | 65 / 85             | 65 / 86             | 65 / 86             | 65 / 87             | 66 / 87             |           |
|  | Heating                         |              | 58 / 79                      | 59 / 79       | 63 / 82       | 62 / 83       | 63 / 83       | 62 / 82             | 64 / 84             | 66 / 85             | 66 / 85             | 64 / 84             | 66 / 86                      | 66 / 86             | 67 / 86             | 67 / 86             | 68 / 87             | 68 / 87             | 68 / 87             | 68 / 87             | 68 / 87             | 68 / 87             | 68 / 88             | 68 / 88   |
| Max. External static pressure              |                                 | Pa           | 80                           | 80            | 80            | 80            | 80            | 80                  | 80                  | 80                  | 80                  | 80                  | 80                           | 80                  | 80                  | 80                  | 80                  | 80                  | 80                  | 80                  | 80                  | 80                  | 80                  |           |
| Compressor motor output                    |                                 | kW           | 7.5                          | 7.5           | 7.5           | 11.0          | 11.0          | 7.5 × 2             | 7.5 × 2             | 7.5 × 2             | 7.5 × 2             | 11.0 × 2            | 11.0 × 2                     | 11.0 × 2            | 11.0 × 2            | 7.5 × 3             | 7.5 × 3             | 11.0 × 2 + 7.5      | 11.0 × 2 + 7.5      | 11.0 × 2 + 7.5      | 11.0 × 3            | 11.0 × 3            | 11.0 × 3            |           |
| Heat exchanger fin                         |                                 |              | Blue fin                     | Blue fin      | Blue fin      | Blue fin      | Blue fin      | Blue fin            | Blue fin            | Blue fin            | Blue fin            | Blue fin            | Blue fin                     | Blue fin            | Blue fin            | Blue fin            | Blue fin            | Blue fin            | Blue fin            | Blue fin            | Blue fin            | Blue fin            | Blue fin            |           |
| Net Dimensions                             | Height                          | mm           | 1,690                        | 1,690         | 1,690         | 1,690         | 1,690         | 1,690               | 1,690               | 1,690               | 1,690               | 1,690               | 1,690                        | 1,690               | 1,690               | 1,690               | 1,690               | 1,690               | 1,690               | 1,690               | 1,690               | 1,690               | 1,690               |           |
|  | Width                           |              | 930                          | 930           | 930           | 1,240         | 1,240         | 930 × 2             | 930 × 2             | 930 × 2             | 930 × 2             | 1,240 + 930         | 1,240 + 930                  | 1,240 × 2           | 1,240 × 2           | 930 × 3             | 930 × 3             | 1,240 + 930 × 2     | 1,240 + 930 × 2     | 1,240 × 2 + 930     | 1,240 × 2 + 930     | 1,240 × 3           | 1,240 × 3           |           |
|  | Depth                           |              | 765                          | 765           | 765           | 765           | 765           | 765                 | 765                 | 765                 | 765                 | 765                 | 765                          | 765                 | 765                 | 765                 | 765                 | 765                 | 765                 | 765                 | 765                 | 765                 | 765                 |           |
| Weight                                     |                                 | kg           | 262                          | 262           | 262           | 286           | 286           | 262 × 2             | 262 × 2             | 262 × 2             | 286 + 262           | 286 + 262           | 286 × 2                      | 286 × 2             | 262 × 3             | 262 × 3             | 286 + 262 × 2       | 286 + 262 × 2       | 286 × 2 + 262       | 286 × 2 + 262       | 286 × 3             | 286 × 3             |                     |           |
| Refrigerant                                | Type (Global Warming Potential) |              | R410A (2,088)                | R410A (2,088) | R410A (2,088) | R410A (2,088) | R410A (2,088) | R410A (2,088)       | R410A (2,088)       | R410A (2,088)       | R410A (2,088)       | R410A (2,088)       | R410A (2,088)                | R410A (2,088)       | R410A (2,088)       | R410A (2,088)       | R410A (2,088)       | R410A (2,088)       | R410A (2,088)       | R410A (2,088)       | R410A (2,088)       | R410A (2,088)       | R410A (2,088)       |           |
|  | Charge                          | kg (CO2eq-1) | 11.8 (24.6)                  | 11.8 (24.6)   | 11.8 (24.6)   | 11.8 (24.6)   | 11.8 (24.6)   | 11.8 × 2 (24.6 × 2) | 11.8 × 2 (24.6 × 2) | 11.8 × 2 (24.6 × 2) | 11.8 × 2 (24.6 × 2) | 11.8 × 2 (24.6 × 2) | 11.8 × 2 (24.6 × 2)          | 11.8 × 2 (24.6 × 2) | 11.8 × 3 (24.6 × 3) | 11.8 × 3 (24.6 × 3) | 11.8 × 3 (24.6 × 3) | 11.8 × 3 (24.6 × 3) | 11.8 × 3 (24.6 × 3) | 11.8 × 3 (24.6 × 3) | 11.8 × 3 (24.6 × 3) | 11.8 × 3 (24.6 × 3) | 11.8 × 3 (24.6 × 3) |           |
|  | Liquid                          | mm           | 12.70                        | 12.70         | 12.70         | 12.70         | 12.70         | 15.88               | 15.88               | 15.88               | 15.88               | 15.88               | 15.88                        | 15.88               | 19.05               | 19.05               | 19.05               | 19.05               | 19.05               | 19.05               | 19.05               | 19.05               | 19.05               |           |
| Connection pipe diameter                   | Discharge Gas                   | mm           | 15.88                        | 19.05         | 19.05         | 22.22         | 22.22         | 22.22               | 22.22               | 22.22               | 28.58               | 28.58               | 28.58                        | 28.58               | 28.58               | 28.58               | 28.58               | 34.92               | 34.92               | 34.92               | 34.92               | 34.92               | 34.92               |           |
|  | Suction Gas                     |              | 22.22                        | 22.22         | 28.58         | 28.58         | 28.58         | 28.58               | 28.58               | 28.58               | 34.92               | 34.92               | 34.92                        | 34.92               | 34.92               | 34.92               | 34.92               | 41.27               | 41.27               | 41.27               | 41.27               | 41.27               | 41.27               |           |
|  | Operating Range                 |              | *CDB                         | -10 to 46     | -10 to 46     | -10 to 46     | -10 to 46     | -10 to 46           | -10 to 46           | -10 to 46           | -10 to 46           | -10 to 46           | -10 to 46                    | -10 to 46           | -10 to 46           | -10 to 46           | -10 to 46           | -10 to 46           | -10 to 46           | -10 to 46           | -10 to 46           | -10 to 46           | -10 to 46           | -10 to 46 |
| Operating Range                            | Heating                         | *CDB         | -20 to 21                    | -20 to 21     | -20 to 21     | -20 to 21     | -20 to 21     | -20 to 21           | -20 to 21           | -20 to 21           | -20 to 21           | -20 to 21           | -20 to 21                    | -20 to 21           | -20 to 21           | -20 to 21           | -20 to 21           | -20 to 21           | -20 to 21           | -20 to 21           | -20 to 21           | -20 to 21           | -20 to 21           |           |
|  | Cooling/Heating                 |              | -10 to 21                    | -10 to 21     | -10 to 21     | -10 to 21     | -10 to 21     | -10 to 21           | -10 to 21           | -10 to 21           | -10 to 21           | -10 to 21           | -10 to 21                    | -10 to 21           | -10 to 21           | -10 to 21           | -10 to 21           | -10 to 21           | -10 to 21           | -10 to 21           | -10 to 21           | -10 to 21           | -10 to 21           | -10 to 21 |

Energy Efficiency Combination

| Rated capacity range                       |                 | HP  | 16                           | 22                         | 24                         | 26                         | 28                         | 30                         | 32                         | 34                           | 36                         | 38                         | 40                         | 42                         | 44                         |  |
|--|-----------------|-----|------------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|------------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|--|
| Model name                                 |                 |     | AJY144GALDHH                 | AJY198GALDHH               | AJY216GALDHH               | AJY234GALDHH               | AJY252GALDHH               | AJY270GALDHH               | AJY288GALDHH               | AJY306GALDHH                 | AJY324GALDHH               | AJY342GALDHH               | AJY360GALDHH               | AJY378GALDHH               | AJY396GALDHH               |  |
| Unit 1<br>Unit 2<br>Unit 3                 |                 |     | AJY072GALDH<br>AJY072GALDH   | AJY126GALDH<br>AJY072GALDH | AJY072GALDH<br>AJY072GALDH | AJY072GALDH<br>AJY072GALDH | AJY090GALDH<br>AJY090GALDH | AJY090GALDH<br>AJY090GALDH | AJY090GALDH<br>AJY090GALDH | AJY126GALDH<br>AJY090GALDH   | AJY126GALDH<br>AJY090GALDH | AJY126GALDH<br>AJY090GALDH | AJY126GALDH<br>AJY090GALDH | AJY144GALDH<br>AJY126GALDH | AJY144GALDH<br>AJY126GALDH |  |
| Maximum connectable indoor units*          |                 |     | 34                           | 47                         | 52                         | 56                         | 60                         | 64                         | 64                         | 64                           | 64                         | 64                         | 64                         | 64                         |                            |  |
| Connectable capacity range of indoor units |                 | kW  | 11.2-67.2*3                  | 15.6-93.6*3                | 16.8-100.8*3               | 18.2-109.2*3               | 19.6-117.6*3               | 21.0-126.0*3               | 22.6-135.6*3               | 24.0-144.0*3                 | 25.6-153.6*3               | 27.0-162.0*3               | 28.3-169.5*3               | 30.0-180.0*3               | 31.3-187.5*3               |  |
| Power source                               |                 |     | 3-phase, 4-wire, 400 V, 50Hz |                            |                            |                            |                            |                            |                            | 3-phase, 4-wire, 400 V, 50Hz |                            |                            |                            |                            |                            |  |
| Capacity                                   | Cooling         | kW  | 44.8                         | 62.4                       | 67.2                       | 72.8                       | 78.4                       | 84.0                       | 90.4                       | 96.0                         | 102.4                      | 108.0                      | 113.0                      | 120.0                      | 125.0                      |  |
|  | Nominal Heating |     | 44.8                         | 62.4                       | 67.2                       | 72.8                       | 78.4                       | 84.0                       | 90.4                       | 96.0                         | 102.4                      | 108.0                      | 110.0                      | 120.0                      | 122.0                      |  |
|  | Max. Heating    |     | 50.0                         | 70.0                       | 75.0                       | 81.5                       | 88.0                       | 94.5                       | 101.5                      | 108.0                        | 115.0                      | 121.5                      | 124.5                      | 135.0                      | 138.0                      |  |
| Input power                                | Cooling         | kW  | 12.52                        | 19.42                      | 18.78                      | 22.05                      | 25.32                      | 28.59                      | 28.95                      | 32.22                        | 32.58                      | 35.85                      | 39.40                      | 39.48                      | 43.03                      |  |
|  | Nominal Heating |     | 10.74                        | 16.17                      | 16.11                      | 18.12                      | 20.13                      | 22.14                      | 23.55                      | 25.56                        | 26.97                      | 28.98                      | 29.99                      | 32.40                      | 33.41                      |  |
|  | Max. Heating    |     | 12.50                        | 20.20                      | 18.75                      | 21.46                      | 24.17                      | 26.88                      | 29.16                      | 31.87                        | 34.15                      | 36.86                      | 37.89                      | 41.85                      | 42.88                      |  |
| EER  | Cooling         | W/W | 3.58                         | 3.21                       | 3.58                       | 3.10                       | 3.10                       | 3.12                       | 2.98                       | 3.12                         | 3.01                       | 3.01                       | 3.04                       | 2.90                       | 2.90                       |  |
|  | Nominal Heating |     | 4.17                         | 3.86                       | 4.17                       | 4.02                       | 3.89                       | 3.79                       | 3.84                       | 3.76                         | 3.80                       | 3.73                       | 3.67                       | 3.70                       | 3.65                       |  |
|  | Max. Heating    |     | 4.00                         | 3.47                       | 4.00                       | 3.80                       | 3.64                       | 3.52                       | 3.48                       | 3.39                         | 3.37                       | 3.30                       | 3.29                       | 3.23                       | 3.22                       |  |
| SEER                                       | Cooling         |     | 7.16                         | 6.96                       | 7.16                       | 6.98                       | 6.79                       | 6.61                       | 6.84                       | 6.61                         | 6.71                       | 6.59                       | 6.52                       | 6.60                       |                            |  |
| SCOP                                       | Heating         |     | 3.78                         | 4.05                       | 3.78                       | 3.77                       | 3.77                       | 3.76                       | 3.95                       | 3.94                         | 4.13                       | 4.16                       | 4.31                       | 4.34                       |                            |  |
| ηc   | Cooling         | %   | 283.0                        | 275.0                      | 283.0                      | 275.0                      | 268.3                      | 261.0                      | 270.3                      | 263.0                        | 272.3                      | 265.0                      | 258.7                      | 260.7                      | 260.7                      |  |
|  | Heating         |     | 148.0                        | 158.5                      | 148.0                      | 147.7                      | 147.3                      |                            |                            |                              |                            |                            |                            |                            |                            |  |




**Heat Pump**  
Modular type

VRF **V-IV**


**System configuration example**

- Suitable for air conditioning midsize and large buildings. Connecting each outdoor unit makes it possible to create a high-capacity system.
- Multiple indoor units are connected with separation tubes and headers.

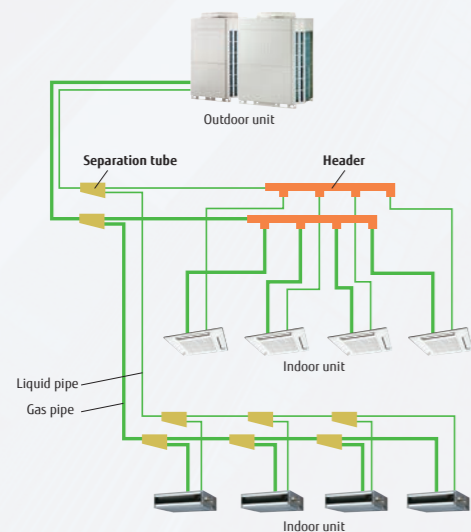

**New intelligent refrigerant control**

Fujitsu General is proposing outdoor units equipped with refrigerant control function. The refrigerant control operates with subtle control corresponding to the heat load of the room and offers a more comfortable environment. The refrigerant control can also provide increased energy savings.

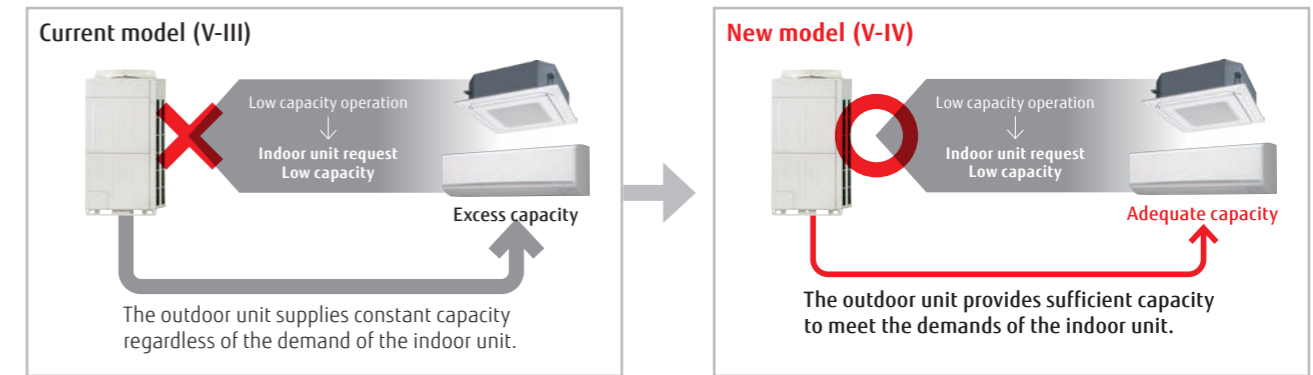


\* The improvements due to the control and the actual sine wave vary depending on the combination of the indoor unit and system operating conditions.


**Efficiency in actual operating conditions**

The use of our proprietary heat exchanger structure and high-efficiency DC twin-rotary compressors achieves the class-leading coefficient of performance (COP) in every combination.

Space saving combination

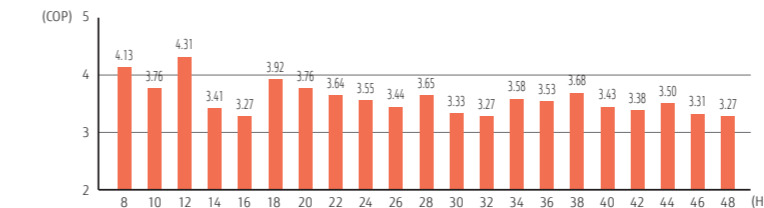

Energy efficiency combination

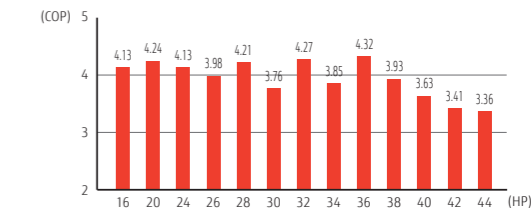

\* These specifications are determined by Cassette combination. \*Multiple outdoor units are not certified by Eurovent.

**The energy-saving technology that boosted operation efficiency**

- Powerful large propeller fan**  
The fan uses CFD\* technology to achieve both high performance and low noise operation. \*CFD: Computational Fluid Dynamics
- 3-phase DC fan motor**  
The use of a DC fan motor with sophisticated driver control improves energy efficiency substantially. In addition, low noise is realized by the DC fan motor.
- Sine-wave DC inverter control**  
High-efficiency is realized by the adoption of reduced switching loss IPM.
- 4-face heat exchanger**  
The 4-face heat exchanger increases the effective surface area and significantly improves heat-exchanging efficiency.
- Subcooling heat exchanger**  
High heat exchange efficiency is achieved by using an internal projection-shape double-pipe construction.
- High-efficient, large-capacity DC twin-rotary compressor**  
Large-capacity high-efficient DC twin-rotary compressor with excellent intermediate capability.
- Front intake port (Corner cut air inlet structure)**  
In multiple outdoor unit installations, the unique front intake design improves airflow into the heat exchanger.

Outdoor units lineup • Combinations other than those listed below are not recommended.

Space saving combination

|  |  |  |  |  |
|--|--|--|--|--|
| 22.4 kW (8 HP)<br>AJY072LALDH<br>UNIT: AJY072LALDH           | 28.0 kW (10 HP)<br>AJY090LALDH<br>UNIT: AJY090LALDH          | 33.5 kW (12 HP)<br>AJY108LALDH<br>UNIT: AJY108LALDH          | 40.0 kW (14 HP)<br>AJY126LALDH<br>UNIT: AJY126LALDH          | 45.0 kW (16 HP)<br>AJY144LALDH<br>UNIT: AJY144LALDH          |
| 50.4 kW (18 HP)<br>AJY162LALDH<br>UNIT: AJY090/072LALDH      | 56.0 kW (20 HP)<br>AJY180LALDH<br>UNIT: AJY090/090LALDH      | 62.4 kW (22 HP)<br>AJY198LALDH<br>UNIT: AJY126/072LALDH      | 68.0 kW (24 HP)<br>AJY216LALDH<br>UNIT: AJY126/090LALDH      | 73.0 kW (26 HP)<br>AJY234LALDH<br>UNIT: AJY144/090LALDH      |
| 78.5 kW (28 HP)<br>AJY252LALDH<br>UNIT: AJY144/108LALDH      | 85.0 kW (30 HP)<br>AJY270LALDH<br>UNIT: AJY144/126LALDH      | 90.0 kW (32 HP)<br>AJY288LALDH<br>UNIT: AJY144/144LALDH      | 95.4 kW (34 HP)<br>AJY306LALDH<br>UNIT: AJY144/090/072LALDH  | 101.0 kW (36 HP)<br>AJY324LALDH<br>UNIT: AJY144/090/090LALDH |
| 106.5 kW (38 HP)<br>AJY342LALDH<br>UNIT: AJY144/108/090LALDH | 113.0 kW (40 HP)<br>AJY360LALDH<br>UNIT: AJY144/126/090LALDH | 118.0 kW (42 HP)<br>AJY378LALDH<br>UNIT: AJY144/144/090LALDH | 123.5 kW (44 HP)<br>AJY396LALDH<br>UNIT: AJY144/144/108LALDH | 130.0 kW (46 HP)<br>AJY414LALDH<br>UNIT: AJY144/144/126LALDH |
| 135.0 kW (48 HP)<br>AJY432LALDH<br>UNIT: AJY144/144/144LALDH |  |  |  |  |

Energy efficiency combination

|   |   |   |   |   |
|---|---|---|---|---|
| 44.8 kW (16 HP)<br>AJY144LALDHH<br>UNIT: AJY072/072LALDH      | 55.9 kW (20 HP)<br>AJY180LALDHH<br>UNIT: AJY108/072LALDH      | 67.2 kW (24 HP)<br>AJY216LALDHH<br>UNIT: AJY072/072/072LALDH  | 72.8 kW (26 HP)<br>AJY234LALDHH<br>UNIT: AJY090/072/072LALDH  | 78.3 kW (28 HP)<br>AJY252LALDHH<br>UNIT: AJY108/072/072LALDH  |
| 84.8 kW (30 HP)<br>AJY270LALDHH<br>UNIT: AJY126/072/072LALDH  | 89.4 kW (32 HP)<br>AJY288LALDHH<br>UNIT: AJY108/108/072LALDH  | 95.9 kW (34 HP)<br>AJY306LALDHH<br>UNIT: AJY126/108/072LALDH  | 100.5 kW (36 HP)<br>AJY324LALDHH<br>UNIT: AJY108/108/108LALDH | 107.0 kW (38 HP)<br>AJY342LALDHH<br>UNIT: AJY126/108/108LALDH |
| 113.5 kW (40 HP)<br>AJY360LALDHH<br>UNIT: AJY126/126/108LALDH | 120.0 kW (42 HP)<br>AJY378LALDHH<br>UNIT: AJY126/126/126LALDH | 125.0 kW (44 HP)<br>AJY396LALDHH<br>UNIT: AJY144/126/126LALDH |   |   |

8, 10 HP: AJY072LALDH / AJY090LALDH  
12, 14, 16 HP: AJY108LALDH / AJY126LALDH / AJY144LALDH




8, 10 HP

12, 14, 16 HP





Dimensions

(Unit: mm)

8, 10 HP

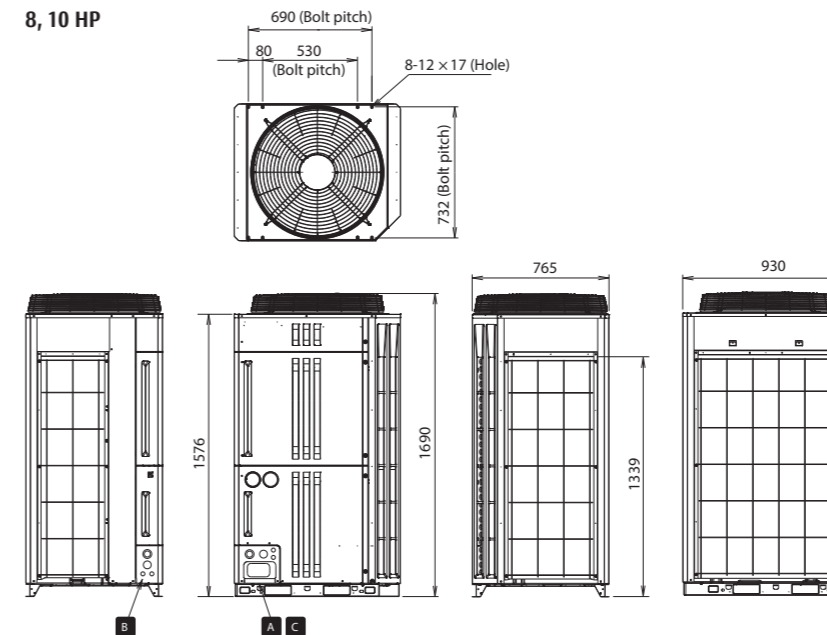

12, 14, 16 HP

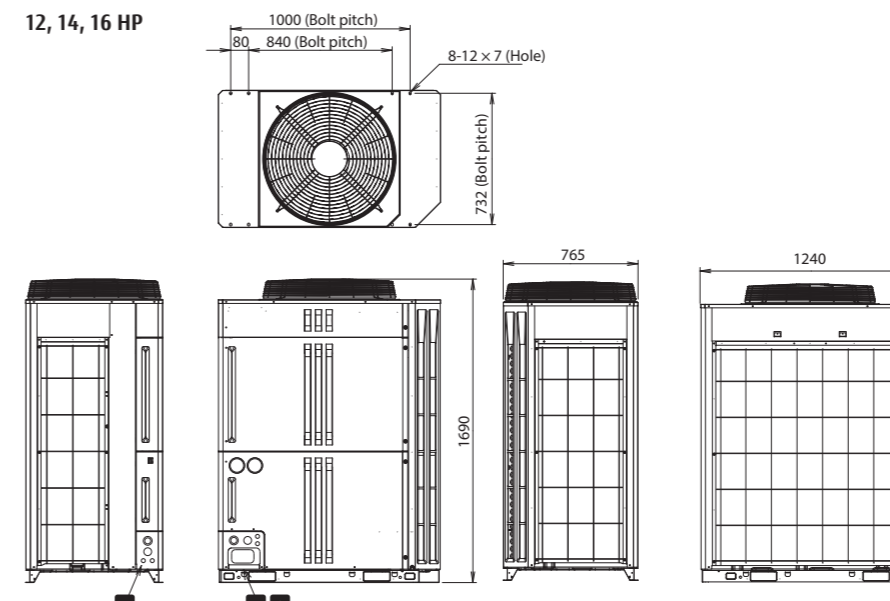

Outdoor unit specifications

Space saving combination

| Rated capacity range                       |                                 | HP           | 8                              | 10            | 12            | 14            | 16            | 18                         | 20                         | 22                         | 24                         | 26                         | 28                             | 30                         | 32                                | 34                                | 36                                | 38                                | 40                                | 42                                | 44                                | 46                                | 48                                |                            |
|--|---------------------------------|--------------|--------------------------------|---------------|---------------|---------------|---------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|--------------------------------|----------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|----------------------------|
| Model name                                 |                                 |              | AJY072LALDH                    | AJY090LALDH   | AJY108LALDH   | AJY126LALDH   | AJY144LALDH   | AJY162LALDH                | AJY180LALDH                | AJY198LALDH                | AJY216LALDH                | AJY234LALDH                | AJY252LALDH                    | AJY270LALDH                | AJY288LALDH                       | AJY306LALDH                       | AJY324LALDH                       | AJY342LALDH                       | AJY360LALDH                       | AJY378LALDH                       | AJY396LALDH                       | AJY414LALDH                       | AJY432LALDH                       |                            |
| Unit 1<br>Unit 2<br>Unit 3                 |                                 |              | AJY072LALDH                    | AJY090LALDH   | AJY108LALDH   | AJY126LALDH   | AJY144LALDH   | AJY090LALDH<br>AJY072LALDH | AJY090LALDH<br>AJY090LALDH | AJY126LALDH<br>AJY072LALDH | AJY126LALDH<br>AJY090LALDH | AJY144LALDH<br>AJY090LALDH | AJY144LALDH<br>AJY108LALDH     | AJY144LALDH<br>AJY126LALDH | AJY144LALDH<br>AJY144LALDH        | AJY144LALDH<br>AJY090LALDH        | AJY144LALDH<br>AJY090LALDH        | AJY144LALDH<br>AJY108LALDH        | AJY144LALDH<br>AJY126LALDH        | AJY144LALDH<br>AJY144LALDH        | AJY144LALDH<br>AJY108LALDH        | AJY144LALDH<br>AJY126LALDH        | AJY144LALDH<br>AJY144LALDH        | AJY144LALDH<br>AJY144LALDH |
| Maximum connectable indoor units*          |                                 |              | 17                             | 21            | 26            | 30            | 34            | 39                         | 43                         | 47                         | 52                         | 56                         | 60                             | 64                         | 64                                | 64                                | 64                                | 64                                | 64                                | 64                                | 64                                | 64                                | 64                                |                            |
| Connectable capacity range of indoor units |                                 | kW           | 11.2-33.6                      | 14.0-42.0     | 16.8-50.2     | 20.0-60.0     | 22.5-67.5     | 25.2-75.6                  | 28.0-84.0                  | 31.2-93.6                  | 34.0-102.0                 | 36.5-109.5                 | 39.3-117.7                     | 42.5-127.5                 | 45.0-135.0                        | 47.7-143.1                        | 50.5-151.5                        | 53.3-159.7                        | 56.5-169.5                        | 59.0-177.0                        | 61.8-185.2                        | 65.0-195.0                        | 67.5-202.5                        |                            |
| Power source                               |                                 |              | 3-phase, 4-wire, ~400 V, 50 Hz |               |               |               |               |                            |                            |                            |                            |                            | 3-phase, 4-wire, ~400 V, 50 Hz |                            |                                   |                                   |                                   |                                   |                                   |                                   |                                   |                                   |                                   |                            |
| Capacity                                   | Cooling                         | kW           | 22.4                           | 28.0          | 33.5          | 40.0          | 45.0          | 50.4                       | 56.0                       | 62.4                       | 68.0                       | 73.0                       | 78.5                           | 85.0                       | 90.0                              | 95.4                              | 101.0                             | 106.5                             | 113.0                             | 118.0                             | 123.5                             | 130.0                             | 135.0                             |                            |
|  | Nominal Heating                 |              | 22.4                           | 28.0          | 33.5          | 40.0          | 45.0          | 50.4                       | 56.0                       | 62.4                       | 68.0                       | 73.0                       | 78.5                           | 85.0                       | 90.0                              | 95.4                              | 101.0                             | 106.5                             | 113.0                             | 118.0                             | 123.5                             | 130.0                             | 135.0                             |                            |
|  | Max. Heating                    |              | 25.0                           | 31.5          | 37.5          | 45.0          | 48.0          | 56.5                       | 63.0                       | 70.0                       | 76.5                       | 83.0                       | 89.5                           | 96.0                       | 102.5                             | 109.0                             | 115.5                             | 122.0                             | 128.5                             | 135.0                             | 141.5                             | 148.0                             | 154.5                             |                            |
| Input power                                | Cooling                         | kW           | 5.95                           | 9.06          | 9.54          | 13.18         | 16.74         | 15.01                      | 18.12                      | 19.13                      | 22.24                      | 25.80                      | 26.28                          | 29.92                      | 33.48                             | 31.75                             | 34.86                             | 35.34                             | 38.98                             | 42.54                             | 43.02                             | 46.66                             | 50.22                             |                            |
|  | Nominal Heating                 |              | 5.42                           | 7.44          | 7.76          | 11.74         | 13.76         | 12.86                      | 14.88                      | 17.16                      | 19.18                      | 21.20                      | 21.52                          | 25.50                      | 27.52                             | 26.62                             | 28.64                             | 28.96                             | 32.94                             | 34.96                             | 35.28                             | 39.26                             | 41.28                             |                            |
|  | Max. Heating                    |              | 6.26                           | 8.98          | 9.48          | 14.00         | 15.02         | 15.24                      | 17.96                      | 20.26                      | 22.98                      | 24.00                      | 24.50                          | 29.02                      | 30.04                             | 30.26                             | 32.98                             | 33.48                             | 38.00                             | 39.02                             | 39.52                             | 44.04                             | 45.06                             |                            |
| EER  | Cooling                         | W/W          | 3.76                           | 3.09          | 3.51          | 3.03          | 2.68          | 3.36                       | 3.09                       | 3.26                       | 3.06                       | 2.83                       | 2.99                           | 2.84                       | 2.69                              | 3.00                              | 2.90                              | 3.01                              | 2.90                              | 2.77                              | 2.87                              | 2.79                              | 2.69                              |                            |
| COP  | Nominal Heating                 |              | 4.13                           | 3.76          | 4.31          | 3.41          | 3.27          | 3.92                       | 3.76                       | 3.64                       | 3.55                       | 3.44                       | 3.65                           | 3.33                       | 3.27                              | 3.58                              | 3.53                              | 3.68                              | 3.43                              | 3.38                              | 3.50                              | 3.31                              | 3.27                              |                            |
|  | Max. Heating                    |              | 3.99                           | 3.50          | 3.95          | 3.21          | 3.19          | 3.71                       | 3.51                       | 3.46                       | 3.33                       | 3.31                       | 3.49                           | 3.20                       | 3.20                              | 3.45                              | 3.37                              | 3.49                              | 3.28                              | 3.27                              | 3.38                              | 3.20                              | 3.20                              |                            |
| SEER                                       | Cooling                         |              | 7.09                           | 6.56          | 7.33          | 6.67          | 6.18          | 6.83                       | 6.56                       | 6.64                       | 6.62                       | 6.37                       | 6.76                           | 6.43                       | 6.18                              | 6.61                              | 6.43                              | 6.69                              | 6.47                              | 6.31                              | 6.56                              | 6.34                              | 6.18                              |                            |
| SCOP                                       | Heating                         |              | 3.83                           | 3.80          | 4.19          | 4.19          | 4.27          | 3.82                       | 3.80                       | 4.05                       | 4.00                       | 4.04                       | 4.23                           | 4.23                       | 4.27                              | 3.96                              | 4.09                              | 4.09                              | 4.11                              | 4.24                              | 4.24                              | 4.24                              | 4.27                              |                            |
| ηc   | Cooling                         | %            | 281.0                          | 259.0         | 290.0         | 264.0         | 244.0         | 270.0                      | 259.0                      | 262.5                      | 261.5                      | 251.5                      | 267.0                          | 254.0                      | 244.0                             | 261.3                             | 254.0                             | 264.3                             | 255.7                             | 249.0                             | 259.3                             | 250.7                             | 244.0                             |                            |
| ηh   | Heating                         |              | 150.0                          | 149.0         | 165.0         | 165.0         | 168.0         | 149.0                      | 159.0                      | 157.0                      | 158.5                      | 166.5                      | 166.5                          | 168.0                      | 168.0                             | 155.7                             | 160.7                             | 160.7                             | 160.7                             | 161.7                             | 167.0                             | 167.0                             | 168.0                             |                            |
| Air flow rate                              | High                            | m³/h         | 11,100                         | 11,100        | 13,000        | 13,000        | 13,700        | 11,100-2                   | 11,100 × 2                 | 13,000 + 11,100            | 13,000 + 11,100            | 13,700 + 11,100            | 13,700 + 13,000                | 13,700 + 13,000            | 13,700 × 2                        | 13,700 + 11,100 × 2               | 13,700 + 11,100 × 2               | 13,700 + 13,000 + 11,100          | 13,700 + 13,000 + 11,100          | 13,700 × 2 + 11,100               | 13,700 + 13,000                   | 13,700 × 2 + 13,000               | 13,700 × 3                        |                            |
| Sound pressure level**/Power level         | Cooling                         | dB(A)        | 58/79                          | 58/79         | 58/81         | 62/84         | 63/86         | 61/82                      | 61/82                      | 63/85                      | 63/85                      | 64/87                      | 64/87                          | 66/88                      | 66/89                             | 65/87                             | 65/87                             | 65/88                             | 66/89                             | 67/89                             | 67/90                             | 67/90                             | 68/91                             |                            |
|  | Heating                         |              | 59/80                          | 60/81         | 60/83         | 64/85         | 65/87         | 63/84                      | 63/84                      | 65/86                      | 65/86                      | 66/88                      | 66/88                          | 68/89                      | 68/89                             | 67/89                             | 67/89                             | 67/89                             | 68/90                             | 69/91                             | 69/91                             | 69/91                             | 70/92                             |                            |
| Max. External static pressure              |                                 | Pa           | 82                             | 82            | 82            | 82            | 82            | 82                         | 82                         | 82                         | 82                         | 82                         | 82                             | 82                         | 82                                | 82                                | 82                                | 82                                | 82                                | 82                                | 82                                | 82                                | 82                                |                            |
| Compressor motor output                    |                                 | kW           | 7.5                            | 7.5           | 11.0          | 11.0          | 11.0          | 7.5 × 2                    | 7.5 × 2                    | 11.0 + 7.5                 | 11.0 + 7.5                 | 11.0 + 7.5                 | 11.0 + 7.5                     | 11.0 + 7.5                 | 11.0 + 7.5                        | 11.0 + 7.5 × 2                    | 11.0 + 7.5 × 2                    | 11.0 + 7.5 × 2                    | 11.0 + 7.5 × 2                    | 11.0 + 7.5 × 2                    | 11.0 + 7.5 × 2                    | 11.0 + 7.5 × 2                    | 11.0 + 7.5 × 2                    |                            |
| Heat exchanger fin                         |                                 |              | Blue fin                       | Blue fin      | Blue fin      | Blue fin      | Blue fin      | Blue fin                   | Blue fin                   | Blue fin                   | Blue fin                   | Blue fin                   | Blue fin                       | Blue fin                   | Blue fin                          | Blue fin                          | Blue fin                          | Blue fin                          | Blue fin                          | Blue fin                          | Blue fin                          | Blue fin                          | Blue fin                          |                            |
| Net Dimensions                             | Height                          | mm           | 1,690                          | 1,690         | 1,690         | 1,690         | 1,690         | 1,690                      | 1,690                      | 1,690                      | 1,690                      | 1,690                      | 1,690                          | 1,690                      | 1,690                             | 1,690                             | 1,690                             | 1,690                             | 1,690                             | 1,690                             | 1,690                             | 1,690                             | 1,690                             |                            |
|  | Width                           |              | 930                            | 930           | 1,240         | 1,240         | 1,240         | 930 × 2                    | 930 × 2                    | 1,240 + 930                | 1,240 + 930                | 1,240 + 930                | 1,240 + 930                    | 1,240 + 930                | 1,240 + 930                       | 1,240 + 930                       | 1,240 + 930 × 2                   | 1,240 + 930 × 2                   | 1,240 + 930 × 2                   | 1,240 + 930 × 2                   | 1,240 + 930 × 2                   | 1,240 + 930 × 2                   | 1,240 + 930 × 2                   |                            |
|  | Depth                           |              | 765                            | 765           | 765           | 765           | 765           | 765                        | 765                        | 765                        | 765                        | 765                        | 765                            | 765                        | 765                               | 765                               | 765                               | 765                               | 765                               | 765                               | 765                               | 765                               | 765                               | 765                        |
| Weight                                     |                                 | kg           | 252                            | 252           | 275           | 275           | 275           | 252 × 2                    | 252 × 2                    | 275 + 252                  | 275 + 252                  | 275 + 252                  | 275 + 252                      | 275 + 252                  | 275 + 252 × 2                     | 275 + 252 × 2                     | 275 + 252 × 2                     | 275 + 252 × 2                     | 275 + 252 × 2                     | 275 + 252 × 2                     | 275 + 252 × 2                     | 275 + 252 × 2                     | 275 + 252 × 2                     |                            |
| Refrigerant                                | Type (Global Warming Potential) |              | R410A (2,088)                  | R410A (2,088) | R410A (2,088) | R410A (2,088) | R410A (2,088) | R410A (2,088)              | R410A (2,088)              | R410A (2,088)              | R410A (2,088)              | R410A (2,088)              | R410A (2,088)                  | R410A (2,088)              | R410A (2,088)                     | R410A (2,088)                     | R410A (2,088)                     | R410A (2,088)                     | R410A (2,088)                     | R410A (2,088)                     | R410A (2,088)                     | R410A (2,088)                     | R410A (2,088)                     |                            |
|  | Charge                          | kg (CO2eq-T) | 11.7 (24.4)                    | 11.7 (24.4)   | 11.8 (24.6)   | 11.8 (24.6)   | 11.8 (24.6)   | 11.7 × 2 (24.4 × 2)        | 11.7 × 2 (24.4 × 2)        | 11.8 + 11.7 (24.6 + 24.4)  | 11.8 + 11.7 (24.6 + 24.4)  | 11.8 × 2 (24.6 × 2)        | 11.8 × 2 (24.6 × 2)            | 11.8 × 2 (24.6 × 2)        | 11.8 + 11.7 × 2 (24.6 + 24.4 × 2) | 11.8 + 11.7 × 2 (24.6 + 24.4 × 2) | 11.8 + 11.7 × 2 (24.6 + 24.4 × 2) | 11.8 + 11.7 × 2 (24.6 + 24.4 × 2) | 11.8 + 11.7 × 2 (24.6 + 24.4 × 2) | 11.8 + 11.7 × 2 (24.6 + 24.4 × 2) | 11.8 + 11.7 × 2 (24.6 + 24.4 × 2) | 11.8 + 11.7 × 2 (24.6 + 24.4 × 2) | 11.8 + 11.7 × 2 (24.6 + 24.4 × 2) |                            |
| Connection pipe diameter                   | Liquid                          | mm           | 12.70                          | 12.70         | 12.70         | 12.70         | 12.70         | 12.70                      | 12.70                      | 15.88                      | 15.88                      | 15.88                      | 15.88                          | 19.05                      | 19.05                             | 19.05                             | 19.05                             | 19.05                             | 19.05                             | 19.05                             | 19.05                             | 19.05                             | 19.05                             |                            |
|  | Gas                             |              | 22.22                          | 22.22         | 28.58         | 28.58         | 28.58         | 28.58                      | 28.58                      | 28.58                      | 34.92                      | 34.92                      | 34.92                          | 34.92                      | 34.92                             | 34.92                             | 41.27                             | 41.27                             | 41.27                             | 41.27                             | 41.27                             | 41.27                             | 41.27                             | 41.27                      |
| Operating Range                            | Cooling                         | °CDB         | -15 to 46                      | -15 to 46     | -15 to 46     | -15 to 46     | -15 to 46     | -15 to 46                  | -15 to 46                  | -5 to 46                   | -5 to 46                   | -5 to 46                   | -5 to 46                       | -5 to 46                   | -5 to 46                          | -5 to 46                          | -5 to 46                          | -5 to 46                          | -5 to 46                          | -5 to 46                          | -5 to 46                          | -5 to 46                          | -5 to 46                          |                            |
|  | Heating                         |              | -20 to 21                      | -20 to 21     | -20 to 21     | -20 to 21     | -20 to 21     | -20 to 21                  | -20 to 21                  | -20 to 21                  | -20 to 21                  | -20 to 21                  | -20 to 21                      | -20 to 21                  | -20 to 21                         | -20 to 21                         | -20 to 21                         | -20 to 21                         | -20 to 21                         | -20 to 21                         | -20 to 21                         | -20 to 21                         | -20 to 21                         | -20 to 21                  |

Energy Efficiency Combination

| Rated capacity range                       |                 | HP  | 16                             | 20                         | 24                         | 26                         | 28                         | 30                         | 32                         | 34                             | 36                         | 38                         | 40                         | 42                         | 44                         |  |
|--|-----------------|-----|--------------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|--------------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|--|
| Model name                                 |                 |     | AJY144LALDHH                   | AJY180LALDHH               | AJY216LALDHH               | AJY234LALDHH               | AJY252LALDHH               | AJY270LALDHH               | AJY288LALDHH               | AJY306LALDHH                   | AJY324LALDHH               | AJY342LALDHH               | AJY360LALDHH               | AJY378LALDHH               | AJY396LALDHH               |  |
| Unit 1<br>Unit 2<br>Unit 3                 |                 |     | AJY072LALDH<br>AJY072LALDH     | AJY108LALDH<br>AJY072LALDH | AJY072LALDH<br>AJY072LALDH | AJY090LALDH<br>AJY072LALDH | AJY108LALDH<br>AJY072LALDH | AJY126LALDH<br>AJY072LALDH | AJY108LALDH<br>AJY072LALDH | AJY126LALDH<br>AJY072LALDH     | AJY108LALDH<br>AJY072LALDH | AJY126LALDH<br>AJY072LALDH | AJY126LALDH<br>AJY072LALDH | AJY126LALDH<br>AJY072LALDH | AJY126LALDH<br>AJY072LALDH |  |
| Maximum connectable indoor units*          |                 |     | 34                             | 43                         | 52                         | 56                         | 60                         | 64                         | 64                         | 64                             | 64                         | 64                         | 64                         | 64                         |                            |  |
| Connectable capacity range of indoor units |                 | kW  | 22.4-67.2                      | 28.0-83.8                  | 33.0-100.8                 | 36.4-109.2                 | 39.2-117.4                 | 42.4-127.2                 | 44.7-134.1                 | 48.0-143.8                     | 50.3-150.7                 | 53.5-160.5                 | 56.8-170.2                 | 60.0-180.0                 | 62.5-187.5                 |  |
| Power source                               |                 |     | 3-phase, 4-wire, ~400 V, 50 Hz |                            |                            |                            |                            |                            |                            | 3-phase, 4-wire, ~400 V, 50 Hz |                            |                            |                            |                            |                            |  |
| Capacity                                   | Cooling         | kW  | 44.8                           | 55.9                       | 67.2                       | 72.8                       | 78.3                       | 84.8                       | 89.4                       | 95.9                           | 100.5                      | 107.0                      | 113.5                      | 120.0                      | 125.0                      |  |
|  | Nominal Heating |     | 44.8                           | 55.9                       | 67.2                       | 72.8                       | 78.3                       | 84.8                       | 89.4                       | 95.9                           | 100.5                      | 107.0                      | 113.5                      | 120.0                      | 125.0                      |  |
|  | Max. Heating    |     | 50.0                           | 62.5                       | 75.0                       | 81.5                       | 87.5                       | 93.5                       | 100.0                      | 107.0                          | 113.5                      | 120.0                      | 127.0                      | 134.0                      | 141.0                      |  |
| Input power                                | Cooling         | kW  | 11.90                          | 15.49                      | 17.85                      | 20.96                      | 21.44                      | 25.08                      | 25.03                      | 28.67                          | 28.62                      | 32.26                      | 35.90                      | 39.54                      | 43.10                      |  |
|  | Nominal Heating |     | 10.84                          | 13.18                      | 16.26                      | 18.28                      | 18.60                      | 22.58                      | 20.94                      | 24.92                          | 23.28                      | 27.26                      | 31.24                      | 35.22                      | 37.24                      |  |
|  | Max. Heating    |     | 12.52                          | 15.74                      | 18.78                      | 21.50                      | 22.00                      | 26.52                      | 25.22                      | 29.74                          | 28.44                      | 32.96                      | 37.48                      | 42.00                      | 43.02                      |  |
| EER  | Cooling         | W/W | 3.76                           | 3.61                       | 3.76                       | 3.47                       | 3.65                       | 3.38                       | 3.57                       | 3.34                           | 3.51                       | 3.32                       | 3.16                       | 3.03                       | 2.90                       |  |
| COP  | Nominal Heating |     | 4.13                           | 4.24                       | 3.98                       | 4.21                       | 3.98                       | 3.76                       | 4.27                       | 3.95                           | 4.32                       | 3.93                       | 3.63                       | 3.41                       | 3.36                       |  |
|  | Max. Heating    |     | 3.99                           | 3.97                       | 3.99                       | 3.79                       | 3.98                       | 3.58                       | 3.97                       | 3.61                           | 3.96                       | 3.64                       | 3.40                       | 3.21                       | 3.21                       |  |
| SEER                                       | Cooling         |     | 7.09                           | 7.21                       | 7.09                       | 6.91                       | 7.17                       | 6.79                       | 7.25                       | 7.03                           | 7.33                       | 7.11                       | 6.89                       | 6.67                       | 6.51                       |  |
| SCOP                                       | Heating         |     | 3.83                           | 4.01                       | 3.83                       | 3.82                       | 3.95                       | 3.98                       | 4.07                       | 4.07                           | 4.19                       | 4.19                       | 4.19                       | 4.19                       | 4.22                       |  |
| ηc   | Cooling         | %   | 281.0                          | 285.5                      | 281.0                      | 273.7                      | 284.0                      | 275.3                      | 287.0                      | 278.3                          | 290.0                      | 281.3                      | 272.7                      | 264.0                      | 257.3                      |  |
| ηh   | Heating         |     | 150.0                          | 157.5                      | 150.0                      | 149.7                      | 155.0                      | 155.0                      | 160.0                      | 160.0                          | 165.0                      | 165.0                      | 165.0                      |                            |                            |  |



# VRF INDOOR UNITS







17 types and 95 models available to meet the requirements of any building design.

Indoor units for the VRF Systems are compact, highly efficient, quiet, and user-friendly. Fujitsu General offers a variety of types and capacities for its indoor units that are easy to install and maintain. In addition, a variety of optional parts are available to provide an even more desirable air conditioning experience to users.

- V-058 VRF Indoor Unit Lineup for J-VS
- V-060 Compact Cassette Grid type
- V-062 Low Static Pressure Duct Slim Duct/Slim Concealed Floor
- V-064 Wall-mounted type
  
- V-066 VRF Indoor Unit Lineup for J-IVS, J-IV, J-IVL, VR-IV, V-IV
- V-068 Compact Cassette Grid type
- V-070 Cassette Slim type Circular Flow
- V-072 Cassette Large type Circular Flow
- V-074 Cassette One-way Flow type
- V-076 3D Flow Cassette
- V-078 Low Static Pressure Duct Mini Duct
- V-080 Low Static Pressure Duct Slim Duct/Slim Concealed Floor
- V-082 Low Static Pressure Duct
- V-084 Medium Static Pressure Duct
- V-086 High Static Pressure Duct
- V-088 Compact Floor
- V-090 Floor/Ceiling
- V-092 Ceiling
- V-094 Wall-mounted (EEV Internal/external)



# VRF Indoor Unit Lineup for J-VS

| Capacity range (kW) |                          |  | 1.1   | 1.7         | 2.2         | 2.8   | 3.6         | 4.0         | 4.5         | 5.6         | 7.1         |
|---------------------|--------------------------|--|---|-------------|-------------|---|-------------|-------------|-------------|-------------|-------------|
| Class               |                          |  | 4   | 5           | 7           | 9   | 12          | 14          | 14          | 18          | 24          |
| Cassette            | Compact type             | Compact Grid type/Standard type                         | AUXB004HLAH                                     | AUXB005HLAH | AUXB007HLAH | AUXB009HLAH                                     | AUXB012HLAH |             | AUXB014HLAH | AUXB018HLAH |             |
|                     |                          | High Efficiency*1                                       |   |             |             | AUXN009HLAH                                     | AUXN012HLAH |             | AUXN014HLAH |             |             |
| Duct                | Low Static Pressure Duct | Slim Duct (With drain pump) <br>004 - 014    018    024 | ARXD004HLAH                                     | ARXD005HLAH | ARXD007HLAH | ARXD009HLAH                                     | ARXD012HLAH |             | ARXD014HLAH | ARXD018HLAH | ARXD024HLAH |
|                     |                          | High Efficiency*1 <br>009 - 014                         |   |             |             | ARXP009HLAH                                     | ARXP012HLAH |             | ARXP014HLAH |             |             |
| Wall-mounted type   | Wall-mounted type        | Wall-mounted type <br>004 - 014                         | ASYA004HCAH                                     | ASYA005HCAH | ASYA007HCAH | ASYA009HCAH                                     | ASYA012HCAH | ASYA014HCAH |             |             |             |
|                     |                          | Wall-mounted type (EEV external) <br>004 - 014          | ASYE004HCAH                                     | ASYE005HCAH | ASYE007HCAH | ASYE009HCAH                                     | ASYE012HCAH | ASYE014HCAH |             |             |             |
|                     |                          |  | This model requires the EV kit to be connected. |             |             | This model requires the EV kit to be connected. |             |             |             |             |             |


\*1: Production by order  
 Specifications and design are subject to change without notice.  
 \*Products other than ducts can be connected to J-IV, J-IVS, J-IVL, V-IV, VR-IV

# Compact Cassette Grid type



## Compact and stylish panel

The compact and stylish panel fits nicely into a grid type ceiling. The linear design is a perfect fit into a grid of 620 mm × 620 mm in the ceiling.

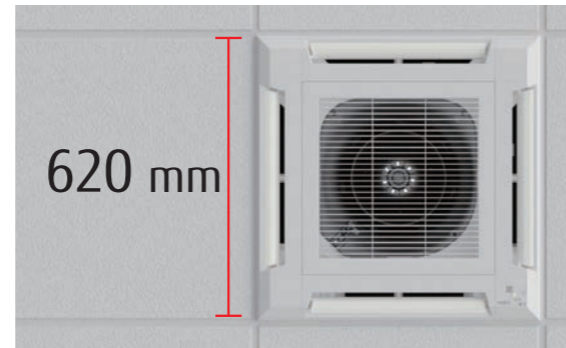

## Easy maintenance

You can access the unit for maintenance just by removing a ceiling panel right next to the grille. As no inspection hole needs to be cut through the ceiling, no additional construction cost is incurred.



The air inlet grille can be installed to open in any direction for easy maintenance.



## Flexible installation

The unit fits nicely into the decor of a grid type ceiling and can be installed near a lighting or a ventilation opening.



## High ceiling mode

The cassette can be installed up to a height of 3.0 m. (012/014/018).

| Model code | Maximum height from floor to ceiling (m) |                   |
|------------|--|-------------------|
|            | Standard mode                            | High ceiling mode |
| 004        | 2.7                                      | -                 |
| 005        | 2.7                                      | -                 |
| 007        | 2.7                                      | -                 |
| 009        | 2.7                                      | -                 |
| 012        | 2.7                                      | 3.0               |
| 014        | 2.7                                      | 3.0               |
| 018        | 2.7                                      | 3.0               |

Model: AUXB004HLAH / AUXB005HLAH / AUXB007HLAH / AUXB009HLAH  
 AUXB012HLAH / AUXB014HLAH / AUXB018HLAH  
 AUXN009HLAH / AUXN012HLAH / AUXN014HLAH \* Production by order



## Specifications


| Model name                                   |                            | AUXB004HLAH                  | AUXB005HLAH | AUXB007HLAH | AUXB009HLAH | AUXB012HLAH | AUXB014HLAH | AUXB018HLAH                  | AUXN009HLAH | AUXN012HLAH | AUXN014HLAH |
|--|----------------------------|------------------------------|-------------|-------------|-------------|-------------|-------------|------------------------------|-------------|-------------|-------------|
| Power source                                 |                            | Single phase, 220-240V, 50Hz |             |             |             |             |             | Single phase, 220-240V, 50Hz |             |             |             |
| Capacity                                     | Cooling                    | 1.1                          | 1.7         | 2.2         | 2.8         | 3.6         | 4.5         | 5.6                          | 2.8         | 3.6         | 4.5         |
|  | Heating                    | 1.3                          | 1.9         | 2.8         | 3.2         | 4.1         | 5.0         | 6.3                          | 3.2         | 4.1         | 5.0         |
| Input power                                  |                            | 21                           | 21          | 23          | 24          | 27          | 33          | 50                           | 41          | 71          | 81          |
| Airflow rate<br>(Cooling / Heating)*         | High                       | 530                          | 530         | 540         | 550         | 600         | 680         | 820                          | 750         | 970         | 1,030       |
|  | Med-High                   | 490 / 480                    | 490 / 480   | 500         | 520         | 560         | 620         | 660                          | 550         | 600         | 680         |
|  | Med                        | 450 / 430                    | 450 / 430   | 460         | 480         | 520         | 560         | 590                          | 480         | 520         | 560         |
|  | Med-Low                    | 420 / 380                    | 420 / 380   | 420         | 440         | 480         | 500         | 520                          | 440         | 480         | 500         |
|  | Low                        | 390 / 340                    | 390 / 340   | 390         | 400         | 430         | 440         | 460                          | 400         | 430         | 440         |
| Quiet  | 350 / 300                  | 350 / 300                    | 350         | 350         | 390         | 390         | 400         | 350                          | 390         | 390         |             |
| Sound pressure level<br>(Cooling / Heating)* | High                       | 34                           | 34          | 34          | 35          | 37          | 39          | 45                           | 42          | 49          | 50          |
|  | Med-High                   | 32 / 31                      | 32 / 31     | 32          | 33          | 34          | 37          | 39                           | 35          | 37          | 39          |
|  | Med                        | 30 / 29                      | 30 / 29     | 30          | 31          | 33          | 34          | 36                           | 31          | 33          | 34          |
|  | Med-Low                    | 28 / 26                      | 28 / 26     | 28          | 29          | 31          | 32          | 33                           | 29          | 31          | 32          |
|  | Low                        | 27 / 24                      | 27 / 24     | 27          | 27          | 29          | 30          | 30                           | 27          | 29          | 30          |
| Quiet  | 25 / 21                    | 25 / 21                      | 25          | 25          | 27          | 27          | 27          | 25                           | 27          | 27          |             |
| Net Dimensions (H × W × D)                   |                            | mm 245 × 570 × 570           |             |             |             |             |             | mm 245 × 570 × 570           |             |             |             |
| Weight                                       |                            | 14.5                         | 14.5        | 15          | 15          | 15.5        | 15.5        | 17                           | 15          | 15.5        | 15.5        |
| Connection pipe diameter                     | Liquid (Flare)             | 6.35                         | 6.35        | 6.35        | 6.35        | 6.35        | 6.35        | 6.35                         | 6.35        | 6.35        | 6.35        |
|  | Gas (Flare)                | 9.52                         | 9.52        | 9.52        | 9.52        | 12.70       | 12.70       | 12.70                        | 9.52        | 12.70       | 12.70       |
| Drain Hose Diameter (I.D./O.D.)              |                            | 25 / 32                      | 25 / 32     | 25 / 32     | 25 / 32     | 25 / 32     | 25 / 32     | 25 / 32                      | 25 / 32     | 25 / 32     | 25 / 32     |
| Cassette Grille                              | Model name                 | UTG-UFYH-W                   |             |             |             |             |             | UTG-UFYH-W                   |             |             |             |
|  | Net Dimensions (H × W × D) | mm 49 × 620 × 620            |             |             |             |             |             | mm 49 × 620 × 620            |             |             |             |
| Weight                                       |                            | 2.3                          | 2.3         | 2.3         | 2.3         | 2.3         | 2.3         | 2.3                          | 2.3         | 2.3         | 2.3         |

Note: Specifications are subject to the following conditions:  
 Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.  
 Heating: Indoor temperature of 20°CDB/(15°CWB), and outdoor temperature of 7°CDB/6°CWB.  
 Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V]  
 \*The value is the same for cooling and heating if there is one value.

## Optional parts


\*For more details, please refer to the chapter "Optional parts".

|                                   |            |                           |                         |
|-----------------------------------|------------|---------------------------|-------------------------|
| Wireless remote controller:       | UTY-LNVY   | WLAN adapter:             | UTY-TFSXZ1, UTY-TFSXJ3, |
| Fresh Air Intake Kit:             | UTZ-VXAA   |                           | FG-AC-WIF1Z1            |
| Insulation kit for high humidity: | UTZ-KXGC   | Gas sensor kit:           | UTY-SGZY                |
| Silver Ion Filter:                | UTD-HFAA   | Expansion kit:            | UTZ-JXXA                |
| Remote sensor kit:                | UTY-XSZXZ1 | Air Outlet Shutter Plate: | UTR-YDZB                |
| Cassette Grille:                  | UTG-UFYH-W |                           |                         |

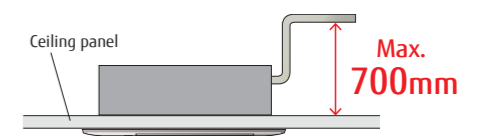

## Dimensions

(Unit: mm)

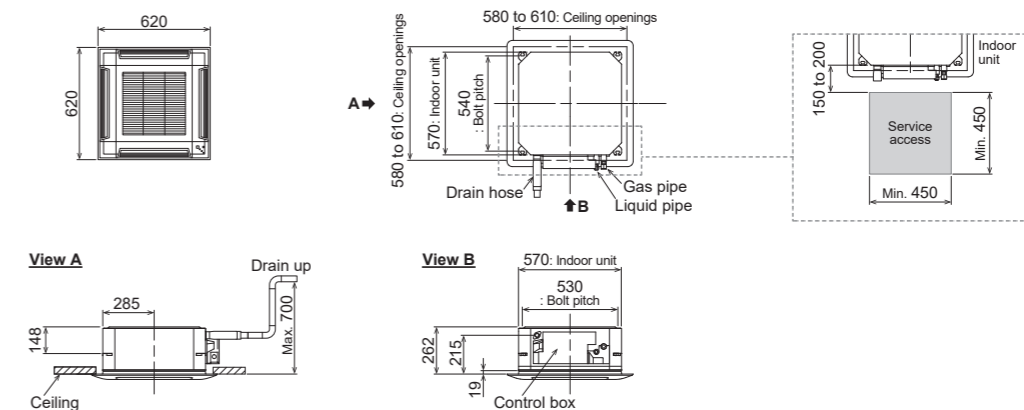


# Low Static Pressure Duct Slim Duct




## Slim design

Slim design allows for installation in a tight ceiling space.

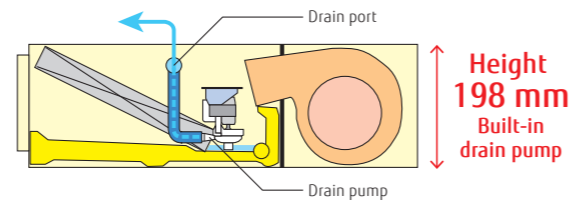

## Air intake

Air intake direction can be selected to match the installation site.

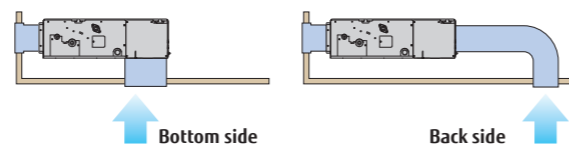

## Wide range of static pressures

The use of a DC fan motor makes it possible to adjust the static pressure between 0 and 90 Pa. The static pressure range can be changed by a remote controller.



Static pressure range  
**0 to 90 Pa**

\* 024 model static pressure range is 0 to 50 Pa.

## Auto louver grille kit (Option)



The optional clean-looking flat Auto louver blends into any interior and provides a comfortable airflow.




## Filter (Accessory)

ARXD004-018


ARXD024




Model: ARXD004HLAH / ARXD005HLAH / ARXD007HLAH / ARXD009HLAH  
ARXD012HLAH / ARXD014HLAH / ARXD018HLAH / ARXD024HLAH  
ARXP009HLAH / ARXP012HLAH / ARXP014HLAH \* Production by order



ARXD004/005/007/009/012/014HLAH  
ARXP009/012/014HLAH



ARXX018HLAH



ARXD024HLAH

## Specifications

| Model name                      | ARXD004HLAH                  | ARXD005HLAH     | ARXD007HLAH | ARXD009HLAH | ARXD012HLAH | ARXD014HLAH | ARXD018HLAH                  | ARXD024HLAH     | ARXP009HLAH | ARXP012HLAH       | ARXP014HLAH |                 |  |
|---------------------------------|------------------------------|-----------------|-------------|-------------|-------------|-------------|------------------------------|-----------------|-------------|-------------------|-------------|-----------------|--|
| Power source                    | Single phase, 220-240V, 50Hz |                 |             |             |             |             | Single phase, 220-240V, 50Hz |                 |             |                   |             |                 |  |
| Capacity                        | Cooling                      | 1.1             | 1.7         | 2.2         | 2.8         | 3.6         | 4.5                          | 5.6             | 7.1         | 2.8               | 3.6         | 4.5             |  |
|                                 | Heating                      | 1.3             | 1.9         | 2.8         | 3.2         | 4.0         | 5.0                          | 6.3             | 8.0         | 3.2               | 4.0         | 5.0             |  |
| Input power                     | W                            | 38              | 38          | 41          | 47          | 48          | 84                           | 76              | 107         | 77                | 128         | 128             |  |
| Airflow rate                    | High                         | 530             | 530         | 550         | 600         | 580         | 790                          | 930             | 1,250       | 770               | 940         | 940             |  |
|                                 | Med-High                     | 480             | 480         | 520         | 550         | 550         | 720                          | 880             | 1,180       | 630               | 810         | 810             |  |
|                                 | Med                          | 440             | 440         | 480         | 500         | 520         | 640                          | 780             | 1,060       | 530               | 660         | 660             |  |
|                                 | Med-Low                      | 410             | 410         | 450         | 460         | 480         | 560                          | 670             | 930         | 480               | 580         | 580             |  |
|                                 | Low                          | 370             | 370         | 400         | 400         | 430         | 470                          | 580             | 810         | 430               | 490         | 490             |  |
| Quiet                           | 320                          | 320             | 360         | 360         | 350         | 370         | 510                          | 640             | 380         | 390               | 390         |                 |  |
| Static pressure range           | Pa                           | 0 to 90         | 0 to 90     | 0 to 90     | 0 to 90     | 0 to 90     | 0 to 90                      | 0 to 90         | 0 to 50     | 0 to 25           | 0 to 25     | 0 to 25         |  |
| Standard static pressure        |                              | 25              | 25          | 25          | 25          | 25          | 25                           | 25              | 25          | 25                | 25          | 25              |  |
| Sound pressure level            | High                         | 26              | 26          | 28          | 29          | 30          | 34                           | 34              | 35          | 36                | 40          | 40              |  |
|                                 | Med-High                     | 26              | 26          | 26          | 27          | 28          | 32                           | 31              | 32          | 32                | 38          | 38              |  |
|                                 | Med                          | 25              | 25          | 25          | 25          | 27          | 30                           | 29              | 30          | 28                | 33          | 33              |  |
|                                 | Med-Low                      | 24              | 24          | 24          | 24          | 26          | 28                           | 27              | 27          | 27                | 31          | 31              |  |
|                                 | Low                          | 22              | 22          | 22          | 22          | 24          | 25                           | 25              | 24          | 25                | 27          | 27              |  |
| Quiet                           | 21                           | 21              | 21          | 21          | 22          | 22          | 23                           | 21              | 23          | 24                | 24          |                 |  |
| Net Dimensions (H × W × D)      | mm                           | 198 × 700 × 620 |             |             |             |             |                              | 198 × 900 × 620 |             | 198 × 1,100 × 620 |             | 198 × 700 × 620 |  |
| Weight                          | kg                           | 16              | 16          | 16.5        | 16.5        | 17          | 17                           | 21              | 25          | 16.5              | 17          | 17              |  |
| Connection pipe diameter        | Liquid (Flare)               | 6.35            | 6.35        | 6.35        | 6.35        | 6.35        | 6.35                         | 6.35            | 9.52        | 6.35              | 6.35        | 6.35            |  |
|                                 | Gas (Flare)                  | 9.52            | 9.52        | 9.52        | 9.52        | 12.70       | 12.70                        | 12.70           | 15.88       | 9.52              | 12.70       | 12.70           |  |
| Drain Hose Diameter (I.D./O.D.) |                              | 25/32           | 25/32       | 25/32       | 25/32       | 25/32       | 25/32                        | 25/32           | 25/32       | 25/32             | 25/32       | 25/32           |  |


Note: Specifications are subject to the following conditions:  
Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.  
Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.  
Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V]  
\*1: This value is under cooling operation.

## Optional parts

\*For more details, please refer to the chapter "Optional parts".


- Wireless remote controller: UTY-LNVY\*  
Remote sensor unit: UTY-XSZXZ1  
IR receiver unit: UTY-TRHX  
WLAN adapter: UTY-TFSXJ3  
UTY-TFSXZ1  
FG-AC-WIF1Z1  
Expansion kit: UTZ-JXXA
- Auto Louver Grille Kit: UTD-GXTA-W (004-014)  
UTD-GXTB-W (018)  
UTD-GXTC-W (024)  
Silver Ion Filter: UTD-HFTA (004-014)  
UTD-HFTB (018)  
UTD-HFTC (024)  
Gas sensor kit: UTY-SGZY

\*IR receiver unit (UTY-TRHX) is required.

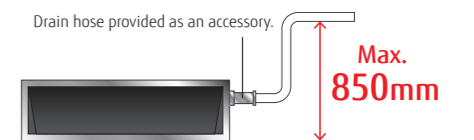


## Dimensions

(Unit: mm)

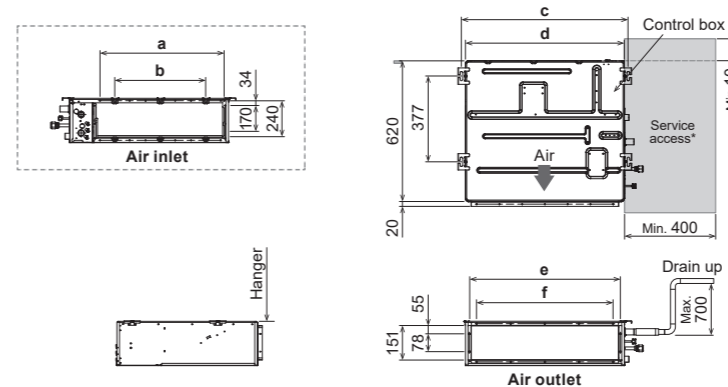

|   | ARXD004-014HLAH | ARXD018HLAH | ARXD024HLAH   |
|---|-----------------|-------------|---------------|
| a | 574             | 774         | 974           |
| b | P200×2=400      | P200×3=600  | P200×4=800    |
| c | 734             | 934         | 1,134         |
| d | 700             | 900         | 1,100         |
| e | 650             | 850         | 1,050         |
| f | P100×6=600      | P100×8=800  | P100×10=1,000 |

\*The design of the service access depends on the installation method. Refer to the installation manual for more information.



NEW

# Wall-mounted type




DC FAN

## Highly-efficiency, compact design

The 004-014 models share the same design. The high-density and large heat exchanger achieves a highly-efficiency and compact design. The compact body blends in well with conference rooms and offices, providing comfortable air conditioning.

High-density heat exchanger

**Slim tube design: 5 mm**  
Greater heat-exchanging capacity is achieved through the use of a high-density heat exchanger and a sub-heat exchanger.

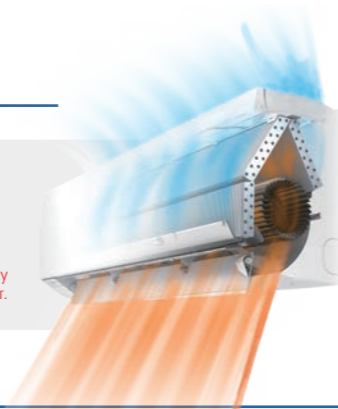


## More comfortable airflow

The unique power diffuser provides comfortable air conditioning.

### Heating

The vertical airflow provides powerful floor-level heating.

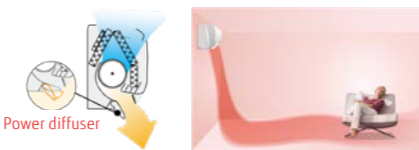


### Cooling

The left/right airflow avoids blowing cool air directly at the occupants in a room.




## Quiet operation & 6-Step fan speed control

The airflow pattern achieves significant noise reduction. Multistep airflow adjustment to suit the environment



- 6-Step Speed
- High
- Med-High
- Med
- Med-Low
- Low
- Quiet

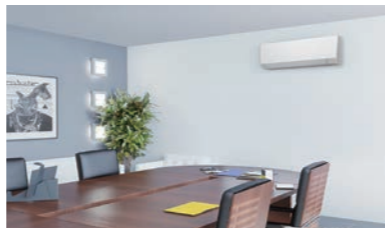


\* Remote controller is compatible with the following:  
UTY-RNRY25 / UTY-RLRY / UTY-RSRY / UTY-RHRY / UTY-DCGY23 / UTY-ALGX21 / UTY-APGX21

## The Occupancy sensor contributes to further energy savings.

Energy saving operation starts automatically by detecting the motion of a person. Two modes of save operation mode and stop mode can be selected.

\*If you want to use the Occupancy sensor control function, you need an setting device that can set the Occupancy sensor control function. For example: Wired RC (Touch panel).

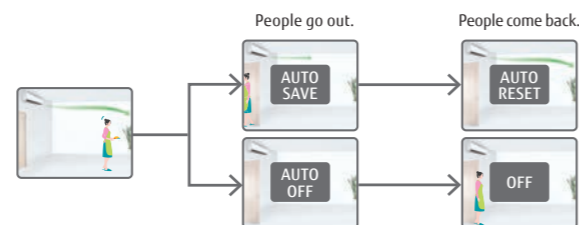

Model: ASYA004HCAH / ASYA005HCAH / ASYA007HCAH  
ASYA009HCAH / ASYA012HCAH / ASYA014HCAH  
[external EEV]  
ASYE004HCAH / ASYE005HCAH / ASYE007HCAH  
ASYE009HCAH / ASYE012HCAH / ASYE014HCAH



## Specifications

| Model name                      | ASYA004HCAH                  | ASYA005HCAH      | ASYA007HCAH | ASYA009HCAH | ASYA012HCAH | ASYA014HCAH | ASYE004HCAH                  | ASYE005HCAH      | ASYE007HCAH | ASYE009HCAH | ASYE012HCAH | ASYE014HCAH |       |
|---------------------------------|------------------------------|------------------|-------------|-------------|-------------|-------------|------------------------------|------------------|-------------|-------------|-------------|-------------|-------|
| Power source                    | Single phase, 220-240V, 50Hz |                  |             |             |             |             | Single phase, 220-240V, 50Hz |                  |             |             |             |             |       |
| Capacity                        | Cooling                      | 1.1              | 1.7         | 2.2         | 2.8         | 3.6         | 4.0                          | 1.1              | 1.7         | 2.2         | 2.8         | 3.6         | 4.0   |
|                                 | Heating                      | 1.3              | 1.9         | 2.8         | 3.2         | 4.0         | 4.5                          | 1.3              | 1.9         | 2.8         | 3.2         | 4.0         | 4.5   |
| Input power                     | W                            | 12               | 12          | 16          | 19          | 25          | 35                           | 12               | 12          | 16          | 19          | 25          | 35    |
| Airflow rate                    | High                         | 450              | 450         | 550         | 590         | 660         | 770                          | 450              | 450         | 550         | 590         | 660         | 770   |
|                                 | Med-High                     | 430              | 430         | 490         | 550         | 590         | 710                          | 430              | 430         | 490         | 550         | 590         | 710   |
|                                 | Med                          | 400              | 400         | 450         | 490         | 550         | 650                          | 400              | 400         | 450         | 490         | 550         | 650   |
|                                 | Med-Low                      | 380              | 380         | 390         | 420         | 510         | 590                          | 380              | 380         | 390         | 420         | 510         | 590   |
|                                 | Low                          | 360              | 360         | 360         | 360         | 450         | 530                          | 360              | 360         | 360         | 360         | 450         | 530   |
| Sound pressure level            | Quiet                        | 310              | 310         | 320         | 320         | 320         | 320                          | 310              | 310         | 320         | 320         | 320         | 320   |
|                                 | High                         | 31               | 31          | 34          | 37          | 40          | 44                           | 31               | 31          | 34          | 37          | 40          | 44    |
|                                 | Med-High                     | 30               | 30          | 32          | 34          | 37          | 42                           | 30               | 30          | 32          | 34          | 37          | 42    |
|                                 | Med                          | 28               | 28          | 30          | 32          | 34          | 40                           | 28               | 28          | 30          | 32          | 34          | 40    |
|                                 | Med-Low                      | 27               | 27          | 28          | 29          | 33          | 37                           | 27               | 27          | 28          | 29          | 33          | 37    |
| Net Dimensions (H x W x D)      | mm                           | 268 x 840 x 203  |             |             |             |             |                              | 268 x 840 x 203  |             |             |             |             |       |
|                                 | kg                           | 8                | 8           | 8.5         | 8.5         | 8.5         | 8.5                          | 8                | 8           | 8.5         | 8.5         | 8.5         | 8.5   |
| Connection pipe diameter        | Liquid (Flare)               | 6.35             | 6.35        | 6.35        | 6.35        | 6.35        | 6.35                         | 6.35             | 6.35        | 6.35        | 6.35        | 6.35        | 6.35  |
|                                 | Gas (Flare)                  | 9.52             | 9.52        | 9.52        | 9.52        | 12.70       | 12.70                        | 9.52             | 9.52        | 9.52        | 9.52        | 12.70       | 12.70 |
| Drain Hose Diameter (I.D./O.D.) | mm                           | 13.8/15.8 to16.7 |             |             |             |             |                              | 13.8/15.8 to16.7 |             |             |             |             |       |
| EV kit (optional)               |                              | -                | -           | -           | -           | -           | -                            | UTR-EV09XC       |             |             | UTR-EV14XC  |             |       |


Note: Specifications are subject to the following conditions:  
Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.  
Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.  
Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V]  
When connecting ASY\*004G\*\*H, ASY\*007G\*\*H, ASY\*009G\*\*H to an outdoor unit other than the outdoor unit of the J-VL Series, the gas pipe diameter should be Ø12.70 mm.

## Optional parts

- Wireless remote controller: UTY-LNVY
- WLAN adapter: UTY-TFSXZ1, UTY-TFSXJ3, FG-AC-WIFI Z1
- Silver Ion Filter: UTR-FA16-5
- Remote sensor kit: UTY-XSZXZ1
- Gas sensor kit: UTY-SGZY
- Expansion kit: UTZ-JXXA

## Dimensions

(Unit: mm)

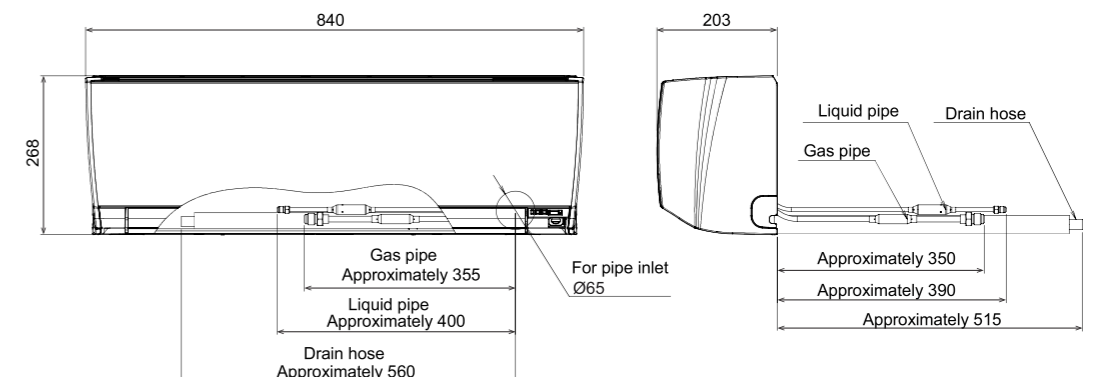

# VRF Indoor Unit Lineup for J-IVS J-IV J-IVL VR-IV V-IV

| Capacity range (kW) |  |                                 | 1.1   | 2.2                                 | 2.8           | 3.6           |               | 4.0 | 4.5           | 5.6           | 7.1           | 9.0           | 10.0          | 11.2          | 12.5          | 14.0          | 18.0 | 22.4            | 25.0            | 28.0            |                 |
|---------------------|--|---------------------------------|---|-------------------------------------|---------------|---------------|---------------|-----|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|------|-----------------|-----------------|-----------------|-----------------|
| Class               |  |                                 | 4   | 7                                   | 9             | 12            |               | 14  | 14            | 18            | 24            | 30            | 34            | 36            | 45            | 54            | 60   | 72              | 90              | 96              |                 |
| Cassette            | Compact type                                     | Compact Grid type/Standard type |   | AUXB 004 GLEH                       | AUXB 007 GLEH | AUXB 009 GLEH | AUXB 012 GLEH |     | AUXB 014 GLEH | AUXB 018 GLEH | AUXB 024 GLEH |               |               |               |               |               |      |                 |                 |                 |                 |
|                     | Slim type  | Circular Flow                   |   |                                     |               |               |               |     |               | AUXM 018 GLEH | AUXM 024 GLEH | AUXM 030 GLEH |               |               |               |               |      |                 |                 |                 |                 |
|                     | Large type                                       | Circular Flow                   |   |                                     |               |               |               |     |               | AUXK 018 GLEH | AUXK 024 GLEH | AUXK 030 GLEH | AUXK 034 GLEH | AUXK 036 GLEH | AUXK 045 GLEH | AUXK 054 GLEH |      |                 |                 |                 |                 |
|                     | One-way Flow type                                | One-way Flow                    | <br>004 - 012    014 - 024                      | AUXV 004 GLEH                       | AUXV 007 GLEH | AUXV 009 GLEH | AUXV 012 GLEH |     | AUXV 014 GLEH | AUXV 018 GLEH | AUXV 024 GLEH |               |               |               |               |               |      |                 |                 |                 |                 |
|                     | 3D Flow type                                     | 3D Flow                         |   |                                     |               |               |               |     |               | AUXS 018 GLEH | AUXS 024 GLEH |               |               |               |               |               |      |                 |                 |                 |                 |
| Duct                | Low Static Pressure Duct                         | Mini Duct (With drain pump)     | <br>004 - 014    018    024                     | ARXK 004 GLGH                       | ARXK 007 GLGH | ARXK 009 GLGH | ARXK 012 GLGH |     | ARXK 014 GLGH | ARXK 018 GLGH | ARXK 024 GLGH |               |               |               |               |               |      |                 |                 |                 |                 |
|                     |  | Slim Duct (With drain pump)     | <br>04/007 - 014    018    024                  | ARXD 04 GALH*2                      | ARXD 007 GLEH | ARXD 009 GLEH | ARXD 012 GLEH |     | ARXD 014 GLEH | ARXD 018 GLEH | ARXD 024 GLEH |               |               |               |               |               |      |                 |                 |                 |                 |
|                     |  | High Efficiency*3               |   |                                     |               |               |               |     |               | ARXP 018 GLFH |               | ARXP 030 GLFH |               |               |               |               |      |                 |                 |                 |                 |
|                     | Medium static pressure duct                      | Normal                          |   |                                     |               |               |               |     |               |               | ARXA 024 GLEH | ARXA 030 GLEH |               | ARXA 036 GLEH | ARXA 045 GLEH |               |      |                 |                 |                 |                 |
|                     |  | High Static Pressure Duct       | Normal  | <br>036/45 - 60    072 - 090    096 |               |               |               |     |               |               |               |               |               |               | ARXC 036 GTEH | ARXC 045 GTEH |      | ARXC 060 GTEH*1 | ARXC 072 GTEH*1 | ARXC 090 GTEH*1 | ARXC 096 GTEH*1 |
| Floor               | Floor (*Same as Ceiling models)                  |                                 |   |                                     |               |               | ABYA 012 GTEH |     | ABYA 014 GTEH | ABYA 018 GTEH | ABYA 024 GTEH |               |               |               |               |               |      |                 |                 |                 |                 |
|                     | Slim Concealed Floor (*Same as Slim Duct models) |                                 | <br>04/007 - 014    018    024                  | ARXD 04 GALH*2                      | ARXD 007 GLEH | ARXD 009 GLEH | ARXD 012 GLEH |     | ARXD 014 GLEH | ARXD 018 GLEH | ARXD 024 GLEH |               |               |               |               |               |      |                 |                 |                 |                 |
|                     | Compact Floor                                    |                                 |   | AGYA 004 GCGH                       | AGYA 007 GCGH | AGYA 009 GCGH | AGYA 012 GCGH |     | AGYA 014 GCGH |               |               |               |               |               |               |               |      |                 |                 |                 |                 |
|                     | Compact Floor (EEV external)                     |                                 |   | AGYE 004 GCEH                       | AGYE 007 GCEH | AGYE 009 GCEH | AGYE 012 GCEH |     | AGYE 014 GCEH |               |               |               |               |               |               |               |      |                 |                 |                 |                 |
|                     |  |                                 | This model requires the EV kit to be connected. |                                     |               |               |               |     |               |               |               |               |               |               |               |               |      |                 |                 |                 |                 |
| Ceiling             |  |                                 | <br>012 - 024    030 - 054                      |                                     |               |               | ABYA 012 GTEH |     | ABYA 014 GTEH | ABYA 018 GTEH | ABYA 024 GTEH | ABYA 030 GTEH |               | ABYA 036 GTEH | ABYA 045 GTEH | ABYA 054 GTEH |      |                 |                 |                 |                 |
| Wall-mounted type   | Wall-mounted type                                |                                 | <br>004 - 014    18 - 24    030 - 034           | ASYA 004 GCGH                       | ASYA 007 GCGH | ASYA 009 GCGH | ASYA 012 GCGH |     | ASYA 014 GCGH |               | ASYA 18 GBCH  | ASYA 24 GBCH  | ASYA 030 GTEH | ASYA 034 GTEH |               |               |      |                 |                 |                 |                 |
|                     | Wall-mounted type (EEV external)                 |                                 | <br>004 - 014                                   | ASYE 004 GCEH                       | ASYE 007 GCEH | ASYE 009 GCEH | ASYE 012 GCEH |     | ASYE 014 GCEH |               |               |               |               |               |               |               |      |                 |                 |                 |                 |
|                     |  |                                 | This model requires the EV kit to be connected. |                                     |               |               |               |     |               |               |               |               |               |               |               |               |      |                 |                 |                 |                 |


\*1: ARXC060/072/090/096G cannot be connected to J-IVS/J-IV Series.  
 \*2: ARXD04GALH cannot be connected to J-IVS/J-IVL/VR-IV Series.  
 \*3: Production by order  
 Specifications and design are subject to change without notice.

# Compact Cassette Grid type



## Compact and stylish panel

The compact and stylish panel fits nicely into a grid type ceiling. The linear design is a perfect fit into a grid of 620 mm × 620 mm in the ceiling.

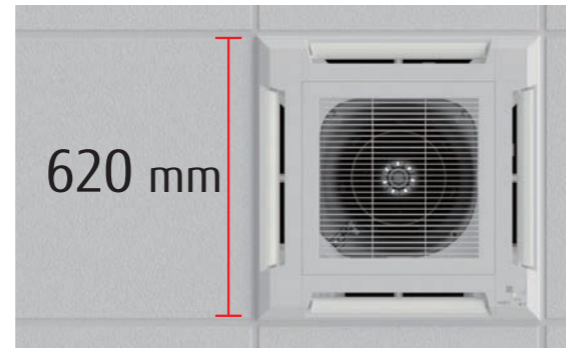

## Easy maintenance

You can access the unit for maintenance just by removing a ceiling panel right next to the grille. As no inspection hole needs to be cut through the ceiling, no additional construction cost is incurred.



The air inlet grille can be installed to open in any direction for easy maintenance.



## Flexible installation

The unit fits nicely into the decor of a grid type ceiling and can be installed near a lighting or a ventilation opening.



## High ceiling mode

The cassette can be installed up to a height of 3.0 m. (012/014/018/024).

| Model code | Maximum height from floor to ceiling (m) |                   |
|------------|--|-------------------|
|            | Standard mode                            | High ceiling mode |
| 004        | 2.7                                      | -                 |
| 007        | 2.7                                      | -                 |
| 009        | 2.7                                      | -                 |
| 012        | 2.7                                      | 3.0               |
| 014        | 2.7                                      | 3.0               |
| 018        | 2.7                                      | 3.0               |
| 024        | 2.7                                      | 3.0               |

Model: AUXB004GLEH / AUXB007GLEH / AUXB009GLEH  
AUXB012GLEH / AUXB014GLEH / AUXB018GLEH  
AUXB024GLEH



## Specifications


| Model name                      | AUXB004GLEH                 | AUXB007GLEH                   | AUXB009GLEH     | AUXB012GLEH     | AUXB014GLEH     | AUXB018GLEH     | AUXB024GLEH     |
|---------------------------------|-----------------------------|-------------------------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Power source                    | Single phase, ~230 V, 50 Hz |                               |                 |                 |                 |                 |                 |
| Capacity                        | Cooling                     | 1.1                           | 2.2             | 2.8             | 3.6             | 4.5             | 7.1             |
|                                 | Heating                     | 1.3                           | 2.8             | 3.2             | 4.1             | 5.0             | 8.0             |
| Input power                     | W                           | 23                            | 25              | 25              | 29              | 35              | 84              |
| Airflow rate                    | High                        | 530/530                       | 540             | 550             | 600             | 680             | 1,030           |
|                                 | Med-High                    | 490/480                       | 500             | 520             | 560             | 620             | 910             |
|                                 | Med                         | 450/430                       | 460             | 480             | 520             | 560             | 790             |
|                                 | Med-Low                     | 420/380                       | 420             | 440             | 480             | 500             | 680             |
|                                 | Low                         | 390/340                       | 390             | 400             | 430             | 440             | 560             |
|                                 | Quiet                       | 350/300                       | 350             | 350             | 390             | 390             | 400             |
| Sound pressure level            | High                        | 34/34                         | 34              | 35              | 37              | 38              | 50              |
|                                 | Med-High                    | 32/31                         | 32              | 33              | 34              | 37              | 46              |
|                                 | Med                         | 30/29                         | 30              | 31              | 33              | 34              | 36              |
|                                 | Med-Low                     | 28/26                         | 28              | 29              | 31              | 32              | 33              |
|                                 | Low                         | 27/24                         | 27              | 27              | 29              | 30              | 30              |
|                                 | Quiet                       | 25/21                         | 25              | 25              | 27              | 27              | 27              |
| Net Dimensions (H × W × D)      | mm                          | 245 × 570 × 570               | 245 × 570 × 570 | 245 × 570 × 570 | 245 × 570 × 570 | 245 × 570 × 570 | 245 × 570 × 570 |
| Weight                          | kg                          | 14.5                          | 15              | 15              | 15              | 15              | 17              |
| Connection pipe diameter        | Liquid (Flare)              | 6.35                          | 6.35            | 6.35            | 6.35            | 6.35            | 9.52            |
|                                 | Gas (Flare)                 | 9.52                          | 9.52            | 9.52            | 12.70           | 12.70           | 15.88           |
| Drain Hose Diameter (I.D./O.D.) |                             | 25/32                         |                 |                 |                 |                 |                 |
| Cassette Grille                 | Model name                  | UTG-UFYE-W/UTG-UFYC-W         |                 |                 |                 |                 |                 |
|                                 | Net Dimensions (H × W × D)  | 49 × 620 × 620/50 × 700 × 700 |                 |                 |                 |                 |                 |
|                                 | Weight                      | 2.3/2.6                       |                 |                 |                 |                 |                 |

Note: Specifications are subject to the following conditions:  
Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.  
Heating: Indoor temperature of 20°CDB/(15°CWB), and outdoor temperature of 7°CDB/6°CWB.  
Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V]  
\*1: This value is under cooling operation.

## Optional parts


\*For more details, please refer to the chapter "Optional parts".

|                                   |            |                             |                                     |
|-----------------------------------|------------|-----------------------------|-------------------------------------|
| Air Outlet Shutter Plate:         | UTR-YDZB   | Cassette Grille:            | UTG-UFYC-W, UTG-UFYE-W              |
| Fresh Air Intake Kit:             | UTZ-VXAA   | External power supply unit: | UTZ-GXXA, UTZ-GXXC*                 |
| Insulation kit for high humidity: | UTZ-KXGC   | WLAN adapter:               | UTY-TFSXZ1, UTY-TFSXJ3, FG-AC-WIFI1 |
| Silver Ion Filter:                | UTD-HFAA   |                             |                                     |
| Remote sensor kit:                | UTY-XSZXZ1 |                             |                                     |

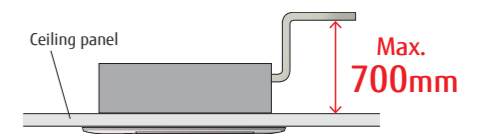

## Dimensions

(Unit: mm)

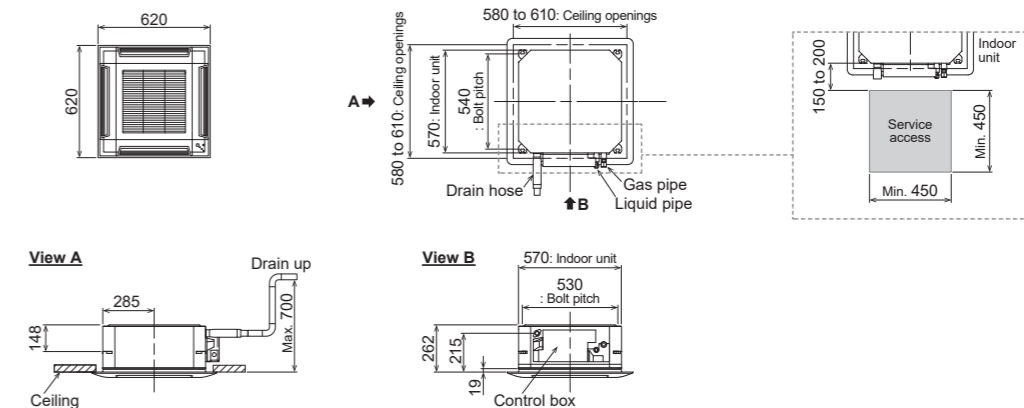


# Cassette Slim type Circular Flow



## Unique circular flow design


This Cassette type air conditioner is equipped with a high performance DC fan motor, a turbo fan, and a louver to propel powerful airflows in all directions.

- Ø7 mm high-density heat exchanger
- New DC fan motor
- High-efficiency turbo fan
- Seamless airflow louver

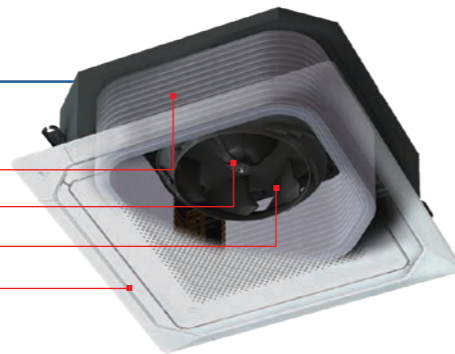

## Uniform temperature air conditioning

Achieve a comfortable air conditioning spread to every corner of the room thanks to the circular flow and wide vertical airflow.

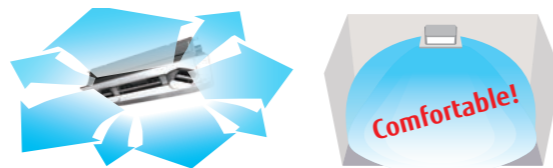

## Individual louver control

Each louver can be set individually by the Touch panel wired remote controller so the user can enjoy the comfort of different directional airflows according to the room layout.

\* UTY-RNRYZ5 Wired remote controller with touch panel and UTY-DCGYZ3 Central remote controller only



Comfortable air conditioning by preventing direct blowing of cold air and by providing swinging air flow simultaneously.

Provides efficient air conditioning based on the room layout

## The Human sensor contributes to further energy savings.

Energy saving operation starts automatically by detecting the motion of a person. Two modes of save operation mode and stop mode can be selected.

\* UTY-RNRYZ5 Wired remote controller with touch panel and UTY-DCGYZ3 Central remote controller only



Human sensor (Optional)

- 2 modes are available to choose from:
- Auto economy mode** The air conditioner switches to operate on reduced power when it detects that the room is unoccupied.
  - Auto-off mode** The air conditioner stops operating when it detects that the room is unoccupied.

Model: AUXM018GLEH / AUXM024GLEH / AUXM030GLEH



## Specifications

| Model name                      | AUXM018GLEH                 |                       | AUXM024GLEH     |       | AUXM030GLEH |  |
|---------------------------------|-----------------------------|-----------------------|-----------------|-------|-------------|--|
| Power source                    | Single phase, ~230 V, 50 Hz |                       |                 |       |             |  |
| Capacity                        | Cooling                     | kW                    | 5.6             | 7.1   | 9.0         |  |
|                                 | Heating                     | kW                    | 6.3             | 8.0   | 10.0        |  |
| Input power                     |                             | W                     | 20              | 25    | 49          |  |
| Airflow rate                    | High                        | m <sup>3</sup> /h     | 1,050           | 1,120 | 1,470       |  |
|                                 | Med-High                    | m <sup>3</sup> /h     | 930             | 1,050 | 1,160       |  |
|                                 | Med                         | m <sup>3</sup> /h     | 900             | 930   | 1,070       |  |
|                                 | Med-Low                     | m <sup>3</sup> /h     | 870             | 900   | 930         |  |
|                                 | Low                         | m <sup>3</sup> /h     | 810             | 870   | 900         |  |
|                                 | Quiet                       | m <sup>3</sup> /h     | 780             | 780   | 780         |  |
| Sound pressure level            | High                        | dB(A)                 | 33              | 35    | 40          |  |
|                                 | Med-High                    | dB(A)                 | 32              | 33    | 36          |  |
|                                 | Med                         | dB(A)                 | 31              | 32    | 34          |  |
|                                 | Med-Low                     | dB(A)                 | 30              | 31    | 32          |  |
|                                 | Low                         | dB(A)                 | 29              | 30    | 31          |  |
|                                 | Quiet                       | dB(A)                 | 28              | 28    | 28          |  |
| Dimensions (H × W × D)          | mm                          |                       | 246 × 840 × 840 |       |             |  |
| Weight                          | kg                          |                       | 24.0            | 24.5  | 24.5        |  |
| Connection pipe diameter        | Liquid (Flare)              | mm                    | 6.35            | 9.52  | 9.52        |  |
|                                 | Gas (Flare)                 | mm                    | 12.70           | 15.88 | 15.88       |  |
| Drain Hose Diameter (I.D./O.D.) |                             |                       | 25/32           |       |             |  |
| Cassette Grille                 | Model name                  | UTG-UKYC-W/UTG-UKYA-B |                 |       |             |  |
|                                 | Dimensions (H × W × D)      | mm                    | 53 × 950 × 950  |       |             |  |
|                                 | Weight                      | kg                    | 6.0             |       |             |  |

Note: Specifications are subject to the following conditions:  
 Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.  
 Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.  
 Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V].  
 When AUX\*018GLEH is connected to an outdoor unit other than one of the J-IVL Series, the pipe diameter should be Ø9.52/Ø15.88 mm (Liquid/Gas).  
 When connecting AUXK036GLEH, AUXK045GLEH, and AUXK054GLEH to an outdoor unit other than the outdoor unit of the J-IVL Series, the gas pipe diameter should be Ø19.05 mm.


## Optional parts

\*For more details, please refer to the chapter "Optional parts".

|                                |   |  |
|--------------------------------|---|--|
| Human sensor Kit: UTY-SHZXC    | Air Outlet Shutter Plate: UTR-YDZK              | IR Receiver Unit: UTY-LBHXD                        |
| Wide Panel: UTG-AKXA-W         | Insulation kit for high humidity: UTZ-KXRA      | WLAN adapter: UTY-TFSXZ1, UTY-TFSXJ3, FG-AC-WIF1Z1 |
| Panel Spacer: UTG-BKXA-W       | Cassette Grille: UTG-UKYC-W, UTG-UKYA-B         | Silver Ion Filter: UTD-HFRA                        |
| Fresh air intake kit: UTZ-VXRA | External power supply unit: UTZ-GXXA, UTZ-GXXC* | Remote sensor kit: UTY-XSZXZ1                      |

## Dimensions

(Unit: mm)

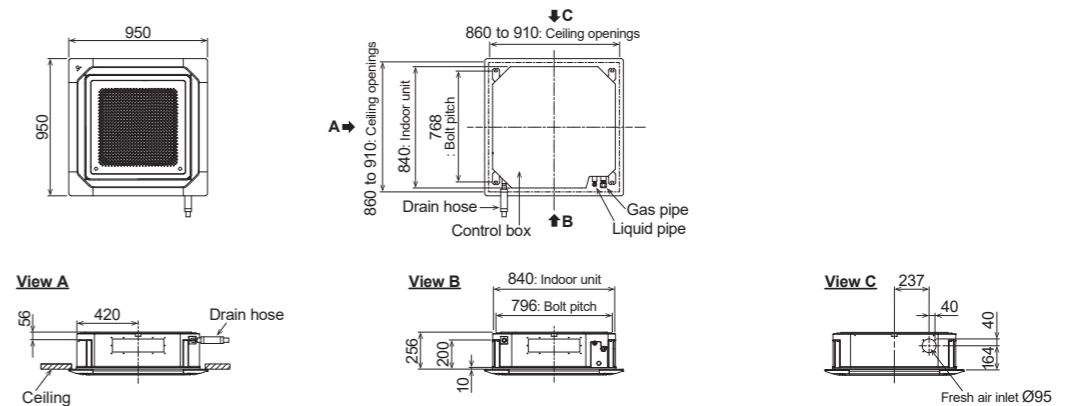



# Cassette Large type


Circular Flow



## Unique circular flow design


This Cassette type air conditioner is equipped with a high performance DC fan motor, a turbo fan, and a louver to propel powerful airflows in all directions.

- Ø7 mm high-density heat exchanger
- New DC fan motor
- High-efficiency turbo fan
- Seamless airflow louver

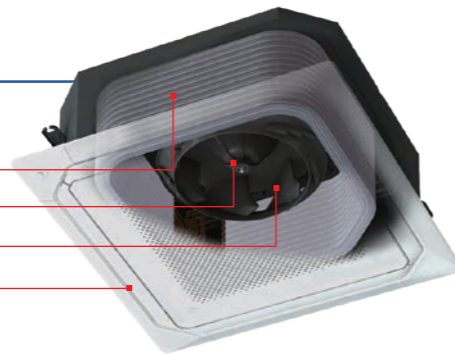

## Uniform temperature air conditioning

Achieve a comfortable air conditioning spread to every corner of the room by circular flow and wide vertical airflow.

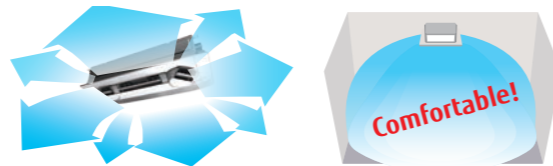

## Individual louver control

Each louver can be set individually by the Touch panel wired remote controller so the user can enjoy the comfort of different directional airflows according to the room layout.

\* UTY-RNRYZ5 Wired remote controller with touch panel and UTY-DCGYZ3 Central remote controller only



Comfortable air conditioning by preventing direct blowing of cold air and by providing swinging air flow simultaneously.

Provides efficient air conditioning based on the room layout

## The Human sensor contributes to further energy savings.

Energy saving operation starts automatically by detecting the motion of a person. Two modes of save operation mode and stop mode can be selected.

\* UTY-RNRYZ5 Wired remote controller with touch panel and UTY-DCGYZ3 Central remote controller only



Human sensor (Optional)

- 2 modes are available to choose from:
- Auto economy mode** The air conditioner switches to operate on reduced power when it detects that the room is unoccupied.
  - Auto-off mode** The air conditioner stops operating when it detects that the room is unoccupied.

Model: AUXK018GLEH / AUXK024GLEH / AUXK030GLEH  
 AUXK034GLEH / AUXK036GLEH / AUXK045GLEH  
 AUXK054GLEH



## Specifications

| Model name                      | AUXK018GLEH                 | AUXK024GLEH           | AUXK030GLEH | AUXK034GLEH | AUXK036GLEH | AUXK045GLEH | AUXK054GLEH |
|---------------------------------|-----------------------------|-----------------------|-------------|-------------|-------------|-------------|-------------|
| Power source                    | Single phase, ~230 V, 50 Hz |                       |             |             |             |             |             |
| Capacity                        | Cooling                     | 5.6                   | 7.1         | 9.0         | 10.0        | 11.2        | 12.5        |
|                                 | Heating                     | 6.3                   | 8.0         | 10.0        | 11.2        | 12.5        | 14.0        |
| Input power                     | kW                          |                       |             |             |             |             |             |
| Airflow rate                    | High                        | 1,420                 | 1,420       | 1,440       | 1,440       | 1,620       | 2,040       |
|                                 | Med-High                    | 1,360                 | 1,360       | 1,400       | 1,400       | 1,500       | 1,800       |
|                                 | Med                         | 1,300                 | 1,300       | 1,340       | 1,340       | 1,400       | 1,590       |
|                                 | Med-Low                     | 1,270                 | 1,270       | 1,300       | 1,300       | 1,340       | 1,440       |
|                                 | Low                         | 1,200                 | 1,200       | 1,280       | 1,280       | 1,280       | 1,300       |
| Sound pressure level            | Quiet                       | 1,150                 | 1,150       | 1,150       | 1,150       | 1,150       | 1,150       |
|                                 | High                        | 38                    | 38          | 39          | 39          | 41          | 44          |
|                                 | Med-High                    | 37                    | 37          | 38          | 38          | 40          | 42          |
|                                 | Med                         | 36                    | 36          | 37          | 37          | 38          | 40          |
|                                 | Med-Low                     | 35                    | 35          | 36          | 36          | 37          | 38          |
| Dimensions (H × W × D)          | mm                          |                       |             |             |             |             |             |
|                                 | 288 × 840 × 840             |                       |             |             |             |             |             |
| Weight                          | kg                          |                       |             |             |             |             |             |
| Connection pipe diameter        | Liquid (Flare)              | 6.35                  | 9.52        | 9.52        | 9.52        | 9.52        | 9.52        |
|                                 | Gas (Flare)                 | 12.70                 | 15.88       | 15.88       | 15.88       | 15.88       | 15.88       |
| Drain Hose Diameter (I.D./O.D.) | 25/32                       |                       |             |             |             |             |             |
| Cassette Grille                 | Model name                  | UTG-UKYC-W/UTG-UKYA-B |             |             |             |             |             |
|                                 | Dimensions (H × W × D)      | mm                    |             |             |             |             |             |
| Weight                          | 53 × 950 × 950              |                       |             |             |             |             |             |
|                                 | kg                          |                       |             |             |             |             |             |
| 6.0                             |                             |                       |             |             |             |             |             |

Note: Specifications are subject to the following conditions:  
 Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.  
 Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.  
 Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V].  
 When AUX\*018GLEH is connected to an outdoor unit other than one of the J-IVL Series, the pipe diameter should be Ø9.52/Ø15.88 mm (Liquid/Gas).  
 When connecting AUXK036GLEH, AUXK045GLEH, and AUXK054GLEH to an outdoor unit other than the outdoor unit of the J-IVL Series, the gas pipe diameter should be Ø19.05 mm.


## Optional parts

\*For more details, please refer to the chapter "Optional parts".

|                                |   |  |
|--------------------------------|---|--|
| Human sensor Kit: UTY-SHZXC    | Air Outlet Shutter Plate: UTR-YDZK              | IR Receiver Unit: UTY-LBHXD                        |
| Wide Panel: UTG-AKXA-W         | Insulation kit for high humidity: UTZ-KXRA      | WLAN adapter: UTY-TFSXZ1, UTY-TFSXJ3, FG-AC-WIF1Z1 |
| Panel Spacer: UTG-BKXA-W       | Cassette Grille: UTG-UKYC-W, UTG-UKYA-B         | Silver Ion Filter: UTD-HFRA                        |
| Fresh air intake kit: UTZ-VXRA | External power supply unit: UTZ-GXXA, UTZ-GXXC* | Remote sensor kit: UTY-XSZXZ1                      |

## Dimensions

(Unit: mm)

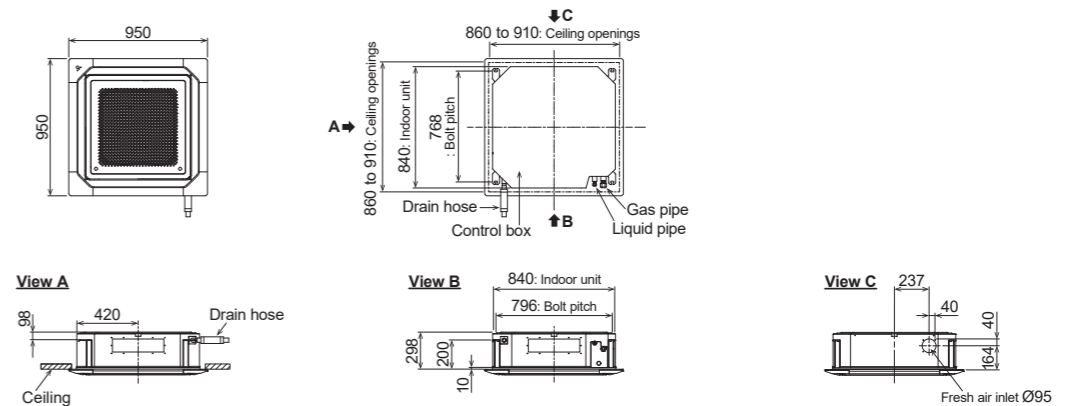

# Cassette

## One-way Flow type



### Compact chassis size

The compact size allows easy installation in a variety of commercial facilities and environments.

- The height of the chassis is less than 200 mm for all models.
- All 4 to 12 kBTu models are less than 1,000 mm wide.
- The depth of the chassis is 570 mm, which fits nicely into a grid type ceiling.




Dimensions (Panel size) (Unit: mm)

|   | 4 | 7         | 9 | 12 | 14 | 18            | 24 |
|---|---|-----------|---|----|----|---------------|----|
| H |   | 198 (43)  |   |    |    | 198 (43)      |    |
| W |   | 785 (950) |   |    |    | 1,190 (1,360) |    |
| D |   | 570 (620) |   |    |    | 570 (620)     |    |

### Wide airflow range

A large flap with a wide range of movements, equipped with louvers arranged triangularly, sends air into every corner of the room.

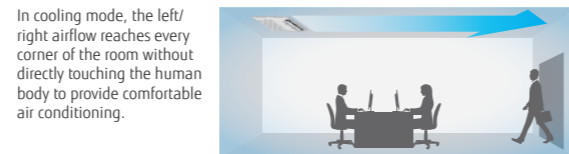

Note: This is a conceptual drawing. The performance of an air conditioner may vary depending on where it is installed, the size of the room, and its distance from the wall.

### Quiet mode

The low operating noise makes the model ideal for use in hotel rooms.



Model: AUXV004GLEH / AUXV007GLEH / AUXV009GLEH  
 AUXV012GLEH / AUXV014GLEH / AUXV018GLEH  
 AUXV024GLEH



AUXV004/007/009/012GLEH



AUXV014/018/024GLEH

### Specifications

| Model name                      | AUXV004GLEH                 | AUXV007GLEH     | AUXV009GLEH     | AUXV012GLEH     | AUXV014GLEH      | AUXV018GLEH       | AUXV024GLEH       |
|---------------------------------|-----------------------------|-----------------|-----------------|-----------------|------------------|-------------------|-------------------|
| Power source                    | Single phase, ~230 V, 50 Hz |                 |                 |                 |                  |                   |                   |
| Capacity                        | Cooling                     | 1.1             | 2.2             | 2.8             | 3.6              | 4.5               | 7.1               |
|                                 | Heating                     | 1.3             | 2.8             | 3.2             | 4.0              | 5.0               | 8.0               |
| Input power                     |                             | 30/30           | 42/42           | 42/42           | 60/60            | 38/38             | 56/56             |
|                                 |                             | 460             | 550             | 550             | 670              | 720               | 890               |
| Airflow rate*                   | High                        | 460             | 550             | 550             | 670              | 720               | 890               |
|                                 | Med-High                    | 440             | 440             | 440             | 520              | 660               | 840               |
|                                 | Med                         | 420             | 420             | 420             | 480              | 630               | 770               |
|                                 | Med-Low                     | 400             | 400             | 400             | 450              | 600               | 710               |
|                                 | Low                         | 380             | 380             | 380             | 410              | 580               | 660               |
|                                 | Quiet                       | 360             | 360             | 360             | 360              | 550               | 580               |
| Sound pressure level*           | High                        | 38              | 42              | 42              | 45               | 37                | 44                |
|                                 | Med-High                    | 37              | 37              | 37              | 41               | 36                | 43                |
|                                 | Med                         | 36              | 36              | 36              | 39               | 35                | 40                |
|                                 | Med-Low                     | 35              | 35              | 35              | 38               | 34                | 38                |
|                                 | Low                         | 33              | 33              | 33              | 36               | 33                | 36                |
|                                 | Quiet                       | 32              | 32              | 32              | 32               | 32                | 34                |
| Net Dimensions (H × W × D)      | mm                          | 198 × 785 × 570 | 198 × 785 × 570 | 198 × 785 × 570 | 198 × 785 × 570  | 198 × 1,190 × 570 | 198 × 1,190 × 570 |
| Weight                          | kg                          | 18              | 19              | 19              | 19               | 26                | 27                |
| Connection pipe diameter        | Liquid (Flare)              | 6.35            | 6.35            | 6.35            | 6.35             | 6.35              | 6.35              |
|                                 | Gas (Flare)                 | 9.52            | 9.52            | 9.52            | 12.70            | 12.70             | 15.88             |
| Drain Hose Diameter (I.D./O.D.) |                             | 25/32           |                 |                 |                  |                   |                   |
| Cassette Grille                 | Model name                  | UTG-UNYA-W      |                 |                 | UTG-UNYB-W       |                   |                   |
|                                 | Net Dimensions (H × W × D)  | 43 × 950 × 620  |                 |                 | 43 × 1,360 × 620 |                   |                   |
|                                 | Weight                      | 6.5             |                 |                 | 8.5              |                   |                   |


Note: Specifications are subject to the following conditions:  
 Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.  
 Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.  
 Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V]

### Optional parts

- WLAN adapter: UTY-TFSXZ1, UTY-TFSXJ3, FG-AC-WIF1Z1
- IR Receiver Unit: UTY-TRHX
- Cassette Grille: UTG-UNYA-W (004-012), UTG-UNYB-W (014-024)
- External power supply unit: UTZ-GXXA, UTZ-GXXC\*
- Remote sensor kit: UTY-XSZXZ1


### Flexible Installation

The L-shaped pipe kit allows for more flexible installation. Equipped with a built-in drain pump as standard, which enables a maximum pipe height difference of 700 m from the ceiling.



### Dimensions

(Unit: mm)

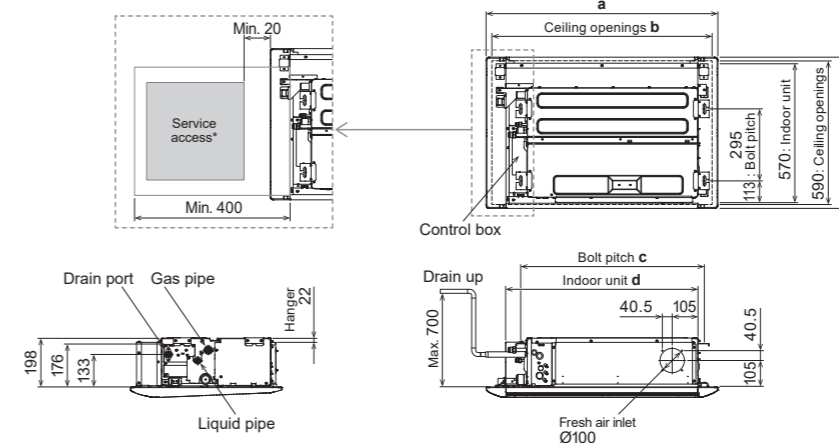

|   | AUXV 004 / 007 / 009 / 012 GLEH | AUXV 014 / 018 / 024 GLEH |
|---|---------------------------------|---------------------------|
| a | 950                             | 1,360                     |
| b | 920                             | 1,330                     |
| c | 752                             | 1,152                     |
| d | 785                             | 1,190                     |

\*The design of the service access depends on the installation method. Refer to the installation manual for more information.

# 3D Flow Cassette




## 3 individually controlled air outlet ports

The Comfortable airflow setting enables the left and right air outlet ports as well as the wide center port to work together to provide a comfortable room environment.


### Temperature distribution during cooling and heating (when set to Comfortable airflow)



**Testing conditions:** Model AUXS024GLEH running cooling operation with the air volume set to "Hi" to maintain the room temperature at 18°C with the outdoor temperature at 35°C, tested in our 40m<sup>2</sup> environmental test room




**Testing conditions:** Model AUXS024GLEH running heating operation with the air volume set to "Hi" to maintain the room temperature at 30°C with the outdoor temperature at 7°C, tested in our 40m<sup>2</sup> environmental test room

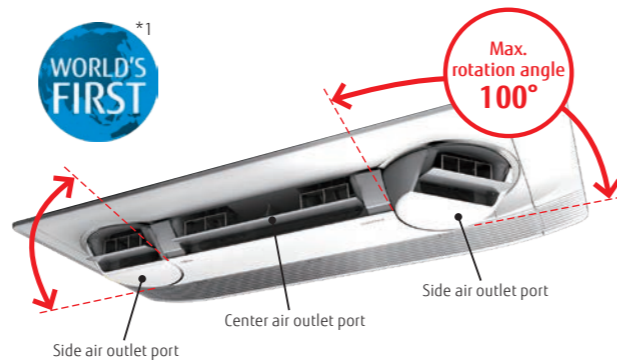

\*1: Announced 2018. In the category of room air conditioners for the home (source: Fujitsu General Limited).

## Individual airflow setting

The individual airflow setting function optimizes the airflow direction to match the room layout.

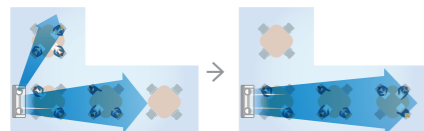

Adjusts airflows from the side air outlet ports to match the layout and usage of the room to minimize the amount of wasted airflow.



The airflow is optimally controlled to provide improved comfort in a narrow room.

## Individual control of air outlet ports

Individual airflow can be set using a Wired remote controller with touch panel and Central remote controller\*. The airflow from each air outlet port can be set individually.



Wired remote controller with Touch Panel  
UTY-RNRYZ5




Central remote controller  
UTY-DCGYZ3

\* Feature available only on UTY-RNRYZ5 Wired remote controller with touch panel and UTY-DCGYZ3 Central remote controller

## High energy saving

The structural design to take in a larger volume of air and blow air out more smoothly reduces air blowing loss and achieves class-leading energy-saving performance.

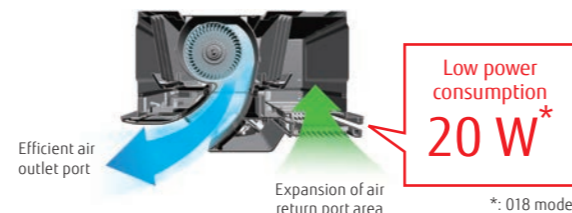

\*: 018 model

Model: AUXS018GLEH / AUXS024GLEH



## Specifications

| Model name                      |                            | AUXS018GLEH                 | AUXS024GLEH       |
|---------------------------------|----------------------------|-----------------------------|-------------------|
| Power source                    |                            | Single phase, ~230 V, 50 Hz |                   |
| Capacity                        | Cooling                    | 5.60                        | 7.10              |
|                                 | Heating                    | 6.30                        | 8.00              |
| Input power                     |                            | 20/28                       | 34/43             |
| Airflow rate*                   | High                       | 750/870                     | 950/1,040         |
|                                 | Med-High                   | 710/830                     | 890/990           |
|                                 | Med                        | 690/780                     | 860/930           |
|                                 | Med-Low                    | 660/740                     | 810/880           |
|                                 | Low                        | 630/700                     | 770/840           |
|                                 | Quiet                      | 540/540                     | 540/540           |
| Sound pressure level*           | High                       | 38/41                       | 43/46             |
|                                 | Med-High                   | 36/40                       | 42/45             |
|                                 | Med                        | 35/39                       | 41/43             |
|                                 | Med-Low                    | 35/37                       | 40/42             |
|                                 | Low                        | 33/36                       | 38/40             |
|                                 | Quiet                      | 29/29                       | 29/29             |
| Net Dimensions (H × W × D)      |                            | mm 200 × 1,240 × 500        | 200 × 1,240 × 500 |
| Weight                          |                            | kg 25                       | 25                |
| Connection pipe diameter        | Liquid (Flare)             | 6.35                        | 9.52              |
|                                 | Gas (Flare)                | 12.70                       | 15.88             |
| Drain Hose Diameter (I.D./O.D.) |                            | 25/32                       |                   |
| Cassette Grille                 | Model name                 | UTG-USYA-W                  |                   |
|                                 | Net Dimensions (H × W × D) | mm 85 × 1,350 × 580         |                   |
|                                 | Weight                     | kg 11.5                     |                   |



Note: Specifications are subject to the following conditions:  
Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.  
Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.  
Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V]  
\*: Applicable to cooling and heating operation

## Optional parts

- WLAN adapter: UTY-TFSXZ1, UTY-TFSXJ3, FG-AC-WIF1Z1
- IR Receiver Unit: UTY-TRHX
- Cassette Grille: UTG-USYA-W
- External power supply unit: UTZ-GXXA, UTZ-GXXC\*
- Remote sensor kit: UTY-XSZXZ1

## Dimensions

(Unit: mm)

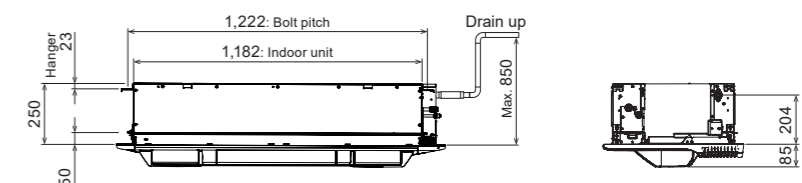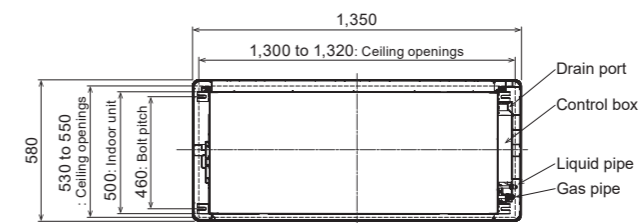


# Low Static Pressure Duct Mini Duct (With drain pump)



## Space saving design


- Fits into a space 198 mm high and 450 mm deep
- 30% smaller than previous-generation models
- Weighs 16 kg, 10% lighter

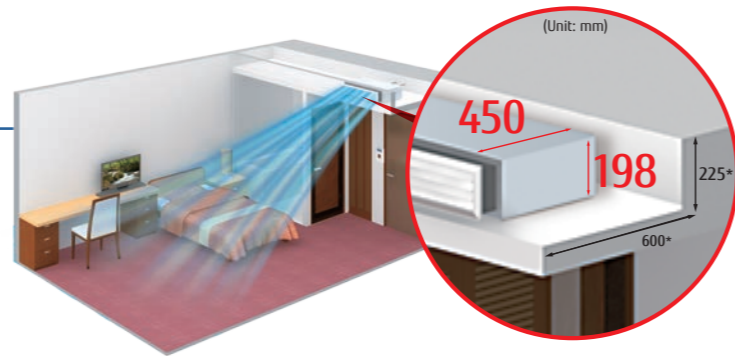

\*: Minimum clearance requirement



## Optimum airflow path and low noise operation

The stabilized airflow reduces the noise level significantly.

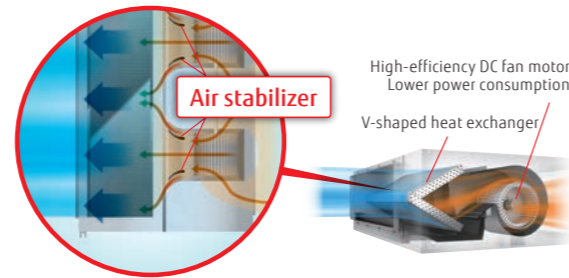

## 6-speed control\*


Multistep airflow adjustment allows installation in a quiet location.

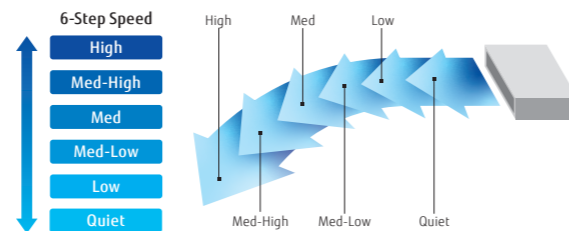

\* Remote controller is compatible with the following:  
UTY-RNRY25 / UTY-RLRY / UTY-RSRY / UTY-RHRY / UTY-DCGY23 / UTY-ALGX21 / UTY-APGX1


## Easy to design and maintain for drain

Indoor unit design for easy maintenance. Parts can be replaced from the side of the unit where maintenance is easier.



A drain pump is built into the unit as standard. Parts can be accessed and replaced through the side of the unit for easy maintenance.

Model: ARXK004GLGH / ARXK007GLGH / ARXK009GLGH  
ARXK012GLGH / ARXK014GLGH / ARXK018GLGH  
ARXK024GLGH

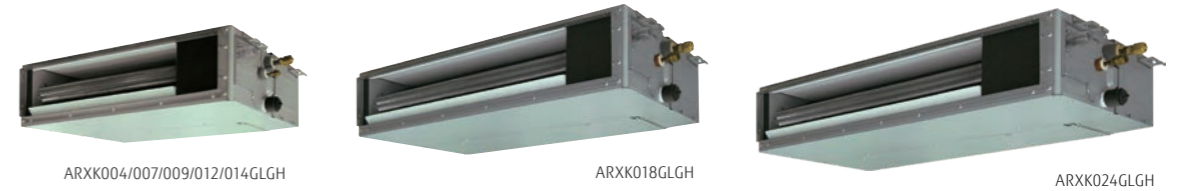

## Specifications

| Model name                      | ARXK004GLGH                 | ARXK007GLGH     | ARXK009GLGH     | ARXK012GLGH     | ARXK014GLGH     | ARXK018GLGH     | ARXK024GLGH       |
|---------------------------------|-----------------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-------------------|
| Power source                    | Single phase, ~230 V, 50 Hz |                 |                 |                 |                 |                 |                   |
| Capacity                        | Cooling                     | 1.1             | 2.2             | 2.8             | 3.6             | 4.5             | 7.1               |
|                                 | Heating                     | 1.3             | 2.8             | 3.2             | 4.0             | 5.0             | 8.0               |
| Input power                     | W                           | 26              | 28              | 28              | 35              | 66              | 80                |
| Airflow rate                    | High                        | 460             | 460             | 460             | 550             | 760             | 1,160             |
|                                 | Med-High                    | 440             | 440             | 440             | 520             | 660             | 1,060             |
|                                 | Med                         | 420             | 420             | 420             | 480             | 560             | 960               |
|                                 | Med-Low                     | 400             | 400             | 400             | 450             | 490             | 860               |
|                                 | Low                         | 370             | 370             | 370             | 410             | 410             | 750               |
|                                 | Quiet                       | 340             | 340             | 340             | 340             | 340             | 610               |
| Static pressure range           | Pa                          | 0 to 30         | 0 to 30         | 0 to 30         | 0 to 30         | 0 to 50         | 0 to 50           |
| Standard static pressure        |                             | 10              | 10              | 10              | 10              | 15              | 15                |
| Sound pressure level            | High                        | 25              | 26              | 26              | 29              | 34              | 32                |
|                                 | Med-High                    | 24              | 25              | 25              | 27              | 31              | 30                |
|                                 | Med                         | 23              | 24              | 24              | 26              | 28              | 28                |
|                                 | Med-Low                     | 22              | 23              | 23              | 25              | 26              | 27                |
|                                 | Low                         | 21              | 22              | 22              | 24              | 24              | 25                |
|                                 | Quiet                       | 20              | 21              | 21              | 22              | 22              | 22                |
| Net Dimensions (H × W × D)      | mm                          | 198 × 700 × 450 | 198 × 700 × 450 | 198 × 700 × 450 | 198 × 700 × 450 | 198 × 700 × 450 | 198 × 1,100 × 450 |
| Weight                          | kg                          | 14.5            | 15.5            | 15.5            | 16              | 16              | 22.5              |
| Connection pipe diameter        | Liquid (Flare)              | 6.35            | 6.35            | 6.35            | 6.35            | 6.35            | 9.52              |
|                                 | Gas (Flare)                 | 9.52            | 9.52            | 9.52            | 12.70           | 12.70           | 15.88             |
| Drain Hose Diameter (I.D./O.D.) |                             | 25/32           |                 |                 |                 |                 |                   |

Note: Specifications are subject to the following conditions:  
Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.  
Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.  
Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V].

## Optional parts

\*For more details, please refer to the chapter "Optional parts".

- |                     |                    |                             |                                  |
|---------------------|--------------------|-----------------------------|----------------------------------|
| Remote sensor unit: | UTY-XSZX1          | External power supply unit: | UTZ-GXXA, UTZ-GXXC*              |
| IR receiver unit:   | UTY-TRHX           | Auto Louver Grille Kit:     | UTD-GXTA-W (004-014)             |
| Silver Ion Filter:  | UTD-HFTA (004-014) |                             | UTD-GXTB-W (018)                 |
|                     | UTD-HFTB (018)     |                             | UTD-GXTC-W (024)                 |
|                     | UTD-HFTC (024)     | WLAN adapter:               | FG-AC-WIF1Z1                     |
|                     |                    |                             | UTY-TFSXJ3, UTY-TFSXZ1 (007-024) |



## Auto Louver Grille Kit (Optional)

The slim design of the unit provides comfortable cooling and heating air conditioning over a wide area. The optional automatic louver grille, which fits nicely into any interior decor, provides comfortable air conditioning (Optional)






## Dimensions

(Unit: mm)

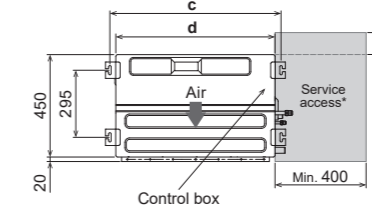

|   | ARXK 004-014GLGH | ARXK018GLGH | ARXK024GLGH   |
|---|------------------|-------------|---------------|
| a | 575              | 775         | 975           |
| b | P200×2=400       | P200×3=600  | P200×4=800    |
| c | 752              | 952         | 1,152         |
| d | 700              | 900         | 1,100         |
| e | 650              | 850         | 1,050         |
| f | P100×6=600       | P100×8=800  | P100×10=1,000 |

\*The design of the service access depends on the installation method. Refer to the installation manual for more information.




# Low Static Pressure Duct Slim Duct/Slim Concealed Floor




## Slim design

Slim design allows for installation in a tight ceiling space.

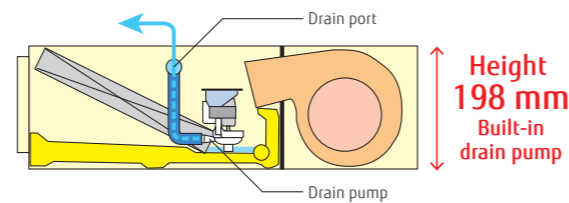


## Air intake

Air intake direction can be selected to match the installation site.

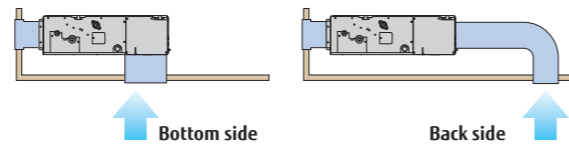


## Flexible installation

Ceiling concealed

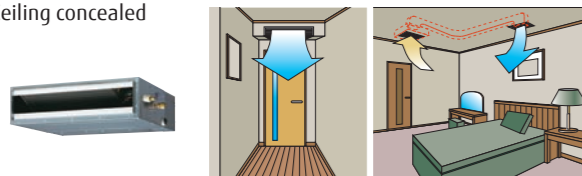

Floor concealed

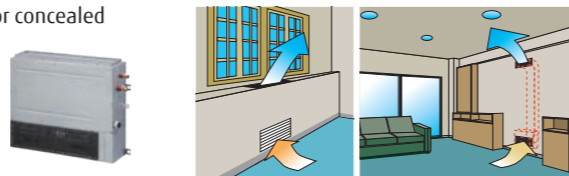

## Wide range of static pressures

The use of a DC fan motor makes it possible to adjust the static pressure between 0 and 90 Pa. The static pressure range can be changed by a remote controller.




Static pressure range  
**0 to 90 Pa**


\*024 model static pressure range is 0 to 50 Pa.

## Filter (Accessory)


ARXD04/007/009/012/014/018 ARXD024

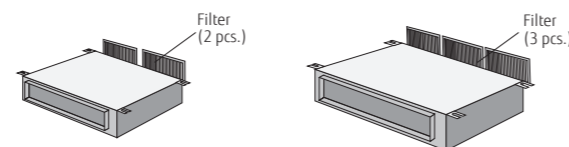

Model: ARXD04GALH / ARXD007GLEH / ARXD009GLEH  
ARXD012GLEH / ARXD014GLEH / ARXD018GLEH  
ARXD024GLEH



ARXD04GALH  
ARXD007/009/012/014GLEH



ARXD018GLEH



ARXD024GLEH

Slim Concealed Floor



## Specifications

| Model name                      | ARXD04GALH*                 | ARXD007GLEH     | ARXD009GLEH     | ARXD012GLEH     | ARXD014GLEH     | ARXD018GLEH     | ARXD024GLEH     |
|---------------------------------|-----------------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Power source                    | Single phase, ~230 V, 50 Hz |                 |                 |                 |                 |                 |                 |
| Capacity                        | Cooling                     | 1.1             | 2.2             | 2.8             | 3.6             | 4.5             | 7.1             |
|                                 | Heating                     | 1.3             | 2.8             | 3.2             | 4.0             | 5.0             | 8.0             |
| Input power                     | W                           | 40              | 44              | 50              | 54              | 92              | 122             |
| Airflow rate                    | High                        | 510             | 550             | 600             | 600             | 800             | 1,330           |
|                                 | Med-High                    | -               | 480             | 510             | 530             | 680             | 1,140           |
|                                 | Med                         | 400/470*1       | 440             | 460             | 490             | 600             | 730             |
|                                 | Med-Low                     | -               | 410             | 420             | 450             | 520             | 630             |
|                                 | Low                         | 320/440*1       | 370             | 370             | 410             | 440             | 540             |
| Quiet                           | -                           | 320             | 320             | 340             | 340             | 470             | 610             |
| Static pressure range           | Pa                          | 0 to 90         | 0 to 90         | 0 to 90         | 0 to 90         | 0 to 90         | 0 to 50         |
| Standard static pressure        | Pa                          | 25              | 25              | 25              | 25              | 25              | 25              |
| Sound pressure level            | High                        | 26              | 28              | 29              | 30              | 34              | 35              |
|                                 | Med-High                    | -               | 26              | 27              | 28              | 32              | 31              |
|                                 | Med                         | 21/25*1         | 25              | 25              | 27              | 30              | 29              |
|                                 | Med-Low                     | -               | 24              | 24              | 26              | 28              | 27              |
|                                 | Low                         | 20/22*1         | 22              | 22              | 24              | 25              | 25              |
| Quiet                           | -                           | 21              | 21              | 22              | 22              | 23              |                 |
| Net Dimensions (H × W × D)      | mm                          | 198 × 700 × 620 | 198 × 700 × 620 | 198 × 700 × 620 | 198 × 700 × 620 | 198 × 700 × 620 | 198 × 900 × 620 |
| Weight                          | kg                          | 17              | 17              | 17              | 18              | 18              | 26              |
| Connection pipe diameter        | Liquid (Flare)              | 6.35            | 6.35            | 6.35            | 6.35            | 6.35            | 9.52            |
|                                 | Gas (Flare)                 | 12.70           | 9.52            | 9.52            | 12.70           | 12.70           | 15.88           |
| Drain Hose Diameter (I.D./O.D.) |                             |                 |                 | 25/32           |                 |                 |                 |


Note: Specifications are subject to the following conditions:  
Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.  
Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.  
Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V].  
\*1: This value is under cooling operation.  
\*: ARXD04GALH cannot be connected to J-IVS/J-IVJ-IVL/VR-IV Series.

## Optional parts

\*For more details, please refer to the chapter "Optional parts".


Remote sensor unit: UTY-XS2XZ1  
IR receiver unit: UTB-YWC (04)  
UTY-TRHX (007-024)  
UTY-TFSXJ3 (007-024)  
UTY-TFSXZ1 (007-024)  
FG-RC-WIF122 (04)  
FG-AC-WIF121 (007-024)

External power supply unit: UTZ-GXXA, UTZ-GXXC\*  
Auto Louver Grille Kit: UTD-GXTA-W (04, 007-014)  
UTD-GXTB-W (018)  
UTD-GXTC-W (024)  
Silver Ion Filter: UTD-HFTA (04, 007-014)  
UTD-HFTB (018)  
UTD-HFTC (024)

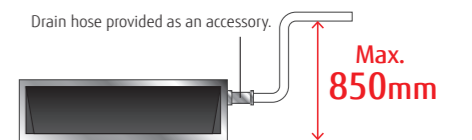


## Dimensions

(Unit: mm)

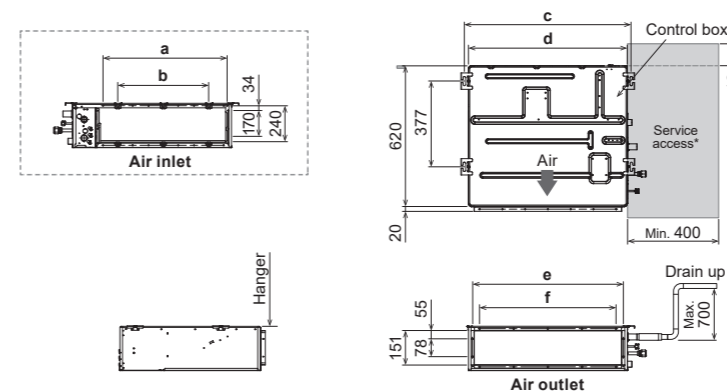

|   | ARXD04GALH<br>ARXD<br>007-014GLEH | ARXD018GLEH | ARXD024GLEH   |
|---|-----------------------------------|-------------|---------------|
| a | 574                               | 774         | 974           |
| b | P200×2=400                        | P200×3=600  | P200×4=800    |
| c | 734                               | 934         | 1,134         |
| d | 700                               | 900         | 1,100         |
| e | 650                               | 850         | 1,050         |
| f | P100×6=600                        | P100×8=800  | P100×10=1,000 |

\*The design of the service access depends on the installation method. Refer to the installation manual for more information.




# Low Static Pressure Duct

High Efficiency



## Slim & Compact design


The slim and compact design of the indoor unit, with the control box mounted on the side, allows installation in narrow spaces.

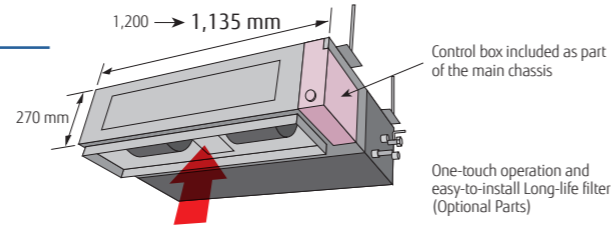

## Easy maintenance


Structural improvement has been developed by making the bottom panel in two pieces, front and rear. The internal fan casing is also manufactured in two pieces—upper and lower. The motor and fan can be easily accessed and maintained by removing the rear panel and the lower casing with the main chassis remaining in place.

See below for rear-suction type

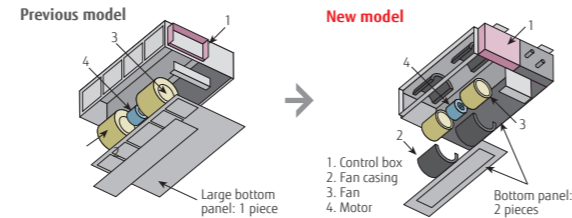


## Installation styles


Embedded in Ceiling



Hanging from Ceiling




A drain pipe can be installed on either the left or right side of the unit



## High-efficiency DC fan motor achieves low-energy consumption.

Improved motor efficiency from previous model.



## Wide range of static pressures

Static pressures can be changed in the range of 0 to 150 Pa.

Static pressure range  
**0 to 80 Pa**

Model: ARXP018GLFH / ARXP030GLFH \* Production by order



## Specifications

| Model name                      |                | ARXP018GLFH               | ARXP030GLFH       |
|---------------------------------|----------------|---------------------------|-------------------|
| Power source                    |                | Single-phase, ~220V, 50Hz |                   |
| Capacity                        | Cooling        | 5.6                       | 9.0               |
|                                 | Heating        | 6.3                       | 10.0              |
| Input power                     |                | 128                       | 228               |
| Airflow rate                    | High           | 1,540 / 1,440             | 1,940 / 1,660     |
|                                 | Med-High       | 1,460 / 1,380             | 1,810 / 1,580     |
|                                 | Med            | 1,380 / 1,320             | 1,680 / 1,510     |
|                                 | Med-Low        | 1,300 / 1,260             | 1,550 / 1,440     |
|                                 | Low            | 1,220 / 1,200             | 1,420 / 1,370     |
| Quiet                           |                | 1,150 / 1,150             | 1,300 / 1,300     |
| Static pressure range           |                | 0 to 80                   | 0 to 80           |
| Standard static pressure        |                | 40                        | 50                |
| Sound pressure level            | High           | 35 / 34                   | 39 / 36           |
|                                 | Med-High       | 34 / 32                   | 38 / 35           |
|                                 | Med            | 32 / 31                   | 36 / 34           |
|                                 | Med-Low        | 31 / 30                   | 34 / 33           |
|                                 | Low            | 29 / 29                   | 32 / 31           |
| Quiet                           |                | 28 / 28                   | 30 / 30           |
| Net Dimensions (H × W × D)      |                | 270 × 1,135 × 700         | 270 × 1,135 × 700 |
| Weight                          |                | 40                        | 40                |
| Connection pipe diameter        | Liquid (Flare) | 6.35                      | 9.52              |
|                                 | Gas (Flare)    | 12.70                     | 15.88             |
| Drain Hose Diameter (I.D./O.D.) |                | 25/32                     |                   |

Note: Specifications are subject to the following conditions:

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.  
Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.  
Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V].


## Optional parts

\*For more details, please refer to the chapter "Optional parts".

|                             |                     |                    |                                      |
|-----------------------------|---------------------|--------------------|--------------------------------------|
| Long-life filter:           | UTD-LF25NA          | IR receiver unit:  | UTY-TRHX                             |
| Flange (square):            | UTD-SF045T          | Drain pump unit:   | UTZ-PX1NBA                           |
| Flange (round):             | UTD-RF204           | WLAN adapter:      | UTY-TFSXZ1, UTY-TFSXJ3, FG-AC-WIF1Z1 |
| External power supply unit: | UTZ-GXXA, UTZ-GXXC* | Silver Ion Filter: | UTD-HFND                             |
| Remote sensor unit:         | UTY-XS2XZ1          |                    |                                      |

## Dimensions

(Unit: mm)

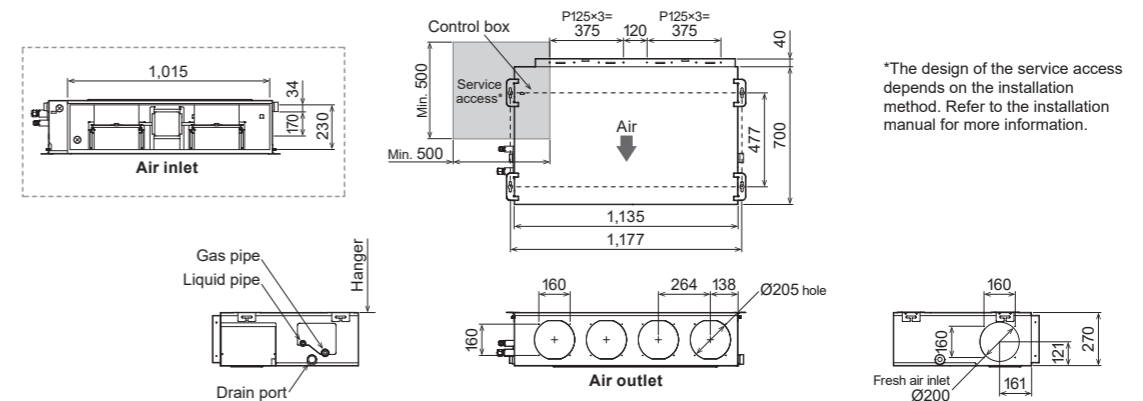


# Medium Static Pressure Duct Normal



## Slim & Compact design


The slim and compact design of the indoor unit, with the control box mounted on the side, allows installation in narrow spaces.

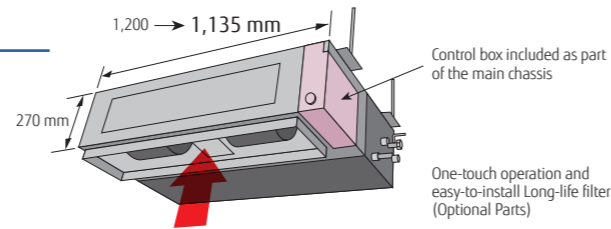


## Easy maintenance

Structural improvement has been developed by making the bottom panel in two pieces, front and rear. The internal fan casing is also manufactured in two pieces—upper and lower. The motor and fan can be easily accessed and maintained by removing the rear panel and the lower casing with the main chassis remaining in place.


See below for rear-suction type

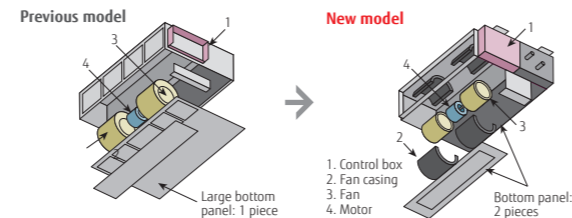

## Installation styles

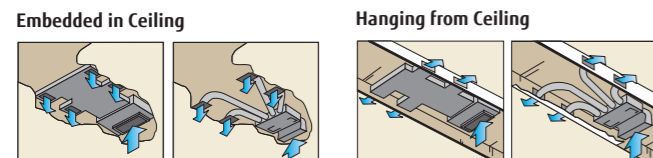


A drain pipe can be installed on either the left or right side of the unit



## High-efficiency DC fan motor achieves low-energy consumption.

Improved motor efficiency from previous model.



## Wide range of static pressures

Static pressures can be changed in the range of 0 to 150 Pa.

Static pressure range  
**0 to 150 Pa**

Model: ARXA024GLEH / ARXA030GLEH / ARXA036GLEH / ARXA045GLEH



## Specifications

| Model name                      |                |                   | ARXA024GLEH                 | ARXA030GLEH       | ARXA036GLEH       | ARXA045GLEH       |
|---------------------------------|----------------|-------------------|-----------------------------|-------------------|-------------------|-------------------|
| Power source                    |                |                   | Single phase, ~230 V, 50 Hz |                   |                   |                   |
| Capacity                        | Cooling        | kW                | 7.1                         | 9.0               | 11.2              | 12.5              |
|                                 | Heating        |                   | 8.0                         | 10.0              | 12.5              | 14.0              |
| Input power                     | W              |                   | 94                          | 108               | 194               | 240               |
| Airflow rate                    | High           | m <sup>3</sup> /h | 1,280                       | 1,410             | 1,840             | 1,970             |
|                                 | Med-High       |                   | 1,180                       | 1,350             | 1,750             | 1,910             |
|                                 | Med            |                   | 1,090                       | 1,280             | 1,660             | 1,860             |
|                                 | Med-Low        |                   | 1,000                       | 1,240             | 1,600             | 1,780             |
|                                 | Low            |                   | 920                         | 1,190             | 1,530             | 1,710             |
| Quiet                           | 840            | 1,150             | 1,470                       | 1,640             |                   |                   |
| Static pressure range           | Pa             |                   | 0 to 150                    | 0 to 150          | 0 to 150          | 0 to 150          |
| Standard static pressure        |                |                   | 40                          | 50                | 50                | 60                |
| Sound pressure level            | High           | dB(A)             | 31                          | 34                | 37                | 41                |
|                                 | Med-High       |                   | 29                          | 33                | 36                | 40                |
|                                 | Med            |                   | 27                          | 32                | 35                | 38                |
|                                 | Med-Low        |                   | 26                          | 31                | 35                | 38                |
|                                 | Low            |                   | 24                          | 30                | 34                | 37                |
| Quiet                           | 23             | 29                | 33                          | 36                |                   |                   |
| Net Dimensions (H × W × D)      | mm             |                   | 270 × 1,135 × 700           | 270 × 1,135 × 700 | 270 × 1,135 × 700 | 270 × 1,135 × 700 |
| Weight                          | kg             |                   | 36                          | 40                | 40                | 40                |
| Connection pipe diameter        | Liquid (Flare) | mm                | 9.52                        | 9.52              | 9.52              | 9.52              |
|                                 | Gas (Flare)    |                   | 15.88                       | 15.88             | 15.88             | 15.88             |
| Drain Hose Diameter (I.D./O.D.) |                |                   | 25/32                       |                   |                   |                   |

Note: Specifications are subject to the following conditions:  
Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.  
Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.  
Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V].


## Optional parts

\*For more details, please refer to the chapter "Optional parts".

- Long-life filter: UTD-LF25NA
- Flange (square): UTD-SF045T
- Flange (round): UTD-RF204
- External power supply unit: UTZ-GXXA, UTZ-GXXC\*
- Remote sensor unit: UTY-XS2XZ1
- IR receiver unit: UTY-TRHX
- Drain pump unit: UTZ-PX1NBA
- WLAN adapter: UTY-TFSXZ1, UTY-TFSXJ3, FG-AC-WIF1Z1
- Silver Ion Filter: UTD-HFND

## Dimensions

(Unit: mm)

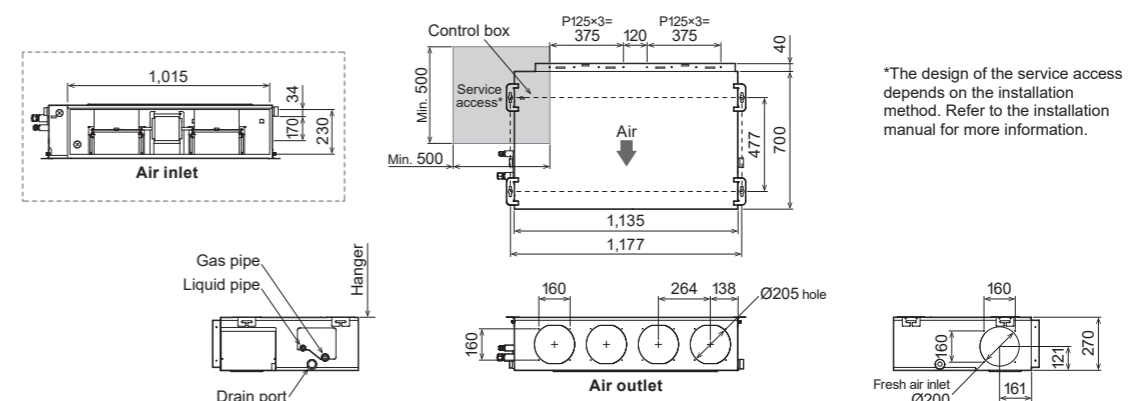

\*The design of the service access depends on the installation method. Refer to the installation manual for more information.

# High Static Pressure Duct Normal



Model: ARXC036GTEH / ARXC045GTEH / ARXC060GTEH  
ARXC072GTEH / ARXC090GTEH / ARXC096GTEH



ARXC036/045/060GTEH



ARXC072/090GTEH



ARXC096GTEH

## Static pressure mode selection

The use of a DC fan motor makes it possible to adjust the static pressure between 0 to 200 Pa (ARXC036) / 250Pa (ARXC045/060) / 300 Pa (ARXC072/090/096)

MAX. 200 Pa (036 type)



(ARXC036/045/060 type)

MAX. 250 Pa (045/060 type)



(ARXC072/090 type)

MAX. 300 Pa



(ARXC096 type)

MAX. 300 Pa

## Easy installation (Compact & Lightweight)


The indoor unit is designed to be compact and light by reducing the basic chassis size and the overall material weight.



(ARXC036/045/060 type)



(ARXC072/090 type)




(ARXC096 type)

(Unit: mm)

## Low noise


Models: ARXC036/ARXC045/ARXC060

The corners of the front panel and fan casing of the indoor unit are shaved to reduce air turbulence. The use of a plastic case and fan reduces the noise level generated by the unit.



ARXC036GTEH: Plastic fan [42 dB(A)]

\* Model: Material (Actual noise measurement value measured at 100 Pa)



## High-efficiency DC fan motor achieves low energy consumption.

Improved motor efficiency compared to the previous model



(ARXC036/045/060 type)



(ARXC072/090/096 type)

## Specifications

| Model name                      | ARXC036GTEH                 | ARXC045GTEH       | ARXC060GTEH*      | ARXC072GTEH*      | ARXC090GTEH*      | ARXC096GTEH*      |
|---------------------------------|-----------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Power source                    | Single phase, ~230 V, 50 Hz |                   |                   |                   |                   |                   |
| Capacity                        | Cooling                     | 11.2              | 12.5              | 18.0              | 22.4              | 28.0              |
|                                 | Heating                     | 12.5              | 14.0              | 20.0              | 25.0              | 31.5              |
| Input power                     | W                           | 207               | 715               | 730               | 681               | 819               |
| Airflow rate                    | High                        | 1,990             | 3,500             | 3,500             | 3,900             | 4,300             |
|                                 | Med                         | 1,680             | 3,000             | 3,000             | 3,300             | 4,000             |
|                                 | Low                         | 1,330             | 2,460             | 2,460             | 3,000             | 3,500             |
| Static pressure range           | Pa                          | 0 to 200          | 100 to 250        | 100 to 250        | 0 to 300          | 0 to 300          |
| Standard static pressure        | Pa                          | 100               | 100               | 100               | 150               | 150               |
| Sound pressure level            | High                        | 42                | 49                | 49                | 47                | 48                |
|                                 | Med                         | 36                | 45                | 45                | 43                | 46                |
|                                 | Low                         | 32                | 42                | 42                | 40                | 44                |
| Net Dimensions (H x W x D)      | mm                          | 400 x 1,050 x 500 | 400 x 1,050 x 500 | 400 x 1,050 x 500 | 450 x 1,587 x 700 | 450 x 1,587 x 700 |
| Weight                          | kg                          | 40                | 46                | 46                | 84                | 84                |
| Connection pipe diameter        | Liquid                      | 9.52 (Flare)      | 9.52 (Flare)      | 9.52 (Flare)      | 9.52 (Flare)      | 9.52 (Flare)      |
|                                 | Gas                         | 15.88 (Flare)     | 15.88 (Flare)     | 15.88 (Flare)     | 19.05 (Flare)     | 19.05 (Flare)     |
| Drain Hose Diameter (I.D./O.D.) | 25/32                       |                   |                   |                   |                   |                   |

Note: Specifications are based on the following conditions:  
Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.  
Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.  
Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V]  
\*: ARXC060/072/090/096G cannot be connected to J-IVJ-IVS Series.

## Optional parts



\*For more details, please refer to the chapter "Optional parts".

Long-life filter: UTD-LF60KA (036/045/060)    WLAN adapter: UTY-TFSXZ1, UTY-TFSXJ3, FG-AC-WIF121  
IR receiver unit: UTY-TRHX    Silver Ion Filter: UTD-HFKB (036/045/060)  
External power supply unit: UTZ-GXXA, UTZ-GXXC\*    Remote sensor unit: UTY-XSZXZ1

## Dimensions



(Unit: mm)

Models: ARXC036/ARXC045/ARXC060

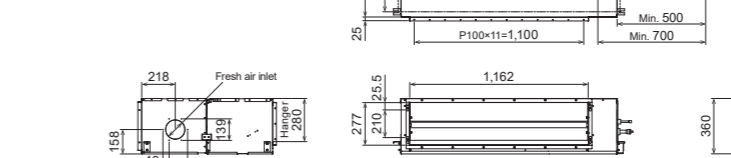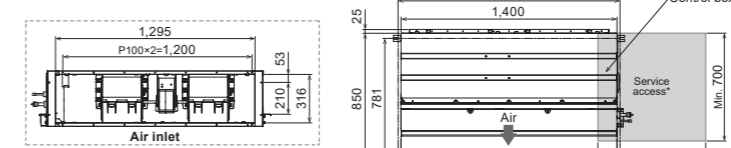

\*The design of the service access depends on the installation method. Refer to the installation manual for more information.

Models: ARXC072/ARXC090/ARXC096

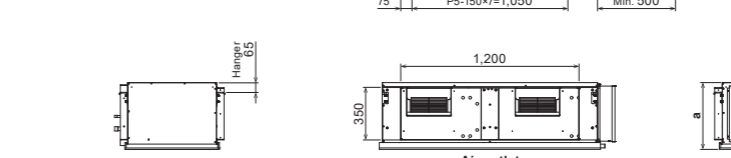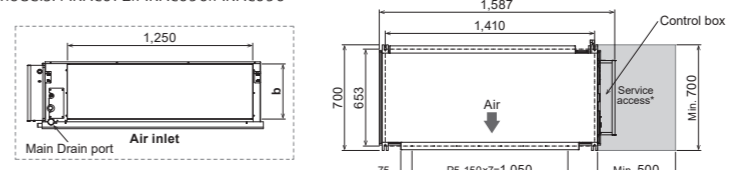

|   | ARXC072/090GTEH | ARXC096GTEH |
|---|-----------------|-------------|
| a | 450             | 550         |
| b | 370             | 470         |

\*The design of the service access depends on the installation method. Refer to the installation manual for more information.




# Compact floor




## 2-fan and wide airflow

A 2-fan individual vertical airflow cools or warms the entire room comfortably.

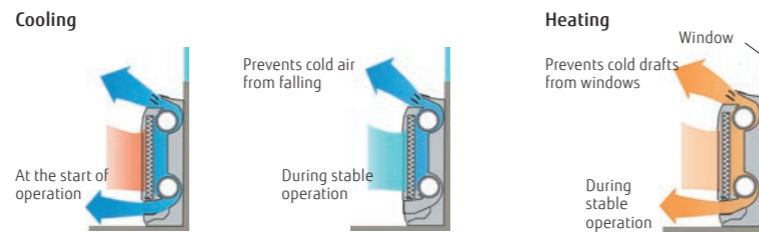


## Flexible and easy installation

The compact and whole-surface suction design provides flexible installation options, including floor-standing, embedded, partially embedded, and wall-mounted installation to match the room layout.

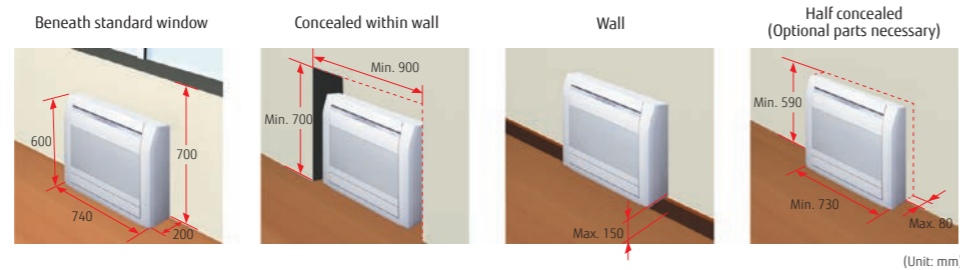


## Quiet operation

6-fan speed control for quiet operation (via 2-wire controller)

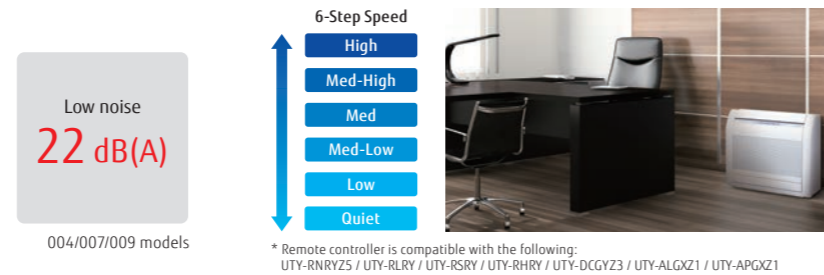

## Flexible pipe connection enables draining and piping in 6 directions

The drain hose and pipe can be connected to the unit in the right, left, straight in depth, or downward direction.

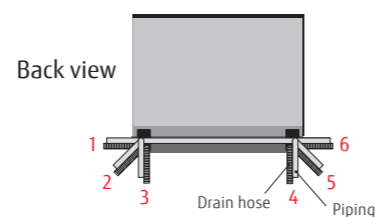

Model: AGYA004GCGH / AGYA007GCGH / AGYA009GCGH  
 AGYA012GCGH / AGYA014GCGH  
 [external EEV]  
 AGYE004GCEH / AGYE007GCEH / AGYE009GCEH  
 AGYE012GCEH / AGYE014GCEH



## Specifications

| Model name                      | AGYA004GCGH                 | AGYA007GCGH | AGYA009GCGH | AGYA012GCGH | AGYA014GCGH | AGYE004GCEH                 | AGYE007GCEH | AGYE009GCEH | AGYE012GCEH | AGYE014GCEH |     |
|---------------------------------|-----------------------------|-------------|-------------|-------------|-------------|-----------------------------|-------------|-------------|-------------|-------------|-----|
| Power source                    | Single phase, ~230 V, 50 Hz |             |             |             |             | Single phase, ~230 V, 50 Hz |             |             |             |             |     |
| Capacity                        | Cooling                     | 1.1         | 2.2         | 2.8         | 3.6         | 4.0                         | 1.1         | 2.2         | 2.8         | 3.6         | 4.0 |
|                                 | Heating                     | 1.3         | 2.8         | 3.2         | 4.0         | 4.5                         | 1.3         | 2.8         | 3.2         | 4.0         | 4.5 |
| Input power                     | W                           |             |             |             |             | W                           |             |             |             |             |     |
| Airflow rate                    | High                        | 380/430     | 470         | 500         | 590         | 670                         | 380/430     | 470         | 500         | 590         | 670 |
|                                 | Med-High                    | 350         | 420         | 450         | 520         | 590                         | 350         | 420         | 450         | 520         | 590 |
|                                 | Med                         | 320         | 390         | 400         | 470         | 520                         | 320         | 390         | 400         | 470         | 520 |
|                                 | Med-Low                     | 310         | 360         | 360         | 420         | 450                         | 310         | 360         | 360         | 420         | 450 |
|                                 | Low                         | 280         | 330         | 330         | 390         | 390                         | 280         | 330         | 330         | 390         | 390 |
| Sound pressure level            | High                        | 210         | 270         | 270         | 340         | 340                         | 210         | 270         | 270         | 340         | 340 |
|                                 | Med-High                    | 35/36       | 37          | 38          | 42          | 46                          | 35/36       | 37          | 38          | 42          | 46  |
|                                 | Med                         | 33          | 35          | 36          | 39          | 42                          | 33          | 35          | 36          | 39          | 42  |
|                                 | Med-Low                     | 31          | 33          | 34          | 37          | 39                          | 31          | 33          | 34          | 37          | 39  |
|                                 | Low                         | 28          | 29          | 29          | 33          | 33                          | 28          | 29          | 29          | 33          | 33  |
| Quiet                           | 22                          | 22          | 22          | 30          | 30          | 22                          | 22          | 22          | 30          | 30          |     |
| Net Dimensions (H × W × D)      | mm                          |             |             |             |             | mm                          |             |             |             |             |     |
| Weight                          | kg                          |             |             |             |             | kg                          |             |             |             |             |     |
| Connection pipe diameter        | Liquid (Flare)              | 6.35        | 6.35        | 6.35        | 6.35        | 6.35                        | 6.35        | 6.35        | 6.35        | 6.35        |     |
|                                 | Gas (Flare)                 | 9.52        | 9.52        | 9.52        | 12.70       | 12.70                       | 9.52        | 9.52        | 9.52        | 12.70       |     |
| Drain Hose Diameter (I.D./O.D.) | 13.8/15.8 to 16.7           |             |             |             |             | 13.8/15.8 to 16.7           |             |             |             |             |     |
| EV kit (optional)               |                             |             |             |             |             | UTR-EV09XB                  |             | UTR-EV14XB  |             |             |     |


Note: Specifications are subject to the following conditions:  
 Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.  
 Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.  
 Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V]  
 When connecting AGYA004/007/009GCGH, AGYE004/007/009GCEH to an outdoor unit other than an outdoor unit of the J-IVL Series, the gas pipe diameter should be Ø12.70 mm.

## Optional parts

- Partially concealing kit: UTR-STA
- External power supply unit: UTZ-GXXA, UTZ-GXXC\*
- WLAN adapter: UTY-TFSXZ1, UTY-TFSXJ3, FG-AC-WIF1Z1
- Silver Ion Filter: UTR-FA03-5

## Dimensions

(Unit: mm)

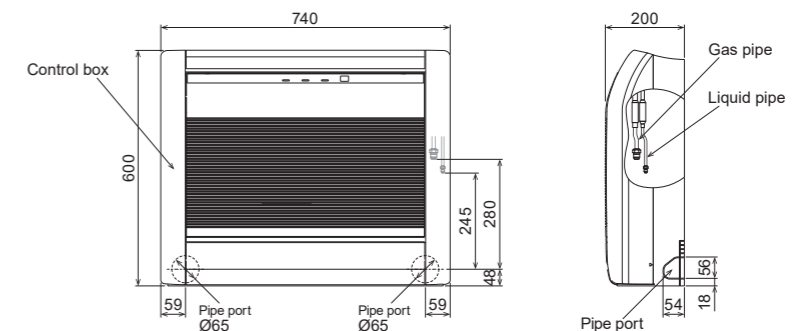

# Floor/Ceiling



## Flexible installation

### Example of floor standing installation

Floor standing console with the back against the wall




### Example of ceiling installation

Under ceiling



## Double auto swing

The combination of horizontal and vertical swings enables 3-dimensional control of the airflow direction.

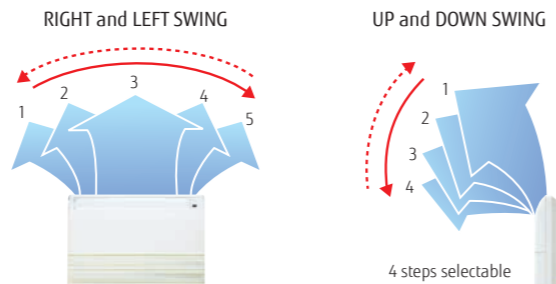

## High-power DC fan motor

- High power
- Wide rotation range
- High-efficiency



## Compact design

Symmetrical, slim and compact design.



Model: ABYA012GTEH / ABYA014GTEH / ABYA018GTEH / ABYA024GTEH



## Specifications

| Model name                      |                | ABYA012GTEH                 | ABYA014GTEH     | ABYA018GTEH     | ABYA024GTEH     |
|---------------------------------|----------------|-----------------------------|-----------------|-----------------|-----------------|
| Power source                    |                | Single phase, ~230 V, 50 Hz |                 |                 |                 |
| Capacity                        | Cooling        | 3.6                         | 4.5             | 5.6             | 7.1             |
|                                 | Heating        | 4.0                         | 5.0             | 6.3             | 8.0             |
| Input power                     |                | 30                          | 42              | 74              | 99              |
| Airflow rate                    | High           | 660                         | 780             | 1,000           | 1,000           |
|                                 | Med-High       | 620                         | 740             | 910             | 930             |
|                                 | Med            | 580                         | 690             | 830             | 870             |
|                                 | Med-Low        | 550                         | 640             | 750             | 800             |
|                                 | Low            | 520                         | 600             | 660             | 740             |
|                                 | Quiet          | 490                         | 550             | 580             | 680             |
| Sound pressure level            | High           | 36                          | 40              | 46              | 47              |
|                                 | Med-High       | 34                          | 39              | 44              | 45              |
|                                 | Med            | 33                          | 38              | 42              | 43              |
|                                 | Med-Low        | 31                          | 36              | 40              | 41              |
|                                 | Low            | 29                          | 35              | 37              | 39              |
|                                 | Quiet          | 28                          | 34              | 35              | 37              |
| Net Dimensions (H × W × D)      |                | mm 199 × 990 × 655          | 199 × 990 × 655 | 199 × 990 × 655 | 199 × 990 × 655 |
| Weight                          |                | kg 25                       | 26              | 26              | 27              |
| Connection pipe diameter        | Liquid (Flare) | 6.35                        | 6.35            | 6.35            | 9.52            |
|                                 | Gas (Flare)    | 12.70                       | 12.70           | 12.70           | 15.88           |
| Drain Hose Diameter (I.D./O.D.) |                | 25/32                       |                 |                 |                 |

Note: Specifications are subject to the following conditions:  
 Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.  
 Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.  
 Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V]


## Optional parts

\*For more details, please refer to the chapter "Optional parts".

External power supply unit: UTZ-GXXA, UTZ-GXXC\*  
 WLAN adapter: UTY-TFSXZ1, UTY-TFSXJ3, FG-AC-WIF1Z1

## Dimensions

(Unit: mm)

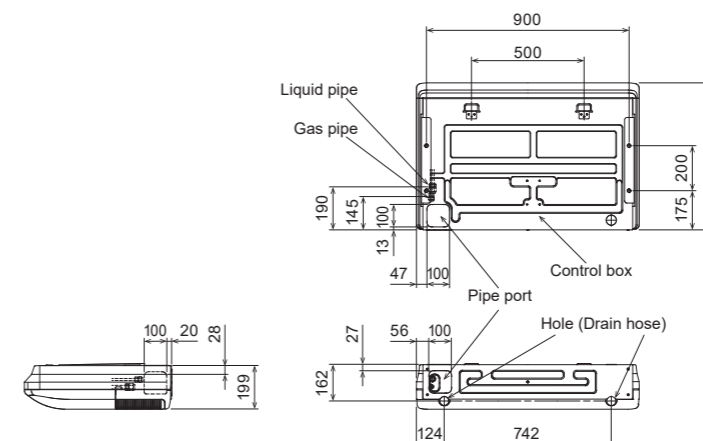

# Ceiling



Model: ABYA030GTEH / ABYA036GTEH / ABYA045GTEH / ABYA054GTEH




### Specifications

| Model name                      |                | ABYA030GTEH                 | ABYA036GTEH       | ABYA045GTEH       | ABYA054GTEH       |
|---------------------------------|----------------|-----------------------------|-------------------|-------------------|-------------------|
| Power source                    |                | Single phase, ~230 V, 50 Hz |                   |                   |                   |
| Capacity                        | Cooling        | 9.0                         | 11.2              | 12.5              | 14.0              |
|                                 | Heating        | 10.0                        | 12.5              | 14.0              | 16.0              |
| Input power                     |                | 66                          | 85                | 131               | 180               |
| Airflow rate                    | High           | 1,630                       | 1,690             | 2,010             | 2,270             |
|                                 | Med-High       | 1,520                       | 1,560             | 1,840             | 2,070             |
|                                 | Med            | 1,420                       | 1,450             | 1,690             | 1,860             |
|                                 | Med-Low        | 1,320                       | 1,360             | 1,530             | 1,660             |
|                                 | Low            | 1,220                       | 1,270             | 1,380             | 1,470             |
|                                 | Quiet          | 1,140                       | 1,170             | 1,230             | 1,280             |
| Sound pressure level            | High           | 42                          | 45                | 48                | 51                |
|                                 | Med-High       | 40                          | 41                | 46                | 49                |
|                                 | Med            | 39                          | 39                | 45                | 46                |
|                                 | Med-Low        | 37                          | 38                | 41                | 43                |
|                                 | Low            | 35                          | 36                | 38                | 40                |
|                                 | Quiet          | 33                          | 34                | 35                | 36                |
| Net Dimensions (H × W × D)      |                | mm 240 × 1,660 × 700        | 240 × 1,660 × 700 | 240 × 1,660 × 700 | 240 × 1,660 × 700 |
| Weight                          |                | kg 46                       | 48                | 48                | 48                |
| Connection pipe diameter        | Liquid (Flare) | 9.52                        | 9.52              | 9.52              | 9.52              |
|                                 | Gas (Flare)    | 15.88                       | 15.88             | 15.88             | 15.88             |
| Drain Hose Diameter (I.D./O.D.) |                | 25/32                       |                   |                   |                   |


Note: Specifications are subject to the following conditions:  
 Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.  
 Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.  
 Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V]

### Installation

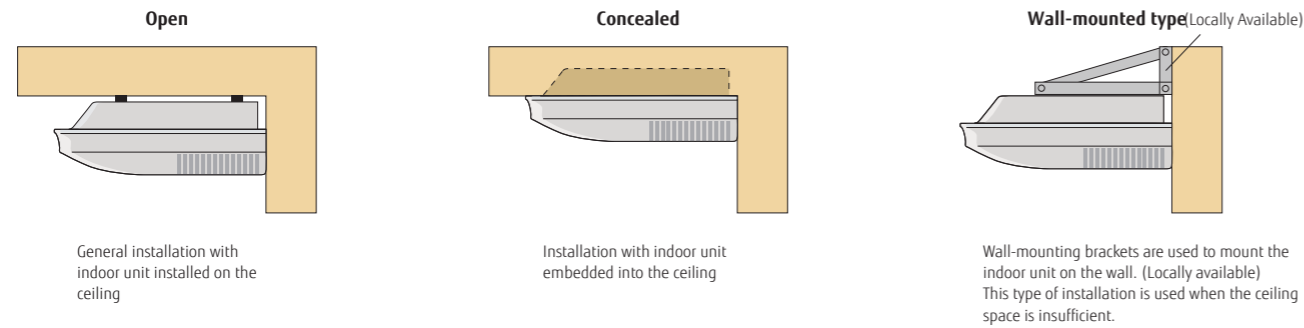

### Double auto swing and wide airflow

Auto airflow direction and auto swing

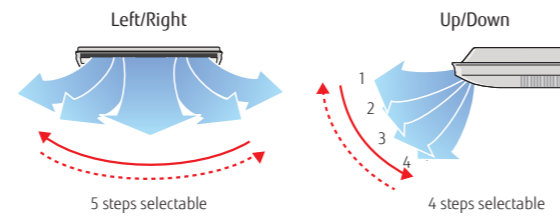


### High-power DC fan motor

- High power
- Wide rotation range
- High-efficiency




### Long airflow

Long airflow provides comfort in every corner of a large room.



### Fresh air intake

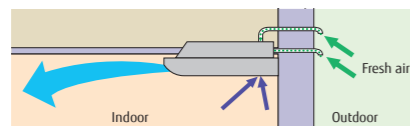


### Slim & Compact design



### Optional parts


\*For more details, please refer to the chapter "Optional parts".

- Drain pump unit: UTR-DPB24T
- Flange: UTD-RF204
- External power supply unit: UTZ-GXXA, UTZ-GXXC\*
- WLAN adapter: UTY-TFSXZ1, UTY-TFSXJ3, FG-AC-WIF1Z1

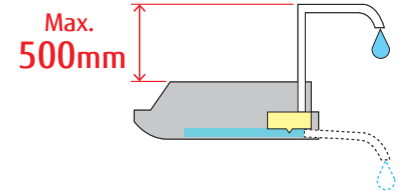

### Dimensions

(Unit: mm)

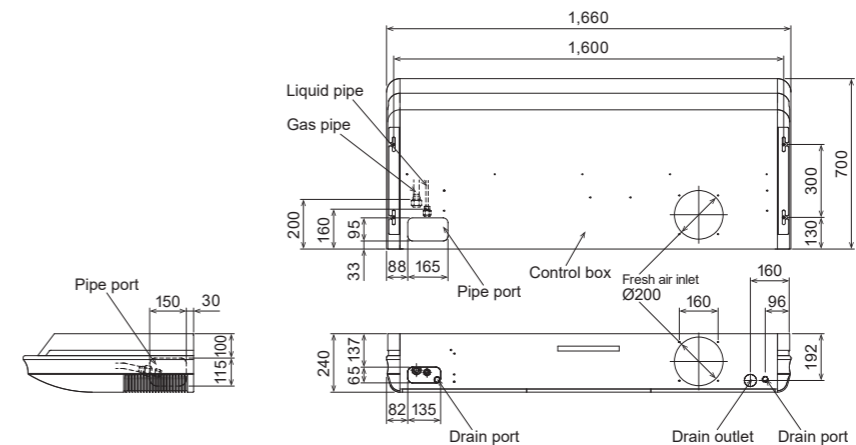

# Wall-mounted type




## Highly-efficiency, compact design

The 004-014 models share the same design. The high-density and large heat exchanger achieves a highly-efficiency and compact design. The compact body blends in well with conference rooms and offices, providing comfortable air conditioning.

### High-density heat exchanger

**Slim tube design: 5 mm**  
Greater heat-exchanging capacity is achieved through the use of a high-density heat exchanger and a sub-heat exchanger.

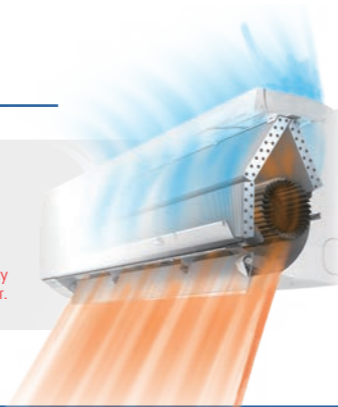


## More comfortable airflow

The unique power diffuser provides comfortable air conditioning.

### Heating

The vertical airflow provides powerful floor-level heating.

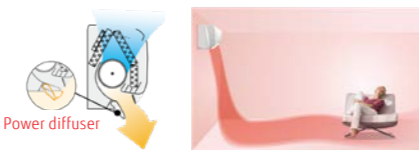


### Cooling

The left/right airflow avoids blowing cool air directly at the occupants in a room.




## Quiet operation & 6-Step fan speed control

The airflow pattern achieves significant noise reduction. Multistep airflow adjustment to suit the environment



- 6-Step Speed
- High
- Med-High
- Med
- Med-Low
- Low
- Quiet

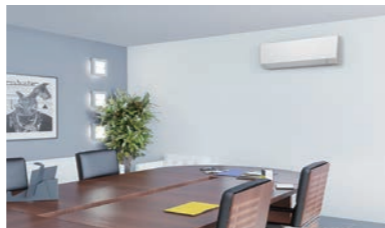


\* Remote controller is compatible with the following:  
UTY-RNRY25 / UTY-RLRY / UTY-RSRY / UTY-RHRY / UTY-DCGY23 / UTY-ALGX21 / UTY-APGX21

## The Human sensor contributes to further energy savings.

Energy saving operation starts automatically by detecting the motion of a person. Two modes of save operation mode and stop mode can be selected.

\*If you want to use the Human sensor control' function, you need an setting device that can set the Human sensor control' function. For example: Wired RC (Touch panel).

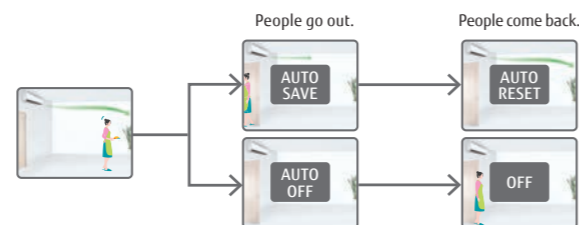

Model: ASYA004GCGH / ASYA007GCGH / ASYA009GCGH  
ASYA012GCGH / ASYA014GCGH  
[external EEV]  
ASYE004GCEH / ASYE007GCEH / ASYE009GCEH  
ASYE012GCEH / ASYE014GCEH



## Specifications

| Model name                      | AS YA004GCGH  | AS YA007GCGH  | AS YA009GCGH | AS YA012GCGH | AS YA014GCGH | AS YE004GCEH                | AS YE007GCEH | AS YE009GCEH | AS YE012GCEH | AS YE014GCEH |     |
|---------------------------------|---|---|--------------|--------------|--------------|-----------------------------|--------------|--------------|--------------|--------------|-----|
| Power source                    | Single phase, ~230 V, 50 Hz                         |   |              |              |              | Single phase, ~230 V, 50 Hz |              |              |              |              |     |
| Capacity                        | Cooling   | 1.1   | 2.2          | 2.8          | 3.6          | 4.0                         | 1.1          | 2.2          | 2.8          | 3.6          | 4.0 |
|                                 | Heating   | 1.3   | 2.8          | 3.2          | 4.0          | 4.5                         | 1.3          | 2.8          | 3.2          | 4.0          | 4.5 |
| Input power                     | W   |   |              |              |              |                             |              |              |              |              |     |
| Airflow rate                    | High  | 450   | 550          | 610          | 690          | 800                         | 450          | 550          | 610          | 690          | 800 |
|                                 | Med-High  | 430   | 510          | 560          | 610          | 740                         | 430          | 510          | 560          | 610          | 740 |
|                                 | Med   | 400   | 470          | 510          | 560          | 680                         | 400          | 470          | 510          | 560          | 680 |
|                                 | Med-Low   | 380   | 410          | 440          | 530          | 610                         | 380          | 410          | 440          | 530          | 610 |
|                                 | Low   | 360   | 360          | 360          | 470          | 550                         | 360          | 360          | 360          | 470          | 550 |
|                                 | Quiet   | 310   | 310          | 310          | 330          | 330                         | 310          | 310          | 310          | 330          | 330 |
| Sound pressure level            | High  | 31  | 34           | 37           | 40           | 44                          | 31           | 35           | 43           | 40           | 44  |
|                                 | Med-High  | 30  | 32           | 35           | 37           | 42                          | 30           | 32           | 38           | 37           | 42  |
|                                 | Med   | 28  | 30           | 32           | 35           | 40                          | 28           | 30           | 34           | 35           | 40  |
|                                 | Med-Low   | 27  | 28           | 29           | 33           | 37                          | 27           | 27           | 29           | 33           | 37  |
|                                 | Low   | 26  | 26           | 26           | 30           | 34                          | 26           | 24           | 24           | 30           | 34  |
|                                 | Quiet   | 22  | 22           | 22           | 24           | 24                          | 22           | 22           | 22           | 24           | 24  |
| Net Dimensions (H x W x D)      | mm 268 x 840 x 203                                  |   |              |              |              | mm 268 x 840 x 203          |              |              |              |              |     |
| Weight                          | kg 8.0, 8.5, 8.5, 8.5, 8.5, 8.0, 8.5, 8.5, 8.5, 8.5 |   |              |              |              |                             |              |              |              |              |     |
| Connection pipe diameter        | Liquid (Flare)                                      | mm 6.35, 6.35, 6.35, 6.35, 6.35, 6.35, 6.35, 6.35, 6.35, 6.35, 6.35 |              |              |              |                             |              |              |              |              |     |
|                                 | Gas (Flare)   | mm 9.52, 9.52, 9.52, 12.70, 12.70, 9.52, 9.52, 9.52, 12.70, 12.70   |              |              |              |                             |              |              |              |              |     |
| Drain Hose Diameter (I.D./O.D.) | 13.8/15.8 to16.7                                    |   |              |              |              | 13.8/15.8 to16.7            |              |              |              |              |     |
| EV kit (optional)               | -   |   |              |              |              | UTR-EV09XB                  |              | UTR-EV14XB   |              |              |     |


Note: Specifications are subject to the following conditions:  
Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.  
Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.  
Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V]  
When connecting ASY\*004G\*\*H, ASY\*007G\*\*H, ASY\*009G\*\*H to an outdoor unit other than the outdoor unit of the J-IVL Series, the gas pipe diameter should be Ø12.70 mm.

## Optional parts

- External power supply unit: UTZ-GXXA, UTZ-GXXC\*
- WLAN adapter: UTY-TFSXZ1, UTY-TFSXJ3, FG-AC-WIF1Z1
- Silver Ion Filter: UTR-FA16-5
- Remote sensor kit: UTY-XSZXZ1

## Dimensions

(Unit: mm)

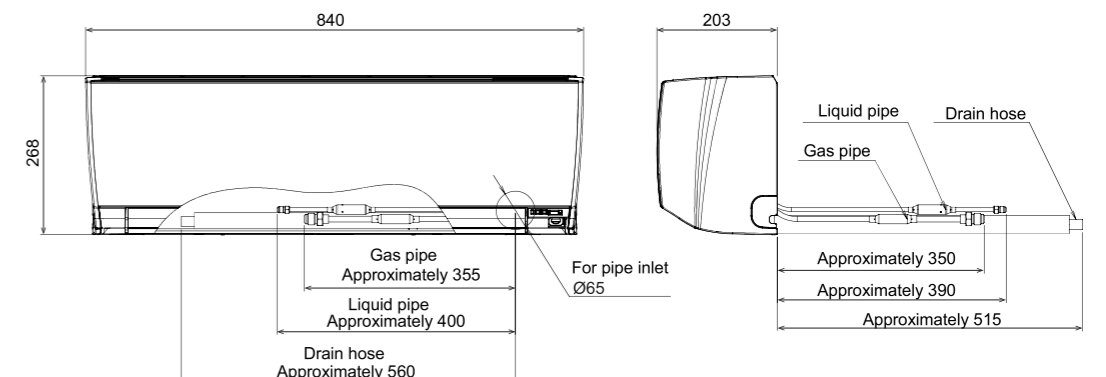


# Wall-mounted type



## Powerful & Comfort airflow


### Powerful Airflow

(ASYA030GTEH)

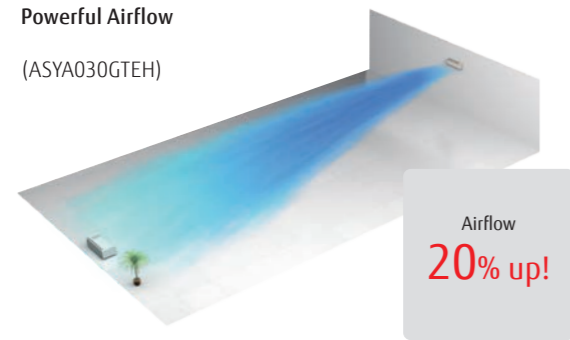

### Power diffuser


(ASYA18/24GBCH)

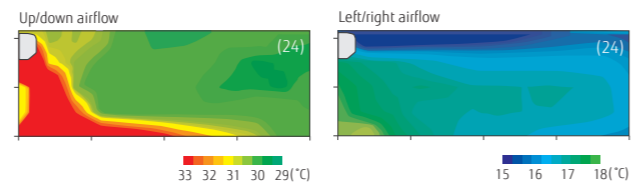

## The Human sensor contributes to further energy savings. (ASYA030/034GTEH only)



Energy saving operation starts automatically by detecting the motion of a person. Two modes of save operation mode and stop mode can be selected.

\*If you want to use the Human sensor control' function, you need an setting device that can set the Human sensor control' function. For example: Wired RC (Touch panel).

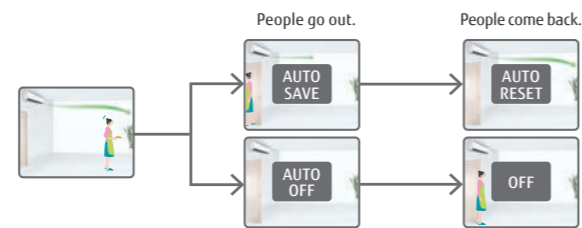

## 6-step fan speed control for quiet operation

The airflow pattern achieves significant noise reduction. A 6-step sound level setting allows for multiple-step silent operations.

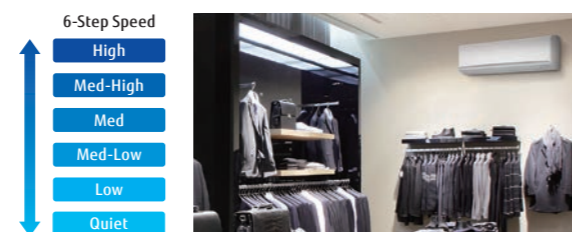

\* Remote controller is compatible with the following: UTY-RNRYZ5 / UTY-RLRY / UTY-RSRY / UTY-RHRY / UTY-DCGYZ3 / UTY-ALGXZ1 / UTY-APGXZ1

Model: ASYA18GBCH / ASYA24GBCH  
ASYA030GTEH / ASYA034GTEH



ASYA18/24GBCH



ASYA030/034GTEH

## Specifications

| Model name                      |                | ASYA18GBCH                  | ASYA24GBCH      | ASYA030GTEH       | ASYA034GTEH       |
|---------------------------------|----------------|-----------------------------|-----------------|-------------------|-------------------|
| Power source                    |                | Single phase, ~230 V, 50 Hz |                 |                   |                   |
| Capacity                        | Cooling        | 5.6                         | 7.1             | 9.0               | 10.0              |
|                                 | Heating        | 6.3                         | 8.0             | 10.0              | 11.2              |
| Input power                     |                | 32                          | 60              | 74                | 103               |
| Airflow rate                    | High           | 840                         | 1,100           | 1,440             | 1,620/1,520       |
|                                 | Med-High       | -                           | -               | 1,200             | 1,300             |
|                                 | Med            | 770                         | 910             | 1,050             | 1,120             |
|                                 | Med-Low        | -                           | -               | 940               | 980               |
|                                 | Low            | 690                         | 730             | 890               | 890               |
|                                 | Quiet          | -                           | -               | 700               | 700               |
| Sound pressure level            | High           | 41                          | 48              | 53                | 55/54             |
|                                 | Med-High       | -                           | -               | 49                | 51                |
|                                 | Med            | 39                          | 43              | 45                | 47                |
|                                 | Med-Low        | -                           | -               | 42                | 43                |
|                                 | Low            | 35                          | 35              | 39                | 39                |
|                                 | Quiet          | -                           | -               | 33                | 33                |
| Net Dimensions (H × W × D)      |                | mm 320 × 998 × 238          | 320 × 998 × 238 | 340 × 1,150 × 280 | 340 × 1,150 × 280 |
| Weight                          |                | kg 15                       | 15              | 18                | 18                |
| Connection pipe diameter        | Liquid (Flare) | 6.35                        | 9.52            | 9.52              | 9.52              |
|                                 | Gas (Flare)    | 12.70                       | 15.88           | 15.88             | 15.88             |
| Drain Hose Diameter (I.D./O.D.) |                | 12/16                       |                 | 13.8/15.8 to 16.7 |                   |

Note: Specifications are subject to the following conditions:  
Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.  
Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.  
Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V].  
When connecting ASYA18GBCH to an outdoor unit other than the outdoor unit of the J-VL Series, the pipe diameter should be Ø9.52/Ø15.88 mm (Liquid/Gas).

## Optional parts


\*For more details, please refer to the chapter "Optional parts".

External power supply unit: UTZ-GXXA (030/034), UTZ-GXXC\* (030/034) Silver Ion Filter: UTR-FA13-3  
WLAN adapter: UTY-TFSXJ3 (030/034), UTY-TFSXZ1 (030/034) Remote sensor kit: UTY-XS2XZ1  
FG-RC-WIF122 (18/24), FG-AC-WIF121 (030/034)


## Dimensions

(Unit: mm)

Models: ASYA18 / ASYA24

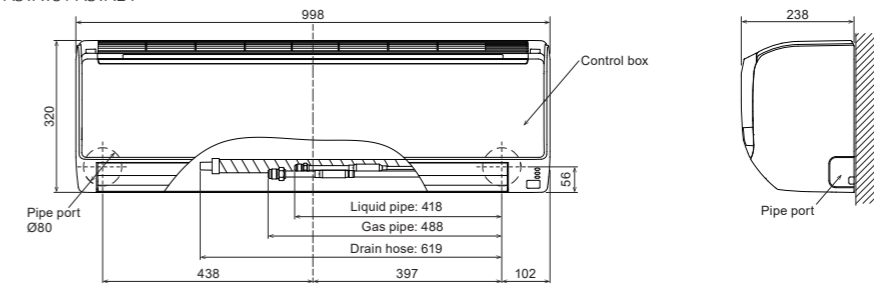


Models: ASYA030 / ASYA034

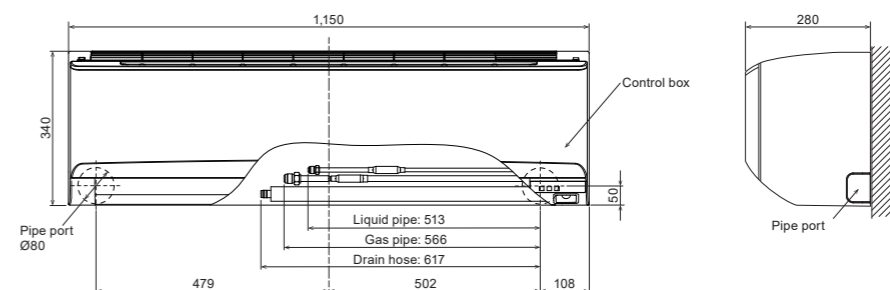

# Residential, Commercial & Light Commercial VENTILATION

## VENTILATION Lineup

- Vn-002 Energy Recovery Ventilator
- Vn-004 DX kit for Air handling applications
  - for VRF Outdoor unit
- Vn-006 DX kit for Air handling applications
  - for Single Split Outdoor Units

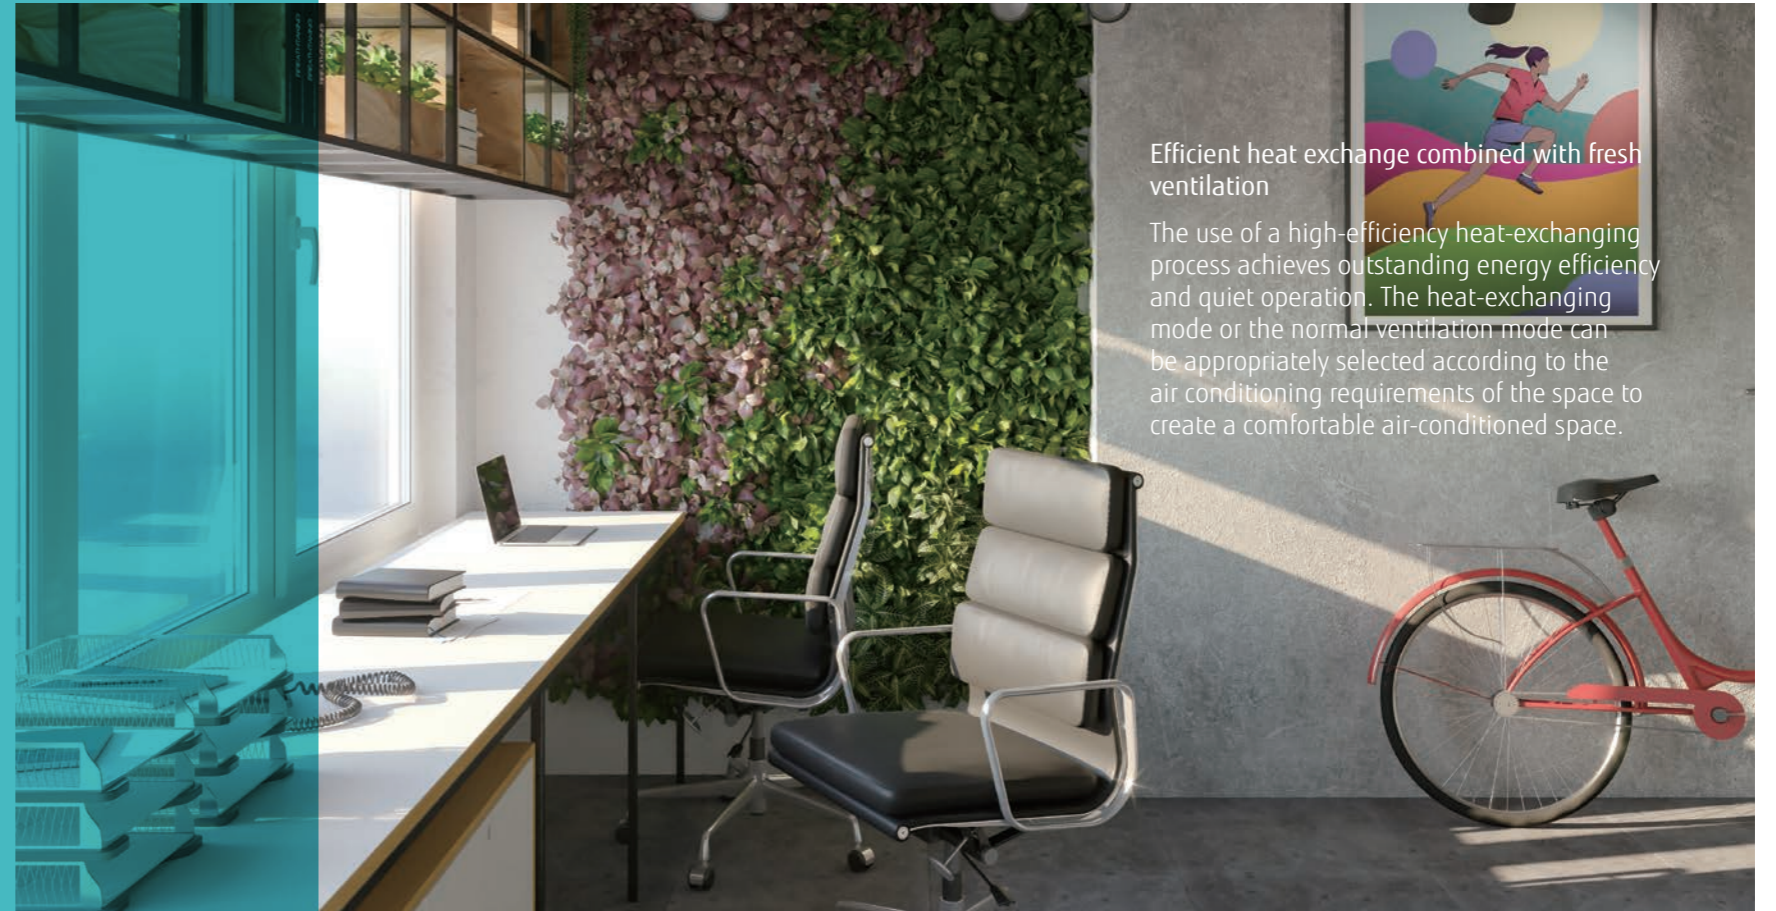











Efficient heat exchange combined with fresh ventilation

The use of a high-efficiency heat-exchanging process achieves outstanding energy efficiency and quiet operation. The heat-exchanging mode or the normal ventilation mode can be appropriately selected according to the air conditioning requirements of the space to create a comfortable air-conditioned space.



## Lineup

| Airflow rate (m <sup>3</sup> /h)   | 250   |     | 350   |      | 500   |      | 800   |      | 1000  |      |
|--|---|-----|---|------|---|------|---|------|---|------|
| <b>Energy Recovery Ventilator</b>  |  |     |  |      |  |      |  |      |  |      |
|  | UTZ-BD025C  |     | UTZ-BD035C  |      | UTZ-BD050C  |      | UTZ-BD080C  |      | UTZ-BD100C  |      |
| Connectable capacity class (kW)  | 5.0   | 6.3 | 8.0   | 10.0 | 12.5  | 14.0 | 20.0  | 25.0 | 40.0  | 50.0 |
| <b>DX kit for Air handling applications for VRF Outdoor unit</b>           |  |     |  |      |  |      |  |      |   |      |
|  | EEV unit UTP-VX30A Control unit UTY-VDGX  |     | EEV unit UTP-VX60A Control unit UTY-VDGX  |      | EEV unit UTP-VX90A Control unit UTY-VDGX  |      | EEV unit UTP-VX90A × 2 Control unit UTY-VDGX  |      |   |      |
| Connectable capacity class (kW)  | 2.5 - 22.0  |     |   |      |   |      |   |      |   |      |
| <b>DX kit for Air handling applications for Single Split Outdoor Units</b> |  |     |   |      |   |      |   |      |   |      |
|  | UTY-XDZX  |     |   |      |   |      |   |      |   |      |

# Energy Recovery Ventilator



The energy recovery ventilator unit provides energy efficiency for comfort and improved savings.


## Heat exchange ventilation and normal ventilation

### Heat exchange ventilation

When a room is cooled or heated, the exhausted cooling or heating energy is recovered by heat exchange ventilation.

### Normal ventilation

Used when the indoor space does not require cooling or heating, i.e., when there is little temperature difference between the indoor and outdoor environments.

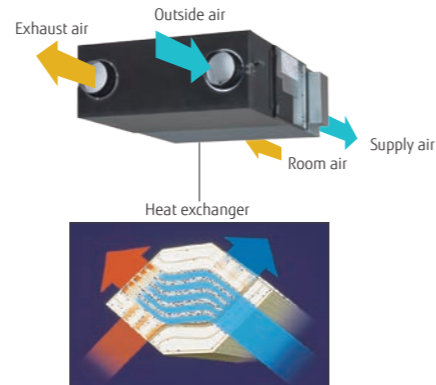


A high-efficiency counter-flow heat-exchanging element is used in the setup.

## Energy efficiency and ecology

The use of a counter-flow heat-exchanging element, designed to recover up to 77% of heat from the outgoing air, significantly reduces energy consumption. The air conditioning load is reduced by approximately 20%, which results in substantial savings in energy cost.

## Comparison of heat-exchanging elements

Air flows in a straight line through a crossflow element. In contrast, air flows for a longer time (a longer distance) through a counter-flow element to achieve more consistent heat-exchanging performance.

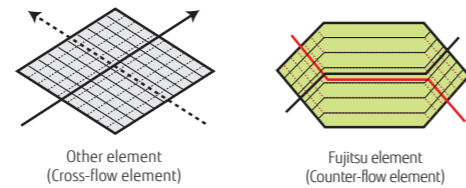

## Quiet operation

Significantly lower noise levels are achieved by reducing pressure loss.

**25.5dB**  
(UTZ-BD035C)

## Extended range of external static pressure

The use of a powerful fan motor improves the external static pressure. This allows it to be installed in a variety of buildings.


## Slim design for easier installation

The use of a counter-flow heat-exchanging element made it possible to design a quieter, slimmer unit.



## Reverse-mountable direct air supply and exhaust system

Simplifies the duct design, due to its straight ducts for air supply and exhaust. Since each unit can be mounted facing opposite directions, only one inspection hole is needed for two units. This makes duct work easier and more flexible.

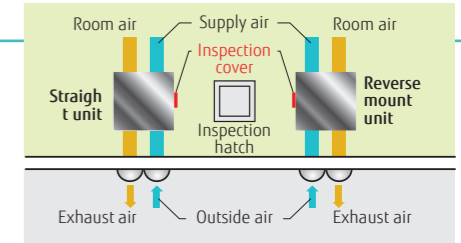

## Simple remote operation

Easy operation with connected liquid crystal switch

- Power On/Off
- Air volume High/Low
- Heat exchange ventilation and normal ventilation
- On/Off Timer
- Clean filter display



Model: UTZ-BD025C/UTZ-BD035C/UTZ-BD050C/UTZ-BD080C/UTZ-BD100C




## Specifications

| Rated flow rate           | 250 m <sup>3</sup> /h                |                       | 350 m <sup>3</sup> /h |                 | 500 m <sup>3</sup> /h |                   | 800 m <sup>3</sup> /h |                     | 1000 m <sup>3</sup> /h |  |
|---------------------------|--------------------------------------|-----------------------|-----------------------|-----------------|-----------------------|-------------------|-----------------------|---------------------|------------------------|--|
| Model name                | UTZ-BD025C                           |                       | UTZ-BD035C            |                 | UTZ-BD050C            |                   | UTZ-BD080C            |                     | UTZ-BD100C             |  |
| Power source              | Single phase, ~220 to 240 V, 50 Hz   |                       |                       |                 |                       |                   |                       |                     |                        |  |
| Heat Exchange Ventilation | Input power                          | (Extra high)/High/Low | W                     | 128/123/96      | 190/185/168           | 289/225/185       | 418/378/295           | 464/432/311         |                        |  |
|                           | Airflow rate                         | (Extra high)/High/Low | m <sup>3</sup> /h     | 250/25/190      | 350/350/240           | 500/500/440       | 800/800/630           | 1,000/1,000/700     |                        |  |
|                           | External static pressure             | (Extra high)/High/Low | Pa                    | 105/95/45       | 140/60/45             | 120/60/35         | 140/110/55            | 105/80/75           |                        |  |
|                           | Temperature exchange efficiency      | (Extra high)/High/Low | %                     | 75/75/77        | 75/75/78              | 75/75/76          | 75/75/76              | 75/75/79            |                        |  |
|                           | Energy exchange efficiency cooling   | (Extra high)/High/Low | %                     | 63/63/65        | 66/66/71              | 62/62/64          | 65/65/68              | 65/65/70            |                        |  |
|                           | Energy exchange efficiency heat pump | (Extra high)/High/Low | %                     | 70/70/72        | 69/69/73              | 67/67/69          | 71/71/74              | 71/71/76            |                        |  |
| Normal Ventilation        | Sound pressure level                 | (Extra high)/High/Low | dB*                   | 31.5/30.5/26.5  | 33.0/31.0/25.5        | 37.5/35.5/32.5    | 37.5/37.0/34.5        | 38.5/37.5/34.5      |                        |  |
|                           | Input power                          | (Extra high)/High/Low | W                     | 128/123/96      | 190/185/168           | 289/225/185       | 418/378/295           | 464/432/311         |                        |  |
|                           | Airflow rate                         | (Extra high)/High/Low | m <sup>3</sup> /h     | 250/25/190      | 350/350/240           | 500/500/440       | 800/800/630           | 1,000/1,000/700     |                        |  |
|                           | External static pressure             | (Extra high)/High/Low | Pa                    | 105/95/45       | 140/60/45             | 120/60/35         | 140/110/55            | 105/80/75           |                        |  |
| Sound pressure level      | (Extra high)/High/Low                | dB*                   | 31.5/30.5/26.5        | 33.0/31.0/25.5  | 38.5/38.0/32.5        | 37.5/37.0/34.5    | 40.5/39.5/36.5        |                     |                        |  |
| Dimensions                | W × D × H                            | mm                    |                       | 882 × 599 × 270 | 1,050 × 804 × 317     | 1,090 × 904 × 317 | 1,322 × 884 × 388     | 1,322 × 1,134 × 388 |                        |  |
| Weight                    |                                      | kg                    |                       | 29              | 49                    | 57                | 71                    | 83                  |                        |  |
| Outlet duct diameter      |                                      | mm                    |                       | 150             | 150                   | 200               | 250                   | 250                 |                        |  |
| Operating range           |                                      | °C                    |                       | -10 to 40       | -10 to 40             | -10 to 40         | -10 to 40             | -10 to 40           |                        |  |
| Maximum humidity          |                                      | %                     |                       | 85              | 85                    | 85                | 85                    | 85                  |                        |  |

\* Noise level measured 1.5 m below the center of the unit

## Dimensions

(Unit: mm)

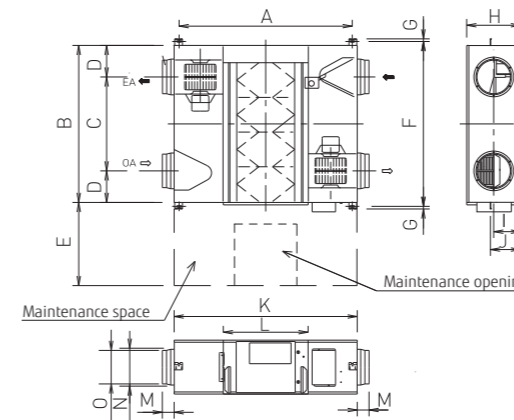


|   | UTZ-BD025C | UTZ-BD035C | UTZ-BD050C | UTZ-BD080C | UTZ-BD100C |
|---|------------|------------|------------|------------|------------|
| A | 810        | 978        | 1,018      | 1,250      | 1,250      |
| B | 599        | 804        | 904        | 884        | 1,134      |
| C | 315        | 580        | 640        | 428        | 678        |
| D | 142        | 112        | 132        | 228        | 228        |
| E | 600        | 600        | 600        | 600        | 600        |
| F | 655        | 860        | 960        | 940        | 1,190      |
| G | 19         | 19         | 19         | 19         | 19         |
| H | 270        | 317        | 317        | 388        | 388        |
| I | 135        | 159        | 159        | 194        | 194        |
| J | 159        | 182        | 182        | 218        | 218        |
| K | 882        | 1,050      | 1,090      | 1,322      | 1,322      |
| L | 414        | 470        | 470        | 612        | 612        |
| M | 95         | 70         | 70         | 85         | 85         |
| N | Ø164       | Ø164       | Ø210       | Ø258       | Ø258       |
| O | Ø144       | Ø144       | Ø194       | Ø242       | Ø242       |

# DX kit for Air handling applications for VRF Outdoor unit



With these kits, air handling units (AHUs) and fan coil units (FCUs) from other manufacturers can be incorporated into Fujitsu General VRF systems, or one AHU can be connected to one Fujitsu General VRF dedicated outdoor unit to control outdoor ventilation and room temperatures.


## Multiple temperature sensors optimally control an Air handling unit and a fan coil unit.

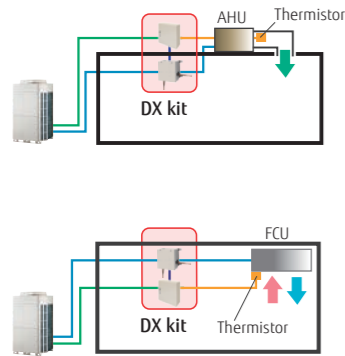

When connected to an Air handling unit, the temperature of supply air is controlled by a discharge air sensor.


When connected to a fan coil unit, the room temperature is controlled by the discharge air sensor.

### Application as part of a VRF system

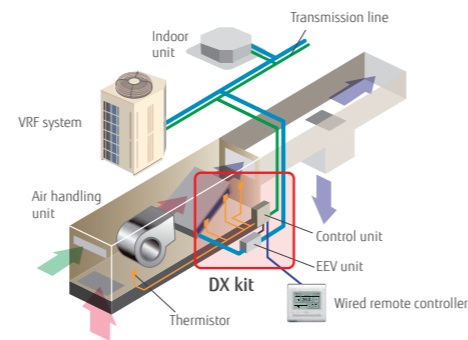


## Supports a wide range of capacity classes

- Two EEV units can be connected in parallel to large-capacity units of up to 20 HP (50 kW). (UTP-LX180A separation tube required)
- Connectable capacity range: 5 kW to 50 kW

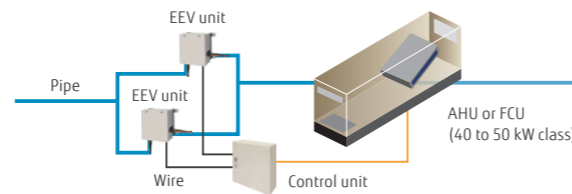


## A variety of control options that meet application requirements

Central control enabled by our VRF controllers or central management controllers

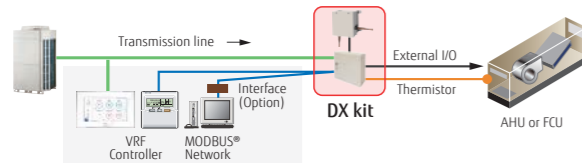

### Central control from external controllers

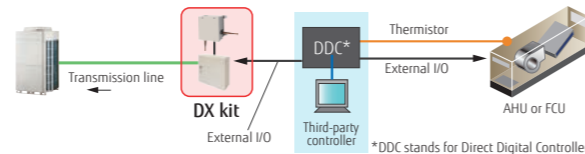

\*DDC stands for Direct Digital Controller

## Summary of functions

### Inputs

- On/Off
- Setting temperature
- Capacity demand
- Heating/Cooling operation modes
- Fault information

### Outputs

- On/Off indication
- Fan On/Off indication
- Thermostat On/Off indication
- Defrost indication
- Fault indication


### MODBUS® Control

Can be controlled via a MODBUS®-enabled BMS using an optional interface.


## Installation requirements

- Connectable VRF Series: All VRF Series
- Capacity range of connectable DX kit systems with outdoor units: 50 to 100% of capacity
- Capacity range of connectable DX kit systems with indoor units: 30% or less of capacity
- Max. wire length from a control unit: 10 m
- Max. pipe length between EEV unit and indoor unit: 5 m
- A control unit (IP54 class) and an EEV unit can be installed outdoors.

### Connectable capacity

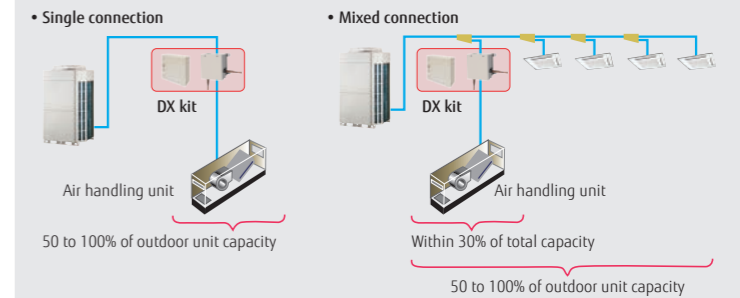


### Pipe and wire length

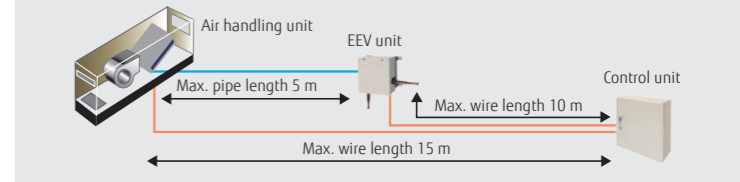

### Optional separation tube to connect two EEV units: UTP-LX180A



### Control unit: UTY-VDGX EEV unit: UTP-VX30A/UTP-VX60A/UTP-VX90A

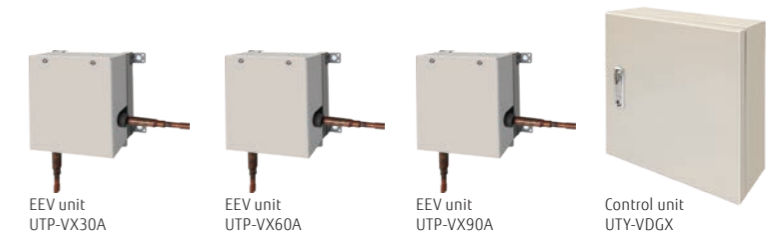

### Specifications

| Connectable capacity class |         | 5.0 kW | 6.3 kW | 8.0 kW | 10.0 kW | 12.5 kW | 14.0 kW | 20.0 kW | 25.0 kW | 40.0 kW | 50.0 kW |
|----------------------------|---------|--------|--------|--------|---------|---------|---------|---------|---------|---------|---------|
| Capacity                   | Cooling | 5.6    | 6.3    | 8.0    | 10.0    | 12.5    | 14.0    | 22.4    | 25.0    | 40.0    | 50.4    |
|                            | Heating | 6.3    | 7.1    | 9.0    | 11.2    | 14.0    | 16.0    | 25.0    | 28.0    | 45.0    | 56.5    |

| Control unit           |    | UTY-VDGX        |  |  |  |
|------------------------|----|-----------------|--|--|--|
| Power source           |    | 230/1/50        |  |  |  |
| Dimensions (H × W × D) | mm | 400 × 400 × 120 |  |  |  |

| EEV unit                          |    | UTP-VX30A      | UTP-VX60A | UTP-VX90A | UTP-VX90A × 2 |
|-----------------------------------|----|----------------|-----------|-----------|---------------|
| Connection pipe diameter (Liquid) | mm | Ø9.53          | Ø12.70    | Ø12.70    | Ø12.70        |
| Dimensions (H × W × D)            | mm | 160 × 220 × 90 |           |           |               |

Note: Specifications are based on the following conditions.  
Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.  
Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.  
Pipe length: 7.5 m Voltage: 230 [V].



# DX kit


for Air handling applications  
for Single Split Outdoor Units



With this kit, other manufacturers' Air handling units (AHUs) and fan coil units (FCUs) can be incorporated into Fujitsu General Split outdoor units.

## Flexible connectivity

This kit allows connections to third-party equipment. This control unit can also be used in conjunction with Fujitsu General single-split outdoor units, providing a perfect solution when a stand-alone Air handling unit is needed.

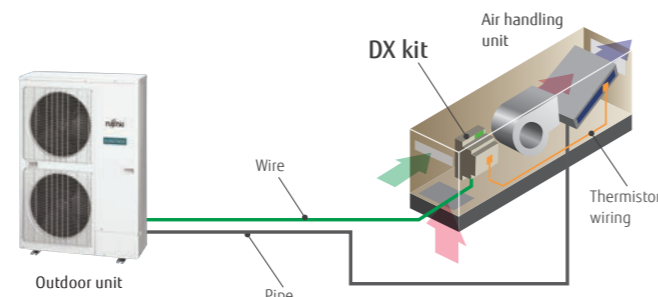


## Supports a wide range of capacity classes

Capable of connecting large capacities in the range of 2.5 kW to 22.0 kW (Nominal)



## Mobile devices allow for operation from anywhere

Can be operated and managed remotely using your smartphone or tablet.

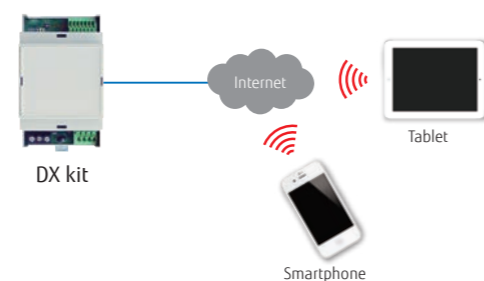

## Summary of functions

### Inputs

- On/Off
- Heating/Cooling operation modes
- Capacity demand (analogue 0 to 10 V)
- Heat exchanger temperature

### Outputs


- Status of Compressor, Defrost, and Errors (Potential free relays)
- Status indicator with LED

### Wireless LAN Control

Wireless LAN control through cloud connectivity enables secure remote monitoring and control from anywhere.

## Easy installation

- Compact DIN rail mountable enclosure for easy installation
- No expansion device required
- No separate external power supply required

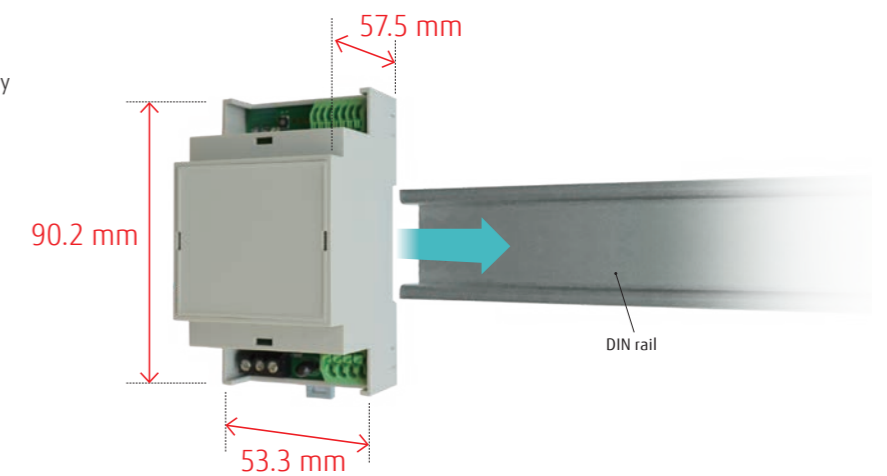

Model: UTY-XDZX



## Specifications

R410A models

| Capacity (Nominal) |         |         | 12  | 14  | 18   | 24   | 30   | 36   | 45   | 54   | 60   | 72 | 90 |
|--------------------|---------|---------|-----|-----|------|------|------|------|------|------|------|----|----|
|                    | Cooling | Heating | kW  |     |      |      |      |      |      |      |      |    |    |
|                    | 3.5     | 4.3     | 5.2 | 6.8 | 8.5  | 9.4  | 12.1 | 13.3 | 15.0 | 19.0 | 22.0 |    |    |
|                    | 4.1     | 5.0     | 6.0 | 7.8 | 10.0 | 10.8 | 13.3 | 15.8 | 18.0 | 22.4 | 27.0 |    |    |

R32 models

| Capacity (Nominal) |         |         | 09  | 12  | 14  | 18  | 22   | 24   | 30   | 36   | 45 | 54 |
|--------------------|---------|---------|-----|-----|-----|-----|------|------|------|------|----|----|
|                    | Cooling | Heating | kW  |     |     |     |      |      |      |      |    |    |
|                    | 2.5     | 3.5     | 4.3 | 5.2 | 6.0 | 6.8 | 8.5  | 9.4  | 12.1 | 13.3 |    |    |
|                    | 3.2     | 4.1     | 5.0 | 6.0 | 7.0 | 7.5 | 10.0 | 10.8 | 13.3 | 15.8 |    |    |

| Model name             |        | UTY-XDZX           |  |
|------------------------|--------|--------------------|--|
| Power source           | V/Ø/Hz | 230/1/50           |  |
| Dimensions (H × W × D) | mm     | 90.2 × 53.3 × 57.5 |  |
| Weight                 | g      | 110                |  |

Note: Specifications are based on the following conditions.  
Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.  
Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.  
Pipe length: 5.0 m Voltage: 230 [V].

## Light Commercial & Commercial, Residential CONTROL SYSTEM & OPTIONAL PARTS

- C-002 Control System Overview
- C-006 Best control solution for each building structure
- C-008 Comparison table of controllers
- C-050 Controller System List
- C-058 Optional Parts Overview
- C-066 Optional parts list
- C-070 Function list

A wide product lineup to meet a variety of needs

We can flexibly meet customer needs through a variety of offerings including wired and wireless individual remote controllers, central remote controllers that simultaneously control multiple indoor units, and a variety of converters that link with other systems.

### CONTROL SYSTEM

#### INDIVIDUAL CONTROL

- C-010 Wired remote controller (Design type)
- C-012 Wired remote controller (with touch panel)
- C-014 Wired remote controller / Compact wired remote controller
- C-015 Wired remote controller
- C-016 Simple remote controller
- C-017 Wireless remote controller
- C-018 IR receiver unit

#### CONVERTERS/ADAPTERS

- C-020 WLAN adapter
- C-024 Multiple protocol WLAN adapter

#### CENTRALIZED CONTROL





- C-025 Home central remote controller
- C-026 Central remote controller
- C-028 Touch panel controller
- C-032 System controller Software / System controller lite Software

#### CONVERTERS/ADAPTERS

- C-036 MODBUS® converter for indoor unit
- C-037 MODBUS® interface
- C-038 MODBUS® converter for VRF
- C-039 BACnet® interface
- C-040 BACnet® gateway Software
- C-041 BACnet® gateway Hardware
- C-042 BACnet®/MODBUS® router
- C-043 BACnet®/MODBUS® cloud device
- C-044 KNX® converter for indoor unit / KNX® converter for VRF
- C-045 KNX® interface
- C-046 Network converter for single-split type
- C-047 Network converter for LONWORKS™
- C-048 External switch controller / Signal amplifier

### Optional parts

- C-060 Silver ion filter
- C-061 Auto louver grille kit
- C-062 Pressure sensor kit
- C-063 External power supply unit  
AIR BEAM radiation air outlet unit
- C-064 Gas sensor kit
- C-074 Separation tube and other piping products

-  SPLIT
-  MULTI-SPLIT
-  VRF J Series
-  VRF V Series

# Control System Overview

## for Split & Multi-split

All indoor units\* are equipped with a wireless or wired remote controller as standard. Additional options are available, such as individual remote controllers and central remote controllers. The easy-to-operate central remote controller makes it simple to control the operation mode, temperature, airflow volume, timer, and other functions of each indoor unit from a single location.

\* Except for some products



### Air Conditioning Individual control

**NEW**

**Wired remote controller**  
A built-in thermo sensor monitors and controls room temperature accurately.

**Wireless remote controller**  
Simple and versatile operations with a choice of 4 different types of timers

**Simple remote controller**  
Compact remote controller with basic functionality

**For Ceiling type**

**IR receiver unit**

**For Duct type**

**IR receiver unit**

**For Cassette type**

**IR receiver unit**

This IR receiver unit enables a wireless remote controller to control a duct-type indoor unit.

### Air Conditioning Centralized control

**Home central remote controller for 5 & 6-unit Multi-split type**  
Enables individual and central control.

### Converters/Adapters

For external control via BMS/Home Automation Systems

- MODBUS® converter for indoor units**  
UTY-VMSX
- MODBUS® interface for indoor units**  
Intesis®
- KNX® converter for indoor units**  
UTY-VK SX
- KNX® interface for indoor units**  
Intesis®
- WLAN adapter**  
Intesis®
- Network converter**  
DC power supply type: UTY-VTGX  
AC power supply type: UTY-VTGXV

### Online Control (Wireless Control via Smartphone/Tablet)

With the WLAN adapter and the AIRSTAGE Mobile app, you can control the heating and cooling of your home anytime, anywhere.

**WLAN adapter**  
The dedicated WLAN adapter enables the air conditioner to be operated by smartphone or tablet computer.

**AIRSTAGE Mobile** **Download Free**  
Available on the App Store and Google Play.

### Simple, user-friendly interface design

The designed screen display makes it easier than ever to operate.

On/Off  
Temperature setting  
Operation mode  
Fan speed  
Timer  
Operation setting  
Economy setting  
Maintenance setting  
Setting

# Control System Overview

## for VRF

To meet the diverse needs of customers, we offer a variety of control options for our VRF systems, such as individual control, centralized control, and building management system (BMS) options.

### Air Conditioning Individual control

- NEW** **Wired remote controller (Design type)**  
UTY-RVRY
- Wired remote controller (with touch panel)**  
UTY-RNRYZ5
- Wired remote controller**  
UTY-RLRY
- Compact wired remote controller**  
UTY-RCRYZ1
- Simple remote controller**  
UTY-RSRY  
UTY-RHRY  
Without operation mode
- NEW** **Wireless Remote Controller**  
UTY-LNVY  
UTY-LNHY
- IR receiver unit**  
UTB-YWC for duct type  
UTY-TRHX for One-way flow cassette Series/3D-flow cassette Series/duct type  
UTY-LBHDX for Circular flow cassette Series

### Air Conditioning Centralized control

**System controller (Software)**  
UTY-APGXZ1/UTY-ALGXZ1 (Lite version) **Up to 1600<sup>\*2</sup> Indoor units**

**Touch panel controller**  
UTY-DTGYZ1 **Up to 400 Indoor units**

**Central remote controller**  
UTY-DCGYZ3 **Up to 100 Indoor units**


\*1: Echelon® U10 USB Network Interface  
\*2: The Lite version controls up to 400 indoor units.



### Converters/Adapters

For external control via BMS/Home Automation Systems

- BACnet® gateway**  
UTY-ABGXZ1 **Software**
- VTY-VBGX (Hardware)**
- BACnet® interface for Indoor units**  
FG-IR-BMG1Z1
- Network converter (For LONWORKS™)**  
UTY-VLGX
- MODBUS® converter for Indoor units**  
UTY-VMSX
- for VRF**  
UTY-VMGX
- KNX® converter for Indoor units**  
UTY-VKSX
- for VRF**  
UTY-VKGX
- WLAN adapter**  
UTY-TFSXJ3 / UTY-TFSXZ1
- External switch controller**  
UTY-TERX

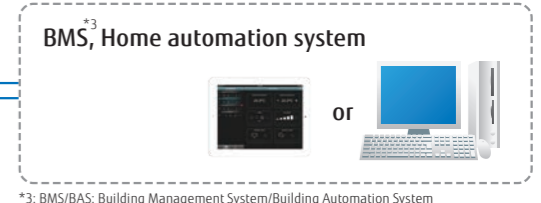

\*3: BMS/BAS: Building Management System/Building Automation System

### Converters/Adapters

for system expansion

- Network converter DC power supply type**  
UTY-VTGX
- Network converter AC power supply type**  
UTY-VTGXV
- Signal amplifier**  
UTY-VSGXZ1



# Best control solution for each building structure

Fujitsu General provides the best control solutions suitable for various building structures.

## SHOP

| Type   | Individual control  |                          |                                  | Centralized control       |                        |                          | Integrating control (Interface) |                   |                |                            |
|--|---|--------------------------|----------------------------------|---------------------------|------------------------|--------------------------|---------------------------------|-------------------|----------------|----------------------------|
|  |   |                          |                                  |                           |                        |                          |                                 |                   |                |                            |
|  | Wired remote controller                                       | Simple remote controller | Wireless remote controller       | Central remote controller | Touch panel controller | System controller        | Network converter for LONWORKS™ | MODBUS® Converter | KNX® converter | External switch controller |
|  | UTY-RVRY<br>UTY-RNRYZ5<br>UTY-RLRY<br>UTY-RVNYM<br>UTY-RCRYZ1 | UTY-RSRY<br>UTY-RHRY     | UTY-LNVY<br>UTY-LNHY<br>UTY-LNTY | UTY-DCGYZ3                | UTY-DTGYZ1             | UTY-APGXZ1<br>UTY-ALGXZ1 | UTY-VLGX                        | UTY-VMGX          | UTY-VKGX       | UTY-TERX                   |
| Automatic control of air conditioning (Schedule timer, Weekly timer, etc.)                           | •   | •                        | •                                | •                         | •                      | •                        |                                 |                   |                |                            |
| Controls limited to staff: Remote controller prohibition, Setting temperature range limitation, etc. |   | •                        | •                                | •                         | •                      | •                        | •                               | •                 | •              |                            |
| Group control  |   | •                        | •                                | •                         | •                      | •                        |                                 |                   |                |                            |
| Advanced energy saving: Peak cut, Operation of indoor unit rotation, etc.                            |   |                          |                                  |                           |                        | •                        |                                 |                   |                |                            |
| Remote monitoring management   |   | •                        | •                                | •                         | •                      | •                        |                                 |                   |                |                            |
| Manage multiple sites  |   | •                        | •                                | •                         | •                      | •                        |                                 |                   |                |                            |
| Monitor energy consumption   |   |                          |                                  |                           |                        | •                        |                                 |                   |                |                            |
| Control third-party products   |   |                          |                                  |                           |                        | •                        |                                 |                   |                |                            |
| Integrate Fujitsu General air conditioning into BMS  |   |                          |                                  |                           |                        |                          | •                               | •                 | •              |                            |
















## HOTEL

| Type  | Individual control                               |                          |                                  | Centralized control       |                        |                          | Integrating control (Interface) |                                 |                   |                |                            |
|---|--|--------------------------|----------------------------------|---------------------------|------------------------|--------------------------|---------------------------------|---------------------------------|-------------------|----------------|----------------------------|
|   |  |                          |                                  |                           |                        |                          |                                 |                                 |                   |                |                            |
|   | Wired remote controller                          | Simple remote controller | Wireless remote controller       | Central remote controller | Touch panel controller | System controller        | BACnet® gateway                 | Network converter for LONWORKS™ | MODBUS® converter | KNX® converter | External switch controller |
|   | UTY-RVRY<br>UTY-RNRYZ5<br>UTY-RLRY<br>UTY-RCRYZ1 | UTY-RSRY<br>UTY-RHRY     | UTY-LNVY<br>UTY-LNHY<br>UTY-LNTY | UTY-DCGYZ3                | UTY-DTGYZ1             | UTY-APGXZ1<br>UTY-ALGXZ1 | UTY-ABGXZ1<br>UTY-VBGX          | UTY-VLGX                        | UTY-VMGX          | UTY-VKGX       | UTY-TERX                   |
| Local control for hotel guests  | •  | •                        | •                                |                           |                        |                          |                                 |                                 |                   |                |                            |
| Centralized air conditioning control for common areas                     |  |                          |                                  | •                         | •                      | •                        | •                               | •                               | •                 | •              |                            |
| Limited control for hotel guests  |  |                          |                                  | •                         | •                      | •                        | •                               | •                               | •                 | •              |                            |
| Remote monitoring management  |  |                          |                                  | •                         | •                      | •                        |                                 |                                 |                   |                |                            |
| Advanced energy saving: Peak cut, Operation of indoor unit rotation, etc. |  |                          |                                  |                           |                        | •                        | •                               |                                 |                   |                |                            |
| Monitor energy consumption  |  |                          |                                  |                           |                        | •                        |                                 |                                 |                   |                |                            |
| Control third-party products  |  |                          |                                  |                           |                        | •                        |                                 |                                 |                   |                |                            |
| Integrate Fujitsu General air conditioning into BMS                       |  |                          |                                  |                           |                        |                          | •                               | •                               | •                 | •              |                            |
| Interlock with window contact   |  |                          |                                  |                           |                        |                          |                                 |                                 |                   |                | •                          |
| Interlock with key card   |  |                          |                                  |                           |                        |                          |                                 |                                 |                   |                | •                          |

## OFFICE

| Type   | Individual control                               |                          |                                  | Centralized control       |                        |                          | Integrating control (Interface) |                                 |                   |                |                            |
|--|--|--------------------------|----------------------------------|---------------------------|------------------------|--------------------------|---------------------------------|---------------------------------|-------------------|----------------|----------------------------|
|  |  |                          |                                  |                           |                        |                          |                                 |                                 |                   |                |                            |
|  | Wired remote controller                          | Simple remote controller | Wireless remote controller       | Central remote controller | Touch panel controller | System controller        | BACnet® gateway                 | Network converter for LONWORKS™ | MODBUS® converter | KNX® converter | External switch controller |
|  | UTY-RVRY<br>UTY-RNRYZ5<br>UTY-RLRY<br>UTY-RCRYZ1 | UTY-RSRY<br>UTY-RHRY     | UTY-LNVY<br>UTY-LNHY<br>UTY-LNTY | UTY-DCGYZ3                | UTY-DTGYZ1             | UTY-APGXZ1<br>UTY-ALGXZ1 | UTY-ABGXZ1<br>UTY-VBGX          | UTY-VLGX                        | UTY-VMGX          | UTY-VKGX       | UTY-TERX                   |
| Local control for office staff   | •  | •                        | •                                | •                         |                        |                          |                                 |                                 |                   |                |                            |
| Automatic control of air conditioning (Schedule timer, Weekly timer, etc.)                           | •  |                          | •                                | •                         | •                      | •                        | •                               |                                 |                   |                |                            |
| Centralized air conditioning control for management  |  |                          |                                  | •                         | •                      | •                        | •                               | •                               | •                 | •              |                            |
| Controls limited to staff: Remote controller prohibition, Setting temperature range limitation, etc. |  |                          |                                  | •                         | •                      | •                        | •                               | •                               | •                 | •              |                            |
| Advanced energy saving: Peak cut, Operation of indoor unit rotation, etc.                            |  |                          |                                  |                           |                        | •                        | •                               |                                 |                   |                |                            |
| Remote monitoring management   |  |                          |                                  | •                         | •                      | •                        |                                 |                                 |                   |                |                            |
| Electricity charge apportionment   |  |                          |                                  |                           | •                      | •                        | •                               |                                 |                   |                |                            |
| Monitor energy consumption   |  |                          |                                  |                           |                        | •                        |                                 |                                 |                   |                |                            |
| Control third-party products   |  |                          |                                  |                           |                        | •                        |                                 |                                 |                   |                |                            |
| Integrate Fujitsu General air conditioning into BMS  |  |                          |                                  |                           |                        |                          | •                               | •                               | •                 | •              |                            |
| Interlock with door contact  |  |                          |                                  |                           |                        |                          |                                 |                                 |                   |                | •                          |
| Interlock with Human sensor for meeting room   |  |                          |                                  | •                         |                        |                          |                                 |                                 |                   |                | •                          |

# Comparison table of controllers

| Item  |  |  |  |  |  |  |   |  |  |  |  |  |  |  |  |  |
|---|---|---|---|--|---|---|---|---|---|---|---|---|---|---|---|---|
| Model name  | UTY-RVRY  | UTY-RNRYZ5  | UTY-RLRY  | UTY-RVNYM  | UTY-RCRYZ1  | UTY-RSRY  |   | UTY-RHRY  | UTY-LNTY  | UTY-LNVY  | UTY-LNHY  | UTY-DMMYM   | UTY-DCGYZ3  | UTY-DTGVZ1  | UTY-ALGXZ1  | UTY-APGXZ1  |
| Maximum number of controllable remote controller groups | 1   | 1   | 1   | 1  | 1   | 1   |   | 1   | 1   | 1   | 1   | 1   | 100   | 400   | 400   | 1600  |
| Maximum number of controllable indoor units             | 16  | 16  | 16  | 16   | 1   | 16  |   | 16  | 16  | 16  | 16  | 8   | 100   | 400   | 400   | 1600  |
| Maximum number of controllable groups                   | -   | -   | -   | -  | -   | -   |   | -   | -   | -   | -   | -   | 50  | 400   | 400   | 1600  |
| Air conditioning control functions                      | ON/OFF  | ●   | ●   | ●  | ●   | ●   |   | ●   | ●   | ●   | ●   | ●   | ●   | ●   | ●   | ●   |
|   | Operation mode setting  | ●   | ●   | ●  | ●   | ●   |   | -   | ●   | ●   | ●   | ●   | ●   | ●   | ●   | ●   |
|   | Fan speed control   | ●   | ●   | ●  | ●   | ●   |   | ●   | ●   | ●   | ●   | ●   | ●   | ●   | ●   | ●   |
|   | Room temperature setting  | ●   | ●   | ●  | ●   | ●   |   | ●   | ●   | ●   | ●   | ●   | ●   | ●   | ●   | ●   |
|   | Setting temperature range limitation  | ●   | ●   | ●  | ●   | -   |   | ●   | -   | -   | -   | -   | ●   | ●   | ●   | ●   |
|   | Test operation  | ●   | ●   | ●  | ●   | ●   |   | ●   | ●   | ●   | ●   | ●   | -   | ●   | ●   | -   |
|   | Vertical louver setting   | ●   | ●   | ●  | ●   | ●   |   | ●   | ●   | ●   | ●   | ●   | -   | ●   | ●   | ●   |
|   | Horizontal louver setting   | ●   | ●   | ●  | ●   | ●   |   | -   | -   | ●   | ●   | ●   | -   | ●   | ●   | ●   |
|   | Individual louver control   | ●   | ●   | -  | -   | ●   |   | -   | -   | -   | -   | -   | -   | ●*3   | -   | -   |
|   | Group setting   | -   | -   | -  | -   | -   |   | -   | -   | -   | -   | -   | -   | ●   | ●   | ●   |
|   | Remote controller prohibition   | -   | -   | -  | -   | -   |   | -   | -   | -   | -   | -   | ●   | ●   | ●   | ●   |
|   | Anti-freeze setting   | ●   | ●   | -  | -   | ●   |   | -   | -   | -   | -   | -   | ●   | ●   | ●   | ●   |
|   | Set temperature auto return   | ●   | ●   | ●  | ●   | -   |   | -   | -   | -   | -   | -   | -   | ●   | ●   | -   |
|   | Economy mode setting  | ●   | ●   | ●  | ●   | ●   |   | -   | ●   | ●   | ●   | ●   | ●   | ●   | ●   | ●   |
|   | Human sensor control  | ●   | ●   | -  | -   | -   |   | -   | -   | -   | -   | -   | ●   | ●   | ●   | ●   |
|   | Displayed items   | Error   | ●   | ●  | ●   | ●   | ● |   | ●   | -   | -   | -   | ●   | ●   | ●   | ●   |
| Defrosting  |   | ●   | ●   | ●  | ●   | ●   |   | ●   | -   | -   | -   | -   | ●   | ●   | ●   | ●   |
| Current time  |   | ●   | ●   | ●  | ●   | -   |   | -   | ●   | ●   | ●   | ●   | ●   | ●   | ●   | ●   |
| Day of week   |   | ●   | ●   | ●  | ●   | -   |   | -   | -   | -   | -   | -   | -   | ●   | ●   | ●   |
| Remote controller prohibition                           |   | ●   | ●   | ●  | ●   | ●   |   | ●   | -   | -   | -   | -   | ●   | ●   | ●   | ●   |
| Address display   |   | ●   | ●   | ●  | ●   | ●   |   | ●   | -   | -   | -   | -   | -   | ●   | ●   | ●   |
| Room temperature  |   | ●   | ●   | -  | ●   | ●   |   | ●   | -   | -   | -   | -   | ●*4   | ●*4   | ●*4   | ●*4   |
| Multiple language support                               |   | ●   | ●   | -  | ●   | -   |   | -   | -   | -   | -   | -   | ●   | ●   | ●   | ●   |
| Setting for daylight saving time                        |   | ●   | ●   | -  | ●   | -   |   | -   | -   | -   | -   | -   | ●   | ●   | ●   | ●   |
| Name registration                                       |   | ●   | ●   | -  | -   | -   |   | -   | -   | -   | -   | -   | ●   | ●   | ●   | ●   |
| Backlighting  |   | ●   | ●   | -  | ●   | ●   |   | ●   | -   | ●   | -   | ●   | ●   | ●   | ●   | -   |
| 2D floor layout/3D building display                     |   | -   | -   | -  | -   | -   |   | -   | -   | -   | -   | -   | -   | -   | -   | ●   |
| Refrigerant leak detector                               |   | -   | -   | -  | -   | -   |   | -   | -   | -   | -   | -   | ●   | ●   | ●   | ●   |
| Refrigerant Cycle Monitor                               |   | ●   | ●   | -  | -   | -   |   | -   | -   | -   | -   | -   | -   | -   | -   | -   |
| Logo Display  |   | ●   | -   | -  | -   | -   |   | -   | -   | -   | -   | -   | -   | -   | -   | -   |
| Limited Visibility of Settings                          |   | ●   | -   | -  | -   | -   |   | -   | -   | -   | -   | -   | -   | -   | -   | -   |
| Timer   | Schedule timer  | Period  | Week  | Week   | Week  | Week  |   | -   | -   | -   | -   | Week  | Year  | Year  | Year  | Year  |
|   |   | ON/OFF, Temp, Low noise mode*5, Times per day                                     | 8   | 8  | 4   | 8   | - | -   | -   | -   | -   | -   | 4   | 20  | 20  | 144   |
|   | ON/OFF timer  | -   | ●   | ●  | ●   | ●(OFF only)   |   | -   | ●   | ●   | ●   | -   | -   | -   | -   | -   |
|   | Sleep timer   | -   | -   | -  | -   | -   |   | -   | ●   | ●   | ●   | -   | -   | -   | -   | -   |
|   | Program timer   | -   | -   | -  | -   | -   |   | -   | ●   | ●   | ●   | -   | -   | -   | -   | -   |
|   | Auto-off timer  | ●   | ●   | ●  | ●   | -   |   | -   | -   | -   | -   | -   | ●   | ●   | ●   | ●   |
| Control   | Day off   | ●   | ●   | ●  | ●   | -   |   | -   | -   | -   | -   | ●   | ●   | ●   | ●   | ●   |
|   | Minimum unit of timer setting (minutes)   | 1 • 10  | 10 • 30   | 30   | 30  | -   |   | -   | 5   | 5   | 5   | 5   | 10  | 10  | 10  | 10  |
|   | Remote monitoring management system   | -   | -   | -  | -   | -   |   | -   | -   | -   | -   | -   | ●   | ●   | ●   | ●   |
|   | Electricity charge apportionment  | -   | -   | -  | -   | -   |   | -   | -   | -   | -   | -   | -   | ○   | ○   | ●   |
|   | Error history   | ●   | ●   | ●  | ●   | -   |   | -   | -   | -   | -   | -   | ●   | ●   | ●   | ●   |
| Emergency stop  | -   | -   | -   | -  | -   |   | - | -   | -   | -   | -   | ●*2   | ●*2   | -   | -   |   |
| Remote monitoring management                            | -   | -   | -   | -  | -   |   | - | -   | -   | -   | -   | ●   | ●   | ○   | ●   |   |
| Energy-saving management                                | -   | -   | -   | -  | -   |   | - | -   | -   | -   | -   | -   | -   | ○   | ○   |   |
| E-mail notification in case of failure                  | -   | -   | -   | -  | -   |   | - | -   | -   | -   | -   | -   | ●   | ●   | ●   |   |
| Key lock  | ● Child lock  | ● Child lock  | ● Child lock  | ● Child lock   | -   |   | - | -   | -   | -   | -   | ● Child lock  | ● Password setting  | ● Password setting  | ● Password setting  | ● Password setting  |
| Low noise mode  | -   | -   | -   | -  | -   |   | - | -   | -   | -   | -   | ●   | ●   | ●   | ●   |   |

\*1 "Operation mode" setting not available.  
 \*2 Available only for external input control.  
 \*3 Monitoring sites can be set up.  
 The main unit side can only be operated to cancel the settings.  
 \*4 Available only when using Wired remote controller.  
 \*5 UTY-DCGYZ3 only  
 ●: Supported ○: Optional function -: Unsupported

# Wired remote controller (Design type)

UTY-RVRY



NEW



Up to 16 indoor units  
Up to 1 group



reddot winner 2024



## Simple and stylish design that harmonizes with the space

- The new stylish design controller, UTY-RVRY, enables intuitive operation with touch screen. It is compatible with many 2-wired indoor units.

## Harmonizes with the Installation Space

When not in use, the controller is a part of the interior décor. This is achieved by using mirrors, glass, and clear panels, and it appears to be one with the wall. The sleek and stylish design won the 2022 Good Design Award and was selected as a finalist for the 2023 IDEA award.



## Intuitive operation

The touch screen is easily operated by swiping vertically and horizontally, and users can operate the controller without using manuals.



## Status LED Colors

When not in use, the operation mode is indicated through LED lamp colors shown under the controller. The LED lamp can be switched ON and OFF to avoid glare at night.



## Features: Wired Remote Controller (Design type)

### Refrigerant cycle monitor

The controller will display specific sensor values of outdoor and indoor units for maintenance and service support.


- \* Display screen example
- \* This function is only supported by split units, using the H-Serial communication protocol! Example: ASYH30KMTB



### Logo Display

The controller can display hotel logos when not in use. Images are sent via Bluetooth® connection where data is saved in the flash memory built into each controller.


\* Color display available

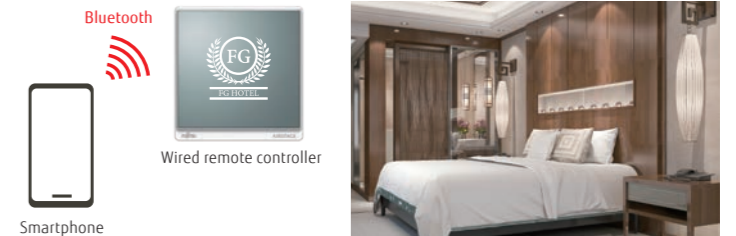

### AIRSTAGE Remo Set application (free download)


Set up your new Wired Remote Controller via Bluetooth from your smartphone (or directly at the controller).

- Features:
- Initial configuration
  - Function setting
  - Custom logo import
  - Copy settings between controllers

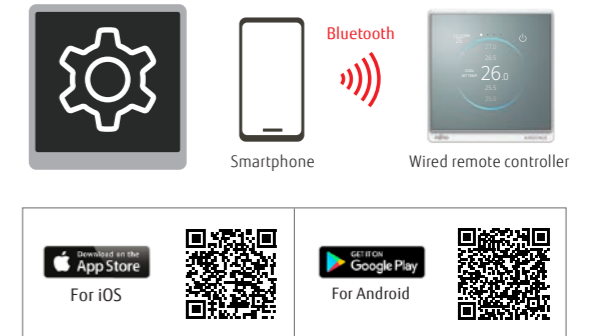

### Initial Settings / Indoor Unit Function

The initial controller settings and indoor unit function settings can be sent from a smartphone by pairing with the controller via Bluetooth. It also can read the setting values of a paired controller, and send a copy of them to one or more additional controllers, significantly reducing installation time.

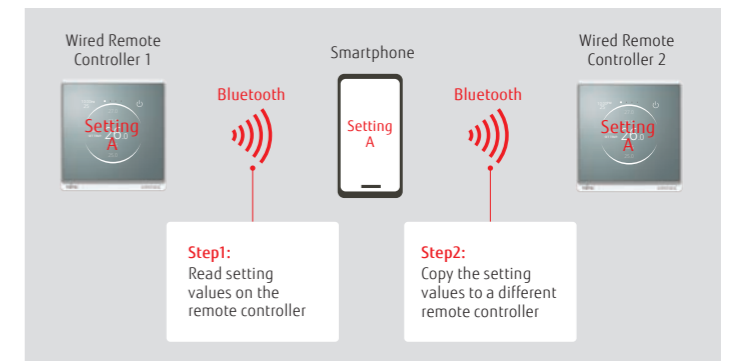

\*Smartphone : Wired Remote Controller = 1 : 1

### Specifications

|                             |                  |
|-----------------------------|------------------|
| Model name                  | UTY-RVRY         |
| Power Source                | DC12V            |
| Dimensions (H × W × D) (mm) | 121.5 × 116 × 26 |
| Weight (g)                  | 225              |

# Wired remote controller (with touch panel)

UTY-RNRYZ5



Up to **16** indoor units  
Up to **1** group

## Easy operation due to large high-resolution STN-LCD touch panel screen

- Touch screen LCD
- Built-in daily/weekly timer (ON/OFF, temperature, modes)
- Backlit screen for easy operation in the dark.
- Room temperature display
- Controls up to 16 indoor units
- Supports 12 languages: Chinese, Dutch, English, French, German, Greek, Italian, Polish, Portuguese, Russian, Spanish, and Turkish
- Nonpolar 2-core type


## High performance and compact size

A single remote controller controls each connected indoor unit and provides a weekly timer function and a variety of energy-saving options.



## Accurate control for comfort

A thermo sensor built into the remote controller monitors room temperature accurately.

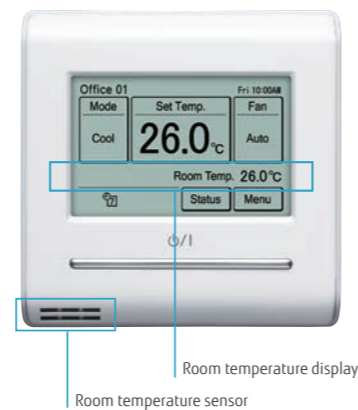

## Energy saving controls

### Custom Auto

- Maintains 2 separate setpoints for heating and cooling operations.
- Automatically switches between heating and cooling modes.

\* Not available for some models

### Auto-off timer



- While the Auto-off timer is activated, if the set off time is specified as, for example, one hour, the power will automatically turn off one hour after the start of operation.
- A desired time frame can be specified for the Auto-off timer.
- The off-time can be set from 30 to 240 minutes.

### 2-setting weekly timer

### Set temperature auto return

### Setting temperature range limitation

Cooling set temp. 27°C, Heating set temp. 26°C

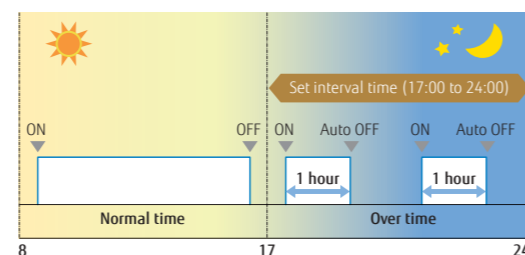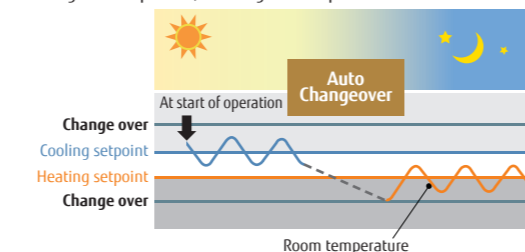


e.g.) Between 17:00 and 24:00 (over time hours), when the 1 hour set off time has elapsed, the system will automatically turn off the indoor unit as it

## Features: Wired Remote Controller (Touch Panel)

### Refrigerant cycle monitor (Option)

Wired Remote Controller (Touch Panel) will support to display some sensor values for maintenance and service support.


\* This function is only supported by split units, using the H-Serial communication protocol! Example: ASYH30KMTB

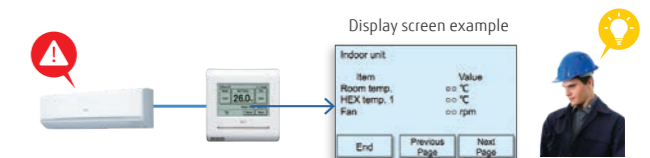

## Multi System Control\*1


### 1) Lead Lag Operation

Standby Indoor Unit can be selected in lead lag operation. By this, the Indoor units will last longer than operating by nonstop.

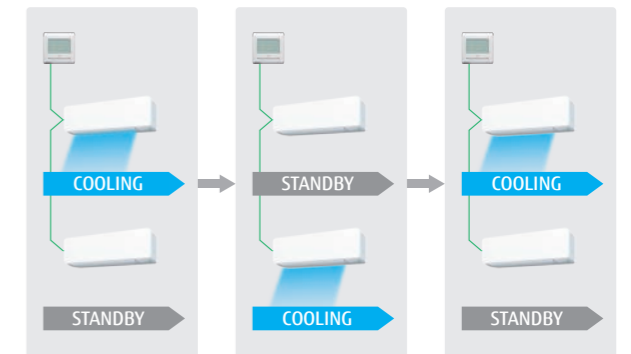


### 2) Back up operation

In case of unexpected Indoor unit error, other Indoor units will start providing back up operation.

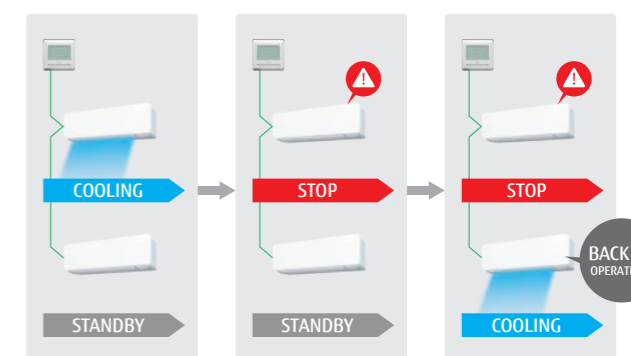

### 3) Lag Operation

In case of unexpected room temperature rise, other Indoor Units will start providing lag operation.

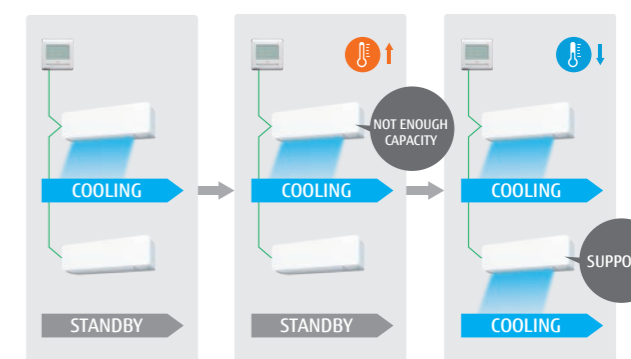

\*1: "Lead Lag Setting" is an easy-to-use function for room temperature control when using multiple indoor units, while reducing the burden placed on each indoor unit.

If you wish to make use of this function, ensure you use indoor units equipped with a "Special Cooling" function.

For Split products with "Special Cooling" function, refer to S-068 to S-071.

If you use indoor units that do not have a "Special Cooling" function, under certain conditions, there is a chance that "Backup operation" may not operate correctly, and the "Lead Lag Setting" function will not give the expected results.

Additionally, for rooms that require strict conditions, such as server rooms, please consider other appropriate measures.

Please note that we will not provide compensation for any damages suffered to your appliances or data as a result of using this function. For more details, please confirm with your nearest retail store.

## Specifications

|                             |                  |
|-----------------------------|------------------|
| Model name                  | UTY-RNRYZ5       |
| Power Source                | DC 12 V          |
| Dimensions (H × W × D) (mm) | 120 × 120 × 20.4 |
| Weight (g)                  | 220              |

DC 12 V is supplied by the indoor unit.



## Wired remote controller

UTY-RLRY



- ON/OFF/Weekly timer settings
- A built-in thermo sensor monitors and controls room temperature accurately.
- When something goes wrong, an error code is displayed.
- 16 error codes from the most recent one will be kept in the history. (Last 16 error codes can be accessed)
- Nonpolar 2-core type

Up to  
**16** indoor units  
Up to  
**1** group


### High performance and compact size

A single remote controller controls each connected indoor unit and provides a weekly timer function and a variety of energy-saving options.




### Visually intuitive operation

- The operation mode, set temperature, and fan speed are shown prominently on the top screen.
- Each function to be set is indicated by an icon.
- The control guide makes it simple and straightforward to operate a remote controller.

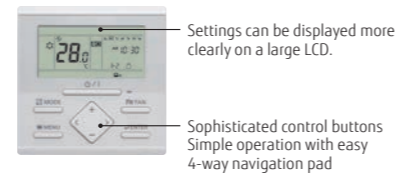

## Compact wired remote controller

UTY-RCRYZ1




- Simple design that matches stylish interiors
- The body of the controller, which is easy to install, is designed to conform to the European standard junction box.
- Can be operated both by wireless and wired remote controller.
- Nonpolar 2-core type

Up to  
**1** indoor units  
Up to  
**1** group


### Large screen and simple display

- Large screen but compact size
- Large, easy-to-read letters are used.
- The controls are simple and easy to understand.

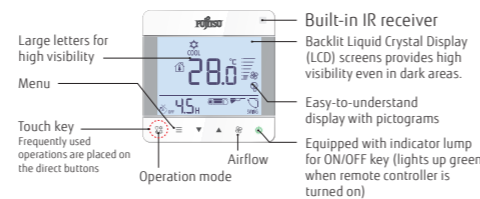


### System overview

#### VRF connection

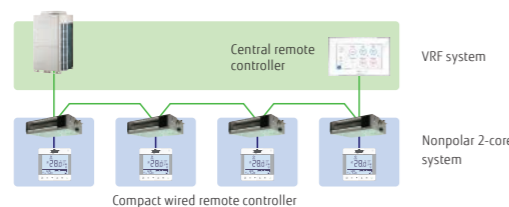

#### RAC connection



### Specifications

| Model name                  | UTY-RLRY       | UTY-RCRYZ1   |
|-----------------------------|----------------|--------------|
| Power source                | 12 V DC        | 12 V DC      |
| Dimensions (H × W × D) (mm) | 120 × 120 × 17 | 86 × 86 × 44 |
| Weight (g)                  | 170            | 135          |

12 V DC supplied by an indoor unit

## Wired remote controller

UTY-RVNYM




### Hi-grade individual control with a wide range of functions.

- 3.7-inch backlit LCD screen.
- Supports energy-saving functions with simple operation.
- Supports 9 languages: English, French, German, Greek, Italian, Portuguese, Russian, Spanish, and Turkish

Up to  
**16** indoor units  
Up to  
**1** group

### Visually intuitive operation

- Each function is displayed as an icon.
- Main functions are indicated by large icons: "Mode," "Set Temp," and "Fan"
- Easy operation with control guide display
- Simple operation with easy 4-way navigation pad

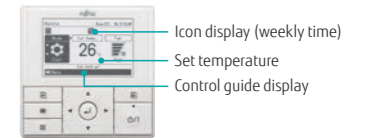

### High performance and compact size

- A single remote controller controls each connected indoor unit and provides a variety of energy-saving options.



## Wired remote controller

UTY-RNNYM




- Simple operation with Built-in Weekly/Daily Timer.
- Control up to 16 indoor units.
- Up to 2 Wired remote controllers can be connected to a single indoor unit.

Up to  
**16** indoor units  
Up to  
**1** group

### Accurate control for comfort

A thermo sensor built into the remote controller monitors room temperature accurately. The wired remote controller and an optional Remote sensor can be installed in any location to meet any requirement.

#### Examples of sensor changes

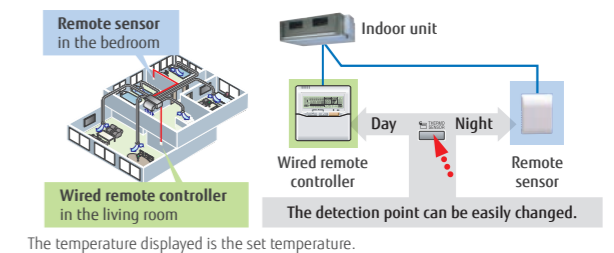

### Built-in timer

**Weekly timer:** ON/OFF time can be set to operate twice for each day of the week.  
**Temperature setback timer:** Sets the time to change the temperature setting and the time to hold the setting for each day of the week.  
 At "Weekly timer" + "Temperature setback timer" setup


### Specifications

| Model name                  | UTY-RVNYM        | UTY-RNNYM      |
|-----------------------------|------------------|----------------|
| Power source                | 12 V DC          | 12 V DC        |
| Dimensions (H × W × D) (mm) | 120 × 120 × 21.3 | 120 × 120 × 18 |
| Weight (g)                  | 220              | 160            |

12 V DC supplied by an indoor unit

## Simple remote controller

UTY-RSRY / UTY-RHRY (without operation mode)



### Compact remote controller with basic functionality

- Up to 16 indoor units can be controlled with one remote controller.
- Suitable for hotels or offices as it is easily operated with no complex functions.
- Simple design that matches stylish interiors
- Large LCD screen and easy-to-use control buttons
- Backlight: White backlight makes it easy to operate in the dark.
- Nonpolar 2-core type


Up to  
**16** indoor units  
Up to  
**1** group

### Supports a variety of applications


- **Vertical louver control:** Adjusts the vertical airflow direction of a duct-type indoor unit with an auto louver or a cassette type installed in a hotel room or a conference room.



- **Setting temperature range limitation:** Enables an indoor unit to operate in an energy-saving manner in a small building not equipped with a central remote controller.

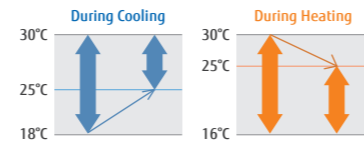

- **Built-in room temperature sensor:** Monitors and controls room temperature accuracy.

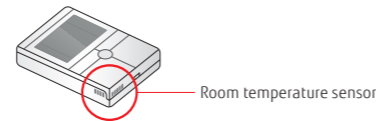

## Wireless remote controller

UTY-LNTY



### Simple and versatile operations with a choice of 4 different types of timers

- Controls up to 16 indoor units.

### Built-in timer

4 timer programs: ON/OFF/Program/Sleep  
Program timer: Sets ON/OFF time once for every 24 hours.  
Sleep timer: Adjusts the set temperature automatically while the sleep timer is on.

### Easy installation and operation

Different codes can be assigned to up to 4 indoor units to prevent a mix-up.  
Wide and precise transmitting range

Up to  
**16** indoor units  
Up to  
**1** group  
Up to  
**4** different daily timers

#### Specifications

| Model name                  | UTY-RSRY        | UTY-RHRY        | UTY-LNTY                     |
|-----------------------------|-----------------|-----------------|------------------------------|
| Power source                | 12 V DC         | 12 V DC         | 3.0V (1.5V R03/LR03/AAA x 2) |
| Dimensions (H × W × D) (mm) | 120 × 75 × 19.4 | 120 × 75 × 19.4 | 205 × 61 × 17                |
| Weight (g)                  | 120             | 120             | 125                          |

12 V DC supplied by an indoor unit

## Wireless remote controller

UTY-LNVY



NEW



Up to  
**16** indoor units  
Up to  
**1** group  
Up to  
**4** different daily timers

### New stylish design with backlight

- It has adopted a new simple and stylish design.
- The built-in backlight allows the screen to be seen even in dark rooms.

### Built-in timer

4 timer programs: ON/OFF/Program/Sleep  
Program timer: Sets ON/OFF time once for every 24 hours.  
Sleep timer: Adjusts the set temperature automatically while the sleep timer is on.

### Error diagnosis

It can detect the reason for system errors easily.  
When an error is detected, the error code number can be checked using the remote controller display.

### Precise control

The setting temperature can be adjusted precisely depending on the environment as the controller can set the temperature via 0.5 °C\*.

\*Depends on the indoor unit

## Wireless remote controller

UTY-LNHY



Up to  
**16** indoor units  
Up to  
**1** group  
Up to  
**4** different daily timers

### Simple and versatile operations with a choice of 4 different types of timers

- Controls up to 16 indoor units.

### Built-in timer

4 timer programs: ON/OFF/Program/Sleep  
Program timer: Sets ON/OFF time once for every 24 hours.  
Sleep timer: Adjusts the set temperature automatically while the sleep timer is on.

### Easy installation and operation


Different codes can be assigned to up to 4 indoor units to prevent a mix-up.  
Wide and precise transmitting range

#### Specifications

| Model name                  | UTY-LNVY                     | UTY-LNHY                     |
|-----------------------------|------------------------------|------------------------------|
| Battery                     | 3.0V (1.5V R03/LR03/AAA x 2) | 3.0V (1.5V R03/LR03/AAA x 2) |
| Dimensions (H × W × D) (mm) | 181 × 58 × 17                | 170 × 56 × 19                |
| Weight (g)                  | 116                          | 85                           |

12 V DC supplied by an indoor unit

## IR receiver unit for duct type UTY-LRHYM / UTY-LBTYM

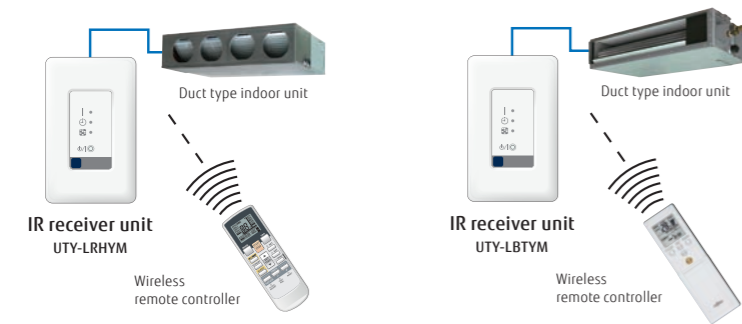

The wireless remote controller controls duct type indoor units.

## IR receiver unit for Cassette UTY-LBTYC



Cassette type indoor unit can be controlled with a Wireless remote controller.

## IR receiver unit for ceiling type UTY-LBTYH



The wireless remote controller controls ceiling type indoor units.

### Specifications

< Wireless Remote Controller >

| Model name                  | UTY-LRHYM            | UTY-LBTYM            | UTY-LBTYC            | UTY-LBTYH            |
|-----------------------------|----------------------|----------------------|----------------------|----------------------|
| Battery                     | 1.5 V (R03/LR03/AAA) | 1.5 V (R03/LR03/AAA) | 1.5 V (R03/LR03/AAA) | 1.5 V (R03/LR03/AAA) |
| Dimensions (H × W × D) (mm) | 170 × 56 × 19        | 205 × 61 × 17        | 205 × 61 × 17        | 205 × 61 × 17        |
| Weight (g)                  | 85                   | 125                  | 125                  | 125                  |

< IR Receiver Unit >

| Battery                     | DC5V          | DC5V          | DC5V | DC5V |
|-----------------------------|---------------|---------------|------|------|
| Dimensions (H × W × D) (mm) | 145 × 90 × 30 | 145 × 90 × 30 | -*   | -*   |
| Weight (g)                  | 150           | 150           | 140  | 100  |

DC 5 V is supplied the indoor unit.


\*It will replace the parts of the indoor unit to be connected.

## IR receiver unit for duct type UTB-YWC / UTY-TRHX



The wireless remote controller controls duct type\* indoor units.

\*Large airflow duct types do not work with this IR receiver unit.

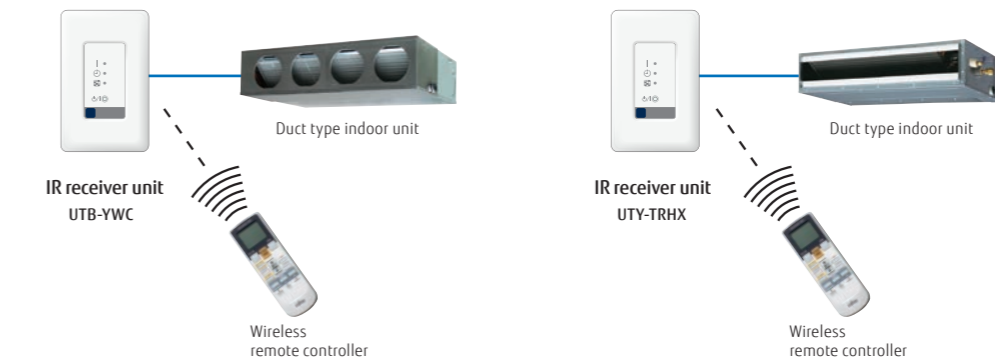


\*A separate wireless remote control (model: UTY-LNHY) is required.

## IR receiver unit for Cassette UTY-LBHXD / UTY-TRHX



Cassette type indoor unit can be controlled with a Wireless remote controller.

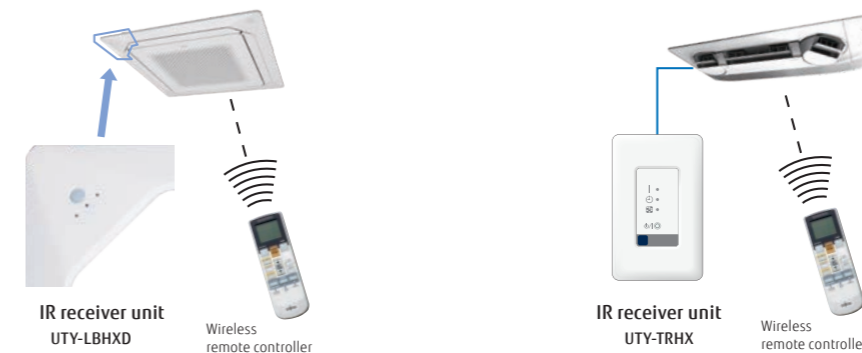

\*A separate wireless remote control (model: UTY-LNVY or UTY-LNHY) is required.

### Specifications

< Wireless Remote Controller >

| Model name                  | UTB-YWC              | UTY-LBHXD            | UTY-TRHX             |
|-----------------------------|----------------------|----------------------|----------------------|
| Battery                     | 1.5 V (R03/LR03/AAA) | 1.5 V (R03/LR03/AAA) | 1.5 V (R03/LR03/AAA) |
| Dimensions (H × W × D) (mm) | 170 × 56 × 19        | 170 × 56 × 19        | 170 × 56 × 19        |
| Weight (g)                  | 85                   | 85                   | 85                   |

< IR Receiver Unit >

| Battery                     | DC5V          | DC5V | DC5V          |
|-----------------------------|---------------|------|---------------|
| Dimensions (H × W × D) (mm) | 145 × 90 × 30 | -*   | 145 × 90 × 30 |
| Weight (g)                  | 150           | 140  | 150           |

DC 5 V is supplied the indoor unit.

\*It will replace the parts of the indoor unit to be connected.

# WLAN adapter

UTY-TFSXH3 / UTY-TFSXJ3



USB type for single split models  
UTY-TFSXH3



UTY-TFSXJ3  
(CN connector type)


Up to  
**1** indoor units



## AIRSTAGE Mobile

“AIRSTAGE Mobile” is an application software that enables you to manage the Fujitsu General's air conditioner(s) with a mobile device from anywhere.

- Maximum 5 accounts per 1 indoor unit
- Room / Outdoor temperature display
- Can be used for a Single / Multi and VRF indoor units.
- No separate external power supply required
- “AIRSTAGE Mobile” is an application software that enables you to operate the Fujitsu General's air conditioners with a mobile device.

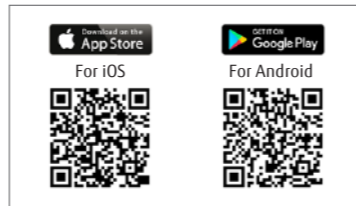


### User Friendly for Everyone

Enjoy easy-to-use centralized operation of air conditioners via a smartphone anytime, anywhere



Image\*

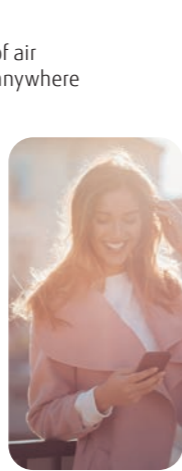

House Owner



Shop Owner



Commercial Building Owner

### Main Functions


- ON / OFF
- Operation mode
- Fan speed
- Louver position
- Set temperature control
- Weekly timer
- Room temperature display
- Outdoor temperature display
- Error display

\*Contents of display differ depending on the type of indoor unit.

### New Design!

Ease of use is pursued to achieve a stylish design.

The more legible and accessible timer UI enables effortless schedule management.



Mode change



Fan speed change




Weekly timer

### Features: AIRSTAGE Mobile

#### Centralized operation for flexible remote management of all air conditioners

AIRSTAGE Mobile is ideal for a wide range of applications, from large residential buildings to smaller commercial spaces such as offices and stores. Anyone who has a smartphone and an adapter can easily manage the system at a low cost.

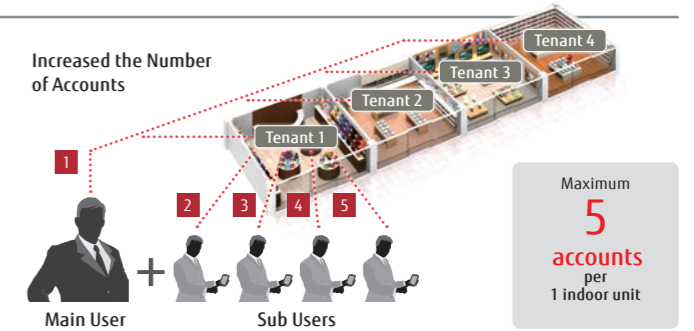


#### Hierarchical group management

Multiple air conditioners can be combined into a single group for centralized operation. Several groups can also be organized at once. Grouping the air conditioners by building, floor, or room makes it easy for users to monitor their operation status and operate them quickly.



#### Operate air conditioner and check its operation status just by talking to it

Connecting with a smart speaker allows the user to operate the air conditioner and check its operation status just by talking to it.

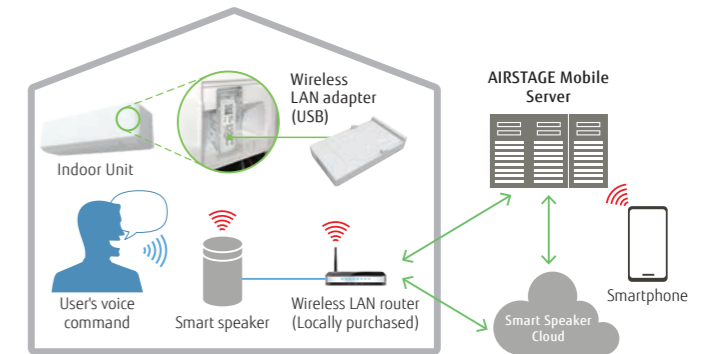

\* The new WLAN adapters for AIRSTAGE Mobile are upper compatible for the indoor units that can connect the following WLAN adapters for FGLair.

|                     | CN connector type | USB type   |
|---------------------|-------------------|------------|
| for FGLair          | UTY-TFSXZ1        | UTY-TFSXF2 |
| for AIRSTAGE Mobile | UTY-TFSXJ3        | UTY-TFSXH3 |

#### Specifications

| Model name                  | UTY-TFSXJ3(CN connector type) | UTY-TFSXH3       |
|-----------------------------|-------------------------------|------------------|
| Dimensions (H × W × D) (mm) | 71 × 38 × 15                  | 56.7 × 34 × 9.72 |
| Weight (g)                  | 35                            | 30               |

# WLAN adapter

UTY-TFNXZ1 / UTY-TFSXZ1 / UTY-TFSXF2



USB type for single-split models  
UTY-TFSXF2




UTY-TFNXZ1  
(3-wire RC-line type)  
UTY-TFSXZ1  
(CN connector type)

Up to  
**1** indoor units




- This interface provides the most advanced solution for the remote management of an air conditioning system by using smartphones, tablets, and computers.
- No separate external power supply required
- Can be used for a Single / Multi and VRF indoor units.

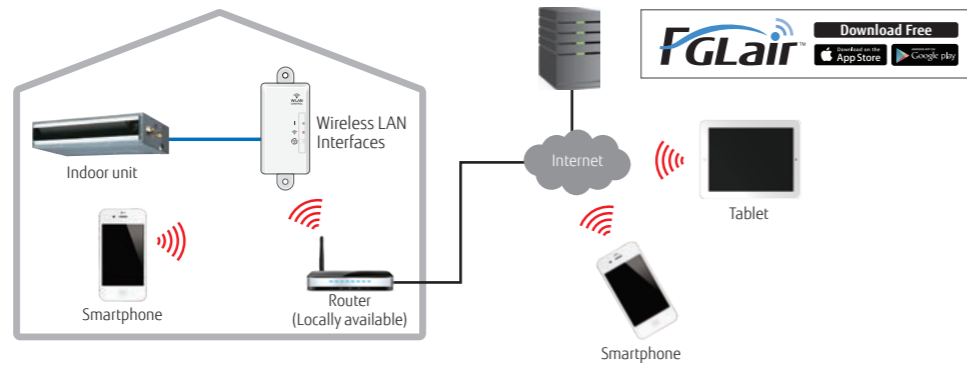


## Basic control

- Turning the units on and off
- Mode control (Heat, Cool, Dry, Auto, Fan)
- Fan speed control
- Louver position (airflow direction setting)
- Timer operation setting (Weekly timer)
- Economy mode setting

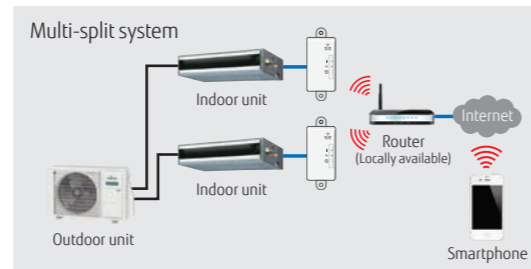


## Multiple air conditioning management

- Manage multiple air conditioning systems in different locations.

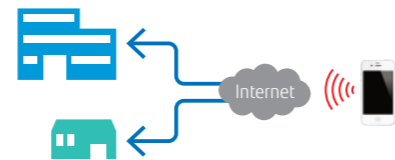

## Error alert and e-mail notice

- E-mail notification alerts
- Air conditioning malfunction alert
- Enables quick service response when errors occur.

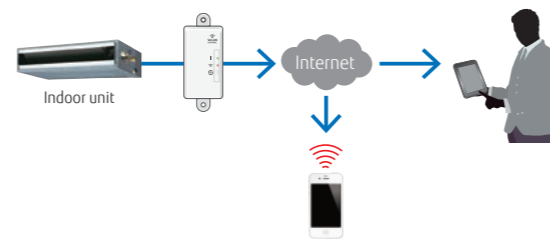

## WLAN adapter (USB type) UTY-TFSXF2

A compact USB type is available. No need for specialized installation. Easily installed on the indoor unit.



### Specifications

| Model name                  | UTY-TFNXZ1 (3-wire RC-line type) | UTY-TFSXZ1 (CN connector type) | UTY-TFSXF2       |
|-----------------------------|----------------------------------|--------------------------------|------------------|
| Dimensions (H × W × D) (mm) | 71 × 38 × 15                     | 71 × 38 × 15                   | 56.7 × 34 × 9.72 |
| Weight (g)                  | 35                               | 35                             | 30               |

# WLAN adapter

FG-RC-WIF1Z2 / FG-IR-WIF1Z1 / FG-AC-WIF1Z1



FG-RC-WIF1Z2  
(3-wire RC-line type)



FG-AC-WIF1Z1  
(CN connector type)



FG-IR-WIF1Z1  
(IR type)


Up to  
**1** indoor units

## AC Cloud Control


- This interface provides the most advanced solution for the remote management of an air conditioning system by using smartphones, tablets, and computers.
- No separate external power supply required

## Installation example


[3-wire RC-line type/CN connector type]

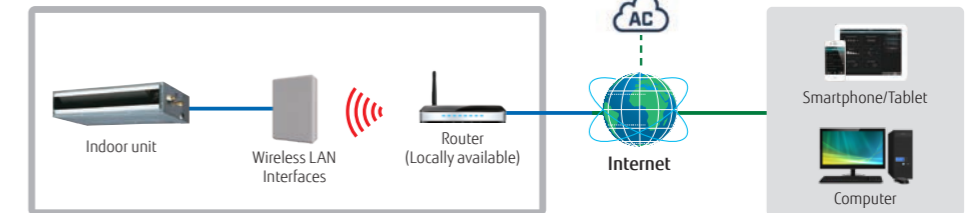

[IR type] Connection to wall-mounted type

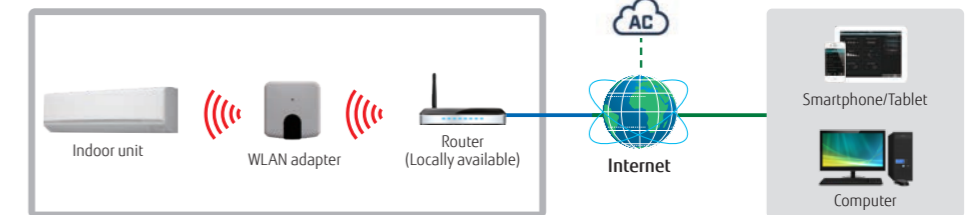

[IR type] Connects to the product with the optional receiver kit

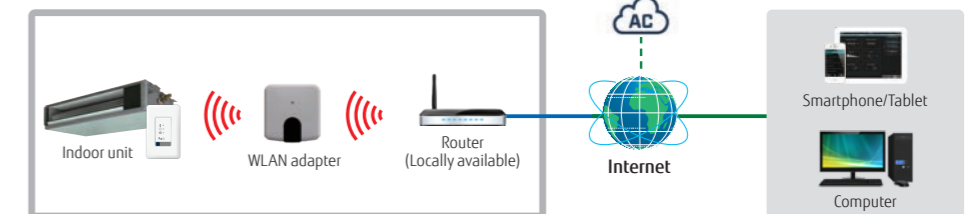

\*IR receiver required.

## Basic control

- Turning air conditioner on and off
- Mode select (Heat, Cool, Dry, Auto, Fan)
- Louver position (airflow direction setting)
- Fan speed control
- Room temperature display
- Setting temperature
- Multiple language support
- One single scene is created.

## Advanced control (optional functions)

- Climate-based operation modes (ECO, Comfort, and Powerful) (to be available in the future)
- Schedule functions (ON/OFF, modes, set temperature, fan speed, louver position)
- Setting temperature range limitation
- Multiple Scenes and Calendars are created.
- Smart Speaker compatibility
- Advanced internet service connections

## Notification and operation history

- E-mail notification alerts
- Air conditioning malfunction alert
- Connectivity monitoring and alert
- Operation history (to be available in the future)

### Specifications

| Model name                    | FG-RC-WIF1Z2 (3-wire RC-line type) | FG-AC-WIF1Z1 (CN connector type) | FG-IR-WIF1Z1 (IR type) |
|-------------------------------|------------------------------------|----------------------------------|------------------------|
| Number of controllable groups | 1                                  | 1                                | 1                      |
| Dimensions (H × W × D) (mm)   | 108 × 70 × 28                      | 81 × 78 × 28                     | 127 × 50 × 17          |
| Weight (g)                    | 80                                 | 76                               | 80                     |

# Multiple protocol WLAN adapter

FG-RC-WMP1Z1 / FG-IR-WMP1Z1 / FG-AC-WMP1Z1



**Intesis**  
BY HBS NETWORKS



FG-RC-WMP1Z1  
(3-wire RC-line type)

**Intesis**  
BY HBS NETWORKS



FG-AC-WMP1Z1  
(CN connector type)

**Intesis**  
BY HBS NETWORKS



FG-IR-WMP1Z1  
(IR type)

Up to  
**1** indoor units

### Specifications

| Model name                    | FG-RC-WMP1Z1 (3-wire RC-line type) | FG-AC-WMP1Z1 (CN connector type) | FG-IR-WMP1Z1 (IR type) |
|-------------------------------|------------------------------------|----------------------------------|------------------------|
| Number of controllable groups | 1                                  | 1                                | 1                      |
| Dimensions (H × W × D) (mm)   | 70 × 100 × 28                      | 127 × 50 × 17                    | 81 × 78 × 28           |
| Weight (g)                    | 98                                 | 80                               | 76                     |

# Multiple protocol LAN adapter

FG-TL-MBS16Z1



**Intesis**  
BY HBS NETWORKS



FG-TL-MBS16Z1  
(VRF type)

Up to  
**16** indoor units

### Specifications

| Model name                  | FG-TL-MBS16Z1 (VRF type)                                       |
|-----------------------------|--|
| Power supply                | 9 to 36 V DC, Max.: 140 mA or 24 V AC 50/60 Hz, Max.: 127 mA.* |
| Input power (W)             | 1.7  |
| Dimensions (H × W × D) (mm) | 90 × 88 × 56   |
| Weight (g)                  | 330  |


\*24 V DC power supply is recommended.

## AC Cloud Control


- Air conditioner control of Home Automation systems via wireless LAN connection.
- No separate external power supply required

### Installation example

[3-wire RC-line type/CN connector type]

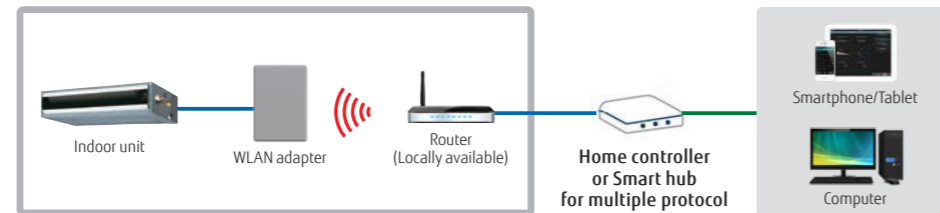

[IR type]

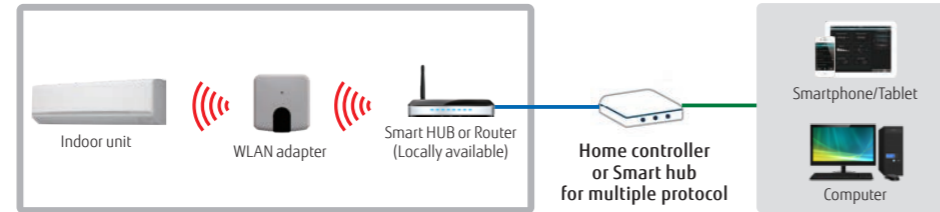

\*IR receiver required for other than wall-mounted type.

# Home central remote controller

UTY-DMMYM / UTY-DMMYM1




Up to  
**1** multi-split system  
Up to  
**6** indoor units

## For 5-unit and 6-unit multi-split type

- Batched control of up to 6 indoor units For all indoor units connected to the remote controllers, the Home central remote controller sets room temperature, airflow volume, and remote controller prohibition from other remote controllers at once.
- Supports 9 languages: English, French, German, Greek, Italian, Portuguese, Russian, Spanish, and Turkish.
- Large backlit LED screen
- Large, easy-to-see operation panel


### Example of system configuration

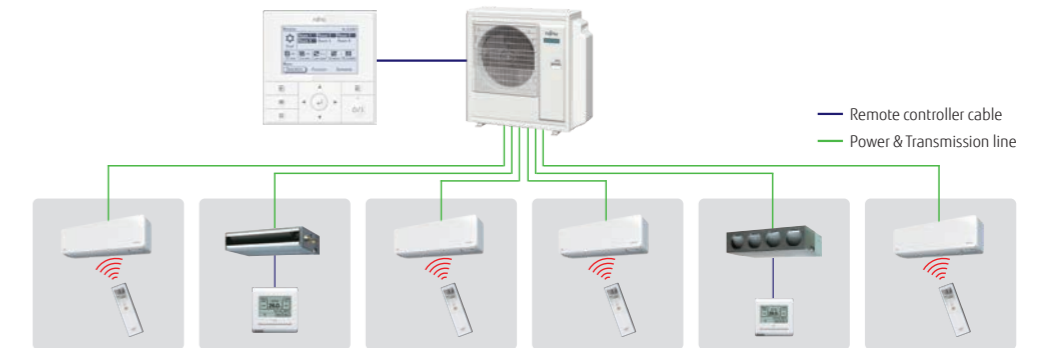

## Home central remote controller

### Weekly timer

Up to 4 ON/OFF settings can be programmed per day. Two weekly patterns can be set, one for the cooling season and the other for the heating season.

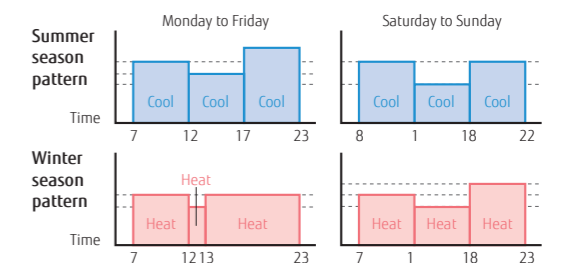

### Low noise operation

You can choose from 4 low noise levels depending on the installation environment. ON/OFF timing of low noise mode can be set with the timer.

### 10°C heat operation

When you leave the house, the air conditioner runs a minimum heating operation to maintain the room temperature at 10°C.


\*Consult your dealer for conditions of use.

### Economy operation

When you select energy-saving economy mode, the temperature setting for the indoor unit increases (during cooling operation) or decreases (during heating operation) by 1°C and the maximum electric value of the outdoor unit is suppressed.

### Prohibiting local control, including settings such as child lock

The Home central remote controller is equipped with a lock function to prevent unauthorized operation from the remote controllers of the indoor unit in each room. The Home central remote controller is equipped with a child lock to prevent children from accidentally turning the air conditioner on or off or changing its settings.

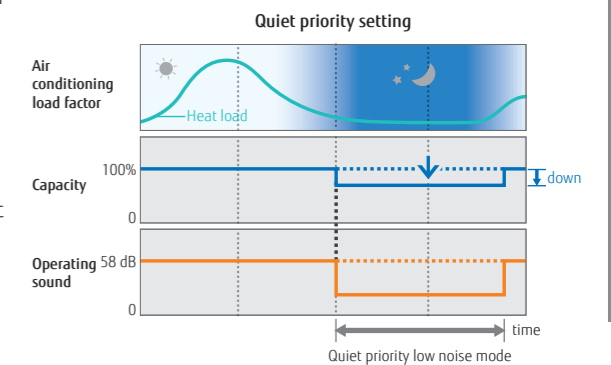

### Specifications

| Model name                  | UTY-DMMYM/UTY-DMMYM1 |
|-----------------------------|----------------------|
| Power source                | 12 V DC              |
| Dimensions (H × W × D) (mm) | 120 × 120 × 21.3     |
| Weight (g)                  | 220                  |

12 V DC supplied by an indoor unit

# Central remote controller

UTY-DCGYZ3



NEW



Up to 100 indoor units  
Up to 50 groups


## For tenants in small to midsize commercial premises

- Individual control and monitoring of up to 100 indoor units
- 7.0inch TFT color screen
- Visually intuitive operation
- Room temperature display by indoor unit sensor & remote controller sensor
- 50 Remote Controller Groups Display & remote controller group rename
- Supports 14 languages: Chinese (Simplified/Traditional), Dutch, English, French, German, Greek, Italian, Polish, Portuguese, Russian, Spanish, Turkish, and Thai (Remote Management only)


## Easy operation

### Air conditioning management by detecting room temperatures of each room

The room temperature detected with indoor unit sensor or remote controller sensor can be displayed. New model can detect the room temperature by indoor units sensors even if wired remote controllers are not connected to the indoor units.

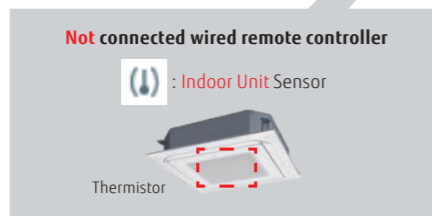

\*Room temperature is displayed only when indoor unit operates.

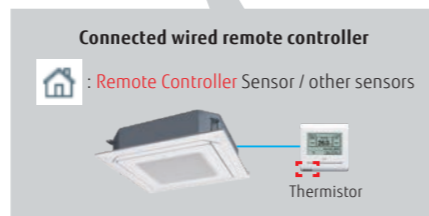

## 50 Remote Controller Groups Display


The group display and the 50 remote controller groups display can be switched easily. Users can choose which display is better, depending on the situation.

### Group Display



Manage & Monitor by each Groups

### 50 Remote Controller Groups Display

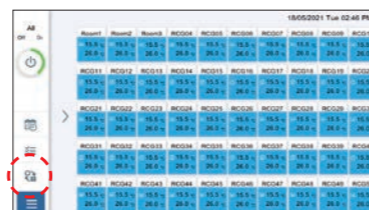

Manage & Monitor by 50 Remote Controller Groups




## Remote Controller Groups Rename

The remote controller group names can be changed. Users can know easily where the air conditioning is located by changing the remote controller group names.



## Features: Central Remote Controller

- Easy intuitive operation from the touch panel display.
- All functions can be accessed through the monitoring screen showing a pop-up window for detailed operation.

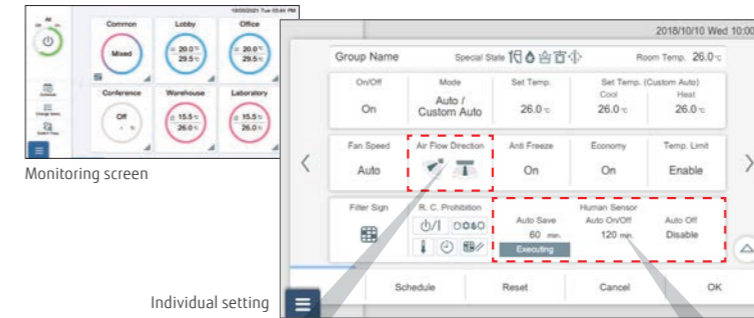


### Added individual wind direction control

Individual wind direction control has been added.  
Circular Flow cassette / 3D Flow cassette



### Human sensor Compatible

Human sensor setting  
• Auto save  
• Auto on / off  
• Auto off detection time  
• Enable and disable




## Remote Management

### Remote monitoring / Remote operation

New central remote controller can control your tenant's air conditioner anytime and anywhere.

When the central remote controller manages the indoor units of some tenants, air conditioning of each tenant can be managed separately online.

### Increased the Number of Accounts

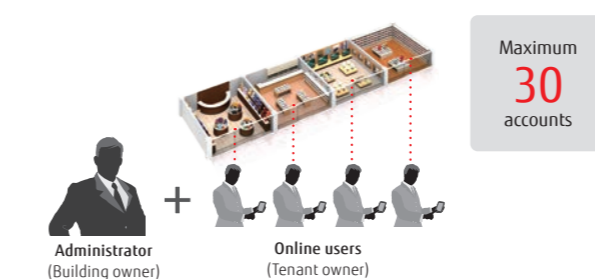

### Trouble support function

#### Display error details

Display descriptive explanation when an error occurs



### Sensor value monitoring function

Monitor sensor data of indoor unit / outdoor unit, send mail

### Notify room temperature by email\*

Notify by e-mail when the temperature around the air conditioner is too high or too low

\*:This function is available only when using wired remote controller.

## Schedule management

### Annual schedule

- An annual schedule can be arranged for each remote controller group or user-defined group.
- Allows for the programming of special settings for weekends, holidays, and store closings throughout the year.



### low noise schedule

Low noise operation of outdoor units can be scheduled.



### Automatic return to set temperature

A function that automatically returns the changed temperature to its original value over time.

## Specifications

|                             |                      |
|-----------------------------|----------------------|
| Model name                  | UTY-DCGYZ3           |
| Power Supply                | 100-240 V 50/60 Hz   |
| Dimensions (H × W × D) (mm) | 134.6 × 216.2 × 37.9 |
| Weight (g)                  | 800                  |

# Touch panel controller

UTY-DTGYZ1




- Large 7.5-inch TFT color LCD screen
- Touch screen operation
- Stylish design to fit nicely into any room environment
- Controls up to 400 indoor units.
- Icon or list view can be selected in monitoring mode.
- Supports 7 languages: Chinese, English, French, German, Polish, Russian, and Spanish.
- Mounted with LAN adapter for remote control & operation, external input/output with emergency stop and batch ON/OFF

Up to  
**400** indoor units  
Up to  
**100** outdoor units  
Up to  
**400** groups

## Easy operation

- Wide range of simple-to-understand icons
- Operate by pressing the icons on the screen with your finger or a stylus.
- The color on the back identifies the current control operation; blue is for monitoring and green is for operational control.

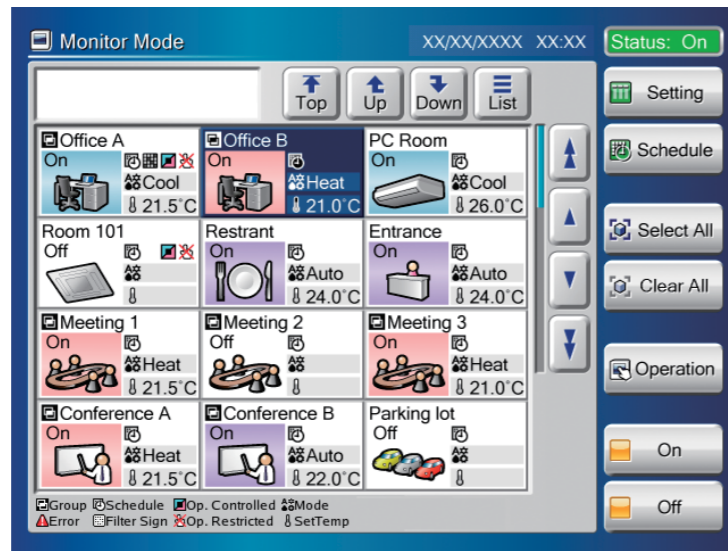

## Easy maintenance

- The flat touch panel can be easily cleaned.
- Touch panel controller with non-glare coating to prevent finger marks
- Front cover for easy removal.




## Easy installation

- The touch panel controller can be mounted on a wall.
- Flat back surface enables easy installation anywhere on a wall.
- No additional parts or components required for installation




## Controls up to 400 indoor units.

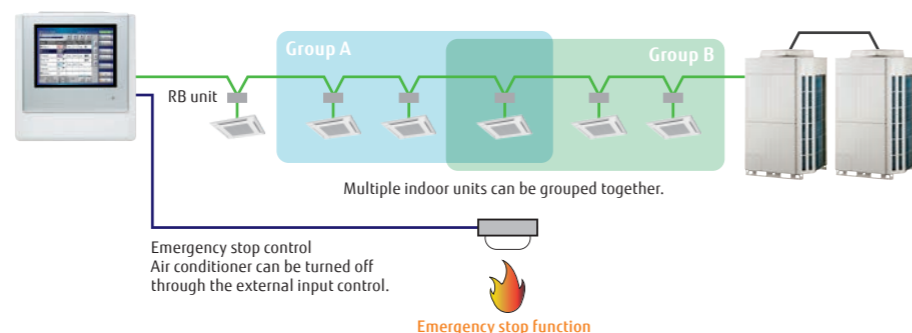

## Features:

### Control & monitoring

- Control and monitor Fujitsu General air conditioners via LAN or internet.
- Users and tenants can manage their assigned equipment from anywhere by computer or tablet.
- When something goes wrong, an error notice is sent by e-mail for prompt troubleshooting.

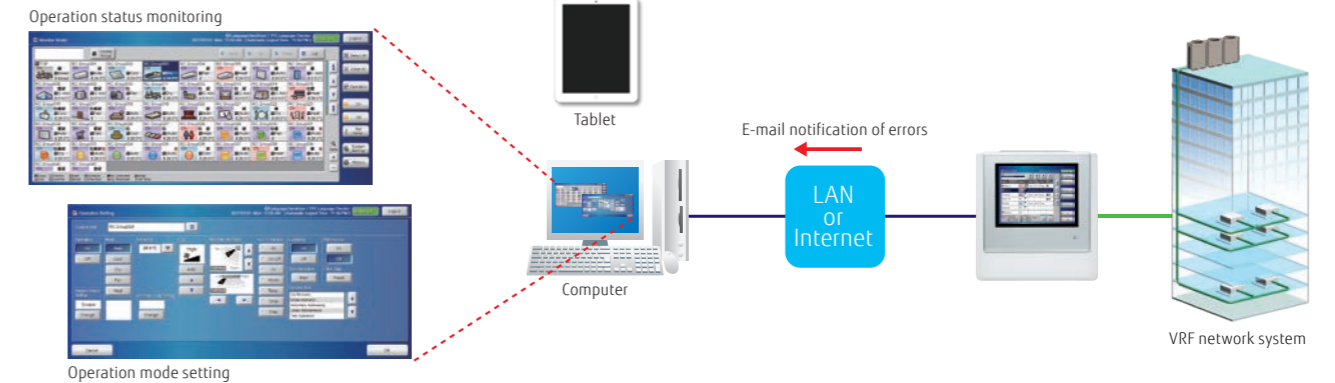

### Smartphone


| Model name               | Browser           |
|--------------------------|-------------------|
| Nexus 6P (Android 7.1.1) | Google Chrome 5.5 |
| iPhone 7 (iOS 10.1)      | Safari 10         |

### Tablet

| Model name                     | Browser   |
|--------------------------------|-----------|
| iPad Pro 9.7 inch (iOS 10.2.1) | Safari 10 |


## Flexible access permissions can be granted to users at each point level.

The administrator can register multiple users and permit them to access any indoor unit and any functions.

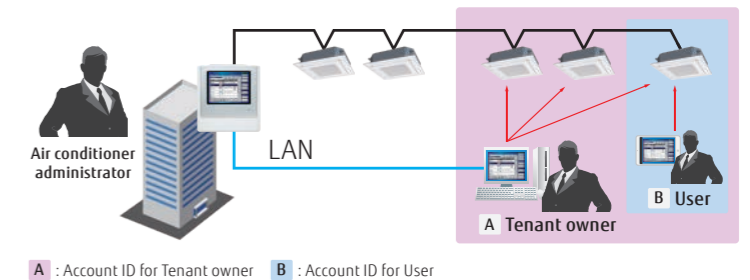

## Additional languages


Supports 7 languages as standard: Chinese, English, French, German, Polish, Russian, and Spanish. Create a language database to integrate additional languages into the remote device. The added languages will only be displayed on the remote device and cannot be added to the Touch panel controller.

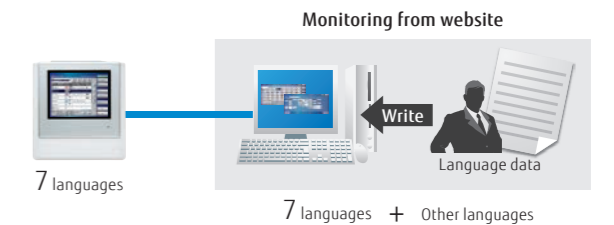

## Electricity charge apportionment (Option: UTY-PTGXA)

- Energy cost can be calculated and allocated to each billing user in proportion to the amount of energy used for air conditioning.

- Apportionment charge/bill calculation
- Tenant (block) setting
- Common facilities apportionment setting
- Rated power consumption allotment
- Individual calculations for cooling and heating
- Electricity meter supported

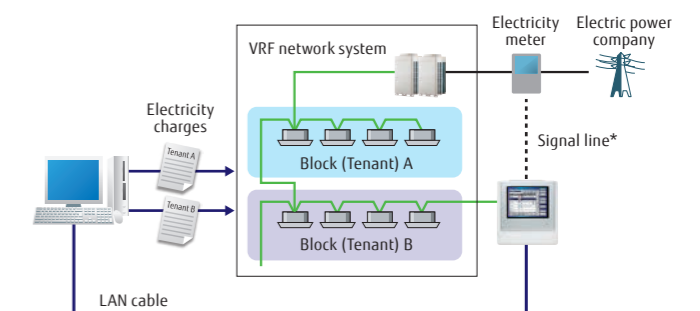

\* An electricity usage meter can be connected to an external input connector of the Touch panel controller. In that case, the meter cannot be connected to an outdoor unit at the same time.



Features:


### Automatic setting for daylight saving time

Functions provided

- 1) Schedule setting for daylight saving time
  - It prevents the user from forgetting to set daylight saving time. In addition, it saves time and effort for the user.


Automatic clock adjustment

- 2) Time can be set for all controllers in a batch automatically.

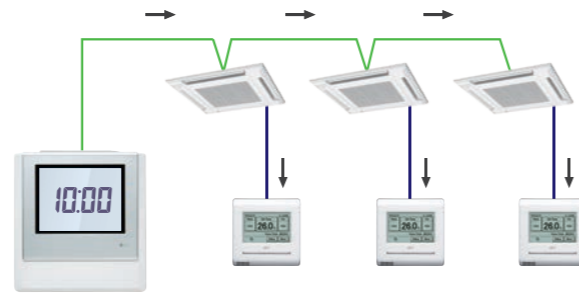


### Outdoor unit low noise operation

You can choose from 4 low noise levels depending on the installation environment. ON/OFF timing of low noise mode can be set with the timer.

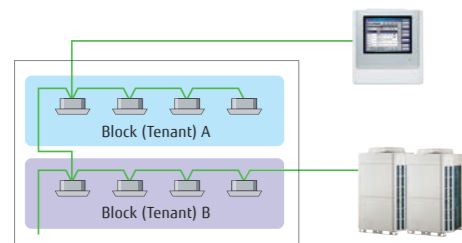

Quiet priority setting

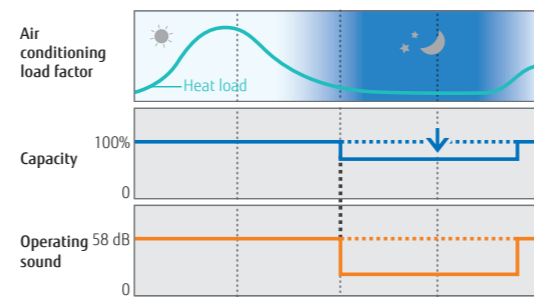

### Energy-saving controls


Custom Auto

- Maintains 2 separate setpoints for heating and cooling operations.
- Automatically switches between heating and cooling modes.

\* Not available for some models



Cooling set temp. 28°C, Heating set temp. 18°C

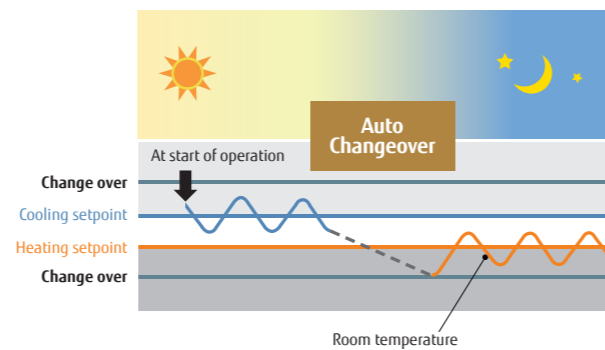

### Refrigerant leak detector

Refrigerant leakage status is indicated by the management equipment. A pop-up message is displayed to notify the user, and the refrigerant is shut off.



Pop-up highlighting

### FUNCTIONS SUMMARY

|   | UTY-DTGYZ1 | Monitoring side |
|---|------------|-----------------|
| <b>Air conditioning control functions</b> |            |                 |
| ON/OFF                                    | ●          | ●               |
| Operation mode setting*                   | ●          | ●               |
| Fan speed control                         | ●          | ●               |
| Room temperature setting                  | ●          | ●               |
| Setting temperature range limitation      | ●          | ●               |
| Test operation                            | ●          | ●               |
| Vertical louver setting                   | ●          | ●               |
| Horizontal louver setting                 | ●          | ●               |
| Individual louver control                 | ●*1        | ●               |
| Group setting                             | ●          | ●               |
| Remote controller prohibition             | ●          | ●               |
| Anti-freeze setting                       | ●          | ●               |
| Set temperature auto return               | —          | ●               |
| Energy-saving controls                    | —          | ●               |
| Economy mode setting                      | ●          | ●               |
| Human sensor control                      | —          | ●               |
| <b>Displayed items</b>                    |            |                 |
| Error                                     | ●          | ●               |
| Defrosting                                | ●          | ●               |
| Current time                              | ●          | ●               |
| Day of week                               | ●          | ●               |
| Remote controller prohibition             | ●          | ●               |
| Cooling/heating priority                  | ●          | ●               |
| Address display                           | ●          | ●               |
| Room temperature                          | ●*3        | ●*3             |
| Multiple language support                 | ●          | ●               |
| Setting for daylight saving time          | ●          | ●               |
| Time zone setting                         | ●          | ●               |
| Name registration                         | ●          | ●               |
| Backlighting                              | ●          | ●               |
| Language setting                          | 7          | 7+ other        |
| Filter sign reset                         | ●          | ●               |
| Memory operations                         | ●          | ●               |
| Refrigerant leak detector                 | ●          | ●               |

●: Supported ○: Optional function —: Not supported  
 \*1 Only setting cancellation can be operated.  
 \*2 Only available for external input control.  
 \*3 Available only when using a Wired remote controller.

### Specifications

|                             | UTY-DTGYZ1                                   |
|-----------------------------|--|
| Model name                  | UTY-DTGYZ1                                   |
| Power supply                | Single phase ~100 to 240 V 50/60 Hz          |
| Dimensions (H × W × D) (mm) | 260 × 246 × 54                               |
| Weight (g)                  | 2,150  |
| Interfaces                  | Transmission/LAN/USB/EXT IN/EXT OUT/Reset SW |

|   | UTY-DTGYZ1                        | Monitoring side |
|---|-----------------------------------|-----------------|
| <b>Timer</b>                            |                                   |                 |
|   | Period                            | Year            |
| Schedule timer                          | ON/OFF, Temp, Mode, Times per day | 20              |
|   |                                   | Year            |
| ON/OFF timer                            | —                                 | —               |
| Sleep timer                             | —                                 | —               |
| Program timer                           | —                                 | —               |
| Auto-off timer                          | —                                 | ●               |
| Day off                                 | ●                                 | ●               |
| Minimum unit of timer setting (minutes) | 10                                | 10              |
| <b>Control</b>                          |                                   |                 |
| Remote monitoring management system     | ●                                 | ●               |
| Electricity charge apportionment        | ○                                 | ○               |
| Error history                           | ●                                 | ●               |
| Emergency stop                          | ●*2                               | ●*2             |
| Remote monitoring management            | —                                 | ●               |
| Energy-saving management                | —                                 | —               |
| E-mail notification in case of failure  | —                                 | ●               |
| Key lock                                | ● Password setting                | —               |
| Low noise mode                          | ●                                 | ●               |

# System controller

UTY-APGXZ1 **Software**

Up to  
**4** VRF network systems  
Up to  
**400** outdoor units  
Up to  
**1,600** indoor units

System controller enables advanced integrated monitoring and control of VRF network systems operating in small to large buildings.

- Up to 1,600 indoor units and 400 outdoor units on up to 4 VRF network systems can be controlled.
- To accommodate facility management needs, the system controller offers—in addition to precise air conditioning control—remote central control, electricity charge apportionment, schedule management, and energy-saving options for VRF network systems.
- Supports 7 languages: Chinese, English, French, German, Polish, Russian, and Spanish.



# System controller lite

UTY-ALGXZ1 **Software**

Up to  
**1** VRF network systems  
Up to  
**100** outdoor units  
Up to  
**400** indoor units

System controller Lite offers a set of standard functions to manage air conditioners operating in a small or midsize building.


- Up to 400 indoor units and 100 outdoor units on a VRF network system can be controlled.
- In addition to precise air conditioning control, a variety of applications are available as options to offer a wider range of control.
- Supports 7 languages: Chinese, English, French, German, Polish, Russian, and Spanish.



## Visually intuitive operation

**Click & Operate:** The visual representation of the property is shown on the screen from the perspective most suitable for operation (Click & Operate) You can select from among 4 display options: site, building, floor, and list.

**Freely define groups for batched control:** Indoor units can be grouped for simplified batch control from the tree menu. They can be grouped by organizational hierarchy, such as by division, department, and section.

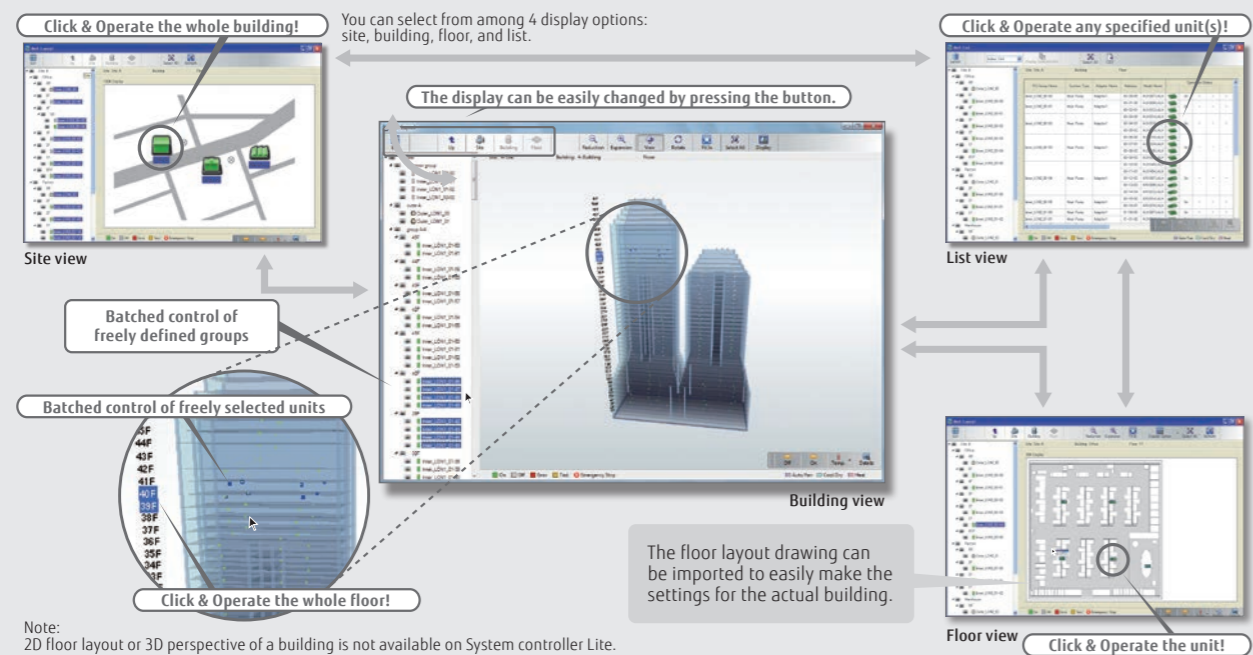


Note: 2D floor layout or 3D perspective of a building is not available on System controller Lite.

## Features:

### Third-party devices connected via MODBUS® can be controlled.

**Standard** for System Controller **Option** for System controller Lite UTY-PLGXX2

When a MODBUS® adapter (locally available) is connected to a computer, electrical equipment and devices supported by MODBUS® can be monitored and controlled centrally from the computer. The central control can reduce wasted energy throughout an entire building resulting from a failure to turn equipment off during or after work, as well as reduce the need for on-site patrols.

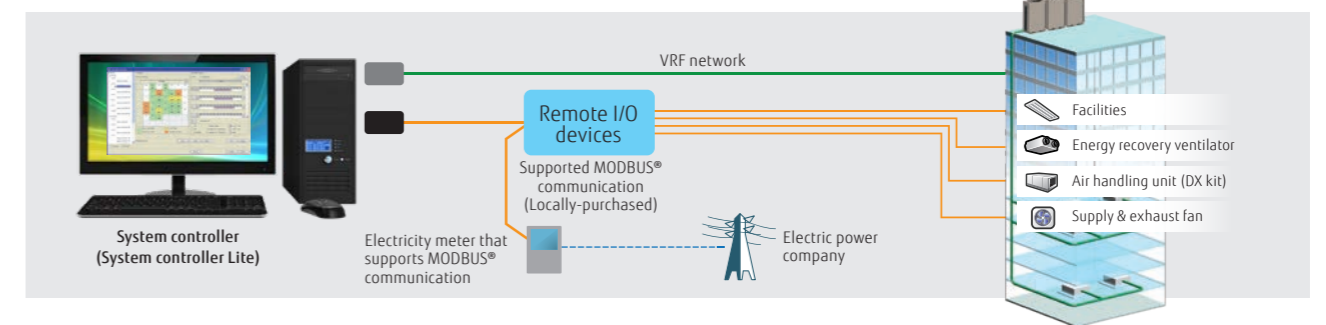


## Wide-ranging operation and data management

**Standard** System controller and System controller Lite

### Schedule management

- An annual schedule can be arranged for each remote controller group or user-defined group.
- ON/OFF, operation mode, remote controller prohibition, and temperature settings can be programmed for up to 143 times per day at 10-minute intervals and for up to 101 configurations for each remote controller group.
- Settings can be programmed for a period that spans midnight.
- Allows for the programming of special settings for weekends, holidays, and store closings throughout the year.
- Low noise operation of outdoor units can be scheduled.

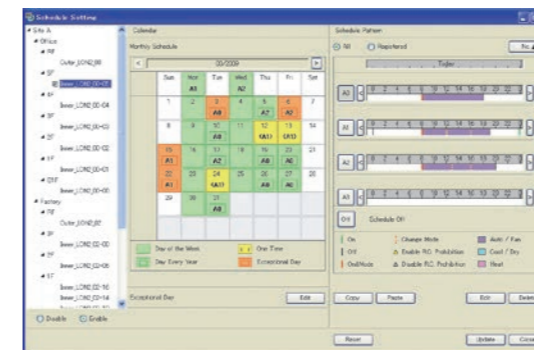

### Wide-ranging control of indoor and outdoor units

- The operation status and mode of each indoor unit are displayed.
- Turn on and off each indoor unit and switch its operation mode.
- Setting temperature range limitation
- Low noise setting of outdoor units

### Remote controller prohibition

Prohibits the operation mode, temperature setting, or ON/OFF of an indoor unit.

### Error alert and e-mail notice

When something goes wrong, an error message is shown in a popup on a computer display with a chime, and an e-mail notice is sent. Errors of the past one year are logged and can be reviewed.

### Operation and control history

A history of operation status and control can be maintained and retrieved.

### Importing and exporting databases

Only an administrator is authorized to import and export registration, layout, and image data.

### Automatic clock adjustment


Time can be set for all controllers in batch automatically.

## Electricity charge apportionment

**Standard** on System controller  
**Option** System controller Lite UTY-PLGXA2

### Electricity charge apportionment method

This is a method to calculate monthly energy costs to be allocated to each tenant based on the amount of energy used by their air conditioners. The first step is to determine exactly how much energy is consumed by air conditioners in each tenant space. The second step is to divide the total energy charge billed by an electric power company based on the amount of energy used by each tenant to determine the energy cost to be allocated to each of them. (See figure on right) The calculation takes into consideration such factors as the number of unused rooms and nighttime electricity rate, which are shown in detail on an energy cost allocation schedule.

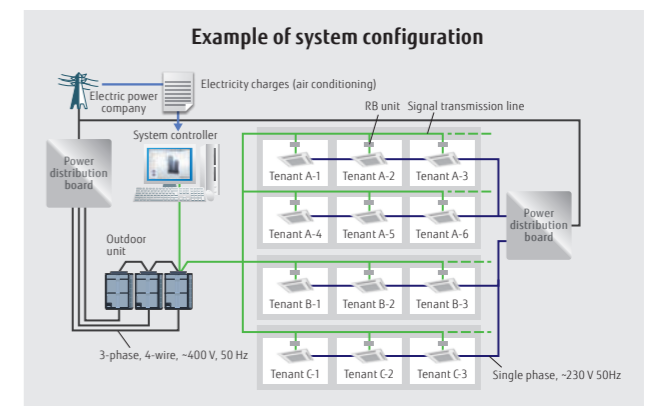


Features:

Remote monitoring management


- Standard on System controller
- Option System controller Lite UTY-PLGXR2

The System controller can be used on site or remotely over networks for remote central control. The System controller requires 2 software programs working together: The VRF controller runs on site and communicates with the VRF system; The VRF explorer, which runs at a remote location, provides a user interface and communicates with the VRF controller. The VRF controller and the VRF explorer run on a single computer or on different computers connected on a network. A computer running VRF explorer can centrally control up to 10 VRF system sites having up to 20 buildings each.

On site central control

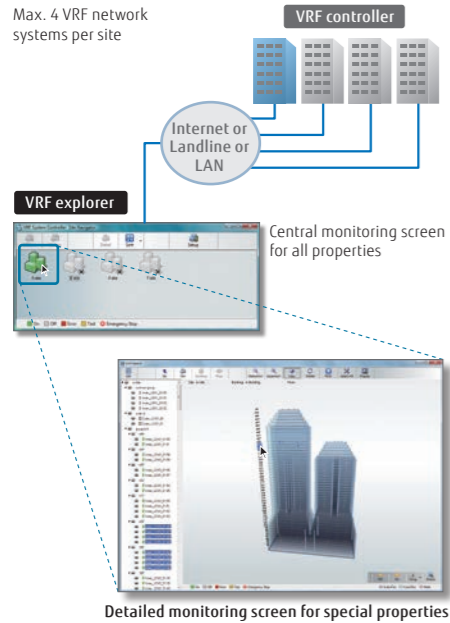


Remote central control

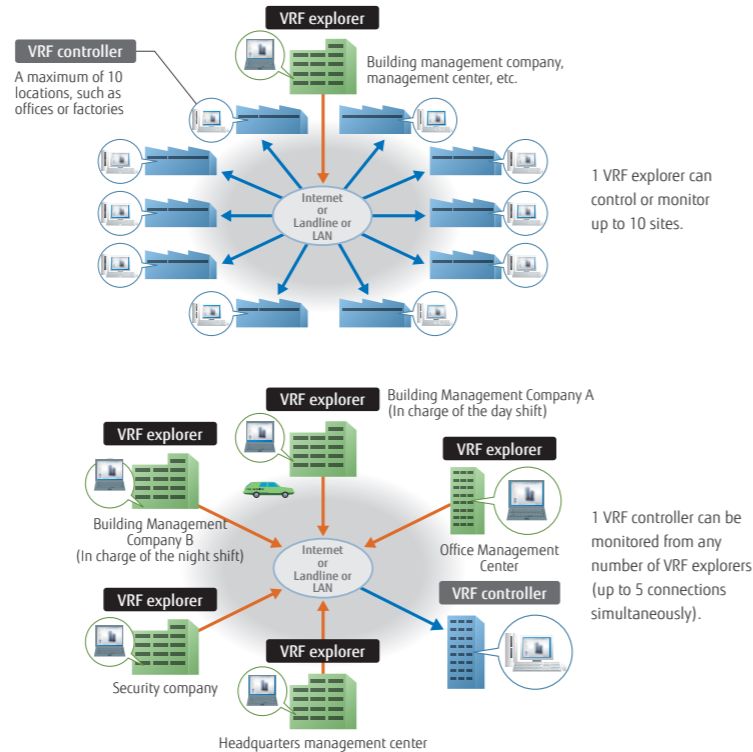

Energy-saving management

- Option System controller UTY-PEGXZ1
- Option System controller Lite UTY-PLGXE2

A variety of energy-saving options can be selected depending on the season, weather, and time of day. Excellent energy-saving operation is performed while keeping users comfortable.

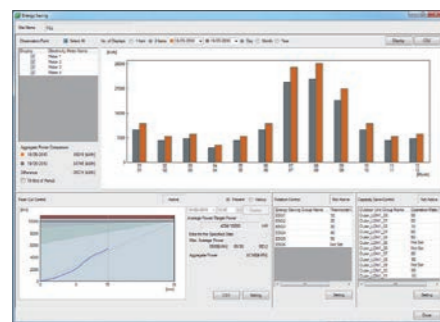

Main screen for energy-saving management

Energy saving graph data: This chart compares the energy consumption for the current month with the previous month and with the same month of the previous year to keep track of the energy-saving performance.

Indoor unit rotation

Indoor units can be automatically rotated to operate within a group in accordance with a predetermined annual schedule to reduce power consumption while keeping users comfortable. The operation stoppage rate can be selected for an indoor unit.

Peak-cut mode

The system controller monitors the connected power meter and controls the energy to maintain the target power consumption set for each time period by changing the set temperature of the indoor units or turning off the thermostat so as to keep the users comfortable. Indoor units to be controlled can be grouped in many ways, and the control level can be set for each group.

Capacity saving for outdoor unit

The upper limit on the capacity of an outdoor unit can be adjusted to reduce power consumption during a hot summer or cold winter by averaging out the power-saving performance of each refrigerant system. The upper limit on capacity can be set at 50% of the rated capacity or more.

Summary of functions

| Functions                         | Type   | System controller                    |                   | System controller Lite |                   |                   |                   |                   |
|-----------------------------------|--|--------------------------------------|-------------------|------------------------|-------------------|-------------------|-------------------|-------------------|
|                                   |  | UTY-APGXZ1                           | Option UTY-PEGXZ1 | UTY-ALGXZ1             | Option UTY-PLGXR2 | Option UTY-PLGXA2 | Option UTY-PLGXE2 | Option UTY-PLGXX2 |
| Specifications                    | Max. number of VRF networks supported  | 4                                    | —                 | 1                      | —                 | —                 | —                 | —                 |
|                                   | Max. number of indoor unit and remote controller groups per VRF network        | 400                                  | —                 | 400                    | —                 | —                 | —                 | —                 |
|                                   | Max. number of outdoor units per VRF network                                   | 100                                  | —                 | 100                    | —                 | —                 | —                 | —                 |
|                                   | Max. number of indoor units and remote controller groups per System controller | 1600                                 | —                 | 400                    | —                 | —                 | —                 | —                 |
| Site supervision                  | Multiple site display  | 10                                   | —                 | 10                     | —                 | —                 | —                 | —                 |
|                                   | Number of buildings per site   | 20                                   | —                 | —                      | —                 | —                 | —                 | —                 |
|                                   | Number of floors per site  | 200                                  | —                 | —                      | —                 | —                 | —                 | —                 |
|                                   | Number of floors per building  | 50                                   | —                 | —                      | —                 | —                 | —                 | —                 |
|                                   | 3D graphical layout view   | ●                                    | —                 | —                      | —                 | —                 | —                 | —                 |
|                                   | 2D graphical layout view   | ●                                    | —                 | —                      | —                 | —                 | —                 | —                 |
|                                   | List display   | ●                                    | —                 | ●                      | —                 | —                 | —                 | —                 |
| Error management                  | Error notification   | ●                                    | —                 | ●                      | —                 | —                 | —                 | —                 |
|                                   | Audible alarm  | ●                                    | —                 | ●                      | —                 | —                 | —                 | —                 |
|                                   | E-mail notification of errors  | ●                                    | —                 | ●                      | —                 | —                 | —                 | —                 |
| History                           | Error history  | ●                                    | —                 | ●                      | —                 | —                 | —                 | —                 |
|                                   | Operation history  | ●                                    | —                 | ●                      | —                 | —                 | —                 | —                 |
| Operation control                 | Individual control   | ON/OFF                               | ●                 | —                      | ●                 | —                 | —                 | —                 |
|                                   |  | Operation mode*                      | ●                 | —                      | ●                 | —                 | —                 | —                 |
|                                   |  | Room temperature                     | ●                 | —                      | ●                 | —                 | —                 | —                 |
|                                   |  | Fan speed                            | ●                 | —                      | ●                 | —                 | —                 | —                 |
|                                   |  | Airflow direction                    | ●                 | —                      | ●                 | —                 | —                 | —                 |
|                                   |  | Economy mode                         | ●                 | —                      | ●                 | —                 | —                 | —                 |
|                                   | Individual management  | Setting temperature range limitation | ●                 | —                      | ●                 | —                 | —                 | —                 |
|                                   |  | Anti-freeze                          | ●                 | —                      | ●                 | —                 | —                 | —                 |
|                                   |  | Low noise setting of outdoor units   | ●                 | —                      | ●                 | —                 | —                 | —                 |
|                                   | Other  | Remote controller prohibition        | ●                 | —                      | ●                 | —                 | —                 | —                 |
|                                   |  | Setting temperature range limitation | ●                 | —                      | ●                 | —                 | —                 | —                 |
|                                   |  | Filter sign reset                    | ●                 | —                      | ●                 | —                 | —                 | —                 |
|                                   |  | memory operations                    | ●                 | —                      | ●                 | —                 | —                 | —                 |
| Schedule                          | Pattern operations   | ●                                    | —                 | ●                      | —                 | —                 | —                 |                   |
|                                   | Annual Schedule  | ●                                    | —                 | ●                      | —                 | —                 | —                 |                   |
|                                   | Setting for a specific date  | ●                                    | —                 | ●                      | —                 | —                 | —                 |                   |
|                                   | ON/OFF per day   | 72                                   | —                 | 72                     | —                 | —                 | —                 |                   |
|                                   | ON/OFF per week  | 504                                  | —                 | 504                    | —                 | —                 | —                 |                   |
|                                   | Day off  | ●                                    | —                 | ●                      | —                 | —                 | —                 |                   |
|                                   | Minimum unit of timer setting (minutes)  | 10                                   | —                 | 10                     | —                 | —                 | —                 |                   |
| Remote monitoring management      | Weekly schedule for low noise mode   | ●                                    | —                 | ●                      | —                 | —                 | —                 |                   |
|                                   | Web Operation  | ●                                    | —                 | ●                      | —                 | —                 | —                 |                   |
|                                   | Remote monitoring  | ●                                    | —                 | ●                      | —                 | —                 | —                 |                   |
|                                   | Remote operation control   | ●                                    | —                 | ●                      | —                 | —                 | —                 |                   |
| Electricity charge apportionment  | Remote function setting  | ●                                    | —                 | ●                      | —                 | —                 | —                 |                   |
|                                   | Apportionment charge/bill calculation  | ●                                    | —                 | ●                      | —                 | —                 | —                 |                   |
|                                   | Tenant (block) setting   | ●                                    | —                 | ●                      | —                 | —                 | —                 |                   |
|                                   | Common facilities apportionment setting  | ●                                    | —                 | ●                      | —                 | —                 | —                 |                   |
| Energy-saving management          | Rated power consumption allotment  | ●                                    | —                 | ●                      | —                 | —                 | —                 |                   |
|                                   | Individual calculations for cooling and heating                                | ●                                    | —                 | ●                      | —                 | —                 | —                 |                   |
|                                   | Electricity meter supported  | ●                                    | —                 | ●                      | —                 | —                 | —                 |                   |
|                                   | Indoor unit rotation   | ●                                    | —                 | ●                      | —                 | —                 | —                 |                   |
| Control of external devices       | Peak cut control   | ●                                    | —                 | ●                      | —                 | —                 | —                 |                   |
|                                   | Capacity saving for outdoor unit   | ●                                    | —                 | ●                      | —                 | —                 | —                 |                   |
|                                   | Record of energy-saving operation  | ●                                    | —                 | ●                      | —                 | —                 | —                 |                   |
|                                   | Information on energy saving   | ●                                    | —                 | ●                      | —                 | —                 | —                 |                   |
| Others                            | Power consumption monitor  | ●                                    | —                 | ●                      | —                 | —                 | —                 |                   |
|                                   | Electricity meter supported  | ●                                    | —                 | ●                      | —                 | —                 | —                 |                   |
|                                   | Monitor  | ●                                    | —                 | ●                      | —                 | —                 | —                 |                   |
|                                   | Control  | ●                                    | —                 | ●                      | —                 | —                 | —                 |                   |
| Importing and exporting databases | Importing and exporting databases  | ●                                    | —                 | ●                      | —                 | —                 | —                 |                   |
|                                   | Automatic clock adjustment   | ●                                    | —                 | ●                      | —                 | —                 | —                 |                   |
|                                   | Multiple language support  | 7 languages                          | —                 | 7 languages            | —                 | —                 | —                 |                   |
|                                   | Refrigerant leak detector  | ●                                    | —                 | ●                      | —                 | —                 | —                 |                   |
| Power shutdown                    | ●  | —                                    | ●                 | —                      | —                 | —                 |                   |                   |

●: Available - : Not available

Computer requirements

The specifications required for the computer are shown in the table below:

|                     | System controller  | System controller Lite   |
|---------------------|--|--|
| Operating system    | <ul style="list-style-type: none"> <li>Microsoft® Windows® 7 Home Premium (32-bit or 64-bit) SP1, Windows® 7 Professional (32-bit or 64-bit) SP1</li> <li>Microsoft® Windows® 8.1 (32-bit or 64-bit), Windows® 8.1 Pro (32-bit or 64-bit)</li> <li>Microsoft® Windows® 10 Home (32-bit or 64-bit), Windows® 10 Pro (32-bit or 64-bit)</li> </ul> Supports 7 languages: English, Chinese, French, German, Russian, Spanish, and Polish  | <ul style="list-style-type: none"> <li>Microsoft® Windows® 7 Home Premium (32-bit or 64-bit) SP1, Windows® 7 Professional (32-bit or 64-bit) SP1</li> <li>Microsoft® Windows® 8.1 (32-bit or 64-bit), Windows® 8.1 Pro (32-bit or 64-bit)</li> <li>Microsoft® Windows® 10 Home (32-bit or 64-bit), Windows® 10 Pro (32-bit or 64-bit)</li> </ul> Supports 7 languages: English, Chinese, French, German, Russian, Spanish, and Polish  |
| CPU                 | Intel® Core™ i3 2 GHz or higher  | Intel® Core™ i3 2 GHz or higher  |
| Memory              | <ul style="list-style-type: none"> <li>2 GB or more (for Windows® 7 [32-bit])</li> <li>4 GB or more (for Windows® 7 [64-bit], Windows® 8.1, and Windows® 10)</li> </ul>  | <ul style="list-style-type: none"> <li>2 GB or more (for Windows® 7 [32-bit])</li> <li>4 GB or more (for Windows® 7 [64-bit], Windows® 8.1, and Windows® 10)</li> </ul>  |
| HDD                 | 40 GB or more of free space  | 40 GB or more of free space  |
| Displayed items     | 1024 × 768 or higher resolution  | 1024 × 768 or higher resolution  |
| Interfaces          | <ul style="list-style-type: none"> <li>Ethernet port (for getting access to the internet using LAN) or a modem (for getting access to the internet via landline)</li> <li>Up to 6 USB ports</li> <li>(Only required for a server computer working as a VRF controller)</li> <li>- Maximum of 2 USB ports are required to connect to a White-USB-key/WibuKey</li> <li>- Up to 4 USB ports required to connect to an Echelon® U10 USB network interface</li> <li>* Maximum number of required USB ports depends on the applicable system configuration.</li> </ul> | <ul style="list-style-type: none"> <li>Ethernet port (for getting access to the internet using LAN) or a modem (for getting access to the internet via landline)</li> <li>Up to 6 USB ports</li> <li>(Only required for a server computer working as a VRF controller)</li> <li>- Maximum of 4 USB ports are required to connect to a White-USB-key/WibuKey</li> <li>- 1 USB port is required for an Echelon® U10 USB Network interface</li> <li>* The maximum number of required USB ports depends on the applicable system configuration.</li> </ul> |
| Graphic accelerator | Microsoft® DirectX® 9.0c compatible  | Microsoft® DirectX® 9.0c compatible  |
| Software            | Adobe® Acrobat Reader® 9.0 or later  | Adobe® Acrobat Reader® 9.0 or later  |

\* Echelon® U10 USB Network interface - TP/FT-10 Channel (Model name: 75010R) (Required for each VRF Network)

Packing list

| Type          | For System controller |                       |                        | For System controller Lite |                                  |               |                     |
|---------------|-----------------------|-----------------------|------------------------|----------------------------|----------------------------------|---------------|---------------------|
|               | System controller     | Option Energy manager | System controller Lite | Remote access              | Electricity charge apportionment | Energy saving | Centralized control |
| Model name    | UTY-APGXZ1            | UTY-PEGXZ1            | UTY-ALGXZ1             | UTY-PLGXR2                 | UTY-PLGXA2                       | UTY-PLGXE2    | UTY-PLGXX2          |
| White-USB-key | 1                     | 1                     | 1                      | 1                          | 1                                | 1             | 1                   |

\*1: Software protection key to be inserted in a USB slot running System controller or System controller Lite. System controller or System controller Lite may only run on a PC with a WHITE-USB-KEY. However, a WHITE-USB-KEY is not required for remote VRF explorer software.

# MODBUS® converter for indoor unit


UTY-VMSX



Up to  
1 indoor unit


MODBUS® converter enables air conditioners to be fully integrated into a MODBUS® network.

- Simple installation due to small and compact size.
- No separate external power supply required.
- The MODBUS® converter must be connected to an indoor unit on a one-to-one basis.
- The MODBUS® converter enables central monitoring and control of air conditioners from BMS, central, or home controller.

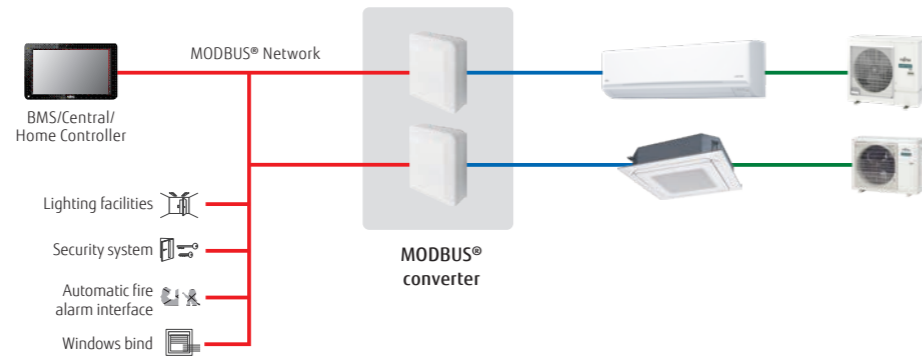

## Easy Installation

Easy to install with minimal wiring and without the need for a power supply cable to the converter

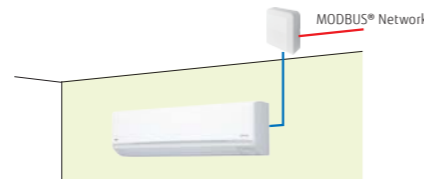

## Basic control

- Turning the units on and off
- Mode control (Heat, Cool, Dry, Auto, Fan)
- Fan speed control
- Louver position (airflow direction setting)
- Room temperature setting and display
- Economy mode setting
- Error status

### Specifications

|  |                |
|--|----------------|
| Model name   | UTY-VMSX       |
| Power supply   | 12 V DC        |
| Input power (W)  | Max. 1.2 W     |
| Dimensions (H × W × D) (mm)                                      | 140 × 117 × 43 |
| Weight (g)   | 200            |
| Maximum number of connectable indoor units per MODBUS® converter | 1              |

### Modbus communication specifications

|                      |                  |
|----------------------|------------------|
| Transfer mode        | RTU mode         |
| Communication speed  | 9600/19200 bps   |
| Data bit             | 8                |
| Parity               | even/odd/none    |
| Stop bit             | 1/2 (no parity)  |
| Network              | RS485            |
| Maximum cable length | 1000 m (3280 ft) |

# MODBUS® interface

FG-RC-MBS1Z1 / FG-AC-MBS1Z1 / FG-IR-BMG1Z1



FG-RC-MBS1Z1  
(3-wire RC-line type)



FG-AC-MBS1Z1  
(CN connector type)




FG-IR-BMG1Z1  
(IR type)

Up to  
1 indoor unit


MODBUS® interface enables air conditioners to be fully integrated into a MODBUS® network.

- Small, compact, and easy to install on DIN rails.
- No separate external power supply required.
- MODBUS® interface enables central monitoring and control of air conditioners from BMS.

## Installation example

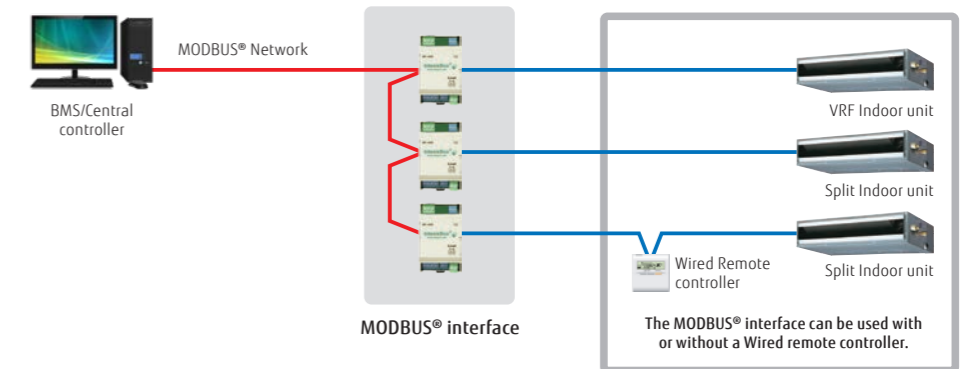

## [IR type] Connection to wall-mounted type

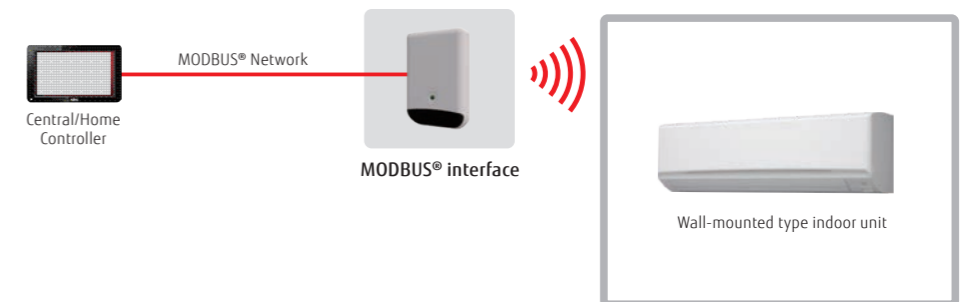


### Specifications

| Model name                    | FG-RC-MBS1Z1 (3-wire RC-line type) | FG-AC-MBS1Z1 (CN connector type) | FG-IR-BMG1Z1 (IR type) |
|-------------------------------|------------------------------------|----------------------------------|------------------------|
| Number of controllable groups | 1                                  | 1                                | 1                      |
| Dimensions (H × W × D) (mm)   | 93 × 53 × 58                       | 93 × 53 × 58                     | 93 × 60 × 21           |
| Weight (g)                    | 85                                 | 85                               | 55                     |

# MODBUS® convertor for VRF

UTY-VMGX / FG-TL-MBS16Z1



UTY-VMGX

Up to  
**9** units per VRF system  
Up to  
**100** outdoor units  
Up to  
**128** indoor units

MODBUS® convertor enables air conditioners to be fully integrated into a MODBUS® network.


- Compact and lightweight design
- Direct connection to MODBUS® network
- MODBUS® convertor enables central monitoring and control of air conditioners from BMS or a central controller.
- Up to 9 converters can be connected to a VRF network (UTY-VMGX). Simultaneous control, such as Power ON/ OFF and temperature setting, can be performed for each zone.
- If a connection error occurs after installation work is completed, the source of the error can be located easily.

## Installation example




FG-TL-MBS16Z1

Up to  
**16** indoor units  
Up to  
**16** outdoor units  
Up to  
**128** indoor units

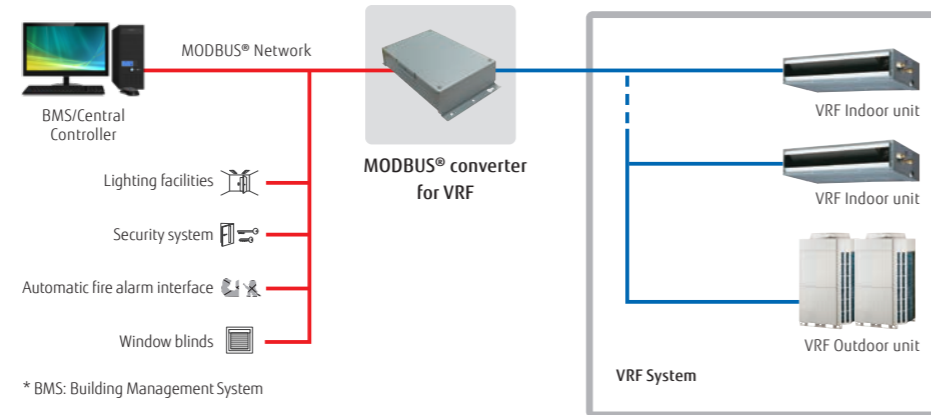

\* BMS: Building Management System

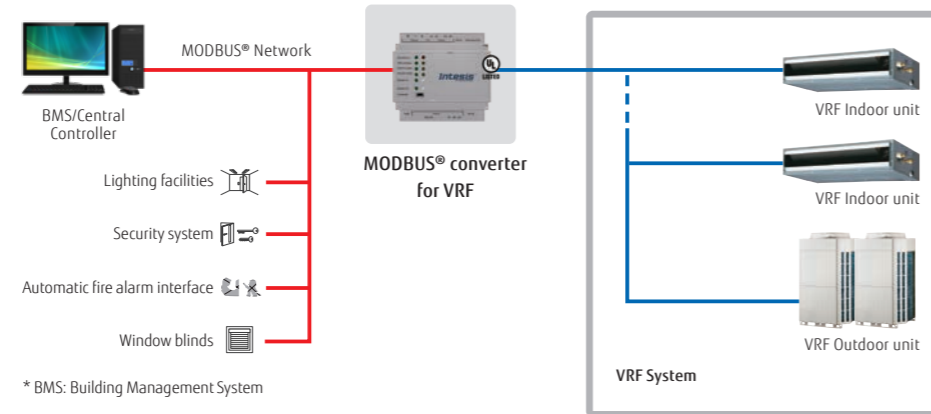

\* BMS: Building Management System

### Specifications

| Model name                  | UTY-VMGX                            | FG-TL-MBS16Z1  |
|-----------------------------|-------------------------------------|--|
| Power supply                | Single phase ~220 to 240 V 50/60 Hz | 9 to 36 V DC, Max.: 140 mA or 24 V AC 50/60 Hz, Max.: 127 mA.* |
| Input power (W)             | Max. 2                              | 1.7  |
| Dimensions (H × W × D) (mm) | 54 × 260 × 150                      | 90 × 88 × 56   |
| Weight (g)                  | 1,100                               | 330  |

\*24 V DC power supply is recommended.

# BACnet® interface

FG-AC-BAC1Z1 / FG-IR-BMG1Z1



FG-AC-BAC1Z1 (CN connector type)




FG-IR-BMG1Z1 (IR type)

Up to  
**1** indoor units


- BACnet® interface connects BMS and a Fujitsu General split/multi-split/VRF system.
- Compatible with BACnet® (ANSI/ASHRAE-135-2012) application-specific controller (B-ASC)
- Compatible with BACnet®/IP over Ethernet.

## Installation example

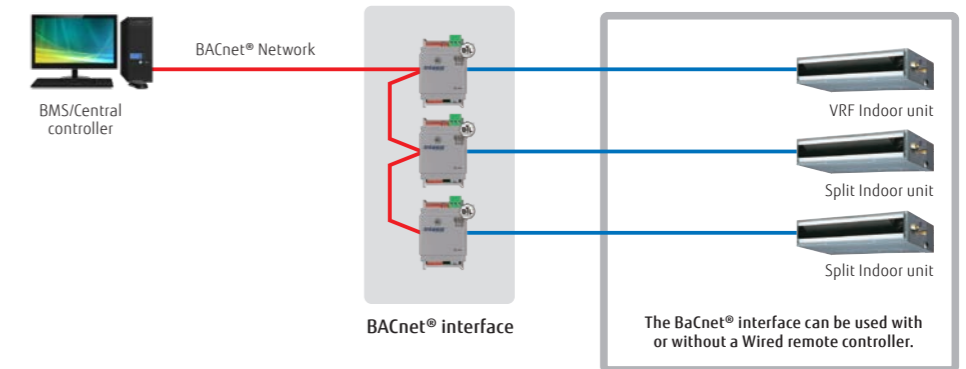

The BACnet® interface can be used with or without a Wired remote controller.

## [IR type] Connection to wall-mounted type

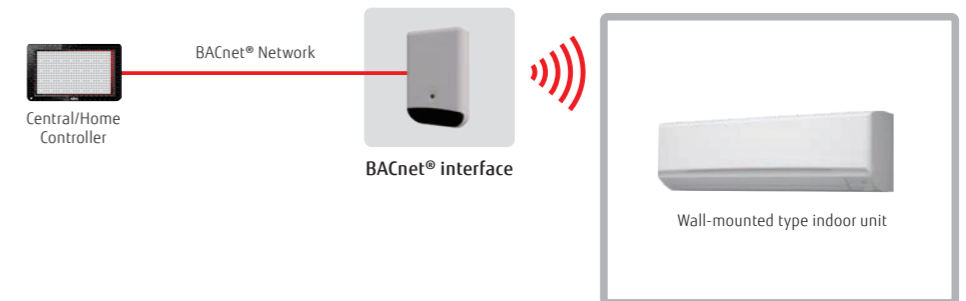

### Specifications

| Model name                    | FG-AC-BAC1Z1 (CN connector type) | FG-IR-BMG1Z1 (IR type) |
|-------------------------------|----------------------------------|------------------------|
| Number of controllable groups | 1                                | 1                      |
| Dimensions (H × W × D) (mm)   | 93 × 53 × 58                     | 93 × 60 × 21           |
| Weight (g)                    | 85                               | 55                     |

12 V DC supplied by an indoor unit

# BACnet® gateway

UTY-ABGXZ1 (Software)




White-USB-key  
(Software Protection Key)



BACnet® is a registered trademark of ASHRAE. ASHRAE does not endorse, approve or test products for compliance with ASHRAE standards. Compliance of listed products to the requirements of ASHRAE Standard 135 is the responsibility of BACnet International (BI). BTL is a registered trademark of BACnet International.

Up to  
**4** VRF network systems  
Up to  
**400** outdoor units  
Up to  
**1,600** indoor units

## Installation example

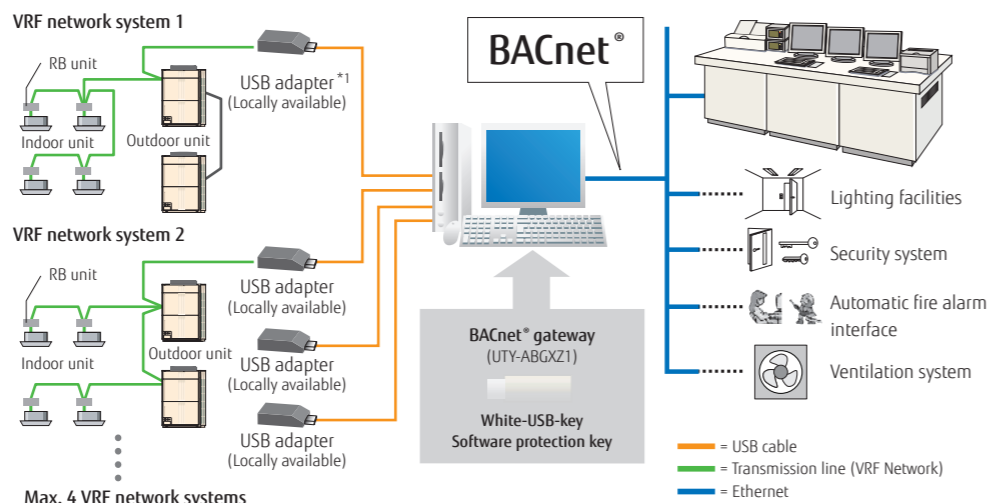

\*1: U10 USB network interface available from Echelon® Corporation.

## Computer requirements

|                  | UTY-ABGXZ1  |
|------------------|---|
| Operating system | <ul style="list-style-type: none"> <li>Microsoft® Windows® 7 Home Premium (32-bit or 64-bit) SP1, Windows® 7 Professional (32-bit or 64-bit) SP1</li> <li>Microsoft® Windows® 8.1 (32-bit or 64-bit), Windows® 8.1 Pro (32-bit or 64-bit)</li> <li>Microsoft® Windows® 10 Home (32-bit or 64-bit), Windows® 10 Pro (32-bit or 64-bit)</li> </ul> Supported languages:<br>Chinese, English, French, German, Polish, Russian, and Spanish |
| CPU              | Intel® Core™ i3 2 GHz or higher   |
| Memory           | <ul style="list-style-type: none"> <li>2 GB or more (for Windows® 7 [32-bit])</li> <li>4 GB or more (for Windows® 7 [64-bit], Windows® 8.1, and Windows® 10)</li> </ul>   |
| HDD              | 40 GB or more of free space   |
| Displayed items  | 1024 × 768 or higher resolution   |
| Interfaces       | <ul style="list-style-type: none"> <li>Ethernet port (for getting access to the internet using LAN)</li> <li>Up to 5 USB ports</li> <li>- 1 USB port required to connect to a White-USB-key/WibuKey</li> <li>- Up to 4 USB ports required to connect to an Echelon® U10 USB network interface</li> </ul> *The maximum number of required USB ports varies depending on the applicable system configuration.                             |
| Software         | Adobe® Acrobat Reader® 9.0 or later   |

\*Echelon® U10 USB Network interface – TP/FT-10 Channel (Model name: 75010R) (Required for each VRF Network)

## Packing list

| Name and shape | Quantity | Application  |
|----------------|----------|--|
| White-USB-key  | 1        | Includes the software, user's manual, and license for BACnet® gateway. |

# BACnet® gateway


UTY-VBGX (Hardware)



BACnet® is a registered trademark of ASHRAE. ASHRAE does not endorse, approve or test products for compliance with ASHRAE standards. Compliance of listed products to the requirements of ASHRAE Standard 135 is the responsibility of BACnet International (BI). BTL is a registered trademark of BACnet International.

Up to  
**1** VRF network systems  
Up to  
**32** refrigerant systems  
Up to  
**128** indoor units

## Installation example

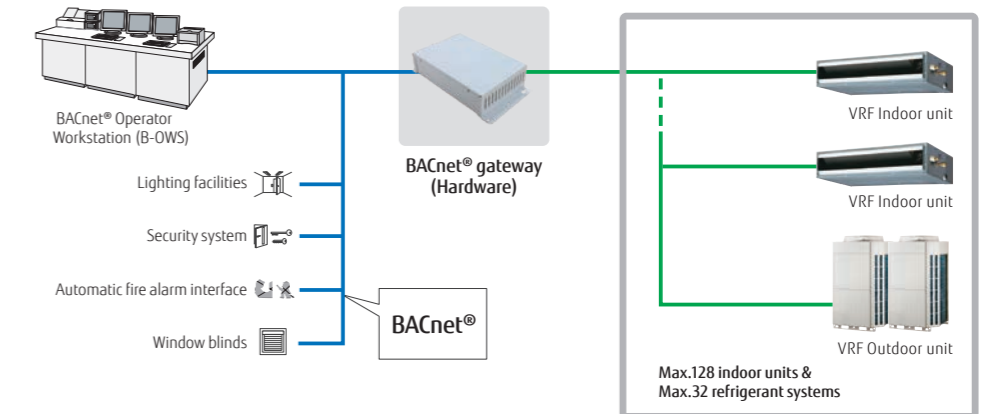

## Specifications

| Model name                                    | UTY-VBGX                          |
|---|-----------------------------------|
| Number of controllable indoor units           | 128                               |
| Number of controllable refrigerant systems    | 32                                |
| Number of controllable VRF networks           | 1                                 |
| Number of connectable units / one VRF network | 4                                 |
| Power supply                                  | Single phase, 100-240 V, 50/60 Hz |
| Power consumption (W)                         | 4.6 (max.)                        |
| Dimensions (H × W × D) (mm)                   | 59.6 × 270.4 × 176                |
| Weight (g)                                    | 1200                              |

# BACnet®/MODBUS® router

FG-RTR-BAC32Z1 / FG-RTR-MBS32Z1



FG-RTR-BAC32Z1 (BAC net)




FG-RTR-MBS32Z1 (MODBUS®)

## Routing between BaCnet® MS/TP and BaCnet® IP networks


- Routing between BaCnet® MS/TP and BaCnet® IP networks
- Routing between MODBUS® RTU and MODBUS® TCP networks

## Installation example

[BaCnet® type]

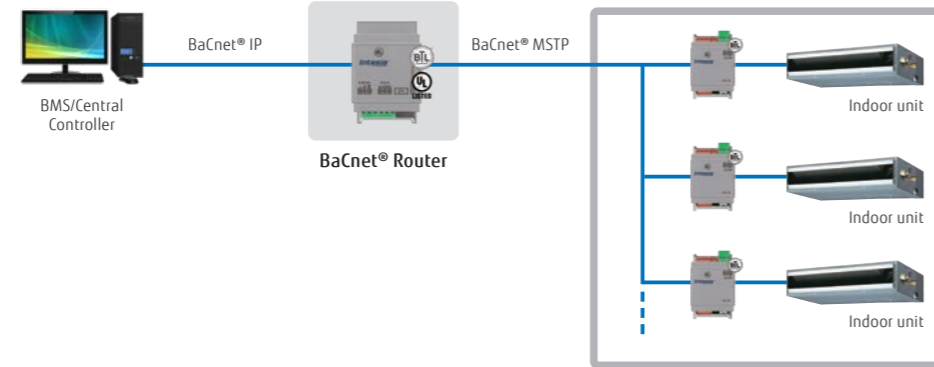

[MODBUS® type]

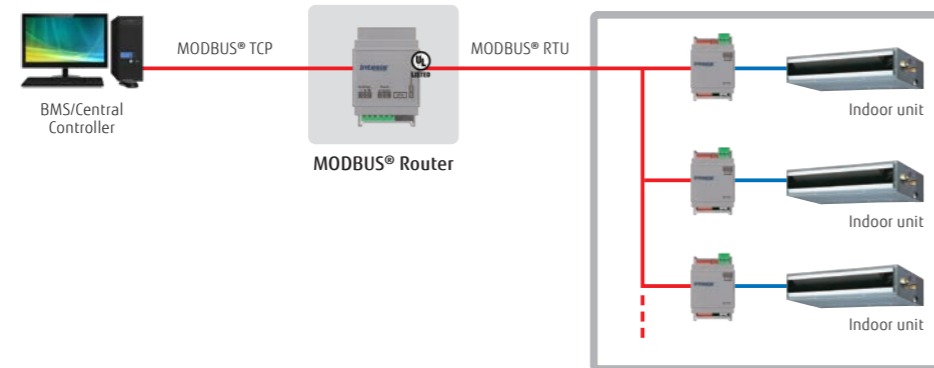

### Specifications

| Model name                        | FG-RTR-BAC32Z1 (MS/TP to IP)                                 | FG-RTR-MBS32Z1 (RTU to TCP)                                  |
|-----------------------------------|--|--|
| Number of routable devices (max.) | 32   | 32   |
| Power supply                      | 9 to 36 V DC, Max.: 140 mA or 24 V AC 50/60 Hz, Max.: 127 mA | 9 to 36 V DC, Max.: 140 mA or 24 V AC 50/60 Hz, Max.: 127 mA |
| Power consumption (W)             | 1.7  | 1.7  |
| Dimensions (H × W × D) (mm)       | 93 × 53 × 58   | 93 × 53 × 58   |
| Weight (g)                        | 150  | 150  |

# BACnet®/MODBUS® cloud device


FG-CLD-BMG4Z1 / FG-CLD-BMG8Z1 / FG-CLD-BMG16Z1 / FG-CLD-BMG32Z1



FG-CLD-BMG4Z1

- The most powerful configuration tool common to all BACnet® gateways provides the system integrators with the power to configure and monitor their systems in an easy and reliable manner.
- A simple, easy-to-use description for the ST Cloud Web and App User Interface, with all widgets customizable to the user's needs, enabling system integrators to easily offer the best user experience to customers who are in control of their BaCnet® or MODBUS® devices.

## Installation example

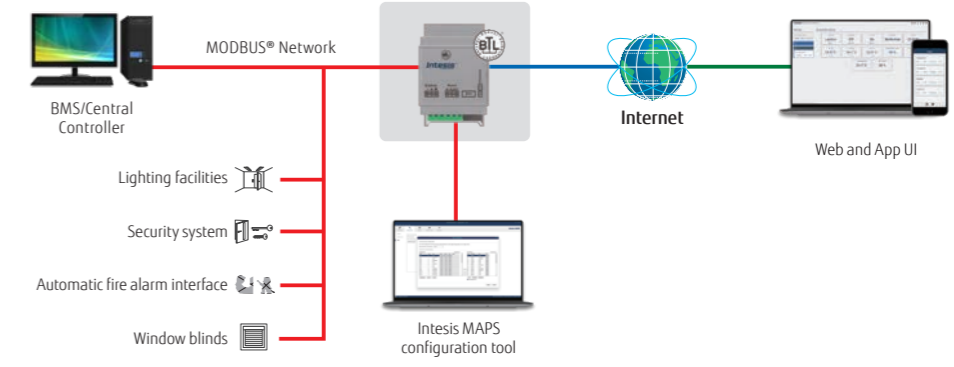

\*BMS: Building Management System

## Gateway features

- BaCnet® IP/MSTP or MODBUS® TCP/RTU connectivity
- Up to 32 devices can be connected to each gateway.
- Up to 12 widgets per device
- Easy device configuration with Intesis MAPS

## Next-generation services

- Industrial-grade connectivity now for building automation
- Fast and scalable real-time edge connectivity over HMS HubTM
- Full data control and protection
- Secure and remote updates during the application lifetime

## System Features

- Monitor and control all devices in an intuitive way
- Comes with a native iOS and Android app and a web interface
- Create scenes and interact with multiple concurrent devices
- Calendar that shows the daily planned installation commands
- Notifications keep you updated about system status
- Device sharing and usage permissions management
- Multiple site management from a common dashboard

### Specifications

| Model name   | FG-CLD-BMG4Z1         | FG-CLD-BMG8Z1         | FG-CLD-BMG16Z1        | FG-CLD-BMG32Z1        |
|--|-----------------------|-----------------------|-----------------------|-----------------------|
| Number of connectable BaCnet® (IP/MSTP) or MODBUS® (TCP/RTU) devices | 4                     | 8                     | 16                    | 32                    |
| Power supply   | 9 to 24 V DC, 50/60Hz | 9 to 24 V DC, 50/60Hz | 9 to 24 V DC, 50/60Hz | 9 to 24 V DC, 50/60Hz |
| Power consumption (W)  | 1.7                   | 1.7                   | 1.7                   | 1.7                   |
| Dimensions (H × W × D) (mm)  | 93 × 53 × 58          | 93 × 53 × 58          | 93 × 53 × 58          | 93 × 53 × 58          |
| Weight (g)   | 150                   | 150                   | 150                   | 150                   |

## KNX® converter for indoor unit


UTY-VKSX



Up to  
**1** indoor unit


KNX® Converter enables individual control of an indoor unit.

- The new KNX® converter connects a central or home controller and a Fujitsu General indoor unit.
- Compact and lightweight design

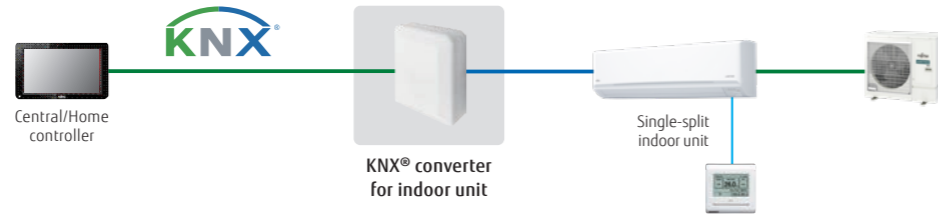

## KNX® converter for VRF

UTY-VKGX / FG-TL-KNX16Z1



UTY-VKGX

Up to  
**100** outdoor units  
Up to  
**128** indoor units




FG-TL-KNX16Z1

Up to  
**16** indoor units  
Up to  
**16** outdoor units

KNX® converter enables centralized control of a system.

- KNX® converter connects a central or home controller and a Fujitsu General VRF system.
- Up to 128 indoor units and 100 outdoor units can be connected to a single KNX® converter. (UTY-VKGX)

Installation example

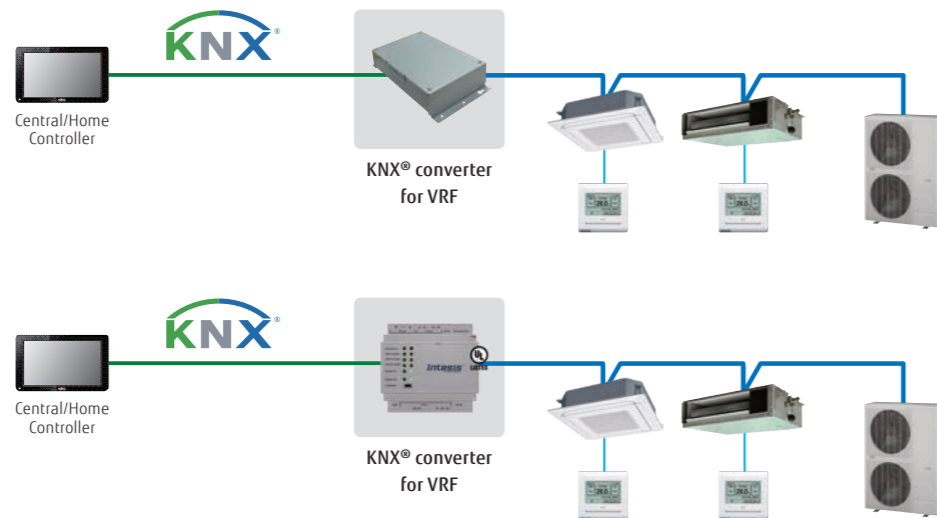

### Specifications

| Model name                  | UTY-VKSX       | UTY-VKGX                            | FG-TL-KNX16Z1  |
|-----------------------------|----------------|-------------------------------------|--|
| Power supply                | 12 V DC        | Single phase ~220 to 240 V 50/60 Hz | 9 to 36 V DC, Max.: 140 mA or 24 V AC 50/60 Hz, Max.: 127 mA.* |
| Input power (W)             | 0.6            | 1.5                                 | 1.6  |
| Dimensions (H × W × D) (mm) | 140 × 117 × 43 | 54 × 260 × 150                      | 90 × 88 × 56   |
| Weight (g)                  | 215            | 1,200                               | 340  |

\*24 V DC power supply is recommended.

## KNX® interface

FG-RC-KNX1Z1 / FG-AC-KNX1Z1 / FG-IR-KNX1Z1



### Intesis®



FG-RC-KNX1Z1  
(3-wire RC-line type)

### Intesis®



FG-AC-KNX1Z1  
(CN connector type)

### Intesis®



FG-IR-KNX1Z1  
(IR type)


Up to  
**1** indoor unit

The KNX® interface enables air conditioners to be fully integrated into a KNX® network system.


- Simple installation due to small and compact size.
- No separate external power supply required (only KNX® bus power required)

Installation example


[3-wire RC-line type/CN connector type]

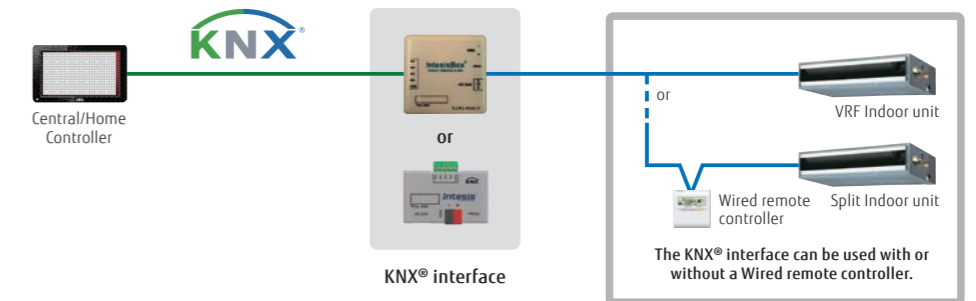

[IR type] Connection to wall-mounted type

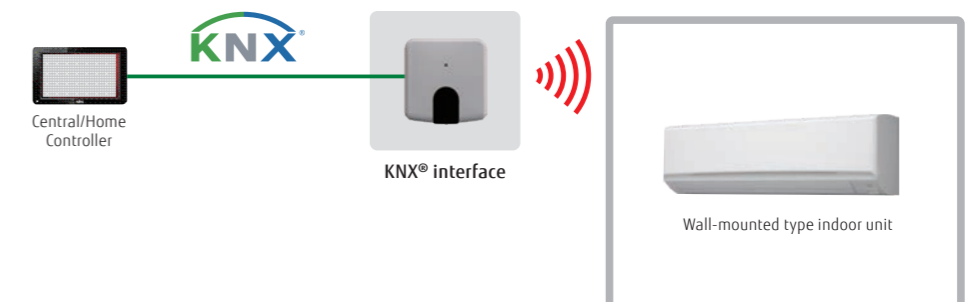

[IR type] Connection to a product other than wall-mounted type

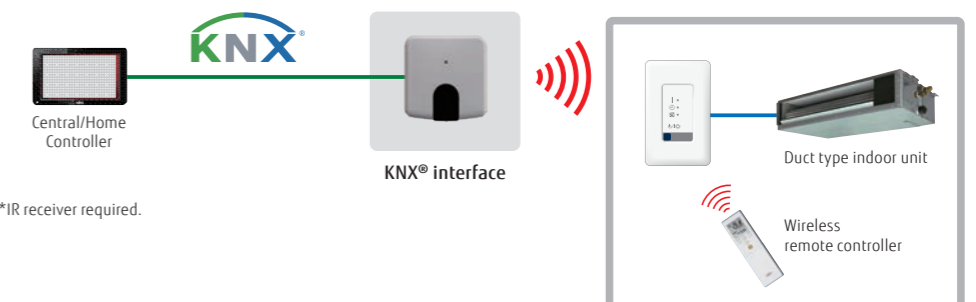

### Specifications

| Model name                    | FG-RC-KNX1Z1 (3-wire RC-line type) | FG-AC-KNX1Z1 (CN connector type) | FG-IR-KNX1Z1 (IR type) |
|-------------------------------|------------------------------------|----------------------------------|------------------------|
| Number of controllable groups | 1                                  | 1                                | 1                      |
| Dimensions (H × W × D) (mm)   | 70 × 70 × 28                       | 45 × 59 × 21                     | 81 × 78 × 28           |
| Weight (g)                    | 70                                 | 35                               | 76                     |




## Network converter for single-split type

UTY-VTGX / UTY-VTGXV



UTY-VTGX  
DC power supply type




UTY-VTGXV  
AC power supply type

Up to  
**16** single indoor units  
Up to  
**1** group  
Up to  
**100** Network Converters


- A network converter is required when connecting a single-split system to a VRF network system.
- Compact and lightweight design
- Connectable to both nonpolar 2-core and polar 3-core remote controllers

### Installation example


- A 1-remote-controller type and a 2-remote-controller type are available.
- Power supply (220 to 240 V AC, 50/60 Hz) is required for the 2-remote-controllers type.

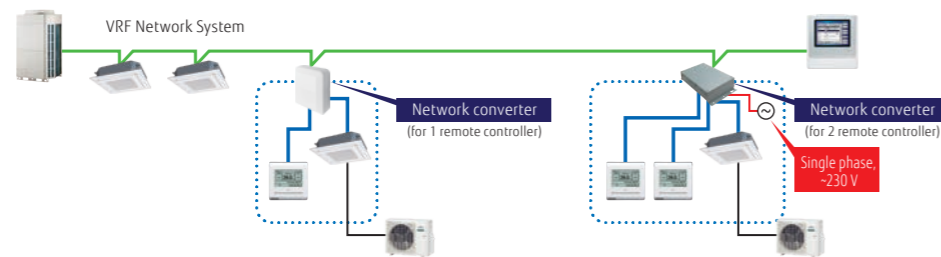

- Both nonpolar 2-core and polar 3-core type Wired remote controllers can be connected.

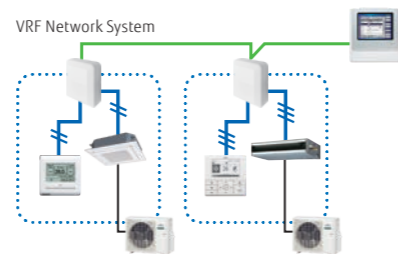

- Central control can be provided for single-split systems. (Up to 100 network converters can be connected in a VRF network system)

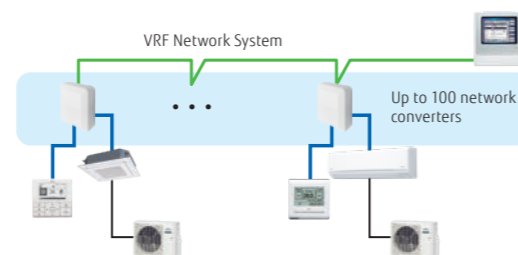


### Specifications

| Model name                  | UTY-VTGX       |                      | UTY-VTGXV               |
|-----------------------------|----------------|----------------------|-------------------------|
|                             | Power supply   | Polar 3-core 12 V DC | Nonpolar 2-core DC 12 V |
| Input power (W)             | Max. 1.2 W     |                      | Max. 3                  |
| Dimensions (H × W × D) (mm) | 140 × 117 × 43 |                      | 54 × 260 × 150          |
| Weight (g)                  | 250            |                      | 1,100                   |

## Network converter for LONWORKS™


UTY-VLGX



Up to  
**4** units to BMS  
Up to  
**100** outdoor units  
Up to  
**128** indoor units

- Connects the VRF network system to a LONWORKS™ open network to manage small and mid-sized BMS and VRF network system.
- The UTY-VLGX enables centralized monitoring and control of VRF network system from a BMS via a LONWORKS™ interface.
- Up to 128 Indoor units can be connected to one network converter for LONWORKS™

### Installation example

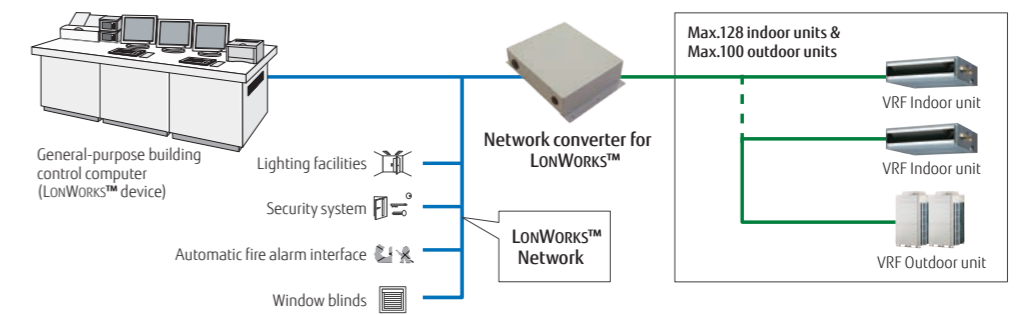

### Specifications

| Model name                  | UTY-VLGX                            |
|-----------------------------|-------------------------------------|
| Power supply                | Single phase ~208 to 240 V 50/60 Hz |
| Power consumption (W)       | 4.5                                 |
| Dimensions (H × W × D) (mm) | 67 × 288 × 211                      |
| Weight (g)                  | 1,500                               |

### Transmission specifications (BMS side)

|                        |   |
|------------------------|---|
| Transmission speed     | 78 kbps   |
| Transceiver            | FT-X1 (available from Echelon® Corporation)                     |
| Transmission line form | Free topology   |
| Terminal resistor      | None<br>(converter to be attached at the terminal of a network) |

# External switch controller

UTY-TERX




Up to  
**1** group

Air conditioner switching can be controlled by connecting this external switch controller to other sensor switches.

- In combination with a commercially available card-key switch or other sensors, this External switch controller enables the control of ON/OFF, room temperature, and fan speed of connected air conditioners as well as master control functions. This makes this product an ideal choice for use in hotel rooms.
- Card key or other sensor switches are locally available.
- The set temperature can be specified at two points each for cooling and heating operations (4 points in total).

## Installation example


Human sensor monitors the movement of a person in a room. When it detects that the person has left the room, it switches the air conditioner to low-capacity mode. When a person returns to the room, the air conditioner returns to the previous operation mode.

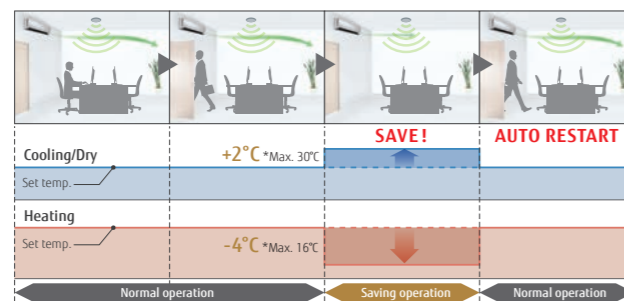

Human sensor equipment needs to be purchased separately.  
Human sensor is not mounted on an External switch controller.


# Signal amplifier

UTY-VSGXZ1



- The transmission line can be extended up to 3,600 m using multiple Signal amplifiers.
- Up to 8 Signal amplifiers can be added in a VRF network system.
- A Signal amplifier is required.
  - (1) When the total wiring length of the transmission line exceeds 500 m.
  - (2) When the total number of units on the transmission line exceeds 64.

## Installation example

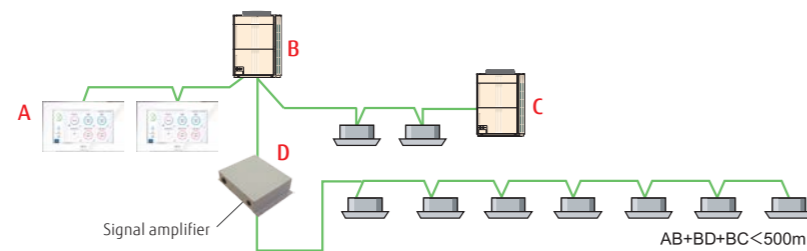

## Specifications

| Model name                  | UTY-VSGXZ1                          | UTY-TERX       |
|-----------------------------|-------------------------------------|----------------|
| Power supply                | Single phase ~208 to 240 V 50/60 Hz | 6.5 to 16 V DC |
| Power consumption (W)       | 4.5                                 | -              |
| Dimensions (H × W × D) (mm) | 67 × 288 × 211                      | 140 × 117 × 43 |
| Weight (g)                  | 1,500                               | 250            |

12 V DC supplied by an indoor unit



# Controller system list (available) for Split/Multi-split

Controller Options/Accessories:



| Type   | Refrigerant   | Indoor unit  |   |               |                |                    |                    |                    |                             |                                |                          |                                      |                                       |  |                                  |                                   |                      |                    |                                |             |              |                  |                                 |              | Outdoor unit         |  |  |
|--|---|--|---|---------------|----------------|--------------------|--------------------|--------------------|-----------------------------|--------------------------------|--------------------------|--------------------------------------|---------------------------------------|--|----------------------------------|-----------------------------------|----------------------|--------------------|--------------------------------|-------------|--------------|------------------|---------------------------------|--------------|----------------------|--|--|
|  |   | Wall-mounted   |   |               |                |                    |                    |                    |                             |                                | Cassette                 |                                      | Duct                                  |  |                                  |                                   |                      |                    |                                |             |              |                  | Multi-split                     |              |                      |  | Single phase                               |
|  |   | Designer Range   |   |               | Standard Range |                    |                    | ECO Range          |                             |                                | Compact 4-way flow Range | Circular flow Range                  | Slim                                  | Medium static pressure (High efficiency & EcoStar) | Medium static pressure (Compact) | Medium static pressure (Standard) | High static pressure | BIG                | Floor                          | Ceiling     | Wall-mounted | Compact cassette | Mini duct                       | Slim duct    | 5/6-unit multi-split |  |  |
|  | ASEH07/09/12/14KGTG, ASYG07/09/12/14KGTG, ASYG07/09/12/14KGTG | ASEG 07/09/12/14 KET, KET-B, ASYG 07/09/12/14 KET, KET-B | ASEH07/09/12/14KMG, KMG-B, ASYG07/09/12/14KMG, ASYG07/09/12/14KMG | ASEG 18/24KMT | ASEH 30/36KMTB | ASEH 07/09/12 KNCA | ASEG 07/09/12 KPCE | ASEH 07/09/12 KLTA | AUXG 09/12/14/18/22/24 KVLA | AUXG 18/22/24/30/36/45/54 KRLB | ARXG 09/12/14/18 KLLAP   | ARXH 12/14/18/22/24/30/36/45/54 KMTP | ARXG 12/14/18/22/24/30/36/45/54 KHTAP | ARXG 24/30/36/45 KMLA                              | ARXG 45/54KHTB                   | ARYG 60LHTA                       | ARYG 72/90LHTA       | AGEG 09/12/14 KVCA | ABEG 18/22/24/30/36/45/54 KRTA | ASEH 05KNCA | ASEG 22KMT   | AUXG 07KVLA      | ARXG 07/09/12/14/18 KSLAP       | ARXG 07KLLAP | AOEG 36KBTA5         |  |  |
|  |   |  |   |               |                |                    |                    |                    |                             |                                |                          |                                      |                                       |  |                                  |                                   |                      |                    |                                |             |              |                  |                                 |              | AOYG 45LBLA6         |  |  |
| Controllers                                      |   | ● UTY-RVRY+ UTY-TWRXZ2                                   |   |               |                |                    |                    |                    |                             |                                | ● UTY-RVRY               |                                      | ● UTY-RVRY                            |  |                                  |                                   |                      |                    |                                |             |              |                  | ● UTY-RVRY+ UTY-TWRXZ2          |              |                      |  | ● UTY-RVRY                                 |
|  |   | ● UTY-RNRYZ5+ UTY-TWRXZ2                                 |   |               |                |                    |                    |                    |                             |                                | ● UTY-RNRYZ5             |                                      | ● UTY-RNRYZ5                          |  |                                  |                                   |                      |                    |                                |             |              |                  | ● UTY-RNRYZ5+ UTY-TWRXZ2        |              |                      |  | ● UTY-RNRYZ5                               |
|  |   | ● UTY-RLRY+ UTY-TWRXZ2                                   |   |               |                |                    |                    |                    |                             |                                | ● UTY-RLRY               |                                      | ● UTY-RLRY                            |  |                                  |                                   |                      |                    |                                |             |              |                  | ● UTY-RLRY+ UTY-TWRXZ2          |              |                      |  | ● UTY-RLRY                                 |
|  |   | ● UTY-RCRYZ1+ UTY-TWRXZ2                                 |   |               |                |                    |                    |                    |                             |                                | ● UTY-RCRYZ1             |                                      | ● UTY-RCRYZ1                          |  |                                  |                                   |                      |                    |                                |             |              |                  | ● UTY-RCRYZ1+ UTY-TWRXZ2        |              |                      |  | ● UTY-RCRYZ1                               |
|  |   |  |   |               |                |                    |                    |                    |                             |                                | ● UTY-RVNYM              |                                      | ● UTY-RVNYM                           |  |                                  |                                   |                      |                    |                                |             |              |                  | ● UTY-RVNYM                     |              |                      |  | ● UTY-RVNYM                                |
|  |   |  |   |               |                |                    |                    |                    |                             |                                | ● UTY-RNNYM              |                                      | ● UTY-RNNYM                           |  |                                  |                                   |                      |                    |                                |             |              |                  | ● UTY-RNNYM                     |              |                      |  | ● UTY-RNNYM                                |
| Simple remote controller                         |   | ● UTY-RSRY UTY-RHRY+ UTY-TWRXZ2                          |   |               |                |                    |                    |                    |                             |                                | ● UTY-RSRY UTY-RHRY      |                                      | ● UTY-RSRY UTY-RHRY                   |  |                                  |                                   |                      |                    |                                |             |              |                  | ● UTY-RSRY UTY-RHRY+ UTY-TWRXZ2 |              |                      |  | ● UTY-RSRY UTY-RHRY                        |
| Home central remote controller                   |   |  |   |               |                |                    |                    |                    |                             |                                |                          |                                      |                                       |  |                                  |                                   |                      |                    |                                |             |              |                  |                                 |              |                      |  | ● UTY-DMMYM1*3 (KBTA5) UTY-DMMYM*3 (LBLA6) |
| Wireless remote controller                       |   |  |   |               |                |                    |                    |                    |                             |                                | ● UTY-LNTY               |                                      |                                       |  |                                  |                                   |                      |                    |                                |             |              |                  | ● UTY-LNTY                      |              |                      |  |  |
| IR receiver unit with Wireless remote controller |   |  |   |               |                |                    |                    |                    |                             |                                |                          |                                      | ● UTY-LRHYM                           |  |                                  |                                   |                      |                    |                                |             |              |                  |                                 |              |                      |  |  |
|  |   |  |   |               |                |                    |                    |                    |                             |                                | ● UTY-LBTYC              |                                      | ● UTY-LBTYM                           |  |                                  |                                   |                      |                    |                                |             |              |                  | ● UTY-LBTYM                     |              |                      |  | ● UTY-LBTYM                                |

\*1: Available only when the WLAN adapter (UY-TFSXF2) is removed. \*2 Available only when the WLAN adapter (UY-TFSXZ1) is removed. \*3 Consult your dealer for conditions of use.

# Controller system list (available) for Split/Multi-split

Controller Options/Accessories:



| Type  | Refrigerant   | Indoor unit  |               |                |                    |                    |                    |                |                             |                                |                                  |                                       |                                       |  |                                  |                                   |                      |                |   |                                |              |                  |             |                           |              |
|---|---|--|---------------|----------------|--------------------|--------------------|--------------------|----------------|-----------------------------|--------------------------------|----------------------------------|---------------------------------------|---------------------------------------|--|----------------------------------|-----------------------------------|----------------------|----------------|---|--------------------------------|--------------|------------------|-------------|---------------------------|--------------|
|   |   | Wall-mounted   |               |                |                    |                    |                    |                |                             |                                | Cassette                         |                                       | Duct                                  |  |                                  |                                   |                      |                | Multi-split   |                                |              |                  |             |                           |              |
|   |   | Designer Range   |               |                | Standard Range     |                    |                    | ECO Range      |                             |                                | Compact 4-way flow Range         | Circular flow Range                   | Slim                                  | Medium static pressure (High Efficiency & Ambient) | Medium static pressure (Compact) | Medium static pressure (Standard) | High static pressure | BIG            | Floor   | Ceiling                        | Wall-mounted | Compact cassette | Mini duct   | Slim duct                 |              |
| ASEH07/09/12/14KGTG, ASYG07/09/12/14KGTG, ASYG07/09/12/14KGTG | ASEG 07/09/12/14 KETF, KETF-B ASYG 07/09/12/14 KETE, KETE-B | ASEH07/09/12/14KMG, ASYG07/09/12/14KMG, ASYG07/09/12/14KMG   | ASEG 18/24KMT | ASEH 30/36KMTB | ASEH 07/09/12 KNCA | ASEG 07/09/12 KPCE | ASEH 07/09/12 KLTA | ASEG 18/24KLCA | AUXG 09/12/14/18/22/24 KVLA | AUXG 18/22/24/30/36/45/54 KRLB | ARXG 09/12/14/18 KLLAP           | ARXH 12/14/18/22/24/30/36/45/54 KMTAP | ARXG 12/14/18/22/24/30/36/45/54 KHTAP | ARXG 24/30/36/45 KMLA                              | ARXG 45/54KHTB                   |                                   | ARYG 60LHTA          | ARYG 72/90LHTA | AGEG 09/12/14 KVCA  | ABEG 18/22/24/30/36/45/54 KRTA | ASEH 05KNCA  | ASEG 22KMT       | AUXG 07KVLA | ARXG 07/09/12/14/18 KSLAP | ARXG 07KLLAP |
| Interfaces  | MODBUS® Converter   | ● UTY-VMSX   |               |                |                    |                    |                    |                |                             |                                | ● UTY-VMSX                       |                                       | ● UTY-VMSX                            |  |                                  |                                   |                      |                | ● UTY-VMSX  |                                |              |                  |             |                           |              |
|   | MODBUS® interface   | ● FG-AC-MBS1Z1   |               |                |                    |                    |                    |                |                             |                                | ● FG-RC-MBS1Z1<br>● FG-AC-MBS1Z1 |                                       | ● FG-RC-MBS1Z1<br>● FG-AC-MBS1Z1      |  |                                  |                                   |                      |                | ● FG-AC-MBS1Z1  |                                |              |                  |             |                           |              |
| WLAN adapter  | IR type   | ● FG-IR-BMG1Z1   |               |                |                    |                    |                    |                |                             |                                | ● FG-IR-BMG1Z1+<br>● UTY-LBTYC   |                                       | ● FG-IR-BMG1Z1+<br>● UTY-LBTYM        |  |                                  |                                   |                      |                | ● FG-IR-BMG1Z1+<br>● UTY-LBTYH                              |                                |              |                  |             |                           |              |
|   | 3-wire RC-line type<br>CN connector type                    | ● FG-AC-KNX1Z1   |               |                |                    |                    |                    |                |                             |                                | ● FG-RC-KNX1Z1<br>● FG-AC-KNX1Z1 |                                       | ● FG-RC-KNX1Z1<br>● FG-AC-KNX1Z1      |  |                                  |                                   |                      |                | ● FG-AC-KNX1Z1  |                                |              |                  |             |                           |              |
| External switch controller                                    | IR type   | ● FG-IR-KNX1Z1   |               |                |                    |                    |                    |                |                             |                                | ● FG-IR-KNX1Z1+<br>● UTY-LBTYC   |                                       | ● FG-IR-KNX1Z1+<br>● UTY-LBTYM        |  |                                  |                                   |                      |                | ● FG-IR-KNX1Z1+<br>● UTY-LBTYH                              |                                |              |                  |             |                           |              |
|   | 3-wire RC-line type <sup>1</sup><br>CN connector type       | ● UTY-TFSX3<br>● UTY-TFSXZ1  |               |                |                    |                    |                    |                |                             |                                | ● UTY-TFSX3<br>● UTY-TFSXZ1      |                                       | ● UTY-TFSX3<br>● UTY-TFSXZ1           |  |                                  |                                   |                      |                | ● UTY-TFSX3<br>● UTY-TFSXZ1                                 |                                |              |                  |             |                           |              |
| Network converter for single-split type                       | USB type <sup>1</sup>                                       | ● Accessory (KGTG, KGTG, KETF, KETF-B, KMG, KMCF)<br>● UTY-TFSXH3, UTY-TFSXF2 (KGTG, KETE, KETE-B, KMCE) |               |                |                    |                    |                    |                |                             |                                | ● UTY-TFSXH3<br>● UTY-TFSXF2     |                                       | ● Accessory                           |  |                                  |                                   |                      |                | ● Accessory   |                                |              |                  |             |                           |              |
|   | 3-wire RC-line type<br>CN connector type                    | ● FG-AC-WIF1Z1   |               |                |                    |                    |                    |                |                             |                                | ● FG-RC-WIF1Z2<br>● FG-AC-WIF1Z1 |                                       | ● FG-RC-WIF1Z2<br>● FG-AC-WIF1Z1      |  |                                  |                                   |                      |                | ● FG-AC-WIF1Z1  |                                |              |                  |             |                           |              |
| Network converter for single-split type                       | IR type   | ● FG-IR-WIF1Z1   |               |                |                    |                    |                    |                |                             |                                | ● FG-IR-WIF1Z1+<br>● UTY-LBTYC   |                                       | ● FG-IR-WIF1Z1+<br>● UTY-LBTYM        |  |                                  |                                   |                      |                | ● FG-IR-WIF1Z1+<br>● UTY-LBTYH                              |                                |              |                  |             |                           |              |
|   | 3-wire RC-line type<br>CN connector type                    | ● FG-AC-WMP1Z1   |               |                |                    |                    |                    |                |                             |                                | ● FG-RC-WMP1Z1<br>● FG-AC-WMP1Z1 |                                       | ● FG-RC-WMP1Z1<br>● FG-AC-WMP1Z1      |  |                                  |                                   |                      |                | ● FG-AC-WMP1Z1  |                                |              |                  |             |                           |              |
| External switch controller                                    | IR type   | ● FG-IR-WMP1Z1   |               |                |                    |                    |                    |                |                             |                                | ● FG-IR-WMP1Z1+<br>● UTY-LBTYC   |                                       | ● FG-IR-WMP1Z1+<br>● UTY-LBTYM        |  |                                  |                                   |                      |                | ● FG-IR-WMP1Z1+<br>● UTY-LBTYH                              |                                |              |                  |             |                           |              |
|   | DC power supply type<br>AC power supply type                | ● UTY-TERX+UTY-TWRXZ2  |               |                |                    |                    |                    |                |                             |                                | ● UTY-TERX                       |                                       | ● UTY-TERX                            |  |                                  |                                   |                      |                | ● UTY-TERX+<br>● UTY-TWRXZ3                                 |                                |              |                  |             |                           |              |
| Network converter for single-split type                       | DC power supply type<br>AC power supply type                | ● UTY-VTGX+UTY-TWRXZ2<br>● UTY-VTGXV+UTY-TWRXZ2  |               |                |                    |                    |                    |                |                             |                                | ● UTY-VTGX<br>● UTY-VTGXV        |                                       | ● UTY-VTGX<br>● UTY-VTGXV             |  |                                  |                                   |                      |                | ● UTY-VTGX+<br>● UTY-TWRXZ3<br>● UTY-VTGXV+<br>● UTY-TWRXZ3 |                                |              |                  |             |                           |              |

\*There are no optional parts for the KL Series.  
 \*1: Available only when the WLAN adapter (UY-TFSXF2) is removed. \*2: Available only when the WLAN adapter (UTY-TFSXZ1) is removed.  
 \*3: For compatibility of the new WLAN adapters with the indoor units which are not listed in this catalogue, please refer to page C-021.





# Optional parts Overview

For Split & Multi-split, VRF

A variety of optional parts are available to enable installation of the selected indoor unit properly according to the environment.

## Optional Parts For Cassette



**Human sensor kit**  
A built-in thermo sensor monitors and controls room temperature accurately.




**Cassette grille**  
A lineup of cassette grilles that match a variety of interiors. A grid ceiling-type cassette grille has been added to the lineup.




**Silver ion filter**  
The Silver ion filter helps to keep indoor air free from viruses, bacteria and molds.\*




**Fresh air intake kit**  
Fresh air can be taken in by a fan connected to an external control unit.




**Insulation kit for high humidity**  
Insulation kit for high humidity is used when the installation location is in a high humidity environment.



**Air outlet shutter plate**  
Airflow directions can be changed to 3 directions using the Air outlet shutter plate depending on the installation location.



**Wide Panel**  
When a cassette type is installed in a narrow space in the ceiling, the wide panel fills in that space.



**Panel spacer**  
If the ceiling space is tight and the main body protrudes from the ceiling surface, a panel spacer can be used as a decorative trim.

## Optional Parts For V-IV



**Pressure sensor kit**  
When installed, the height difference between the outdoor unit and indoor unit can be allowed up to 110 m.



## Optional Parts For R32 VRF products




**Gas Sensor kit**  
Used to ensure standards compliance and safety when R32 VRF products are installed.



**Expansion kit**  
Connect to indoor units to expand the number of inputs and outputs when using multiple safety devices or external input/output functions.

## Optional Parts For Floor



**Half concealed kit**  
Used to half conceal a floor type indoor unit in the wall.



**Silver ion filter**  
The Silver ion filter helps to keep indoor air free from viruses, bacteria and molds.\*


## Optional Parts For Duct & Ceiling



**Auto louver grille kit**  
The optional clean-looking flat Auto louver grille blends into any interior and provides a comfortable airflow.



**Remote sensor unit**  
The remote sensor provides additional convenience.



**Silver ion filter**  
The Silver ion filter helps to keep indoor air free from viruses, bacteria and molds.\*



**Long-life filter**  
Captures grit and dust. Long-life design with consideration of running costs.



**Flange**  
Flanges are used when connecting a medium static pressure duct type and a ceiling type with air intake and exhaust ducts.




**Drain pump unit**  
Drains water that has accumulated during operation.



## Connection Parts



**Communication kit**  
Required for a wall-mounted type when the External connect kit set or a Wired remote controller is connected to the indoor unit.



**External connect kit & set**  
Connect the printed circuit board (PCB) to external devices.



**External input and output PCB**  
For Wall-mounted, Duct, or Cassette type, these parts are required when the external input and output function is used.



**Connection Units**  
Connection units are available to separate the pipes when connecting multiple indoor units in a Multi-split type or VRF system.



**External input and output PCB box & bracket**  
Box and bracket for installing the External input and output PCB.



**External power supply unit**  
The External power supply unit protects the increment in the system even if the power supply for some of the indoor units is shut down.

\*Not a result of experiments in an actual use environment. Silver ion filter inhibits activity or growth of microorganism, but do not prevent infection.

# Silver Ion Filter

UTR-FA16-5 / UTR-FA13-3 / UTR-FA03-5 / UTD-HFAA / UTD-HFRA / UTD-HFTA / UTD-HFTB / UTD-HFTC / UTD-HFNC / UTD-HFNB / UTD-HFNA / UTD-HFND / UTD-HFKB / UTD-HFKA



For Wall mounted / Floor  
UTR-FA16-5 / UTR-FA13-3  
UTR-FA03-5

For Cassette  
UTD-HFAA / UTD-HFRA


For Duct  
UTD-HFTA / UTD-HFTB  
UTD-HFTC / UTD-HFNC  
UTD-HFNB / UTD-HFNA  
UTD-HFND / UTD-HFKB  
UTD-HFKA

The Silver ion filter helps to keep indoor air free from viruses, bacteria and molds.

(Not a result of experiments in an actual use environment. Silver ion filter inhibits activity or growth of microorganism, but do not prevent infection.)

The silver ion filter inhibits the activities of viruses\*1, bacteria\*2 and molds\*3 trapped on the filter.

(Only effective when the microorganism is trapped on the filter with dust or droplet)

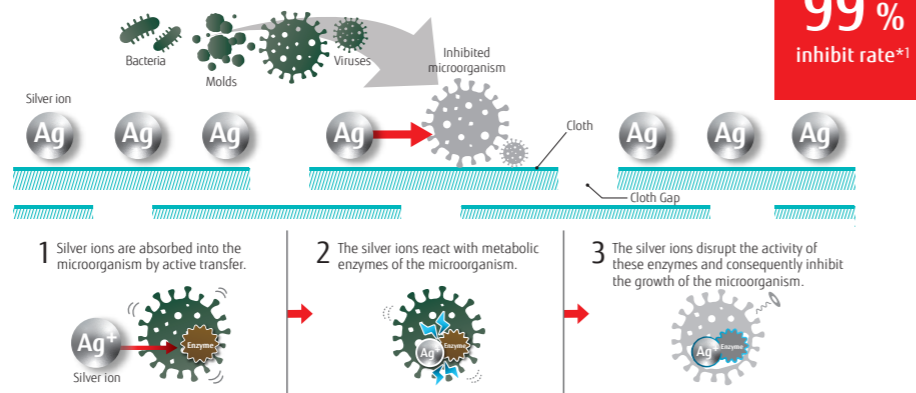

\*1 [Testing organization] Kitasato Research Center for Environmental Science [Test Report] No. 2020\_0408 [Test virus] Escherichia coli phage Qbeta NBRC 20012 (1 type) [Test Method] Based on the antiviral test method for textile products (JIS L 1922) [Test results] Inhibited by at least 99% in 24 hours. Not tested to prevent transmission of SARS-CoV-2.  
\*2 [Testing organization] Kitasato Research Center for Environmental Science [Test Report] No. 2020\_0409 [Test bacteria] Escherichia coli NBRC 3972 (1 type) [Test Method] Based on the determination of antibacterial activity and efficacy of textile products (JIS L 1902) [Test results] The growth of the test bacteria was inhibited by 24 hours testing  
\*3 [Testing organization] Kitasato Research Center for Environmental Science [Test Report] No. 2020\_0410 [Test fungi] Aspergillus Niger NBRC 105649 and other fungi (3 types) [Test Method] Based on the test for fungus resistance (JIS Z 2911) [Test results] The growth of the fungus was inhibited by 28 days testing

The filter is easily removable\* and hand-washable.

(\*Wall mounted and floor models only)



\*4 Hand-washing or vacuuming by 3 months is recommended. Cleaning frequency varies depending on the environment of use.

## Specifications

| Model name                | For Wall mounted / Floor |              |              | for Cassette |               |               |
|---------------------------|--------------------------|--------------|--------------|--------------|---------------|---------------|
|                           | UTR-FA16-5               | UTR-FA13-3   | UTR-FA03-5   | UTD-HFAA     | UTD-HFRA      |               |
| Net Dimension (H × W × D) | mm                       | 35 × 210 × 6 | 50 × 364 × 6 | 43 × 272 × 6 | 350 × 125 × 6 | 550 × 136 × 6 |
| Weight                    | g                        | 2            | 2            | 2            | 7             | 23            |
| Quantity                  |                          | 2            | 2            | 2            | 1             | 1             |

| Model name                | for Duct |              |              |                              |              |              |              |              |               |               |
|---------------------------|----------|--------------|--------------|------------------------------|--------------|--------------|--------------|--------------|---------------|---------------|
|                           | UTD-HFTA | UTD-HFTB     | UTD-HFTC     | UTD-HFNC                     | UTD-HFNB     | UTD-HFNA     | UTD-HFND     | UTD-HFKB     | UTD-HFKA      |               |
| Net Dimension (H × W × D) | mm       | 290 × 70 × 6 | 390 × 70 × 6 | 290 × 70 × 6<br>390 × 70 × 6 | 620 × 88 × 6 | 420 × 88 × 6 | 620 × 88 × 6 | 500 × 79 × 6 | 420 × 125 × 6 | 620 × 108 × 6 |
| Weight                    | g        | 6            | 8            | 10                           | 8            | 10           | 16           | 12           | 16            | 20            |
| Quantity                  |          | 2            | 2            | 3                            | 1            | 2            | 2            | 2            | 2             | 2             |

# Auto louver grille kit

UTD-GXTA-W / UTD-GXTB-W / UTD-GXTC-W




The optional clean-looking flat Auto louver grille kit blends into any interior and provides a comfortable airflow.




## Flexible Control

- The Auto louver grille of the indoor unit can be operated in conjunction with the remote control of the indoor unit.
- Vertical auto swing**
  - Auto airflow direction and auto swing
  - 4 steps selectable
- Auto-closing louver**
  - The louvers will automatically close when the indoor unit stops operating.

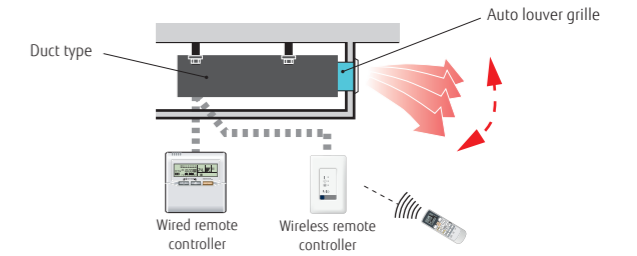

## Dimensions

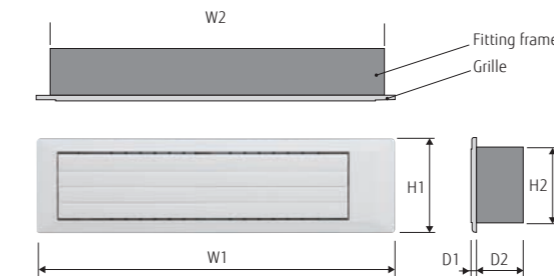

| Model name | W1    | W2    | H1  | H2  | D1 | D2 |
|------------|-------|-------|-----|-----|----|----|
| UTD-GXTA-W | 683   | 645   |     |     |    |    |
| UTD-GXTB-W | 883   | 845   | 180 | 148 | 9  | 84 |
| UTD-GXTC-W | 1,083 | 1,045 |     |     |    |    |

Unit: mm

## Specifications

| Model name                  | UTD-GXTA-W  |                      | UTD-GXTB-W                                |                      | UTD-GXTC-W                                |                        |
|-----------------------------|---|----------------------|---|----------------------|---|------------------------|
| Applicable indoor unit      | SPLIT & MULTI-SPLIT<br>ARYG07/09LLTA<br>ARXG07/09/12/14KSLAP<br>ARXG07/09/12/14KLLAP<br>ARYG07/09LSLAP                                |                      | ARXG18KSLAP<br>ARXG18KLLAP                |                      | ARXD018GLEH<br>ARXD018HLAH<br>ARXK018GLGH |                        |
|                             | VRF<br>ARXD007/009/012/014GLEH<br>ARXX004/007/009/012/014GLGH<br>ARXD04GALH<br>ARXD004/005/007/009/012/014HLAH<br>ARXP009/012/014HLAH |                      | ARXD018GLEH<br>ARXD018HLAH<br>ARXK018GLGH |                      | ARXD024GLEH<br>ARXD024HLAH<br>ARXK024GLGH |                        |
| Power supply                | Connecting with Control box of indoor unit  |                      |   |                      |   |                        |
| Fixing Auto louver grille   | Screwed to Flange or Square duct  |                      |   |                      |   |                        |
| Extension Square duct limit | 1.0 m (Max. duct length between indoor unit and Auto louver grille)   |                      |   |                      |   |                        |
| Net Dimensions (H × W × D)  | mm  | 180 × 683 × (84 + 9) |   | 180 × 883 × (84 + 9) |   | 180 × 1,083 × (84 + 9) |
| Weight                      | Net   | kg (lbs)             |   | 2.0 (4.4)            |   | 2.5 (5.6)              |
| Accessories                 | Fitting Flame, etc.   |                      |   |                      |   |                        |
| Operating range             | Cooling   | °C                   |   | 18 to 32             |   |                        |
|                             |   | % RH                 |   | 80 % or less         |   |                        |
| Operating range             | Heating   | °C                   |   | 16 to 30             |   |                        |




# Pressure sensor kit

UTY-SPWX




## Design flexibility

The height difference between the outdoor unit and the indoor unit is normally 50 m for the V-IV Series, but can be extended to 110 m by installing the Pressure sensor kit. (Can only be connected to the V-IV Series. Also, it can only be connected to outdoor units using outdoor unit software compatible with the product.)

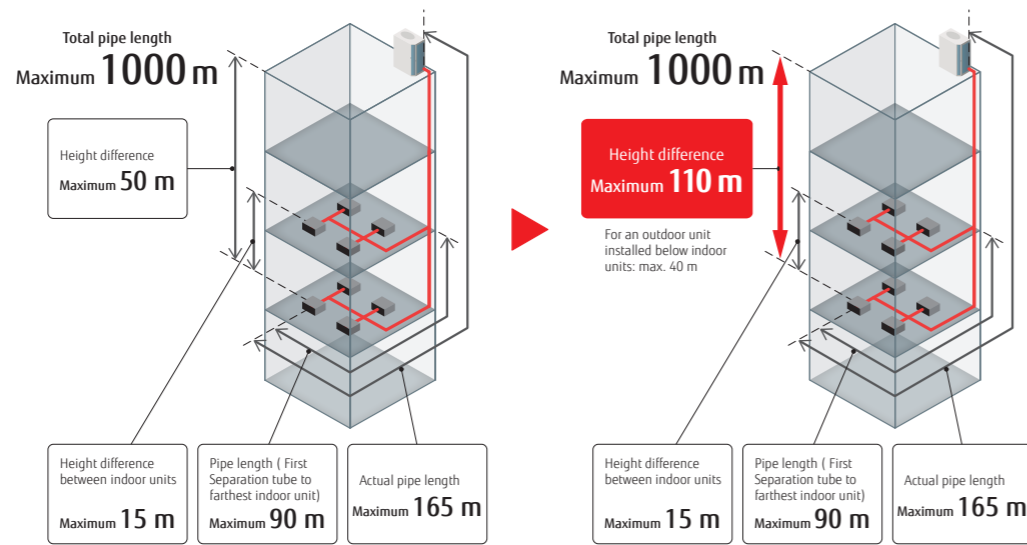

## System overview

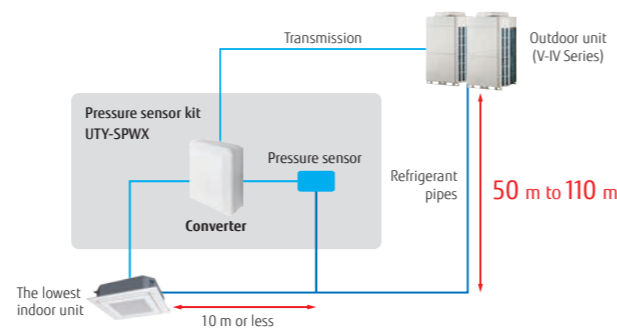

## Pressure sensor kit

| Pressure sensor kit (Converter) | Refrigerant pressure sensor | Joint pipe |
|---------------------------------|-----------------------------|------------|
|                                 |                             |            |

## Specifications

| Model name                  | UTY-SPWX       |
|-----------------------------|----------------|
| Power supply                | 9 to 16 V DC   |
| Dimensions (H × W × D) (mm) | 140 × 117 × 43 |
| Weight (g)                  | 200            |

# External power supply unit

UTZ-GXXA / UTZ-GXXC




## The External power supply unit protects the increment in the system even if the power supply for some of the indoor units is shut down.

Connects to the External power supply unit to supply power to the indoor unit from the auxiliary power supply. This allows for continuous operation without system errors. Built-in relays reduce installation time and cost. The UTZ-GXXC have a built-in relay, which reduces installation time and cost.

## High reliability

- A: Interruption of the main power supply is detected by the power cut-off detection part.
- B: Supplies power for driving the expansion valve of the indoor unit. (12 V or 5 V DC)
- C: Gives notification of the power supply from the External power supply unit.

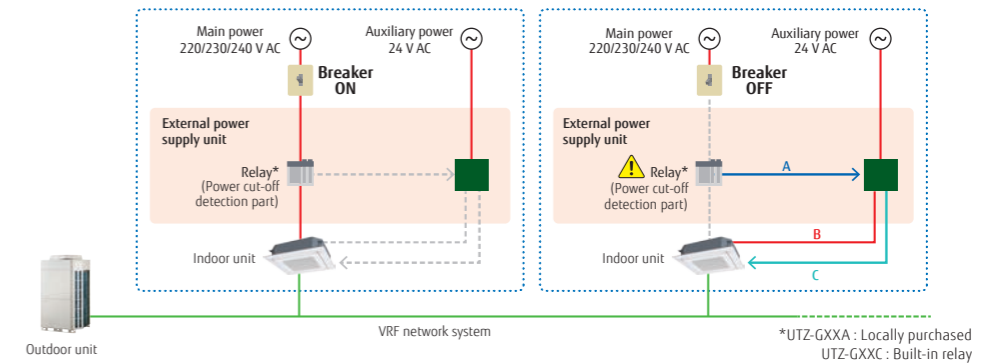

## Note

- When changing the power supply voltage to 24 V AC, use a power transformer with an insulated structure that complies with the regulations\* of the installation region.
- A powered-off indoor unit driven by the External power supply unit is treated in the same way as an operation-off unit in the electricity charge appointment function. If standby power is generated, the result of the electricity charge appointment may not be zero.

\*UL Class II or IEC 61558 Class III, for example.

## Specifications


| Model name                  | UTZ-GXXA         | UTZ-GXXC |
|-----------------------------|------------------|----------|
| Power supply                | 24 V AC 50/60 Hz |          |
| Dimensions (H × W × D) (mm) | 97 × 200 × 178   |          |
| Weight (g)                  | 800              |          |

# AIR BEAM Radiation air outlet unit


\*Production by order  
 Contact us for more details.



## Key component



## Cross-section view

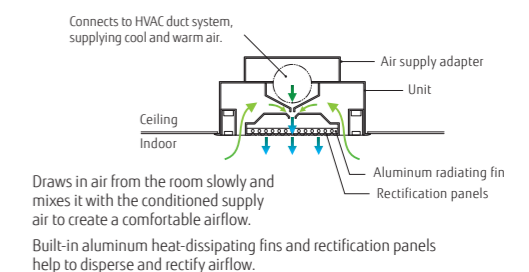

|   |               |               |
|---|---------------|---------------|
| Airflow rate (m <sup>3</sup> /h)              | 180 (160-215) | 270 (240-325) |
| Grid  | 600 × 2       | 600 × 3       |
| AIR BEAM For system ceiling (Integrated type) | KS-180        | KS-270        |

# Gas sensor kit

UTY-SGZY



NEW




## Enhanced disaster safety measures

The system is designed to meet the environmental safety requirements specified in the IEC 603352-40 standard for the use of R32 refrigerant. The environment requiring safety measures is determined by the size of the room in relation to the amount of refrigerant required.

For example, if the system is designed for maximum pipe length and the refrigerant charge is 6 kg, safety measures are required for rooms of 15 m<sup>2</sup> or less.

For Example: Total pipe length 120m

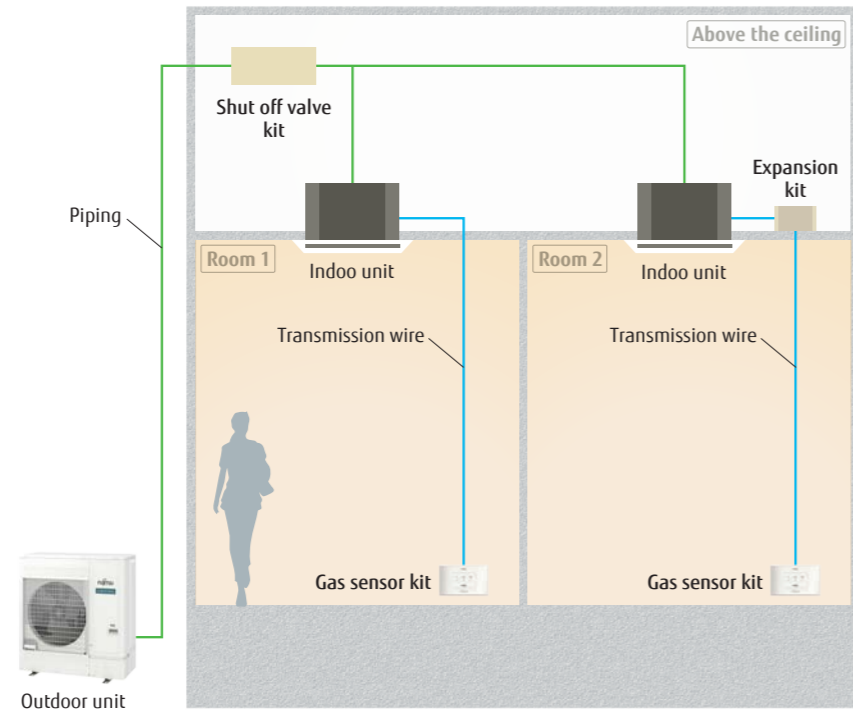

**Shut off valve kit**  
UTP-GX027A, UTP-GX060A

Block the path to prevent refrigerant flow in the event of a refrigerant leakage.

**Gas sensor kit**  
UTY-SGZY\*

Gas Sensor kit Used to ensure standards compliance and safety when R32 VRF products are installed.


\*Connection cable (UTY-XWZXZL) is required.

**Expansion kit**  
UTZ-JXXA

Used to ensure standards compliance and safety when R32 VRF products are installed.

## Conditions requiring safety measures

The graph below will help you determine if a safety design is required when installing R32 VRF products. The amount of refrigerant in a refrigerant system determines the floor area, and if the room to be conditioned by the system is less than that area, a "shut off valve kit" and a "gas sensor kit" must be installed.

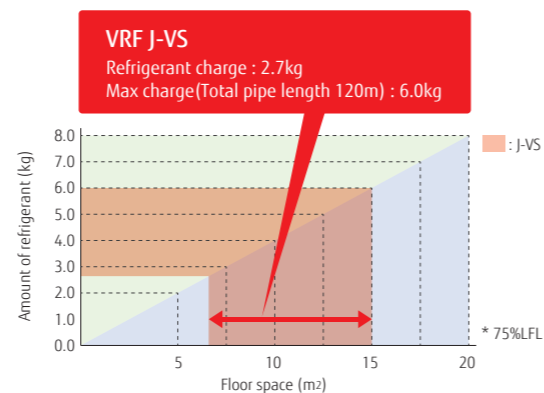


Features: Gas sensor kit

## Refrigerant leak detector connection pattern


1) Corresponds to the case where the classification of air conditioner installation differs from property to property.

Installation position of "Shut off valve kit"


- A** Indoor unit 1~4 in one room
- B** Indoor units 1, 2 and 3, 4, if they are set up in two separate rooms.
- C** Indoor units 1~4 are installed in different rooms.

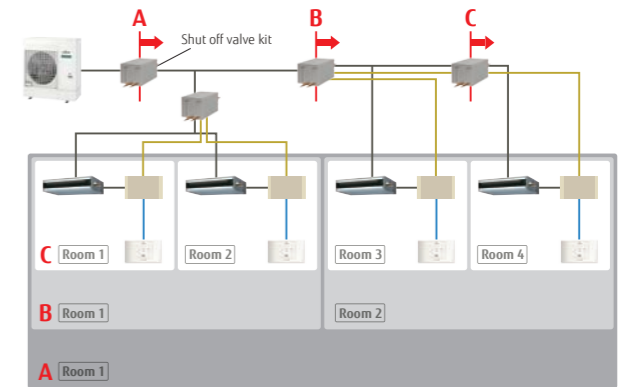

2) Multiple rooms or areas are air conditioned using ducted airflow paths

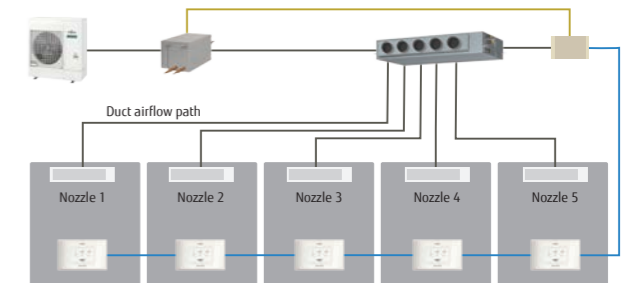

3) When operating multiple indoor units with a remote control group

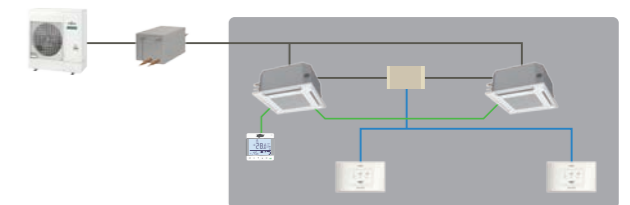

## Specifications

|                             |               |
|-----------------------------|---------------|
| Model name                  | UTY-SGZY      |
| Dimensions (H × W × D) (mm) | 80 × 130 × 35 |
| Weight (g)                  | 500           |

# Optional parts list for Split/Multi-split



| Type                             | Refrigerant  | Indoor unit                              |  |   |                |                |                       |                    |                    |                |                             |                                | Indoor unit   |   |   |                                   |                      |               |                    |                                |   |   |   |
|----------------------------------|--|--|--|---|----------------|----------------|-----------------------|--------------------|--------------------|----------------|-----------------------------|--------------------------------|---|---|---|-----------------------------------|----------------------|---------------|--------------------|--------------------------------|---|---|---|
|                                  |  | Wall-mounted                             |  |   |                |                |                       |                    |                    |                | Cassette                    | Cassette                       | Duct  |   |   |                                   |                      | Floor         | Ceiling            | Multi-split                    |   |   |   |
|                                  |  | Designer Range                           |  |   | Standard Range |                |                       | ECO Range          |                    |                | 4-way flow Compact          | Circular flow                  | Slim  | Medium static pressure (High-Efficiency & Comfort)              | Medium static pressure (Compact)                                | Medium static pressure (Standard) | High static pressure | Big           |                    |                                | 4-way flow Compact cassette             | Mini duct                                       | Slim duct                                   |
|                                  |  | ASEH07/09/12/14KGTG, ASYG07/09/12/14KGTG | ASEG 07/09/12/14, KETF, KETF-B, ASYG 07/09/12/14, KETE, KETE-B | ASEH07/09/12/14KMG, KMG-B, ASYG07/09/12/14KMG, ASYG07/09/12/14KMG | ASEG 18/24KMTG | ASEH 30/36KMTB | ASEH 05/07/09/12 KNCA | ASEG 07/09/12 KPCE | ASEH 07/09/12 KLTA | ASEG 18/24KLCA | AUXG 09/12/14/18/22/24 KVLG | AUXG 18/22/24/30/36/45/54 KRLB | ARXG 09/12/14/18 KLLAP  | ARXH 12/14/18/22/24/30/36/45/54 KMTAP                           | ARXG 12/14/18/22/24/30/36/45/54 KHTAP                           | ARXC22KMLB, ARXG 24/30/36/45 KMLA | ARXG45/54KHTB        |               | AGEG 09/12/14 KVCA | ABEG 18/22/24/30/36/45/54 KRTA | AUXG07KVLG                              | ARXG 07/09/12/14/18 KSLAP                       | ARXG07KLLAP                                 |
|                                  |  |  |  |   |                |                |                       |                    |                    |                |                             |                                |   |   |   |                                   | ARYG60LHTA           | ARYG72/90LHTA |                    | AUYG07/09LVLG                  | ARYG07/09LSLAP                          | ARYG07/09LLTA                                   |   |
| Human sensor kit                 |  |  |  |   |                |                |                       |                    |                    |                |                             |                                | • UTY-SHZXC   |   |   |                                   |                      |               |                    |                                |   |   |   |
| Remote sensor unit               | <br>The remote sensor provides additional convenience.         |  |  |   |                |                |                       |                    |                    |                |                             |                                |   |   |   |                                   |                      |               |                    |                                |   |   | • UTY-XSZXZ1                                |
| Cassette grille                  |  |  |  |   |                |                |                       |                    |                    |                | • UTG-UFYF-W                |                                | • UTG-UKYA-W, UTG-UKYC-W, UTG-UKYA-B                            |   |   |                                   |                      |               |                    |                                |   |   | • UTG-UFYF-W (KVLG), UTG-UFYD-W (LVLG)      |
| Auto louver grille kit           |  |  |  |   |                |                |                       |                    |                    |                |                             |                                | • UTD-GXTA-W (09/12/14), UTD-GXTB-W (18)                        |   |   |                                   |                      |               |                    |                                |   |   | • UTD-GXTA-W (07/09/12/14), UTD-GXTB-W (18) |
| Silver ion filter                |  |  | • UTR-FA16-5   |   | • UTR-FA13-3   |                | • UTR-FA16-5          |                    |                    |                | • UTD-HFAA                  | • UTD-HFRA                     | • UTD-HFTA (09/12/14), UTD-HFTB (18)                            | • UTD-HFNC (12/14/18), UTD-HFNB (22/24), UTD-HFNA (30/36/45/54) | • UTD-HFNC (12/14), UTD-HFNB (18/22/24/30), UTD-HFNA (36/45/54) | • UTD-HFND                        | • UTD-HFKB (45/54)   | • UTD-HFKA    | • UTR-FA03-5       | • UTD-HFAA                     | • UTD-HFTA (07/09/12/14), UTD-HFTB (18) | • UTD-HFTA                                      |   |
| Long-life filter                 |  |  |  |   |                |                |                       |                    |                    |                |                             |                                | • UTD-LFDC (12/14/18), UTD-LFDB (22/24), UTD-LFDA (30/36/45/54) | • UTD-LFNA (36/45/54), UTD-LFNB (18/22/24/30), UTD-LFNC (12/14) | • UTD-LF2SNA  | • UTD-LF60KA (45/54)              | • UTD-LFKA           |               |                    |                                |   |   |   |
| Flange                           |  |  |  |   |                |                |                       |                    |                    |                |                             |                                |   |   |   | • UTD-SF045T, UTD-RF204           |                      |               |                    |                                |   |   |   |
| Drain pump unit                  |  |  |  |   |                |                |                       |                    |                    |                |                             |                                |   |   |   | • UTY-PX1NBA                      | • UTY-PX1NAB         |               |                    | • UTR-DB24T                    |   |   |   |
| Wide Panel                       |  |  |  |   |                |                |                       |                    |                    |                |                             |                                | • UTG-AKXA-W  |   |   |                                   |                      |               |                    |                                |   |   |   |
| Panel spacer                     |  |  |  |   |                |                |                       |                    |                    |                |                             |                                | • UTG-BKXA-W  |   |   |                                   |                      |               |                    |                                |   |   |   |
| Fresh air intake kit             | <br>For Compact For Circular flow cassette                     |  |  |   |                |                |                       |                    |                    |                | • UTY-VXAA                  |                                | • UTY-VXRA  |   |   |                                   |                      |               |                    |                                |   | • UTY-VXAA                                      |   |
| Air outlet shutter plate         | <br>For Compact cassette For Circular flow cassette            |  |  |   |                |                |                       |                    |                    |                | • UTR-YDZB                  |                                | • UTR-YDZK  |   |   |                                   |                      |               |                    |                                |   | • UTR-YDZB                                      |   |
| Insulation kit for high humidity |  |  |  |   |                |                |                       |                    |                    |                | • UTY-KXGC                  |                                | • UTY-KXRA  |   |   |                                   |                      |               |                    |                                |   | • UTY-KXGC                                      |   |
| Half concealed kit               | <br>Used to half conceal a floor type indoor unit in the wall. |  |  |   |                |                |                       |                    |                    |                |                             |                                |   |   |   |                                   |                      |               |                    |                                |   | • UTR-STA                                       |   |
| L-type piping kit                |  |  |  |   |                |                |                       |                    |                    |                |                             |                                |   |   |   |                                   |                      |               |                    |                                |   | • UTP-FX24A (18/22/24), UTP-FX35A (30/36/45/54) |   |

# Optional parts list for VRF



| Type                                | Refrigerant      | Indoor unit                          |                       |                                  |                                      |                                      |                 |                                  |                          |                          |                      |                      |                              | Indoor unit                  |                          |                          |                              |                              |                |                  |   |   |  | V-IV Series |  |
|-------------------------------------|------------------|--------------------------------------|-----------------------|----------------------------------|--------------------------------------|--------------------------------------|-----------------|----------------------------------|--------------------------|--------------------------|----------------------|----------------------|------------------------------|------------------------------|--------------------------|--------------------------|------------------------------|------------------------------|----------------|------------------|---|---|--|-------------|--|
|                                     |                  | Cassette                             |                       |                                  |                                      | Slim type                            |                 | Large type                       |                          | Duct                     |                      |                      |                              | Duct                         |                          | Floor                    |                              | Ceiling                      |                | Wall-mounted     |   |   |  |             |  |
|                                     |                  | One-way flow                         | 3D flow               | Compact grid type/ Standard type |                                      | Circular flow                        |                 | Mini (With drain pump)           | Low static pressure duct |                          |                      | High Efficiency      | Normal                       | Normal                       | -                        | external EEV             | Floor/Ceiling                | Ceiling                      | -              | external EEV     | - | - |  |             |  |
|                                     |                  |                                      |                       | High Efficiency                  | High Efficiency                      | High Efficiency                      | High Efficiency |                                  | High Efficiency          | High Efficiency          | High Efficiency      |                      |                              |                              |                          |                          |                              |                              |                |                  |   |   |  |             |  |
| 004/005/007/009/012/014/018/024GLEH | AUXS 018/024GLEH | AUXB 004/007/009/012/014/018/024GLEH | AUXN 009/012/014/HLAH | AUXM 018/024/030GLEH             | AUXK 018/024/030/034/036/045/054GLEH | ARXK 004/007/009/012/014/018/024GLGH | ARXD 04GALH     | ARXD 007/009/012/014/018/024GLEH | ARXP 018/030GLFH         | ARXA 024/030/036/045GLEH | ARXC 036/045/060GTEH | ARXC 072/090/096GTEH | AGYA 004/007/009/012/014GCGH | AGYE 004/007/009/012/014GCEH | ABYA 012/014/018/024GTEH | ABYA 030/036/045/054GTEH | ASYA 004/007/009/012/014GCGH | ASYE 004/007/009/012/014GCEH | ASYA 18/24GBCH | ASYA 030/034GTEH |   |   |  |             |  |
| Human sensor kit                    |                  |                                      |                       |                                  |                                      |                                      |                 |                                  |                          |                          |                      |                      |                              |                              |                          |                          |                              |                              |                |                  |   |   |  |             |  |
| Remote sensor unit                  |                  |                                      |                       |                                  |                                      |                                      |                 |                                  |                          |                          |                      |                      |                              |                              |                          |                          |                              |                              |                |                  |   |   |  |             |  |
| Cassette grille                     |                  |                                      |                       |                                  |                                      |                                      |                 |                                  |                          |                          |                      |                      |                              |                              |                          |                          |                              |                              |                |                  |   |   |  |             |  |
| Auto louver grille kit              |                  |                                      |                       |                                  |                                      |                                      |                 |                                  |                          |                          |                      |                      |                              |                              |                          |                          |                              |                              |                |                  |   |   |  |             |  |
| Silver ion filter                   |                  |                                      |                       |                                  |                                      |                                      |                 |                                  |                          |                          |                      |                      |                              |                              |                          |                          |                              |                              |                |                  |   |   |  |             |  |
| Long-life filter                    |                  |                                      |                       |                                  |                                      |                                      |                 |                                  |                          |                          |                      |                      |                              |                              |                          |                          |                              |                              |                |                  |   |   |  |             |  |
| Flange                              |                  |                                      |                       |                                  |                                      |                                      |                 |                                  |                          |                          |                      |                      |                              |                              |                          |                          |                              |                              |                |                  |   |   |  |             |  |
| Drain Pump Unit                     |                  |                                      |                       |                                  |                                      |                                      |                 |                                  |                          |                          |                      |                      |                              |                              |                          |                          |                              |                              |                |                  |   |   |  |             |  |
| Wide Panel                          |                  |                                      |                       |                                  |                                      |                                      |                 |                                  |                          |                          |                      |                      |                              |                              |                          |                          |                              |                              |                |                  |   |   |  |             |  |
| Panel spacer                        |                  |                                      |                       |                                  |                                      |                                      |                 |                                  |                          |                          |                      |                      |                              |                              |                          |                          |                              |                              |                |                  |   |   |  |             |  |
| Fresh air intake kit*1              |                  |                                      |                       |                                  |                                      |                                      |                 |                                  |                          |                          |                      |                      |                              |                              |                          |                          |                              |                              |                |                  |   |   |  |             |  |
| Air outlet shutter plate:           |                  |                                      |                       |                                  |                                      |                                      |                 |                                  |                          |                          |                      |                      |                              |                              |                          |                          |                              |                              |                |                  |   |   |  |             |  |
| Insulation kit for high humidity    |                  |                                      |                       |                                  |                                      |                                      |                 |                                  |                          |                          |                      |                      |                              |                              |                          |                          |                              |                              |                |                  |   |   |  |             |  |
| Half concealed kit                  |                  |                                      |                       |                                  |                                      |                                      |                 |                                  |                          |                          |                      |                      |                              |                              |                          |                          |                              |                              |                |                  |   |   |  |             |  |
| External power supply unit          |                  |                                      |                       |                                  |                                      |                                      |                 |                                  |                          |                          |                      |                      |                              |                              |                          |                          |                              |                              |                |                  |   |   |  |             |  |
| Pressure sensor kit                 |                  |                                      |                       |                                  |                                      |                                      |                 |                                  |                          |                          |                      |                      |                              |                              |                          |                          |                              |                              |                |                  |   |   |  |             |  |
| Gas sensor kit                      |                  |                                      |                       |                                  |                                      |                                      |                 |                                  |                          |                          |                      |                      |                              |                              |                          |                          |                              |                              |                |                  |   |   |  |             |  |





# Separation tube



## For SPLIT/MULTI-SPLIT/SIMULTANEOUS MULTI-SPLIT

|   |   |
|---|---|
| <p>Separation tube</p> <p>UTP-SX236A / UTP-SX254A<br/>For 3-phase simultaneous multi-split</p> <p>UTP-SX272A<br/>For Simultaneous multi-split Twin/Triple/Double Twin</p> | <p>UTP-SX354A<br/>For 3-phase simultaneous multi-split</p> <p>UTP-SX372A<br/>For Simultaneous multi-split Twin/Triple/Double Twin</p> |
|---|---|



## for VRF

|  |  |  |  |
|--|--|--|--|
| <p>Separation tube</p> <p>UTP-AX054A</p> <p>Gas pipe</p> <p>Liquid pipe</p>            | <p>UTP-AX090A</p> <p>Gas pipe</p> <p>Liquid pipe</p>                                   | <p>UTP-AX180A</p> <p>Gas pipe</p> <p>Liquid pipe</p>                                   | <p>UTP-AX567A</p> <p>Gas pipe</p> <p>Liquid pipe</p> |
| <p>UTP-BX090A</p> <p>Suction Gas pipe</p> <p>Discharge Gas pipe</p> <p>Liquid pipe</p> | <p>UTP-BX180A</p> <p>Suction Gas pipe</p> <p>Discharge Gas pipe</p> <p>Liquid pipe</p> | <p>UTP-BX567A</p> <p>Suction Gas pipe</p> <p>Discharge Gas pipe</p> <p>Liquid pipe</p> | <p>UTP-LX180A<br/>For DX kit</p>                     |

## Header

|   |   |   |   |
|---|---|---|---|
| <p>UTR-H0906L / UTR-H1806L</p> <p>Gas pipe</p> <p>Liquid pipe</p> | <p>UTR-H0908L / UTR-H1808L</p> <p>Gas pipe</p> <p>Liquid pipe</p> | <p>UTP-J0906A / UTP-J1806A</p> <p>Suction gas pipe</p> <p>Discharge gas pipe</p> <p>Liquid pipe</p> | <p>UTP-J0908A / UTP-J1808A</p> <p>Suction gas pipe</p> <p>Discharge gas pipe</p> <p>Liquid pipe</p> |
|---|---|---|---|

## Outdoor unit branch kit


UTP-CX567A

Gas Pipe

Liquid Pipe

## Separation tube for RB unit

|  |  |  |
|--|--|--|
| <p>UTP-DX567A</p> <p>Suction Gas Pipe</p> <p>Discharge Gas Pipe</p> <p>Liquid Pipe</p> | <p>UTP-EX060A</p> <p>Gas Pipe</p> <p>Liquid Pipe</p> | <p>UTP-EX096A</p> <p>Gas Pipe</p> <p>Liquid Pipe</p> |
|--|--|--|



## for VRF

|  |   |  |   |
|--|---|--|---|
| <p>EV kit</p> <p>Model name <math>\leq</math> 09: UTR-EV09XB<br/>Model name <math>\geq</math> 12: UTR-EV14XB<br/>for compact wall-mounted type</p> | <p><b>NEW</b> Model name <math>\leq</math> 09: UTR-EV09XC<br/>Model name <math>\leq</math> 12: UTR-EV14XC<br/>for R32 VRF wall-mounted type</p> | <p><b>NEW</b> UTP-GX027A<br/>for R32 VRF indoor unit</p> | <p><b>NEW</b> UTP-GX060A<br/>for R32 VRF outdoor unit</p> |
|--|---|--|---|

## RB unit

|   |  |  |  |
|---|--|--|--|
| <p>UTP-RX01AH / UTP-RX01BH / UTP-RX01CH<br/>Single type</p> | <p>UTP-RX04BH<br/>Multi-split type</p> | <p>UTP-RX08AH<br/>Multi-split type</p> | <p>UTP-RX12AH<br/>Multi-split type</p> |
|---|--|--|--|

## Specifications

### Separation tube

|  |              |              |              |              |
|--|--------------|--------------|--------------|--------------|
| Model name                                 | UTP-AX054A   | UTP-AX090A   | UTP-AX180A   | UTP-AX567A   |
| Total cooling capacity of indoor unit (kW) | 19.6 or less | 28.0 or less | 28.1 to 56.0 | 56.1 or more |
| Model name                                 | UTP-BX090A   | UTP-BX180A   | UTP-BX567A   |              |
| Total cooling capacity of indoor unit (kW) | 28.0 or less | 28.1 to 56.0 | 56.1 or more |              |

### Header

|  |              |              |              |
|--|--------------|--------------|--------------|
| Model name                                 | 3-6 Branches | UTR-H0906L   | UTR-H1806L   |
|  | 3-8 Branches | UTR-H0908L   | UTR-H1808L   |
| Total cooling capacity of indoor unit (kW) |              | 28.0 or less | 28.1 to 56.0 |
| Model name                                 | 3-6 Branches | UTP-J0906A   | UTP-J1806A   |
|  | 3-8 Branches | UTP-J0908A   | UTP-J1808A   |
| Total cooling capacity of indoor unit (kW) |              | 28.0 or less | 28.1 to 56.0 |

### Outdoor unit branch kit

|                         |                       |                        |
|-------------------------|-----------------------|------------------------|
| Model name              | UTP-CX567A (for V-IV) | UTP-DX567A (for VR-IV) |
| Number of outdoor units | 2 outdoor units       | 1                      |
|                         | 3 outdoor units       | 2                      |

### EV kit

|                   |   |   |                            |  |
|-------------------|---|---|----------------------------|--|
| Model name        | UTR-EV09XB                                | UTR-EV14XB                                | UTR-EV09XC                 | UTR-EV14XC   |
| Application model | ASYE004GCEH<br>ASYE007GCEH<br>ASYE009GCEH | AGYE004GCEH<br>AGYE007GCEH<br>AGYE009GCEH | ASYE012GCEH<br>AGYE014GCEH | ASYE004HCAH<br>ASYE005HCAH<br>ASYE007HCAH<br>ASYE009HCAH |

### RB unit

|   |             |            |            |            |            |            |                  |               |               |                 |               |                 |                 |
|---|-------------|------------|------------|------------|------------|------------|------------------|---------------|---------------|-----------------|---------------|-----------------|-----------------|
| Type  | Single type |            |            |            |            |            | Multi-split type |               |               |                 |               |                 |                 |
| Model name  | UTP-RX01AH  | UTP-RX01BH | UTP-RX01CH | UTP-RX04BH | UTP-RX08AH | UTP-RX12AH |                  |               |               |                 |               |                 |                 |
| Power source  | 230/1/50    |            |            |            |            |            |                  |               |               |                 |               |                 |                 |
| Input power   | W           |            |            |            |            |            | 17               | 24            | 31            | 96              | 136           | 204             |                 |
| Number of branches  |             |            |            |            |            |            | 1                | 1             | 1             | 4               | 8             | 12              |                 |
| Maximum capacity of connectable indoor units (Q)            | kW          |            |            |            |            |            | Q $\leq$ 8.0     | Q $\leq$ 18.0 | Q $\leq$ 28.0 | Q $\leq$ 56.1*  | Q $\leq$ 72.0 | Q $\leq$ 95.0   |                 |
| Maximum capacity of connectable indoor units per branch (Q) | kW          |            |            |            |            |            | Q $\leq$ 8.0     | Q $\leq$ 18.0 | Q $\leq$ 28.0 | Q $\leq$ 18.0   | Q $\leq$ 8.0  | Q $\leq$ 8.0    |                 |
| Maximum Connectable Indoor Units per Branch                 |             |            |            |            |            |            | 3                | 8             | 8             | 8               | 7             | 7               |                 |
| Dimensions (H x W x D)                                      | mm          |            |            |            |            |            | 198 x 298 x 268  |               |               | 260 x 658 x 428 |               | 298 x 660 x 618 | 298 x 990 x 618 |

\*1: When two RB units are connected in series (8 branches in total), the maximum capacity of the connectable indoor units is up to 56.0 kW.

### Shut off valve kit

|   |            |  |                 |
|---|------------|--|-----------------|
| Model name  | UTP-GX027A |  | UTP-GX060A      |
| Power source  | 230/1/50   |  | 230/1/50        |
| Input power   | W          |  | 24              |
| Number of branches  |            |  | 1               |
| Maximum number of connectable Expansion kit                 | kW         |  | 4               |
| Maximum capacity of connectable indoor units (Q)            | kW         |  | Q $\leq$ 8.0    |
| Maximum capacity of Connectable Indoor Units per Branch (Q) | kW         |  | Q $\leq$ 8.0    |
| Dimensions (H x W x D)                                      | mm         |  | 250 x 540 x 267 |

## Residential AIR TO WATER

- W-002 AIR TO WATER Overview
- W-004 AIR TO WATER Lineup
- W-006 Benefits
- W-008 Home Heating & Domestic Hot Water Supply
- W-010 High-Efficiency Technology
- W-012 Split Type
  - Comfort Series
  - Super High Power Series
  - High Power Series
- W-018 Split DHW Integrated Type
  - Comfort Series
  - Super High Power Series
  - High Power Series
- W-024 Control Overview
- W-026 Comfort Control
- W-028 System Configuration
- W-030 Case Studies
- W-032 Simple installation
  - Easy Installation & Maintenance
- W-034 Installation requirements
- W-035 AIR TO WATER Optional Parts



AIR TO WATER  
Residential



FUJITSU GENERAL LIMITED



# AIR TO WATER Overview


## Solutions that meet a variety of needs

Water heated by Air to water using clean energy is delivered reliably and comfortably throughout the house, including the living room.



## Heat Pump System Framework

Heat is absorbed from the atmosphere by expanding the refrigerant. Higher-temperature heat is generated by compressing the refrigerant, and the indoor unit transfers that heat to the water.

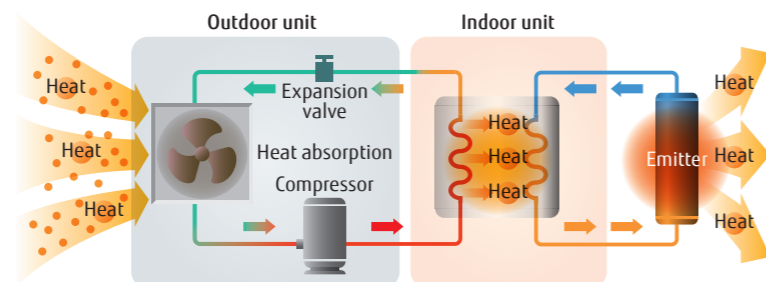


## Our Goal

### Decarbonisation

European Commission is committed to decarbonisation and has a national target of "Net Zero" carbon emissions by 2050.

We need to reduce carbon emissions with green technology products and increase carbon absorption by working to extend nature.

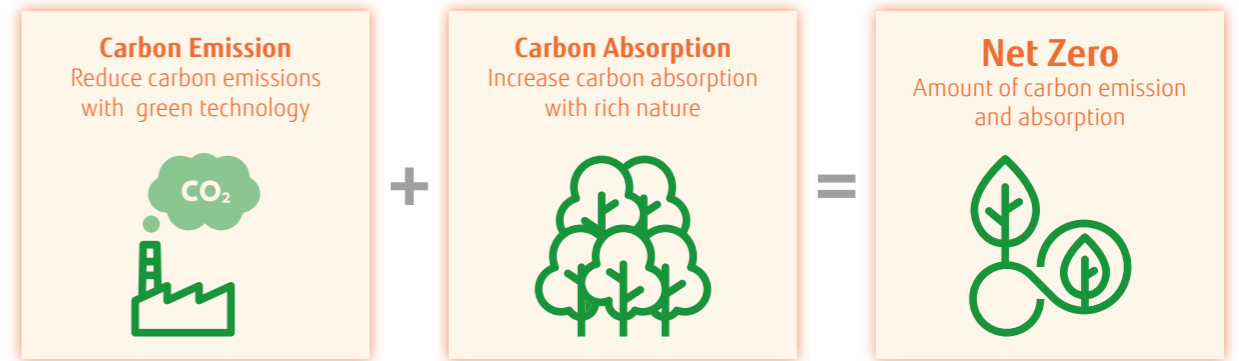


Fujitsu General's ATW system will provide the best solutions that are friendly to the environment and people with products conscious of decarbonisation.

## The Choice of ATW


### Optimized refrigerant cycle operation

Super High Power and High Power Series deliver high performance and efficiency with twin sensors and hot water heating technology.

#### Split Type

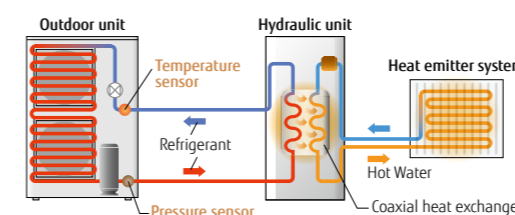


#### Split DHW Integrated Type

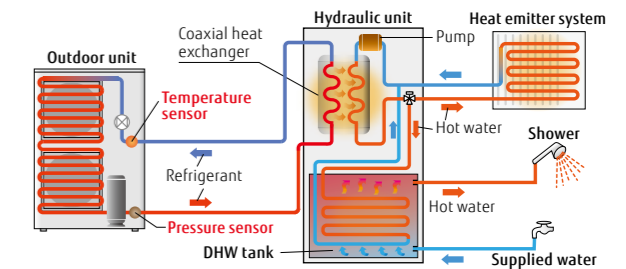

### What is a heat pump?


A heat pump extracts heat energy from the atmosphere. It requires only 1 kWh of electricity to generate 3 to 5 kWh of thermal energy.

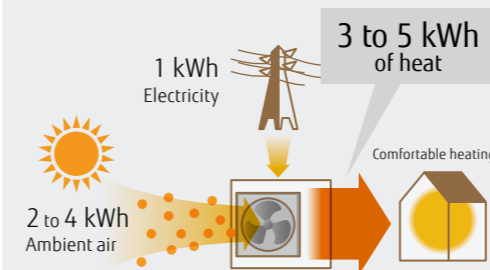

### Primary energy usage reduced substantially

Proportion of primary energy converted into heating energy is 100%

#### Primary Energy Consumption\*

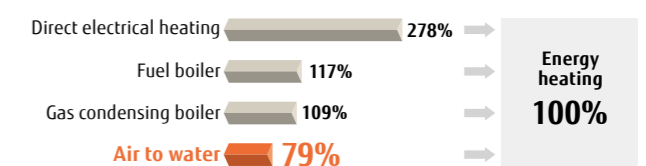

\* The amount of electricity loss varies according to the power plant. Typical energy efficiency of a power plant: 36%

# AIR TO WATER Lineup



| Type           | Split Type  |                          |  |                        |  |                           | Split DHW Integrated Type  |                          |  |                          |  |                           |                           |             |
|----------------|---|--------------------------|--|------------------------|--|---------------------------|--|--------------------------|--|--------------------------|--|---------------------------|---------------------------|-------------|
|                | Comfort Series  |                          | Super High Power Series  |                        | High Power Series  |                           | Comfort Series   |                          | Super High Power Series  |                          | High Power Series  |                           |                           |             |
| Hydraulic unit |   |                          |  |                        |  |                           |  |                          |  |                          |  |                           |                           |             |
| Outdoor unit   |   |                          |  |                        |  |                           |  |                          |  |                          |  |                           |                           |             |
| Capacity range | 5/6 kW  | 8 kW                     | 10 kW  | 16 kW                  | 15/17 kW   | 11/14 kW                  | 11/14/16 kW  | 5/6 kW                   | 8 kW   | 10 kW                    | 16 kW  | 15/17 kW                  | 11/14 kW                  | 11/14/16 kW |
| System outline | <ul style="list-style-type: none"> <li>Supplies 55°C hot water even when the outdoor temperature is -10°C.</li> <li>Heating and DHW supply in one system.*</li> <li>Equipped with additional electric heater for backup</li> <li>Up to two independent control circuits.*</li> <li>Cooling operation is possible.*</li> <li>Operating range is -20 to 35°C.</li> <li>Can be used with a variety of heating systems, including underfloor heating and radiators.*</li> </ul> |                          | <ul style="list-style-type: none"> <li>Supplies 60°C hot water even when the outdoor temperature is -20°C.</li> <li>Supplies 55°C hot water even when the outdoor temperature is -22°C.</li> <li>Can be used with a variety of heating systems, including underfloor heating and radiators.*</li> <li>Heating and DHW supply in one system.*</li> <li>Equipped with additional electric heater for backup</li> <li>Up to two independent control circuits.*</li> <li>Cooling operation is possible.*</li> <li>Operating range is -25 to 35°C.</li> </ul> |                        | <ul style="list-style-type: none"> <li>Supplies 60°C hot water even when the outdoor temperature is -20°C.</li> <li>Can be used with a variety of heating systems, including underfloor heating and radiators.*</li> <li>Heating and DHW supply in one system.*</li> <li>Up to two independent control circuits.*</li> <li>Cascade connection is possible for up to three systems.*</li> <li>Cooling operation is possible.*</li> <li>Operating range is -25 to 35°C.</li> </ul> |                           | <ul style="list-style-type: none"> <li>Supplies 55°C hot water even when the outdoor temperature is -10°C.</li> <li>Heating and DHW supply in one system.</li> <li>Equipped with additional electric heater for backup</li> <li>Up to two independent control circuits.*</li> <li>Cooling operation is possible.*</li> <li>Operating range is -20 to 35°C.</li> <li>Can be used with a variety of heating systems, including underfloor heating and radiators.*</li> </ul> |                          | <ul style="list-style-type: none"> <li>Supplies 60°C hot water even when the outdoor temperature is -20°C.</li> <li>Supplies 55°C hot water even when the outdoor temperature is -22°C.</li> <li>Can be used with a variety of heating systems, including underfloor heating and radiators.*</li> <li>Space saving heating and DHW supply in a single Hydraulic unit</li> <li>Equipped with additional electric heater for backup</li> <li>Up to two independent control circuits.*</li> <li>Cooling operation is possible.*</li> <li>Operating range is -25 to 35°C.</li> </ul> |                          | <ul style="list-style-type: none"> <li>Supplies 60°C hot water even when the outdoor temperature is -20°C.</li> <li>Can be used with a variety of heating systems, including underfloor heating and radiators.*</li> <li>Space saving heating and DHW supply in a single Hydraulic unit</li> <li>Up to two independent control circuits.*</li> <li>Cooling operation is possible.*</li> <li>Operating range is -25 to 35°C.</li> </ul> |                           |                           |             |
| Power source   | Single phase, ~230 V, 50 Hz   |                          | Single phase, ~230 V, 50 Hz  | 3-phase, ~400 V, 50 Hz | Single phase, ~230 V, 50 Hz  | 3-phase, ~400 V, 50 Hz    | Single phase, ~230 V, 50 Hz  |                          | Single phase, ~230 V, 50 Hz  | 3-phase, ~400 V, 50 Hz   | Single phase, ~230 V, 50 Hz  | 3-phase, ~400 V, 50 Hz    |                           |             |
| Capacity       | 5 kW  | WSYA050ML3<br>WOYA060KLT |  |                        |  |                           |  | WGYA050ML3<br>WGYA060KLT |  |                          |  |                           |                           |             |
|                | 6 kW  | WSYA080ML3<br>WOYA060KLT |  |                        |  |                           |  | WGYA080ML3<br>WGYA060KLT |  |                          |  |                           |                           |             |
|                | 8 kW  | WSYA080ML3<br>WOYA080KLT |  |                        |  |                           |  | WGYA080ML3<br>WGYA080KLT |  |                          |  |                           |                           |             |
|                | 10 kW   | WSYA100ML3<br>WOYA100KLT |  |                        |  |                           |  | WGYA100ML3<br>WGYA100KLT |  |                          |  |                           |                           |             |
|                | 11 kW   |                          |  |                        | WSYG140DG6<br>WOYG112LHT   | WSYK160DG9<br>WOYK112LCTA |  |                          |  |                          | WGYK140DG6<br>WGYK112LHT   | WGYK160DG9<br>WGYK112LCTA |                           |             |
|                | 14 kW   |                          |  |                        | WSYG140DG6<br>WOYG140LCTA  | WSYK160DG9<br>WOYK140LCTA |  |                          |  |                          | WGYK140DG6<br>WGYK140LCTA  | WGYK160DG9<br>WGYK140LCTA |                           |             |
|                | 15 kW   |                          |  |                        |  |                           |  |                          |  |                          | WGYK170DJ9<br>WGYK150LJL   |                           |                           |             |
|                | 16 kW   |                          |  |                        | WSYG160DJ6<br>WOYG160LJL   |                           | WSYK160DG9<br>WOYK160LCTA  |                          |  |                          | WGYK160DJ6<br>WGYK160LJL   |                           | WGYK160DG9<br>WGYK160LCTA |             |
| 17 kW          |   |                          |  |                        |  |                           |  |                          |  | WGYK170DJ9<br>WGYK170LJL |  |                           |                           |             |
| Approval       |   |                          |  |                        |  |                           |  |                          |  |                          |  |                           |                           |             |
|                |   |                          |  |                        |  |                           |  |                          |  |                          |  |                           |                           |             |


\* Please refer to page W-038 and W-039 for optional parts information.

# Benefits

## Less CO<sub>2</sub> Emissions

Air to water is an environmentally friendly system that emits substantially less carbon dioxide than conventional gas and hydrocarbon combustion systems.

### Average annual CO<sub>2</sub> emissions

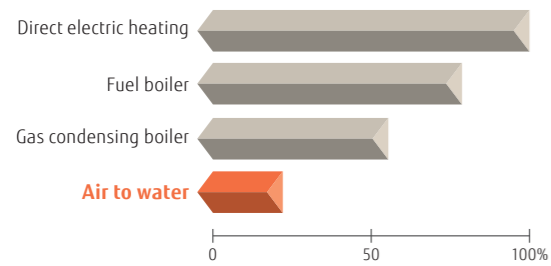

\*Calculations based on energy efficiency data provided by the European Programme for Energy Efficiency in EU-27: 89% for fuel boilers; 93% for gas boiler

## Clean and Healthy

As an Air to water system does not use a burner to heat water, it does not produce NO<sub>x</sub> or other harmful substances.




Environmentally friendly heating system



## Low Running Cost

High-efficiency heat pump technology keeps the running cost of an Air to water system.

### Average annual running cost

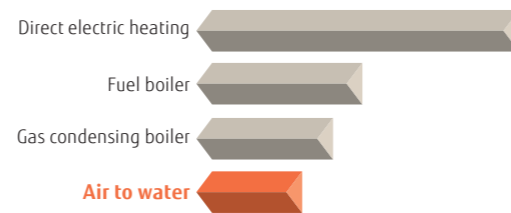

\*The running cost may vary depending on a system's installation, geographical location, and operating conditions.


## Easy Installation and Maintenance

All components are built into a compact outdoor unit or a Hydraulic unit.



**Well-designed Hydraulic unit**  
The sophisticated arrangement of Hydraulic units makes piping and maintenance work easy.

## Energy Efficiency Standards Product labels

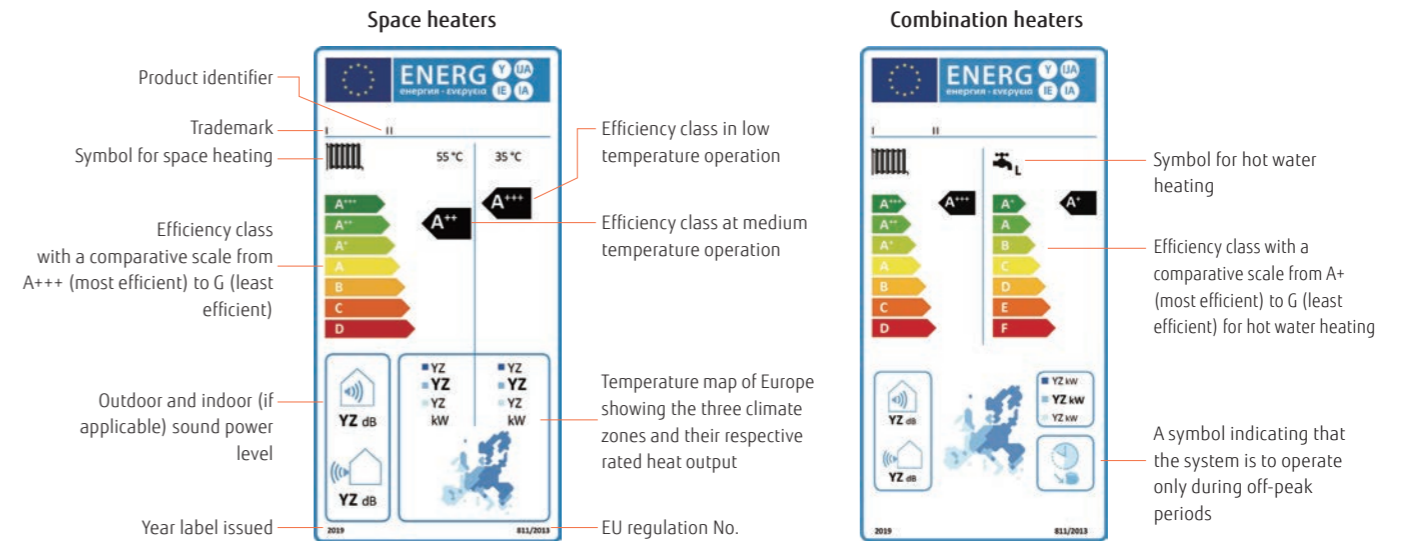

### The Ecodesign Directive Lot 1 Regulation 813/2013

The Ecodesign directive defines a regulatory framework for improving the environmental performance of energy-related products (ErP) through design.

Since September 26, 2015, the Ecodesign Directive has applied to space heaters, including heat pumps and fossil fuel fired boilers, combination heaters for space and hot water heating, water heaters, and water storage tanks.

All of these products must meet minimum requirements for energy efficiency\*<sup>1</sup> and maximum sound power level. The minimum energy efficiency class were raised on September 26, 2017, and the maximum sound levels were lowered on September 26, 2018.

\*1: Energy efficiency is expressed in terms of seasonal space heating efficiencies (η<sub>s</sub>). The value is based upon the Seasonal Coefficient of Performance (SCOP).

### The Energy Labelling Directive (EU) No. 811/2013

Energy label is intended to enable consumers to make direct comparisons of energy use and product features. All labels should indicate the product identifier, efficiency class, sound power level, and heat output. Heat generators are rated A+++ to D. There are two different product labels. One for space heaters and one for combination heaters.

### Seasonal space heating Energy efficiency class

| Class | Except low temp. HP 55°C   | Low temp. HP 35°C          |
|-------|----------------------------|----------------------------|
| A+++  | η <sub>s</sub> ≥ 150       | η <sub>s</sub> ≥ 175       |
| A++   | 125 ≤ η <sub>s</sub> < 150 | 150 ≤ η <sub>s</sub> < 175 |
| A+    | 98 ≤ η <sub>s</sub> < 125  | 123 ≤ η <sub>s</sub> < 150 |
| A     | 90 ≤ η <sub>s</sub> < 98   | 115 ≤ η <sub>s</sub> < 123 |
| B     | 82 ≤ η <sub>s</sub> < 90   | 107 ≤ η <sub>s</sub> < 115 |
| C     | 75 ≤ η <sub>s</sub> < 82   | 100 ≤ η <sub>s</sub> < 107 |
| D     | 36 ≤ η <sub>s</sub> < 75   | 61 ≤ η <sub>s</sub> < 100  |
| E     | 34 ≤ η <sub>s</sub> < 36   | 59 ≤ η <sub>s</sub> < 61   |
| F     | 30 ≤ η <sub>s</sub> < 34   | 55 ≤ η <sub>s</sub> < 59   |
| G     | η <sub>s</sub> < 30        | η <sub>s</sub> < 55        |

### EHPA Quality Label



Fujitsu General's Air to water<sup>2</sup> has acquired the EHPA Quality Label<sup>3</sup> through testing in accordance with the International Standards EN14511 and EN17025. The EHPA Quality Label<sup>3</sup> is a label that shows the end-consumer a quality heat pump unit on the market.

\*2: 3-phase High Power Series only  
\*3: Learn more about the validity of the mark at [www.ehpa.org/quality/quality-label/](http://www.ehpa.org/quality/quality-label/)

### SG ready Label



SG ready is a label issued to heat pumps and their control technologies that meet the requirements set by BWP<sup>4</sup>, and technologies that conform to their standards can be integrated into a smart grid. SG ready labeled heat pumps receive signals from the power grid and PV systems with regard to energy and renewable energy sources such as wind, solar, and water. All of Fujitsu General's new heat pump series are SG ready compatible.

\*4: BWP: Bundesverband Wärmepumpe e. V (Federal German Heat Pump Association)

### The CEN Heat Pump KEYMARK




The Heat Pump KEYMARK is a full certificate supporting the quality of heat pumps in the European market. The Heat Pump KEYMARK is a voluntary, independent, European certification mark (ISO Type 5 Certification) for all heat pumps, combination heat pumps, and hot water heaters (as covered by Ecodesign, EU Regulation 813/2013 and 814/2013). Fujitsu General's Air to water<sup>5</sup> has acquired the KEYMARK certificate<sup>6</sup>.

\*5: R32 refrigerant comfort model only  
\*6: Learn more about the validity of the mark at [www.heatpumpkeymark.com/about/](http://www.heatpumpkeymark.com/about/)

# Home Heating & Domestic Hot Water Supply

A wide range of products to suit regional characteristics, family structures, and usage patterns. We provide a variety of products to meet the needs of customers from the heating-centered High Power Series to the reasonably priced Compact Series.

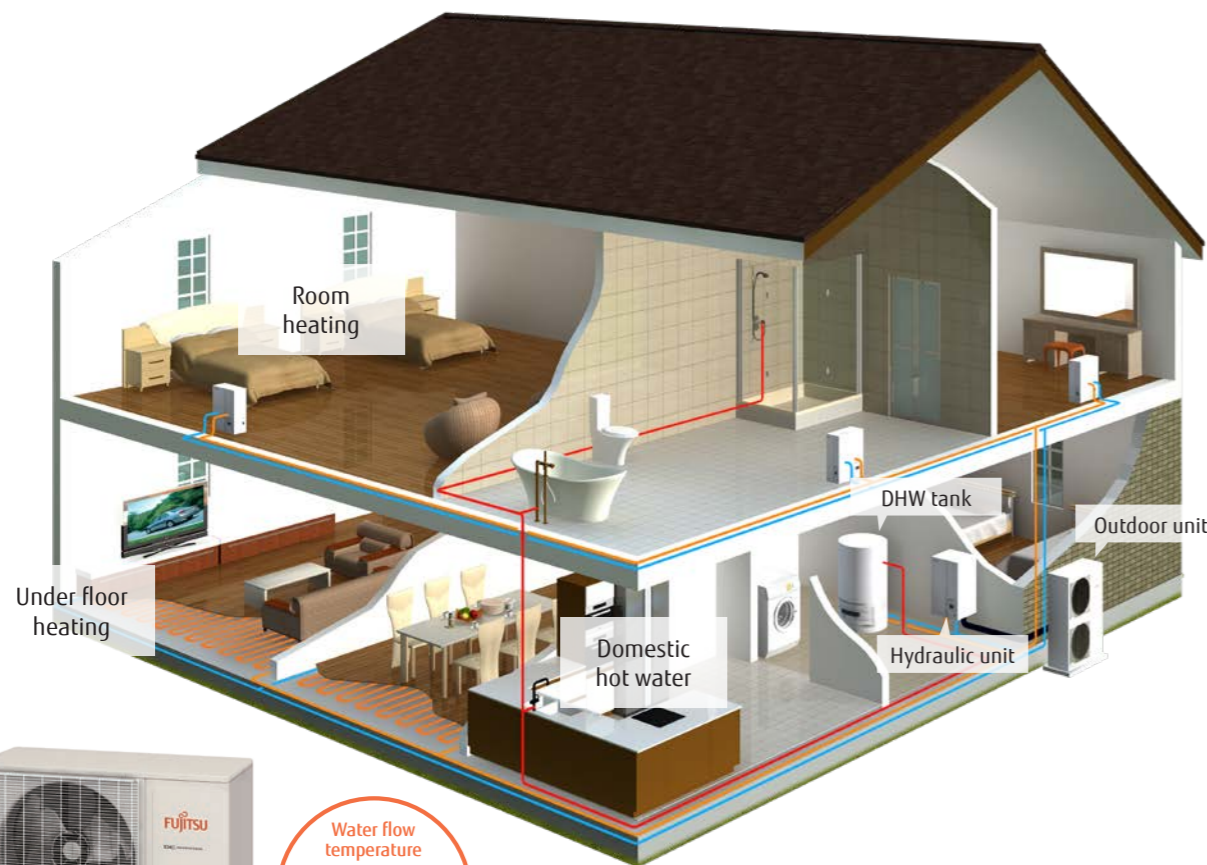

Water flow temperature  
**60°C**

Super High Power Series  
High Power Series

## High water flow temperature

The temperature of water flow can be maintained at 60°C without using a backup heater, even when the outdoor temperature drops to -20°C.

## Floor heating and domestic hot water supply

Outdoor units and hydraulic indoor units can be installed flexibly and easily. Hydraulic units installed inside the house prevent the circulating water from freezing. More units can be cascaded together to provide a greater heating capacity with greater flexibility.\*

\*1: High Power Series only



## Adopting R32 refrigerant

R32 refrigerant is an environmentally friendly refrigerant with a significantly lower Global Warming Potential (GWP) than conventional refrigerants.



300 Liters


## + DHW tank

A DHW tank (optional) can be connected to supply hot water.

## + Boiler

By combining with an existing boiler, powerful heating can be achieved even at low outdoor temperature.

\* Please refer to page W-038 and W-039 for optional parts information.

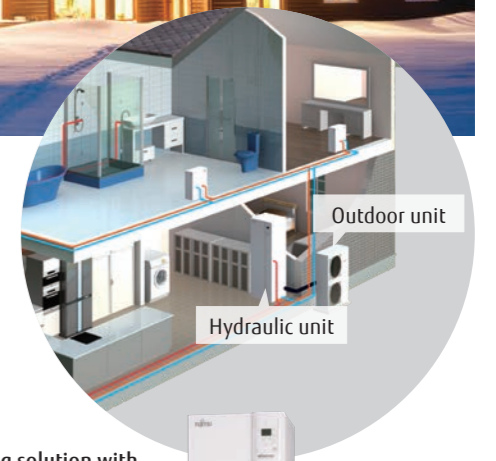


Stylish space saving solution with built-in DHW tank



## Built-in DHW tank saves a great deal of space.

Existing boilers can be replaced easily. A higher heating capacity can be achieved with the flexibility to cascade more units.

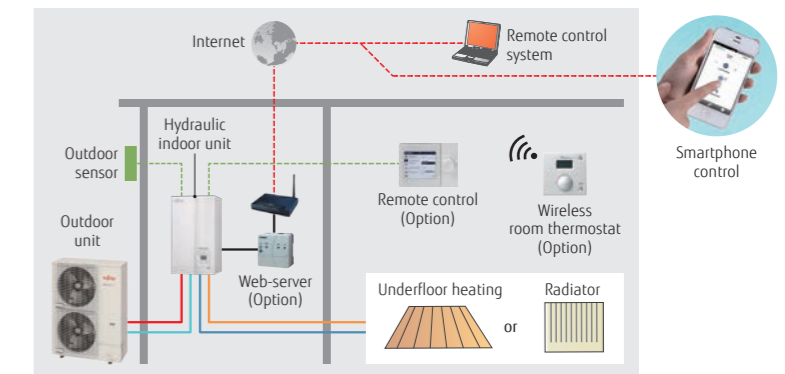

## Smart control

To meet the diverse needs of customers, we offer a variety of control options, such as individual control and remote control options.

# High-Efficiency Technology


## Twin-Rotary Compressor





### For Outdoor unit

#### Twin-Rotary Compressor with Linear Control Injection Port


The compressor achieves a high condensing temperature without overheating the discharge gas temperature due to the Linear control injection process used during compression. This makes the condensing temperature higher than in a normal circuit. Higher water temperatures can be achieved by controlling the injection volume according to usage conditions.

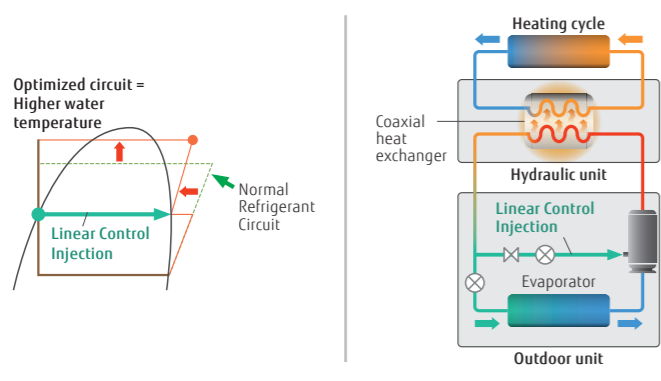

#### DC inverter technology controls temperatures precisely.

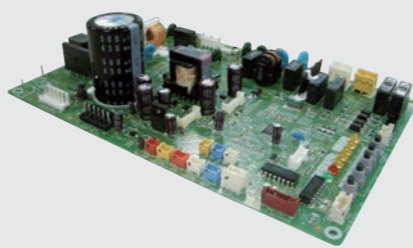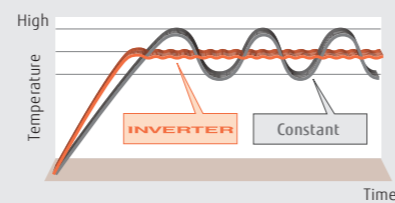

## High-durability coaxial heat exchanger

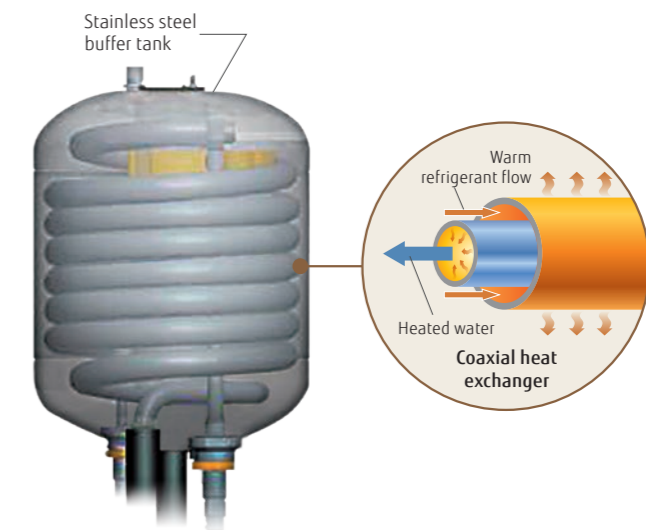

### For Hydraulic unit

#### Stainless steel buffer tank

Heat exchange amount is 25% higher than the previous model. Energy-saving performance has also been improved.

- Anti-corrosion protection
- No flow switch required
- Anti-freeze protection not required

#### Class A Pump

Energy-saving pump with the ability to adjust the flow rate and pressure to a constant level



# Split Type

Comfort Series



**Hydraulic unit:**  
**WSYA050ML3 / WSYA080ML3 /**  
**WSYA100ML3**  
**Outdoor unit:**  
**WOYA060KLT / WOYA080KLT /**  
**WOYA100KLT**



### Specifications

| Model Name                 | Hydraulic unit   |    | WSYA050ML3 |  | WSYA080ML3 |  | WSYA080ML3 |  | WSYA100ML3 |  |
|----------------------------|------------------|----|------------|--|------------|--|------------|--|------------|--|
|                            | Outdoor unit     |    | WOYA060KLT |  | WOYA060KLT |  | WOYA080KLT |  | WOYA100KLT |  |
| <b>Capacity Range</b>      |                  |    | 5          |  | 6          |  | 8          |  | 10         |  |
| 7°C/35°C floor heating *1  | Heating capacity | kW | 4.50       |  | 5.50       |  | 7.50       |  | 9.50       |  |
|                            | Input power      |    | 0.949      |  | 1.18       |  | 1.69       |  | 2.11       |  |
|                            | COP              |    | 4.74       |  | 4.65       |  | 4.43       |  | 4.50       |  |
| 2°C/35°C floor heating *1  | Heating capacity | kW | 4.50       |  | 5.30       |  | 6.30       |  | 9.30       |  |
|                            | Input power      |    | 1.33       |  | 1.65       |  | 1.96       |  | 3.08       |  |
|                            | COP              |    | 3.39       |  | 3.22       |  | 3.21       |  | 3.02       |  |
| -7°C/35°C floor heating *1 | Heating capacity | kW | 4.40       |  | 5.00       |  | 5.70       |  | 8.90       |  |
|                            | Input power      |    | 1.59       |  | 1.90       |  | 2.13       |  | 3.36       |  |
|                            | COP              |    | 2.76       |  | 2.63       |  | 2.68       |  | 2.65       |  |
| -7°C/55°C Radiator *1      | Heating capacity | kW | 3.90       |  | 4.25       |  | 5.30       |  | 8.00       |  |
|                            | Input power      |    | 2.11       |  | 2.25       |  | 2.79       |  | 4.10       |  |
|                            | COP              |    | 1.85       |  | 1.89       |  | 1.90       |  | 1.95       |  |

### Space heating characteristics\*2

| Temperature application                                    | °C             | 55    | 35    | 55    | 35    | 55    | 35    | 55    | 35    |
|--|----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Energy efficiency class                                    |                | A++   | A+++  | A++   | A+++  | A++   | A+++  | A++   | A+++  |
| Rated heat output (P <sub>rated</sub> )                    | kW             | 5     | 5     | 5     | 5     | 6     | 7     | 8     | 9     |
| Seasonal space heating energy efficiency (η <sub>s</sub> ) | %              | 125   | 175   | 125   | 175   | 128   | 177   | 130   | 178   |
| Annual energy consumption                                  | kWh            | 3,035 | 2,322 | 3,411 | 2,594 | 3,903 | 2,982 | 5,083 | 3,875 |
| Sound power level*3  | Hydraulic unit | 40    |       | 40    |       | 40    |       | 40    |       |
|  | Outdoor unit   | 57    |       | 57    |       | 60    |       | 62    |       |

### Hydraulic unit specifications

| Power source                   | Single phase, ~230 V, 50 Hz |                 |  |                 |  |                 |  |                 |  |
|--------------------------------|-----------------------------|-----------------|--|-----------------|--|-----------------|--|-----------------|--|
| Dimensions H × W × D           | mm                          | 847 × 450 × 493 |  | 847 × 450 × 493 |  | 847 × 450 × 493 |  | 847 × 450 × 493 |  |
| Weight (Net)                   | kg                          | 47              |  | 47              |  | 47              |  | 47              |  |
| Water circulation              | Min./Max.                   | L/min           |  | 7.6/22.0        |  | 8.5/22.0        |  | 10.0/22.0       |  |
| Buffer tank capacity           | L                           | 16              |  | 16              |  | 16              |  | 16              |  |
| Expansion vessel capacity      | L                           | 8               |  | 8               |  | 8               |  | 8               |  |
| Water flow temperature range   | Max.                        | °C              |  | 55              |  | 55              |  | 55              |  |
| Water pipe connection diameter | Flow/Return                 | mm              |  | Ø25.4/Ø25.4     |  | Ø25.4/Ø25.4     |  | Ø25.4/Ø25.4     |  |
| Backup heater                  | Capacity                    | kW              |  | 3.0             |  | 3.0             |  | 3.0             |  |

### Outdoor unit specifications

| Power source                  | Single phase, ~230 V, 50 Hz     |                 |    |                 |      |                 |      |                 |      |  |
|-------------------------------|---------------------------------|-----------------|----|-----------------|------|-----------------|------|-----------------|------|--|
| Current                       | Max.                            | A               |    | 13.0            |      | 18.0            |      | 19.0            |      |  |
| Dimensions H × W × D          | mm                              | 632 × 799 × 290 |    | 632 × 799 × 290 |      | 716 × 820 × 315 |      | 998 × 940 × 320 |      |  |
| Weight (Net)                  | kg                              | 39              |    | 39              |      | 42              |      | 62              |      |  |
| Refrigerant                   | Type (Global Warming Potential) | R32 (675)       |    | R32 (675)       |      | R32 (675)       |      | R32 (675)       |      |  |
|                               | Charge                          | kg              |    | 0.97            |      | 1.02            |      | 1.63            |      |  |
| Additional refrigerant charge |                                 | g/m             |    | 25              |      | 25              |      | 20              |      |  |
|                               | Diameter                        | Liquid          | mm |                 | 6.35 |                 | 6.35 |                 | 9.52 |  |
| Connection pipe               | Gas                             | mm              |    | 12.70           |      | 12.70           |      | 15.88           |      |  |
|                               | Length                          | Min./Max.       | m  |                 | 3/30 |                 | 3/30 |                 | 3/30 |  |
|                               | Length (Pre-charge)             | m               |    | 15              |      | 15              |      | 20              |      |  |
|                               | Height difference               | Max.            | m  |                 | 20   |                 | 20   |                 | 20   |  |
| Operating range               | Heating                         | °C              |    | -20 to 35       |      | -20 to 35       |      | -20 to 35       |      |  |

\*1: Heating capacity, input power, and COP are measured using the EN14511 standard. Actual usage environments, such as the operating modes of the heating equipment, room temperature, and controller settings, may cause differences in values between those listed in the catalog and the actual performance characteristics.


\*2: Information about ErP can be downloaded from our website at [www.fujitsu-general.com/global/support/downloads/search/](http://www.fujitsu-general.com/global/support/downloads/search/)

\*3: The sound power level values are based on EN12102 standard measurements under EN14825 standard conditions.


### Dimensions

(Unit: mm)


**Outdoor unit:**  
 WOYA060KLT




WOYA080KLT



WOYA100KLT

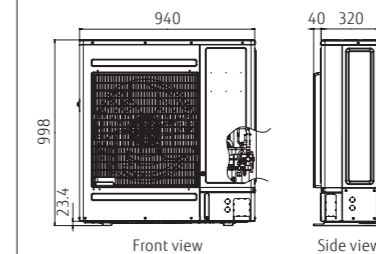

**Hydraulic unit:**  
 WSYA050ML3/WSYA080ML3/WSYA100ML3

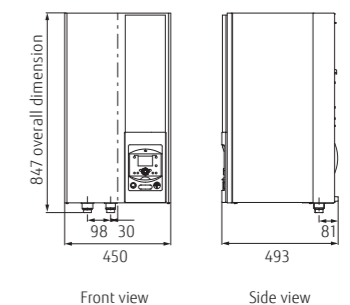

## High water flow temperature

The temperature of water flow is up to 55°C without a backup heater. Hot water supply temperature can be maintained even at -10°C outdoor temperature.

\* If you want to raise the temperature of the water supply to above the maximum temperature, use a backup heater to supplement the primary heater.



## High COP

Heat pumps of ATW Systems work more efficiently and consume less energy than conventional heating systems.


Energy efficiency class



\*Temperature application: Heating temp. 35°C

### Seasonal space heating energy efficiency (η<sub>s</sub>)

Conditions: Outdoor Temp. 7°C Heating Temp. 35°C

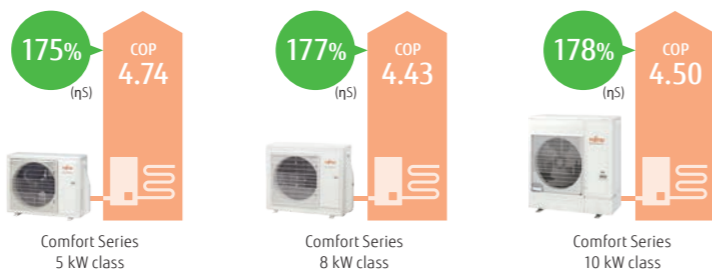

## Outdoor unit technology



**DC Fan Motor**  
 High-performance, high-efficiency small DC fan motor mounted

**DC Twin-Rotary Compressor**  
 High-efficiency DC twin-rotary compressor

**DC Inverter**  
 DC inverter provides smooth water temperature control.

# Split Type


Super High Power Series



## High water flow temperature

The temperature of water flow can be maintained at 60°C without using a backup heater, even when the outdoor temperature drops to -20°C. The system can supply 55°C water without a backup heater at an outdoor temperature of -22°C.

\* If you want to raise the temperature of the water supply to above the maximum temperature, use a backup heater to supplement the primary heater.

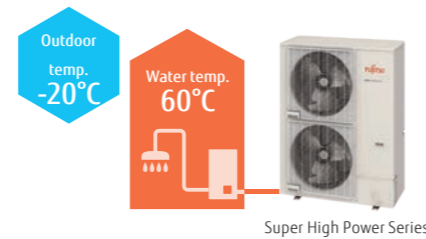


## High COP

Heat pumps of ATW Systems work more efficiently and consume less energy than conventional heating systems.

Energy efficiency class **A++**

### Seasonal space heating energy efficiency (η<sub>s</sub>)

Conditions: Outdoor Temp. 7°C Heating Temp. 35°C

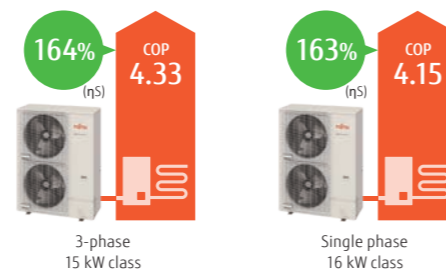

## Operating range extended to -25°C

Operating range improved down to -25°C outdoor temperature



**Hydraulic unit:**  
WSYG160DJ6 / [3-phase] WSYK170DJ9  
**Outdoor unit:**  
WOYG160LJL  
[3-phase] WOYK150LJL / WOYK170LJL



### Specifications

| Model Name   | Hydraulic unit                  |                                   | WSYG160DJ6                  | WSYK170DJ9 | WSYK170DJ9             |       |        |       |
|--|---------------------------------|-----------------------------------|-----------------------------|------------|------------------------|-------|--------|-------|
| Capacity range   | Outdoor unit                    |                                   | WOYG160LJL                  | WOYK150LJL | WOYK170LJL             |       |        |       |
| 7°C/35°C floor heating *1                                  | Heating capacity                | kW                                | 16.00                       | 15.00      | 17.00                  |       |        |       |
|  | Input power                     |                                   | 3.86                        | 3.46       | 4.10                   |       |        |       |
|  | COP                             |                                   | 4.15                        | 4.33       | 4.15                   |       |        |       |
| 2°C/35°C floor heating *1                                  | Heating capacity                | kW                                | 13.30                       | 13.20      | 13.50                  |       |        |       |
|  | Input power                     |                                   | 4.25                        | 4.06       | 4.27                   |       |        |       |
|  | COP                             |                                   | 3.13                        | 3.25       | 3.16                   |       |        |       |
| -7°C/35°C floor heating*1                                  | Heating capacity                | kW                                | 14.50                       | 13.20      | 15.00                  |       |        |       |
|  | Input power                     |                                   | 5.27                        | 4.55       | 5.32                   |       |        |       |
|  | COP                             |                                   | 2.75                        | 2.90       | 2.82                   |       |        |       |
| -7°C/55°C Radiator*1                                       | Heating capacity                | kW                                | 10.90                       | 13.20      | 14.20                  |       |        |       |
|  | Input power                     |                                   | 5.89                        | 6.77       | 7.40                   |       |        |       |
|  | COP                             |                                   | 1.85                        | 1.95       | 1.92                   |       |        |       |
| <b>Space heating characteristics*2</b>                     |                                 |                                   |                             |            |                        |       |        |       |
| Temperature application                                    | °C                              |                                   | 55                          | 35         | 55                     | 35    | 55     | 35    |
| Energy efficiency class                                    |                                 |                                   | A++                         | A++        | A++                    | A++   | A++    | A++   |
| Rated heat output (P <sub>rated</sub> )                    | kW                              |                                   | 14                          | 16         | 16                     | 17    | 17     | 18    |
| Seasonal space heating energy efficiency (η <sub>s</sub> ) | %                               |                                   | 125                         | 163        | 130                    | 164   | 130    | 161   |
| Annual energy consumption                                  | kWh                             |                                   | 8,757                       | 8,014      | 9,915                  | 8,606 | 10,232 | 9,059 |
| Sound power level  | Hydraulic unit                  | dB(A)                             | 45                          | 45         | 45                     | 45    | 45     | 45    |
|  | Outdoor unit                    |                                   | 67                          | 66         | 67                     | 66    | 67     | 68    |
| <b>Hydraulic unit specifications</b>                       |                                 |                                   |                             |            |                        |       |        |       |
| Power source   |                                 |                                   | Single phase, ~230 V, 50 Hz |            | 3-phase, ~400 V, 50 Hz |       |        |       |
| Dimensions H × W × D                                       | mm                              |                                   | 805 × 450 × 471             |            | 805 × 450 × 471        |       |        |       |
| Weight (Net)   | kg                              |                                   | 52.5                        |            | 52.5                   |       |        |       |
| Water circulation  | Min./Max.                       | L/min                             | 26.4/57.8                   |            | 24.0/54.2              |       |        |       |
| Buffer tank capacity                                       | L                               |                                   | 22                          |            | 22                     |       |        |       |
| Expansion vessel capacity                                  | L                               |                                   | 10                          |            | 10                     |       |        |       |
| Water flow temperature range                               | Max.                            | °C                                | 60                          |            | 60                     |       |        |       |
| Water pipe connection diameter                             | Flow/Return                     | mm                                | Ø25.4/Ø25.4                 |            | Ø25.4/Ø25.4            |       |        |       |
| Backup heater  | Capacity                        | kW                                | 6.0 (3.0 kW × 2 pcs.)       |            | 9.0 (3.0 kW × 3 pcs.)  |       |        |       |
| <b>Outdoor unit specifications</b>                         |                                 |                                   |                             |            |                        |       |        |       |
| Power source   |                                 |                                   | Single phase, ~230 V, 50 Hz |            | 3-phase, ~400 V, 50 Hz |       |        |       |
| Current  | Max.                            | A                                 | 28.0                        |            | 14.0                   |       |        |       |
| Dimensions H × W × D                                       | mm                              |                                   | 1,428 × 1,080 × 480         |            | 1,428 × 1,080 × 480    |       |        |       |
| Weight (Net)   | kg                              |                                   | 137                         |            | 138                    |       |        |       |
| Refrigerant  | Type (Global Warming Potential) |                                   | R410A (2,088)               |            |                        |       |        |       |
| Additional refrigerant charge                              | Charge                          | kg                                | 3.80                        |            | 3.80                   |       |        |       |
|  |                                 | g/m                               | 50                          |            | 50                     |       |        |       |
| Connection pipe  | Diameter                        | Liquid                            | Ø9.52                       |            | Ø9.52                  |       |        |       |
|  |                                 | Gas                               | Ø15.88                      |            | Ø15.88                 |       |        |       |
|  | Length                          | Min./Max.                         | 5/30                        |            | 5/30                   |       |        |       |
|  |                                 | Length (Pre-charge)               | 15                          |            | 15                     |       |        |       |
| Height difference  | Max.                            | 25/15 (Outdoor unit: Upper/Lower) |                             |            |                        |       |        |       |
| Operating range  | Heating                         | °C                                | -25 to 35                   |            | -25 to 35              |       |        |       |


\*1: Heating capacity, input power, and COP are measured using the EN14511 standard. Actual usage environments, such as the operating modes of the heating equipment, room temperature, and controller settings, may cause differences in values between those listed in the catalog and the actual performance characteristics.

\*2: Information about ErP can be downloaded from our website at [www.fujitsu-general.com/global/support/downloads/search/](http://www.fujitsu-general.com/global/support/downloads/search/)


### Dimensions

(Unit: mm)

**Outdoor unit:**  
Single phase: WOYG160LJL  
3-phase: WOYK150LJL/WOYK170LJL

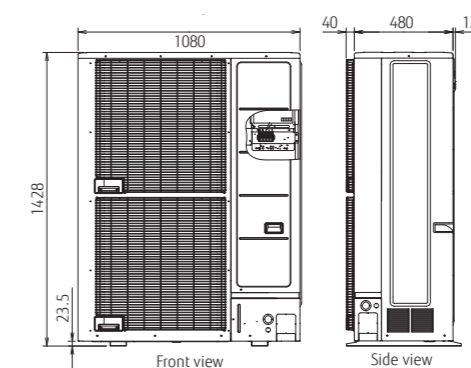

**Hydraulic unit:**  
Single phase: WSYG160DJ6  
3-phase: WSYK170DJ9

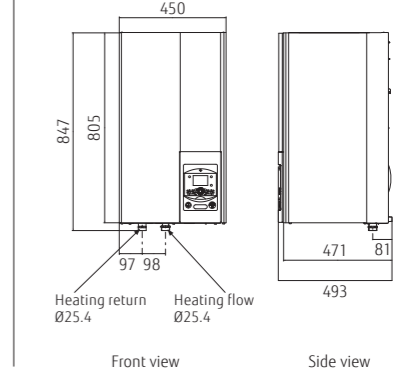

# Split Type

High Power Series



## High water flow temperature

The temperature of water flow can be maintained at 60°C without using a backup heater, even when the outdoor temperature drops to -20°C.

\* If you want to raise the temperature of the water supply to above the maximum temperature, use a backup heater to supplement the primary heater.



## High COP


Heat pumps of ATW Systems work more efficiently and consume less energy than conventional heating systems.

Energy efficiency class **A++\***

\*Temperature application: Heating temp. 35°C

### Seasonal space heating energy efficiency (η<sub>s</sub>)

Conditions: Outdoor Temp. 7°C Heating Temp. 35°C

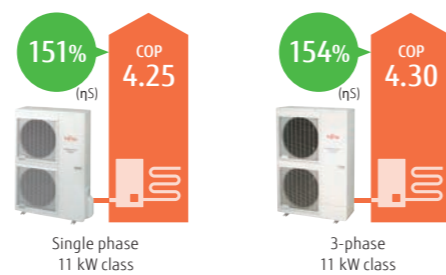

**Hydraulic unit:**  
WSYG140DG6 / [3-phase] WSYK160DG9  
**Outdoor unit:**  
WOYG112LHT / WOYG140LCTA  
[3-phase] WOYK112LCTA / WOYK140LCTA /  
WOYK160LCTA



## Specifications

| Model Name                | Hydraulic unit   |    | WSYG140DG6 |  | WSYG140DG6  |  | WSYK160DG9  |  | WSYK160DG9  |  | WSYK160DG9  |  |
|---------------------------|------------------|----|------------|--|-------------|--|-------------|--|-------------|--|-------------|--|
|                           | Outdoor unit     |    | WOYG112LHT |  | WOYG140LCTA |  | WOYK112LCTA |  | WOYK140LCTA |  | WOYK160LCTA |  |
| Capacity range            |                  |    | 11         |  | 14          |  | 11          |  | 14          |  | 16          |  |
| 7°C/35°C floor heating *1 | Heating capacity | kW | 10.80      |  | 13.50       |  | 10.80       |  | 13.50       |  | 15.17       |  |
|                           | Input power      |    | 2.54       |  | 3.23        |  | 2.51        |  | 3.20        |  | 3.70        |  |
|                           | COP              |    | 4.25       |  | 4.18        |  | 4.30        |  | 4.22        |  | 4.10        |  |
| 2°C/35°C floor heating *1 | Heating capacity | kW | 10.77      |  | 12.00       |  | 10.77       |  | 13.00       |  | 13.50       |  |
|                           | Input power      |    | 3.44       |  | 3.87        |  | 3.40        |  | 4.15        |  | 4.34        |  |
|                           | COP              |    | 3.13       |  | 3.10        |  | 3.17        |  | 3.13        |  | 3.11        |  |
| -7°C/35°C floor heating*1 | Heating capacity | kW | 10.38      |  | 11.54       |  | 10.38       |  | 12.20       |  | 13.50       |  |
|                           | Input power      |    | 4.32       |  | 5.08        |  | 4.28        |  | 5.13        |  | 5.40        |  |
|                           | COP              |    | 2.40       |  | 2.27        |  | 2.43        |  | 2.38        |  | 2.50        |  |
| -7°C/55°C Radiator*1      | Heating capacity | kW | 7.57       |  | 9.20        |  | 9.27        |  | 10.10       |  | 11.00       |  |
|                           | Input power      |    | 4.57       |  | 5.08        |  | 5.09        |  | 5.65        |  | 6.29        |  |
|                           | COP              |    | 1.66       |  | 1.81        |  | 1.82        |  | 1.79        |  | 1.75        |  |

### Space heating characteristics\*2

| Temperature application                                    | °C             | 55    |       | 35    |       | 55    |       | 35    |       | 55    |       | 35    |       |
|--|----------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Energy efficiency class                                    |                | A+    | A++   | A+    | A++   | A+    | A++   | A+    | A++   | A+    | A++   | A+    | A++   |
| Rated heat output (P <sub>rated</sub> )                    | kW             | 9     | 11    | 11    | 13    | 9     | 11    | 11    | 13    | 13    | 14    | 13    | 14    |
| Seasonal space heating energy efficiency (η <sub>s</sub> ) | %              | 112   | 151   | 113   | 148   | 112   | 154   | 117   | 150   | 117   | 149   | 117   | 149   |
| Annual energy consumption                                  | kWh            | 6,704 | 6,062 | 8,041 | 6,824 | 6,669 | 5,930 | 7,803 | 6,738 | 9,062 | 7,408 | 9,062 | 7,408 |
| Sound power level  | Hydraulic unit | 46    |       | 46    |       | 46    |       | 46    |       | 46    |       | 46    |       |
|  | Outdoor unit   | 68    |       | 69    |       | 69    |       | 68    |       | 70    |       | 68    |       |

### Hydraulic unit specifications

| Power source                   | Single phase, ~230 V, 50 Hz |       |                       |           | 3-phase, ~400 V, 50 Hz |           |                       |  |
|--------------------------------|-----------------------------|-------|-----------------------|-----------|------------------------|-----------|-----------------------|--|
| Dimensions H × W × D           | mm 800 × 450 × 457          |       |                       |           | mm 800 × 450 × 457     |           |                       |  |
| Weight (Net)                   | kg 42                       |       |                       |           | kg 42                  |           |                       |  |
| Water circulation              | Min./Max.                   | L/min | 19.5/39.0             | 24.4/48.7 | 19.5/39.0              | 24.4/48.7 | 27.4/54.8             |  |
| Buffer tank capacity           | L                           | 16    | 16                    | 16        |                        |           |                       |  |
| Expansion vessel capacity      | L                           | 8     | 8                     | 8         |                        |           |                       |  |
| Water flow temperature range   | Max.                        | °C    | 60                    | 60        | 60                     |           |                       |  |
| Water pipe connection diameter | Flow/Return                 | mm    | Ø25.4/Ø25.4           |           | Ø25.4/Ø25.4            |           | Ø25.4/Ø25.4           |  |
| Backup heater                  | Capacity                    | kW    | 6.0 (3.0 kW × 2 pcs.) |           | 9.0 (3.0 kW × 3 pcs.)  |           | 9.0 (3.0 kW × 3 pcs.) |  |

### Outdoor unit specifications

| Power source                  | Single phase, ~230 V, 50 Hz     |               |              |      | 3-phase, ~400 V, 50 Hz |     |      |  |
|-------------------------------|---------------------------------|---------------|--------------|------|------------------------|-----|------|--|
| Current                       | Max.                            | A             | 22.0         | 25.0 | 9.0                    | 9.5 | 10.5 |  |
| Dimensions H × W × D          | mm 1,290 × 900 × 330            |               |              |      | mm 1,290 × 900 × 330   |     |      |  |
| Weight (Net)                  | kg 92                           |               |              |      | kg 99                  |     |      |  |
| Refrigerant                   | Type (Global Warming Potential) | R410A (2,088) |              |      |                        |     |      |  |
|                               | Charge                          | kg            | 2.50         |      |                        |     |      |  |
| Additional refrigerant charge |                                 | g/m           | 50           |      |                        |     |      |  |
|                               | Diameter                        | Liquid        | mm Ø9.52     |      |                        |     |      |  |
| Connection pipe               |                                 | Gas           | mm Ø15.88    |      |                        |     |      |  |
|                               | Length                          | Min./Max.     | m 5/20       |      |                        |     |      |  |
|                               | Length (Pre-charge)             |               | m 15         |      |                        |     |      |  |
| Height difference             | Max.                            | m             | m 15         |      |                        |     |      |  |
|                               | Heating                         | °C            | °C -25 to 35 |      |                        |     |      |  |


\*1: Heating capacity, input power, and COP are measured using the EN14511 standard. Actual usage environments, such as the operating modes of the heating equipment, room temperature, and controller settings, may cause differences in values between those listed in the catalog and the actual performance characteristics.

\*2: Information about ErP can be downloaded from our website at [www.fujitsu-general.com/global/support/downloads/search/](http://www.fujitsu-general.com/global/support/downloads/search/)


## Dimensions

(Unit: mm)


**Outdoor unit:**  
Single phase: WOYG112LHT/WOYG140LCTA

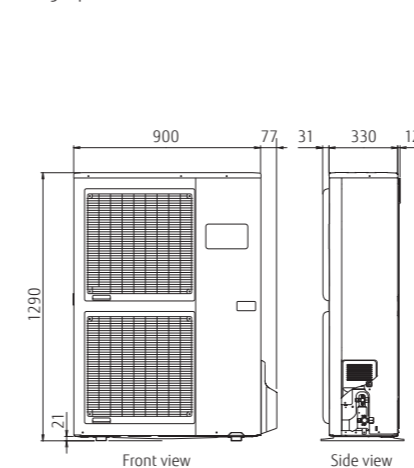

3-phase: WOYK112LCTA/WOYK140LCTA/WOYK160LCTA

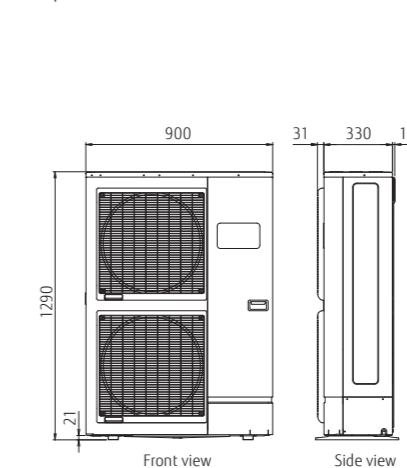

**Hydraulic unit:**  
Single phase: WSYG140DG6  
3-phase: WSYK160DG9

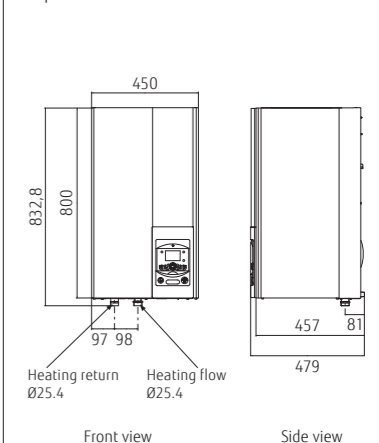



# Split DHW Integrated Type

Comfort Series



**Hydraulic unit:**  
WGYA050ML3 / WGYA080ML3 / WGYA100ML3  
**Outdoor unit:**  
WOYA060KLT / Woya080KLT / Woya100KLT



## Specifications

| Model Name   | Hydraulic unit                  | WGYA050ML3                  | WGYA080ML3        | WGYA080ML3        | WGYA100ML3        |           |       |       |       |
|--|---------------------------------|-----------------------------|-------------------|-------------------|-------------------|-----------|-------|-------|-------|
|  | Outdoor unit                    | WOYA060KLT                  | WOYA060KLT        | WOYA080KLT        | WOYA100KLT        |           |       |       |       |
| <b>Capacity range</b>                                      |                                 | 5                           | 6                 | 8                 | 10                |           |       |       |       |
| 7°C/35°C floor heating *1                                  | Heating capacity                | 4.50                        | 5.50              | 7.50              | 9.50              |           |       |       |       |
|  | Input power                     | 0.949                       | 1.18              | 1.69              | 2.11              |           |       |       |       |
|  | COP                             | 4.74                        | 4.65              | 4.43              | 4.50              |           |       |       |       |
| 2°C/35°C floor heating *1                                  | Heating capacity                | 4.50                        | 5.30              | 6.30              | 9.30              |           |       |       |       |
|  | Input power                     | 1.33                        | 1.65              | 1.96              | 3.08              |           |       |       |       |
|  | COP                             | 3.39                        | 3.22              | 3.21              | 3.02              |           |       |       |       |
| -7°C/35°C floor heating *1                                 | Heating capacity                | 4.40                        | 5.00              | 5.70              | 8.90              |           |       |       |       |
|  | Input power                     | 1.59                        | 1.90              | 2.13              | 3.36              |           |       |       |       |
|  | COP                             | 2.76                        | 2.63              | 2.68              | 2.65              |           |       |       |       |
| -7°C/55°C Radiator *1                                      | Heating capacity                | 3.90                        | 4.25              | 5.30              | 8.00              |           |       |       |       |
|  | Input power                     | 2.11                        | 2.25              | 2.79              | 4.10              |           |       |       |       |
|  | COP                             | 1.85                        | 1.89              | 1.90              | 1.95              |           |       |       |       |
| <b>Space heating characteristics**</b>                     |                                 |                             |                   |                   |                   |           |       |       |       |
| Temperature application                                    | °C                              | 55                          | 35                | 55                | 35                | 55        | 35    | 55    | 35    |
| Energy efficiency class                                    |                                 | A++                         | A+++              | A++               | A+++              | A++       | A+++  | A++   | A+++  |
| Rated heat output (P <sub>rated</sub> )                    | kW                              | 5                           | 5                 | 5                 | 6                 | 6         | 7     | 8     | 9     |
| Seasonal space heating energy efficiency (η <sub>s</sub> ) | %                               | 125                         | 175               | 125               | 175               | 128       | 177   | 130   | 178   |
| Annual energy consumption                                  | kWh                             | 3,035                       | 2,322             | 3,411             | 2,594             | 3,903     | 2,982 | 5,083 | 3,875 |
| Sound power level*3  | Hydraulic unit                  | 40                          | -                 | 40                | -                 | 40        | -     | 40    | -     |
|  | Outdoor unit                    | 57                          | -                 | 57                | -                 | 60        | -     | 62    | -     |
| <b>Domestic hot water characteristics**</b>                |                                 |                             |                   |                   |                   |           |       |       |       |
| Load profile   |                                 | L                           | L                 | L                 | L                 |           |       |       |       |
| Energy efficiency class                                    |                                 | A+                          | A+                | A+                | A+                |           |       |       |       |
| Energy efficiency (η <sub>wh</sub> )                       | %                               | 130                         | 130               | 130               | 130               |           |       |       |       |
| Annual electricity consumption                             | kWh                             | 793                         | 793               | 793               | 793               |           |       |       |       |
| <b>Hydraulic unit specifications</b>                       |                                 |                             |                   |                   |                   |           |       |       |       |
| Power source   |                                 | Single phase, ~230 V, 50 Hz |                   |                   |                   |           |       |       |       |
| Dimensions H × W × D                                       | mm                              | 1,863 × 648 × 700           | 1,863 × 648 × 700 | 1,863 × 648 × 700 | 1,863 × 648 × 700 |           |       |       |       |
| Weight (Net)   | kg                              | 145                         | 145               | 145               | 145               |           |       |       |       |
| Water circulation  | Min./Max. L/min                 | 7.6/22.0                    | 8.5/22.0          | 10.0/22.0         | 13.2/30.0         |           |       |       |       |
| DHW capacity   | L                               | 190                         | 190               | 190               | 190               |           |       |       |       |
| Electrical heater capacity                                 | Heating                         | 3.0                         | 3.0               | 3.0               | 3.0               |           |       |       |       |
|  | DHW                             | 1.5                         | 1.5               | 1.5               | 1.5               |           |       |       |       |
| Buffer tank capacity                                       | L                               | 16                          | 16                | 16                | 16                |           |       |       |       |
| Expansion vessel capacity                                  | L                               | 8                           | 8                 | 8                 | 8                 |           |       |       |       |
| Water flow temperature range                               | Max. °C                         | 55                          | 55                | 55                | 55                |           |       |       |       |
| Water pipe connection diameter                             | Flow/Return mm                  | Ø25.4/Ø25.4                 | Ø25.4/Ø25.4       | Ø25.4/Ø25.4       | Ø25.4/Ø25.4       |           |       |       |       |
| Hot water pipe connection diameter                         | mm                              | Ø19.05                      | Ø19.05            | Ø19.05            | Ø19.05            |           |       |       |       |
| <b>Outdoor unit specifications</b>                         |                                 |                             |                   |                   |                   |           |       |       |       |
| Power source   |                                 | Single phase, ~230 V, 50 Hz |                   |                   |                   |           |       |       |       |
| Current  | Max. A                          | 13.0                        | 13.0              | 18.0              | 19.0              |           |       |       |       |
| Dimensions H × W × D                                       | mm                              | 632 × 799 × 290             | 632 × 799 × 290   | 716 × 820 × 315   | 998 × 940 × 320   |           |       |       |       |
| Weight (Net)   | kg                              | 39                          | 39                | 42                | 62                |           |       |       |       |
| Refrigerant  | Type (Global Warming Potential) | R32 (675)                   |                   |                   |                   |           |       |       |       |
|  | Charge                          | kg                          | 0.97              | 0.97              | 1.02              | 1.63      |       |       |       |
| Additional refrigerant charge                              |                                 | g/m                         | 25                | 25                | 20                |           |       |       |       |
|  | Diameter                        | Liquid                      | 6.35              | 6.35              | 6.35              | 9.52      |       |       |       |
| Connection pipe  |                                 | Gas                         | 12.70             | 12.70             | 12.70             | 15.88     |       |       |       |
|  | Length                          | Min./Max.                   | m                 | 3/30              | 3/30              | 3/30      |       |       |       |
|  | Length (Pre-charge)             | m                           | 15                | 15                | 15                | 20        |       |       |       |
|  | Height difference               | Max.                        | m                 | 20                | 20                | 20        |       |       |       |
| Operating range  | Heating                         | °C                          | -20 to 35         | -20 to 35         | -20 to 35         | -20 to 35 |       |       |       |

## High water flow temperature

The temperature of water flow is up to 55°C without a backup heater. Hot water supply temperature can be maintained even at -10°C outdoor temperature.

\* If you want to raise the temperature of the water supply to above the maximum temperature, use a backup heater to supplement the primary heater.




## High COP

Heat pumps of ATW Systems work more efficiently and consume less energy than conventional heating systems.

Energy efficiency class **A+++\***

\*Temperature application: Heating temp. 35°C

Seasonal space heating energy efficiency (η<sub>s</sub>)  
Conditions: Outdoor Temp. 7°C Heating Temp. 35°C

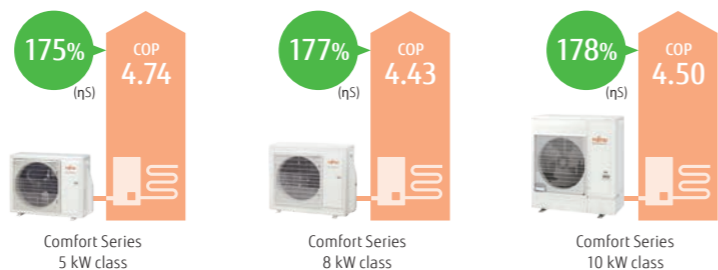

## Outdoor unit technology



**DC Fan Motor**  
High-performance, high-efficiency small DC fan motor mounted

**DC Twin-Rotary Compressor**  
High-efficiency DC twin-rotary compressor


**DC Inverter**  
DC inverter provides smooth water temperature control.

\*1: Heating capacity, input power, and COP are measured using the EN14511 standard. Actual usage environments, such as the operating modes of the heating equipment, room temperature, and controller settings, may cause differences in values between those listed in the catalog and the actual performance characteristics.  
\*2: Information about ErP can be downloaded from our website at [www.fujitsu-general.com/global/support/downloads/search/](http://www.fujitsu-general.com/global/support/downloads/search/)  
\*3: The sound power level values are based on EN12102 standard measurements under EN14825 standard conditions.


## Dimensions

(Unit: mm)


**Outdoor unit:**  
WOYA060KLT




WOYA080KLT



WOYA100KLT

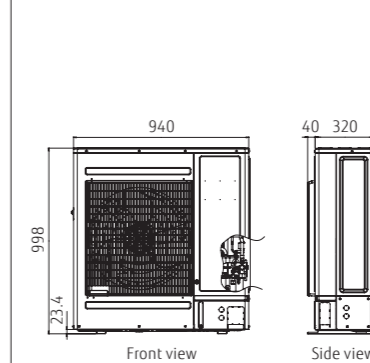

**Hydraulic unit:**  
WGYA050ML3/WGYA080ML3/WGYA100ML3

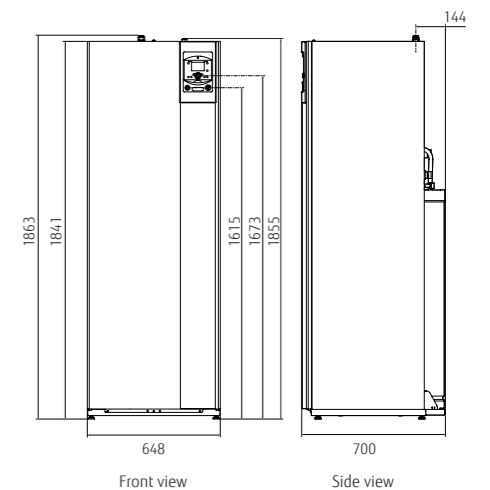

# Split DHW Integrated Type


Super High Power Series



## High water flow temperature

The temperature of water flow can be maintained at 60°C without using a backup heater, even when the outdoor temperature drops to -20°C. The system can supply 55°C water without a backup heater at an outdoor temperature of -22°C.

\* If you want to raise the temperature of the water supply to above the maximum temperature, use a backup heater to supplement the primary heater.

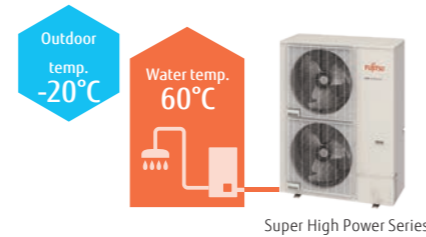


## High COP

Heat pumps of ATW Systems work more efficiently and consume less energy than conventional heating systems.



### Seasonal space heating energy efficiency (η<sub>s</sub>)

Conditions: Outdoor Temp. 7°C Heating Temp. 35°C

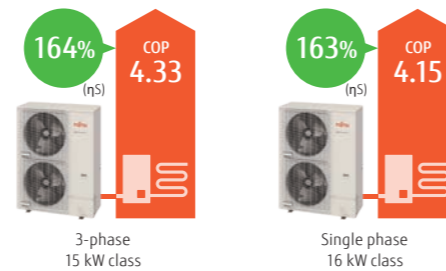

## Operating range extended to -25°C

Operating range improved down to -25°C outdoor temperature

Stylish space saving solution with **Built-in High-performance DHW tank 190 L**

- Coil heat exchanger optimizes DHW supply performance.
- Temperature rises quickly due to the large surface of the exchanger.

**Hydraulic unit:**  
WGYG160DJ6 / [3-phase] WGYK170DJ9  
**Outdoor unit:**  
WOYG160LJL  
[3-phase] WOYK150LJL / WOYK170LJL



### Specifications

| Model Name   | Hydraulic unit                  | WGYG160DJ6                        | WGYK170DJ9                        | WGYK170DJ9 |
|--|---------------------------------|-----------------------------------|-----------------------------------|------------|
| Capacity range   | Outdoor unit                    | WOYG160LJL                        | WOYK150LJL                        | WOYK170LJL |
| 7°C/35°C floor heating *1                                  | Heating capacity                | 16.00                             | 15.00                             | 17.00      |
|  | Input power                     | 3.86                              | 3.46                              | 4.10       |
|  | COP                             | 4.15                              | 4.33                              | 4.15       |
| 2°C/35°C floor heating *1                                  | Heating capacity                | 13.30                             | 13.20                             | 13.50      |
|  | Input power                     | 4.25                              | 4.06                              | 4.27       |
|  | COP                             | 3.13                              | 3.25                              | 3.16       |
| -7°C/35°C floor heating *1                                 | Heating capacity                | 14.50                             | 13.20                             | 15.00      |
|  | Input power                     | 5.27                              | 4.55                              | 5.32       |
|  | COP                             | 2.75                              | 2.90                              | 2.82       |
| -7°C/55°C Radiator *1                                      | Heating capacity                | 10.90                             | 13.20                             | 14.20      |
|  | Input power                     | 5.89                              | 6.77                              | 7.40       |
|  | COP                             | 1.85                              | 1.95                              | 1.92       |
| <b>Space heating characteristics**</b>                     |                                 |                                   |                                   |            |
| Temperature application                                    | °C                              | 55                                | 35                                | 55         |
| Energy efficiency class                                    |                                 | A++                               | A++                               | A++        |
| Rated heat output (P <sub>rated</sub> )                    | kW                              | 14                                | 16                                | 17         |
| Seasonal space heating energy efficiency (η <sub>s</sub> ) | %                               | 125                               | 163                               | 130        |
| Annual energy consumption                                  | kWh                             | 8,757                             | 8,014                             | 9,915      |
| Sound power level  | dB(A)                           | 45                                | 45                                | 45         |
|  | Outdoor unit                    | 67                                | 66                                | 67         |
| <b>Domestic hot water characteristics**</b>                |                                 |                                   |                                   |            |
| Load profile   |                                 |                                   | L                                 |            |
| Energy efficiency class                                    |                                 |                                   | A                                 |            |
| Energy efficiency (η <sub>DHW</sub> )                      | %                               |                                   | 109                               |            |
| Annual electricity consumption                             | kWh                             |                                   | 941                               |            |
| <b>Hydraulic unit specifications</b>                       |                                 |                                   |                                   |            |
| Power source   |                                 | Single phase, ~230 V, 50 Hz       | 3-phase, ~400 V, 50 Hz            |            |
| Dimensions H × W × D                                       | mm                              |                                   | 1,841 × 648 × 698                 |            |
| Weight (Net)   | kg                              |                                   | 166                               |            |
| Water circulation  | Min./Max. L/min                 | 26.4/57.8                         | 24.0/54.2                         | 27.3/61.4  |
| DHW capacity   | L                               |                                   | 190                               |            |
| Electrical heater capacity                                 | Heating kW                      | 6.0 (3.0 kW × 2 pcs.)             | 9.0 (3.0 kW × 3 pcs.)             |            |
|  | DHW                             |                                   | 1.5                               |            |
| Buffer tank capacity                                       | L                               |                                   | 22                                |            |
| Expansion vessel capacity                                  | L                               |                                   | 12                                |            |
| Water flow temperature range                               | Max. °C                         |                                   | 60                                |            |
| Water pipe connection diameter                             | Flow/Return mm                  |                                   | Ø25.4/Ø25.4                       |            |
| Hot water pipe connection diameter                         | mm                              |                                   | Ø19.05                            |            |
| <b>Outdoor unit specifications</b>                         |                                 |                                   |                                   |            |
| Power source   |                                 | Single phase, ~230 V, 50 Hz       | 3-phase, ~400 V, 50 Hz            |            |
| Current  | Max. A                          | 28.0                              | 14.0                              |            |
| Dimensions H × W × D                                       | mm                              | 1,428 × 1,080 × 480               | 1,428 × 1,080 × 480               |            |
| Weight (Net)   | kg                              | 137                               | 138                               |            |
| Refrigerant  | Type (Global Warming Potential) | R410A (2.088)                     | R410A (2.088)                     |            |
| Additional refrigerant charge                              | Charge                          | 3.80                              | 3.80                              |            |
|  | q/m                             | 50                                | 50                                |            |
| Connection pipe  | Diameter                        | Liquid                            | Ø9.52                             |            |
|  |                                 | Gas                               | Ø15.88                            |            |
|  | Length                          | Min./Max.                         | 5/30                              |            |
|  | Length (Pre-charge)             | m                                 | 15                                |            |
| Height difference  | Max. m                          | 25/15 (Outdoor unit: Upper/Lower) | 25/15 (Outdoor unit: Upper/Lower) |            |
| Operating range  | Heating °C                      | -25 to 35                         | -25 to 35                         |            |

\*1: Heating capacity, input power, and COP are measured using the EN14511 standard. Actual usage environments, such as the operating modes of the heating equipment, room temperature, and controller settings, may cause differences in values between those listed in the catalog and the actual performance characteristics.



\*2: Information about ErP can be downloaded from our website at [www.fujitsu-general.com/global/support/downloads/search/](http://www.fujitsu-general.com/global/support/downloads/search/)

### Dimensions

(Unit: mm)

**Outdoor unit:**  
Single phase: WOYG160LJL  
3-phase: WOYK150LJL/WOYK170LJL

**Hydraulic unit:**  
Single phase: WGYG160DJ6  
3-phase: WGYK170DJ9

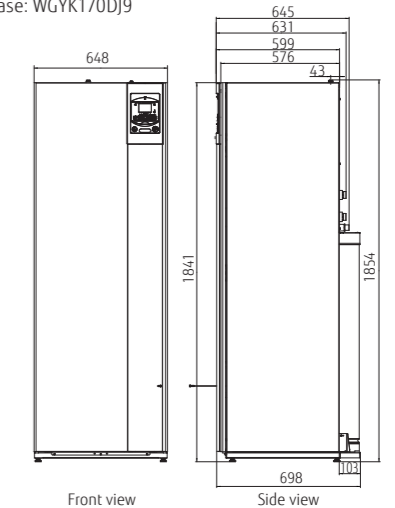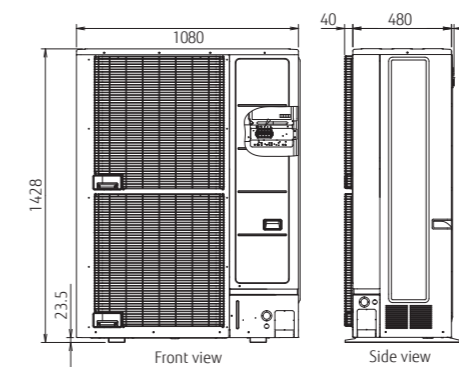

# Split DHW Integrated Type

High Power Series



## High water flow temperature

The temperature of water flow can be maintained at 60°C without using a backup heater, even when the outdoor temperature drops to -20°C.

\* If you want to raise the temperature of the water supply to above the maximum temperature, use a backup heater to supplement the primary heater.



## High COP


Heat pumps of ATW Systems work more efficiently and consume less energy than conventional heating systems.



\*Temperature application: Heating temp. 35°C


### Seasonal space heating energy efficiency (η<sub>s</sub>)

Conditions: Outdoor Temp. 7°C Heating Temp. 35°C

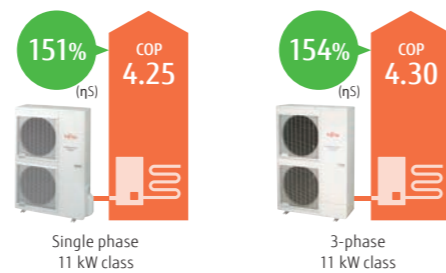

## Optimized refrigerant cycle operation

The High Power Series deliver high performance and efficiency with twin sensors and hot water heating technology.

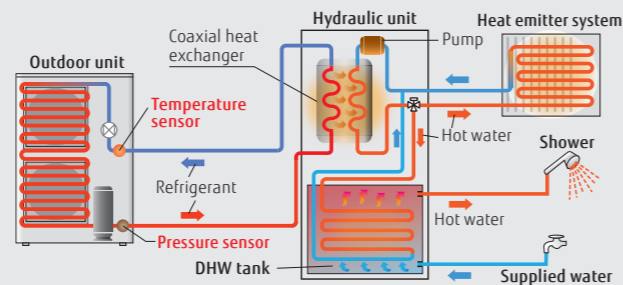

**Hydraulic unit:**  
WGYG140DG6 / [3-phase] WGYK160DG9  
**Outdoor unit:**  
WOYG112LHT / WOYG140LCTA  
[3-phase] WOYK112LCTA / WOYK140LCTA / WOYK160LCTA



## Specifications

| Model Name   | Hydraulic unit                  |                     | WGYG140DG6            |             | WGYG140DG6  |             | WGYK160DG9             |             | WGYK160DG9            |             | WGYK160DG9  |             |  |  |
|--|---------------------------------|---------------------|-----------------------|-------------|-------------|-------------|------------------------|-------------|-----------------------|-------------|-------------|-------------|--|--|
|  | Outdoor unit                    |                     | WOYG112LHT            | WOYG140LCTA | WOYG112LCTA | WOYG140LCTA | WOYK112LCTA            | WOYK140LCTA | WOYK112LCTA           | WOYK140LCTA | WOYK160LCTA | WOYK160LCTA |  |  |
| <b>Capacity range</b>                                      |                                 |                     | 11                    | 14          | 11          | 14          | 11                     | 14          | 11                    | 14          | 16          |             |  |  |
| 7°C/35°C floor heating *1                                  | Heating capacity                | kW                  | 10.80                 | 13.50       | 10.80       | 13.50       | 10.80                  | 13.50       | 10.80                 | 13.50       | 15.17       |             |  |  |
|  | Input power                     |                     | 2.54                  | 3.23        | 2.51        | 3.20        | 2.51                   | 3.20        | 2.51                  | 3.20        | 3.70        |             |  |  |
|  | COP                             |                     | 4.25                  | 4.18        | 4.30        | 4.22        | 4.30                   | 4.22        | 4.30                  | 4.22        | 4.10        |             |  |  |
| 2°C/35°C floor heating *1                                  | Heating capacity                | kW                  | 10.77                 | 12.00       | 10.77       | 12.00       | 10.77                  | 12.00       | 10.77                 | 12.00       | 13.50       |             |  |  |
|  | Input power                     |                     | 3.44                  | 3.87        | 3.40        | 4.15        | 3.40                   | 4.15        | 3.40                  | 4.15        | 4.34        |             |  |  |
|  | COP                             |                     | 3.13                  | 3.10        | 3.17        | 3.13        | 3.17                   | 3.13        | 3.17                  | 3.13        | 3.11        |             |  |  |
| -7°C/35°C floor heating*1                                  | Heating capacity                | kW                  | 10.38                 | 11.54       | 10.38       | 11.54       | 10.38                  | 11.54       | 10.38                 | 11.54       | 13.50       |             |  |  |
|  | Input power                     |                     | 4.32                  | 5.08        | 4.28        | 5.13        | 4.28                   | 5.13        | 4.28                  | 5.13        | 5.40        |             |  |  |
|  | COP                             |                     | 2.40                  | 2.27        | 2.43        | 2.38        | 2.43                   | 2.38        | 2.43                  | 2.38        | 2.50        |             |  |  |
| -7°C/55°C Radiator*1                                       | Heating capacity                | kW                  | 7.57                  | 9.20        | 7.57        | 9.20        | 7.57                   | 9.20        | 7.57                  | 9.20        | 11.00       |             |  |  |
|  | Input power                     |                     | 4.57                  | 5.08        | 4.57        | 5.08        | 4.57                   | 5.08        | 4.57                  | 5.08        | 6.29        |             |  |  |
|  | COP                             |                     | 1.66                  | 1.81        | 1.66        | 1.81        | 1.66                   | 1.81        | 1.66                  | 1.81        | 1.75        |             |  |  |
| <b>Space heating characteristics*2</b>                     |                                 |                     |                       |             |             |             |                        |             |                       |             |             |             |  |  |
| Temperature application                                    | °C                              |                     | 55                    | 35          | 55          | 35          | 55                     | 35          | 55                    | 35          | 55          | 35          |  |  |
| Energy efficiency class                                    |                                 |                     | A+                    | A++         | A+          | A+          | A+                     | A++         | A+                    | A++         | A+          | A+          |  |  |
| Rated heat output (P <sub>rated</sub> )                    | kW                              |                     | 9                     | 11          | 11          | 13          | 9                      | 11          | 11                    | 13          | 13          | 14          |  |  |
| Seasonal space heating energy efficiency (η <sub>s</sub> ) | %                               |                     | 112                   | 151         | 113         | 148         | 112                    | 154         | 117                   | 150         | 117         | 149         |  |  |
| Annual energy consumption                                  | kWh                             |                     | 6,704                 | 6,062       | 8,041       | 6,824       | 6,669                  | 5,930       | 7,803                 | 6,738       | 9,062       | 7,408       |  |  |
| Sound power level  | Hydraulic unit                  | dB(A)               | 46                    |             | 46          |             | 46                     |             | 46                    |             | 46          |             |  |  |
|  | Outdoor unit                    |                     | 68                    |             | 69          |             | 69                     |             | 68                    |             | 71          |             |  |  |
| <b>Domestic hot water characteristics*2</b>                |                                 |                     |                       |             |             |             |                        |             |                       |             |             |             |  |  |
| Load profile   | L                               |                     |                       |             |             |             |                        |             |                       |             |             |             |  |  |
| Energy efficiency class                                    | A                               |                     |                       |             |             |             |                        |             |                       |             |             |             |  |  |
| Energy efficiency (η <sub>wh</sub> )                       | 88                              |                     |                       |             |             |             |                        |             |                       |             |             |             |  |  |
| Annual electricity consumption                             | kWh                             |                     |                       |             |             |             |                        |             |                       |             |             |             |  |  |
| <b>Hydraulic unit specifications</b>                       |                                 |                     |                       |             |             |             |                        |             |                       |             |             |             |  |  |
| Power source   | Single phase, ~230 V, 50 Hz     |                     |                       |             |             |             | 3-phase, ~400 V, 50 Hz |             |                       |             |             |             |  |  |
| Dimensions H × W × D                                       | mm                              |                     |                       |             |             |             | 1,840 × 648 × 698      |             |                       |             |             |             |  |  |
| Weight (Net)   | kg                              |                     |                       |             |             |             | 152                    |             |                       |             |             |             |  |  |
| Water circulation  | Min./Max.                       | L/min               |                       | 19.5/39.0   |             | 24.4/28.7   |                        | 19.5/39.0   |                       | 24.4/48.7   |             | 27.4/54.8   |  |  |
| DHW capacity   | L                               |                     |                       |             |             |             |                        |             |                       |             |             |             |  |  |
| Electrical heater capacity                                 | Heating                         | kW                  | 6.0 (3.0 kW × 2 pcs.) |             |             |             |                        |             | 9.0 (3.0 kW × 3 pcs.) |             |             |             |  |  |
|  |                                 |                     | DHW                   | 1.5         |             |             |                        |             |                       | 1.5         |             |             |  |  |
| Buffer tank capacity                                       | L                               |                     |                       |             |             |             |                        |             |                       |             |             |             |  |  |
| Expansion vessel capacity                                  | L                               |                     |                       |             |             |             |                        |             |                       |             |             |             |  |  |
| Water flow temperature range                               | Max.                            | °C                  |                       |             |             |             |                        |             |                       |             |             |             |  |  |
| Water pipe connection diameter                             | Flow/Return                     | mm                  |                       |             |             |             |                        |             |                       |             |             |             |  |  |
|  |                                 | Ø25.4/Ø25.4         |                       |             |             |             |                        |             |                       |             |             |             |  |  |
| Hot water pipe connection diameter                         | mm                              |                     |                       |             |             |             |                        |             |                       |             |             |             |  |  |
| <b>Outdoor unit specifications</b>                         |                                 |                     |                       |             |             |             |                        |             |                       |             |             |             |  |  |
| Power source   | Single phase, ~230 V, 50 Hz     |                     |                       |             |             |             | 3-phase, ~400 V, 50 Hz |             |                       |             |             |             |  |  |
| Current  | Max.                            | A                   |                       | 22.0        |             | 25.0        |                        | 9.0         |                       | 9.5         |             | 10.5        |  |  |
| Dimensions H × W × D                                       | mm                              |                     |                       |             |             |             |                        |             |                       |             |             |             |  |  |
| Weight (Net)   | kg                              |                     |                       |             |             |             |                        |             |                       |             |             |             |  |  |
| Refrigerant  | Type (Global Warming Potential) | R410A (2,088)       |                       |             |             |             |                        |             |                       |             |             |             |  |  |
|  | Charge                          | kg                  |                       |             |             |             |                        |             |                       |             |             |             |  |  |
| Additional refrigerant charge                              | g/m                             |                     |                       |             |             |             |                        |             |                       |             |             |             |  |  |
|  | 50                              |                     |                       |             |             |             |                        |             |                       |             |             |             |  |  |
| Connection pipe  | Diameter                        | Liquid              | mm                    |             |             |             |                        |             |                       |             |             |             |  |  |
|  |                                 | Gas                 | Ø9.52                 |             |             |             |                        |             |                       |             |             |             |  |  |
|  | Length                          | Min./Max.           | m                     |             |             |             |                        |             |                       |             |             |             |  |  |
|  |                                 | Length (Pre-charge) | m                     |             |             |             |                        |             |                       |             |             |             |  |  |
| Height difference  | Max.                            | m                   |                       |             |             |             |                        |             |                       |             |             |             |  |  |
|  | Heating                         | °C                  |                       |             |             |             |                        |             |                       |             |             |             |  |  |
| Operating range  | -25 to 35                       |                     |                       |             |             |             |                        |             |                       |             |             |             |  |  |

\*1: Heating capacity, input power, and COP are measured using the EN14511 standard. Actual usage environments, such as the operating modes of the heating equipment, room temperature, and controller settings, may cause differences in values between those listed in the catalog and the actual performance characteristics.

\*2: Information about ErP can be downloaded from our website at [www.fujitsu-general.com/global/support/downloads/search/](http://www.fujitsu-general.com/global/support/downloads/search/)

## Dimensions

(Unit: mm)


### Outdoor unit:

Single phase: WOYG112LHT/WOYG140LCTA

3-phase: WOYK112LCTA/WOYK140LCTA/WOYK160LCTA

### Hydraulic unit:

Single phase: WGYG140DG6  
3-phase: WGYK160DG9

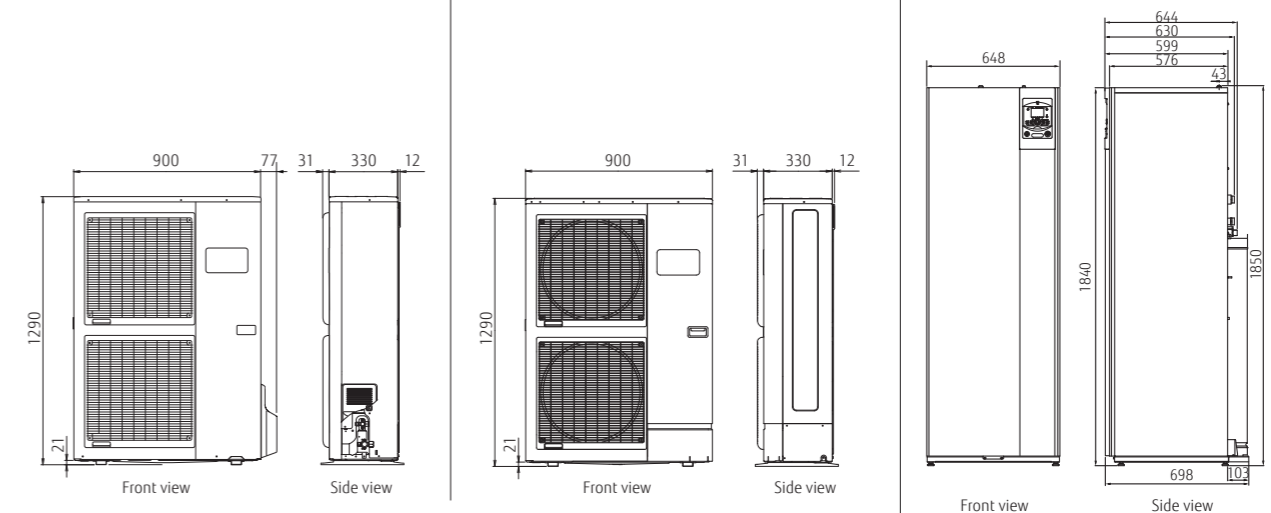

# Comfort Control

The high-grade heating controller automatically adjusts the flow temperature according to the climate conditions to maintain the room and domestic hot water temperatures at the desired levels.

## Hydraulic unit Controller 4 Heating modes


- 1. Automatic mode**  
Enables automatic switching between Comfort mode and Reduce mode according to time program
- 2. Reduce mode**  
Maintains water temperature at a lower level
- 3. Comfort mode**  
Maintains water temperature at a comfortable level
- 4. Protection mode**  
Activates frost protection in standby operation



## Useful Features


### Automatic heating curve control

Automatic temperature regulation according to heating curve (depending on heating terminal and outdoor temperature)

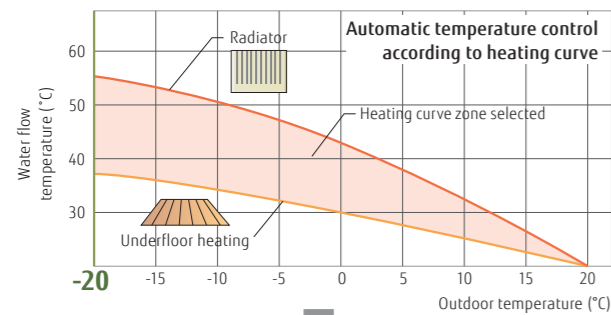

The heating curve will shift to adjust the room temperature setting.

Can be fine-adjusted when it is too warm or too cold.

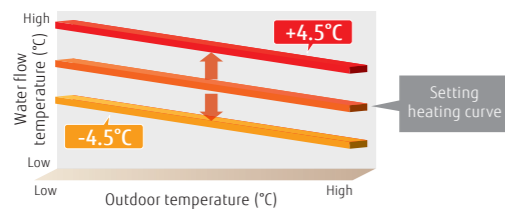

### Quick recovery from defrosting

Maintains room temperature by boost start operation during defrosting.


### Auto changeover

When cooling mode is selected, the system automatically switches between cooling and heating modes depending on the outdoor temperature to serve as an all-season air conditioner.

### 2-zone independent control

2-zone independent control (For example, the individual control of 2 underfloor heating zones or the combination of 1 underfloor heating zone and 1 radiator zone)\*1


\*1: Optional parts required



### 2-stage low-noise mode

The outdoor unit can be switched to quiet mode, depending on the installation environment.

\*Effective only for High Power Series



### Backup heater operation

Backup heater maintains a comfortable room temperature even when the outside temperature is low. The backup heater is intelligently controlled as a safety backup for very cold days and nights, and only operates when really needed.

## Energy Saving

### Time program

- The timer is easy to set.
- You can select the heating mode in conjunction with various times of the day.

### Day-weekly timer

- Allows up to 3 settings per day.
- Allows individual settings for each day of the week.

### Holiday timer

- Allows up to 8 settings.
- While you are away from home for an extended period during winter, the system prevents your room or house from freezing.

### Peak cut Function\*2

Sets the peak current value to reduce power consumption.

| Mode | Ratio to reduce power consumption |
|------|-----------------------------------|
| 1    | 100%                              |
| 2    | 75%                               |
| 3    | 50%                               |
| 4    | Almost 0%                         |

\* Please refer to page W-038 and W-039 for optional parts information.

## Safety Features



### Anti-Legionella function

Prevents the growth of Legionella bacteria in the DHW tank to supply safe and clean hot water at all times.




### Anti-freeze function

When the outside temperature drops below a specified level, the compressor will self-activate and water will also be automatically circulated to prevent freezing.

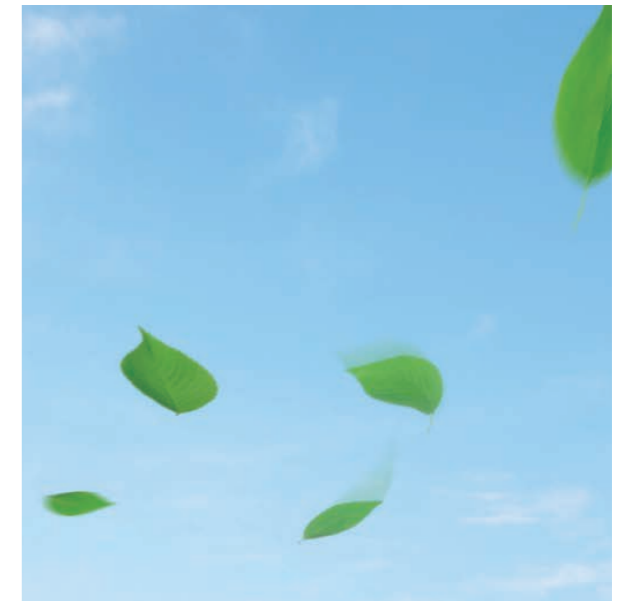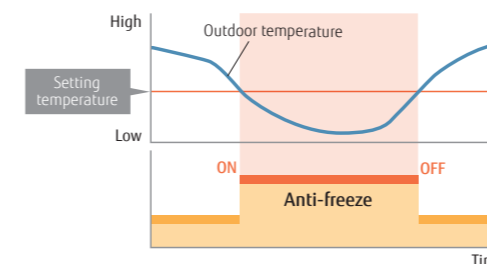

### Emergency operation

If an outdoor unit fails to operate, a built-in backup heater or an external boiler is activated to supply an uninterrupted supply of hot water to the house.

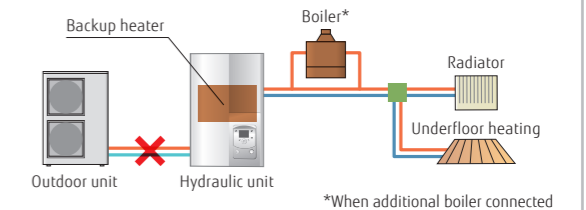


### Error and Maintenance Alarm

Enables quick error-handling services and maintenance




- Error history saves 10 errors in memory
- Display telephone number of service company



# Simple installation

## Presetting configurations

A controller installed makes it easy to configure the system without having to set each component or unit individually.

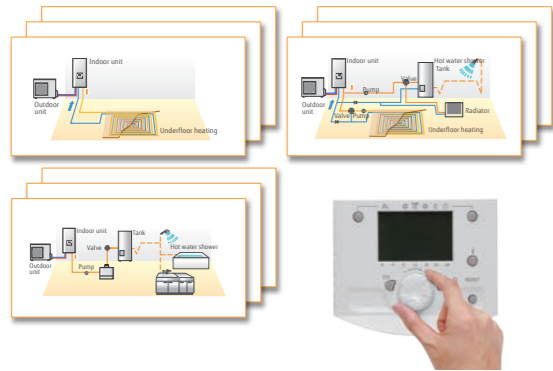


8 simple patterns for system presetting (Pair of heating: 12 patterns)

| Configuration (Parameter 5700) | Installation type   |
|--------------------------------|---|
| Presetting 1                   | 1 heating circuit   |
| Presetting 2                   | 2 heating circuits  |
| Presetting 3                   | 1 heating circuit with boiler backup                      |
| Presetting 4                   | 2 heating circuits with boiler backup                     |
| Presetting 5                   | 1/2 heating circuit with buffer control                   |
| Presetting 6                   | 1/2 heating circuit with buffer control and boiler backup |
| Presetting 7                   | Cascade connection Primary                                |
| Presetting 8                   | Cascade connection A                                      |
| Presetting 9                   | Cascade connection B/C                                    |

- DHW & solar control auto detection
- Cascade connection only available in High Power models.

## Outdoor temperature simulation


It verifies that each unit operates properly under the set conditions and expected outdoor air temperature when the system is actually assembled.

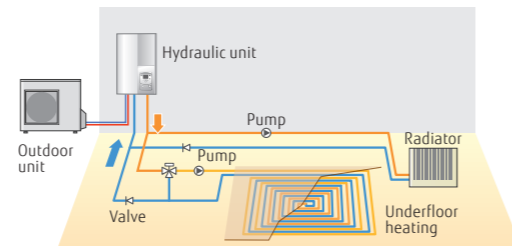


The outdoor temperatures can be simulated in the range of -50°C to +50°C.

## Concrete floor drying

Allows the concrete surrounding the hot-water pipes to dry more quickly, shortening the construction period for underfloor heating installations.

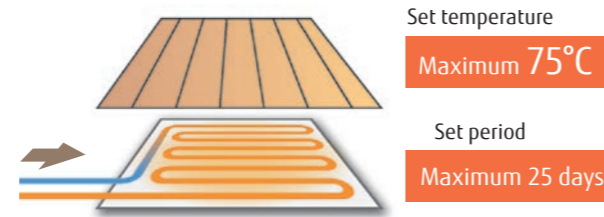

## Controller with a large liquid crystal display and buttons for easy function setting

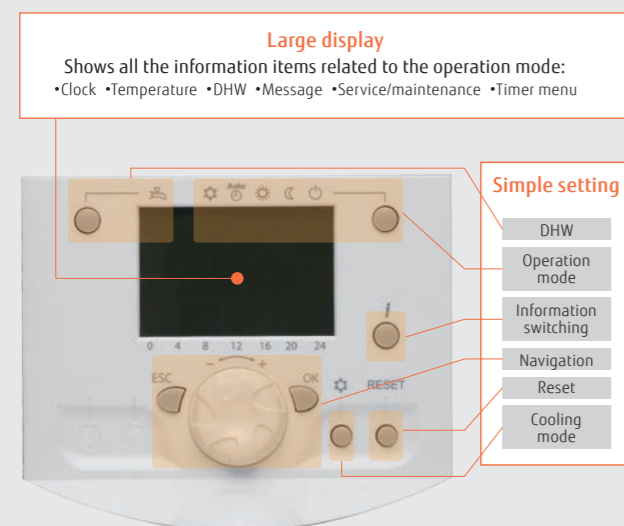

### Main operation flow and settings for installers and end users



|            | Flow Chart            | Example Item   |
|------------|-----------------------|--|
| Installers | 1 Install Setting     | Pump speed setting, Configuration, Heating curve setting, Heat pump shut off   |
|            | 2 Option Setting      | Cooling kit, DHW kit, Boiler kit   |
|            | 3 Convenient Function | Automatic heating curve setting, Underfloor controlled driving, Outdoor temperature adjustment, Maintenance period setting |
|            | 4 Workout Setting     | Outdoor temperature simulator  |
|            | 5 Confirmation        | Checking operation (Heating and cooling, DHW, option)  |
| End users  | 6 User Setting        | Date and time, Time program, Operation temperature setting   |

# Easy Installation & Maintenance

- All hydraulic safety and control components are built in with no additional selection required.
- Lifting bars for installation free of difficulty or risk
- Easy access for maintenance
- Refrigerant pump down operation

## Maintenance Support

### Diagnostics functions for troubleshooting

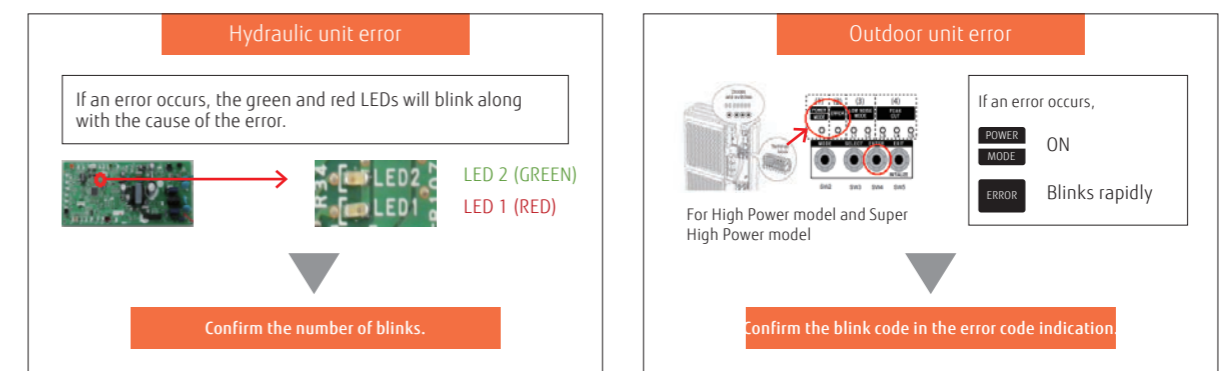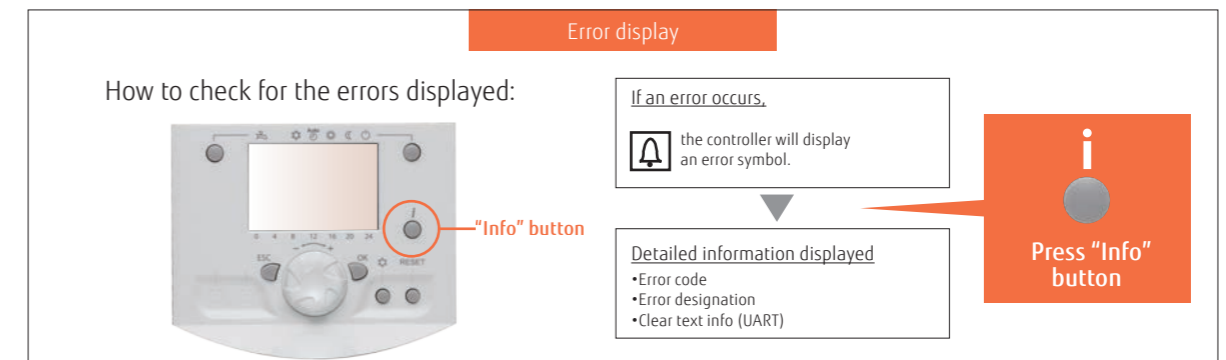



Check the error code table

# Installation requirements

## Installation of equipment & electrical wiring



### Split type Hydraulic unit

- The Hydraulic unit is hung on the wall.
- Weight  $\leq 88$  kg (including water)
- Space for maintenance needs to be taken into consideration.

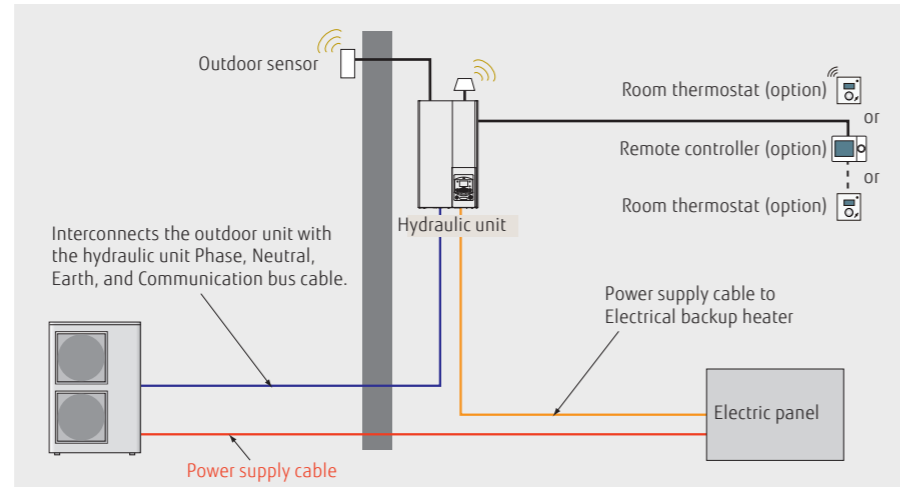


### Split DHW Integrated Type Hydraulic Unit

- Floor standing
- Weight  $\leq 393$  kg (including water)
- Space for maintenance needs to be taken into consideration.

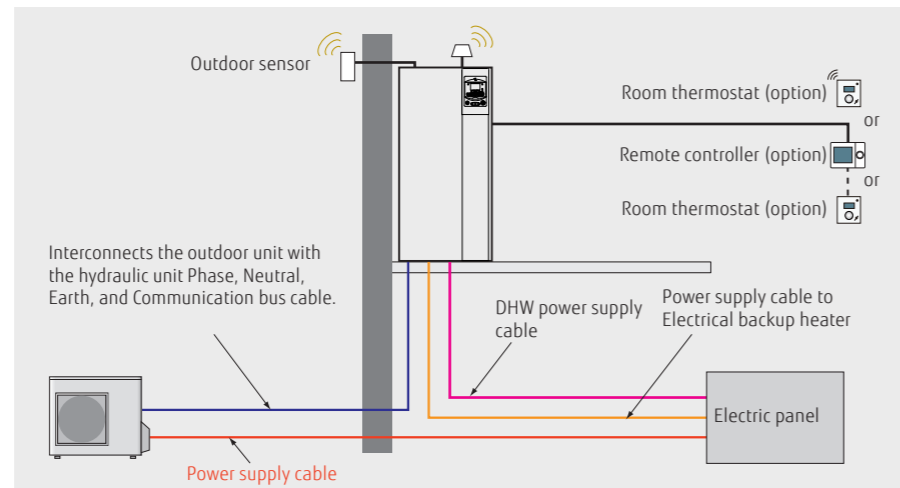


## Piping and Wiring split type

| Series           | Capacity range (kW) | Pipe diameter (Liquid/Gas) (mm) | H1 (m) | H2 (m) | L (m) |
|------------------|---------------------|---------------------------------|--------|--------|-------|
| R32 Comfort      | 5                   | 6.35/12.70                      | +20    | -20    | 3-30  |
|                  | 6                   |                                 |        |        |       |
|                  | 8                   |                                 |        |        |       |
| High Power       | 10                  | 9.52/15.88                      | +15    | -15    | 5-20  |
|                  | 11                  |                                 |        |        |       |
|                  | 14                  |                                 |        |        |       |
| Super High Power | 15                  | 9.52/15.88                      | +15    | -25    | 5-30  |
|                  | 16                  |                                 |        |        |       |
|                  | 17                  |                                 |        |        |       |

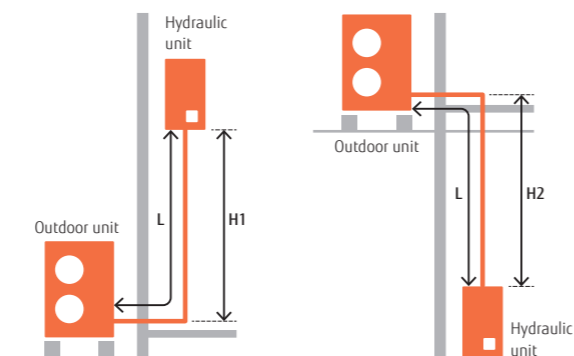


# System Configuration

## Split Type

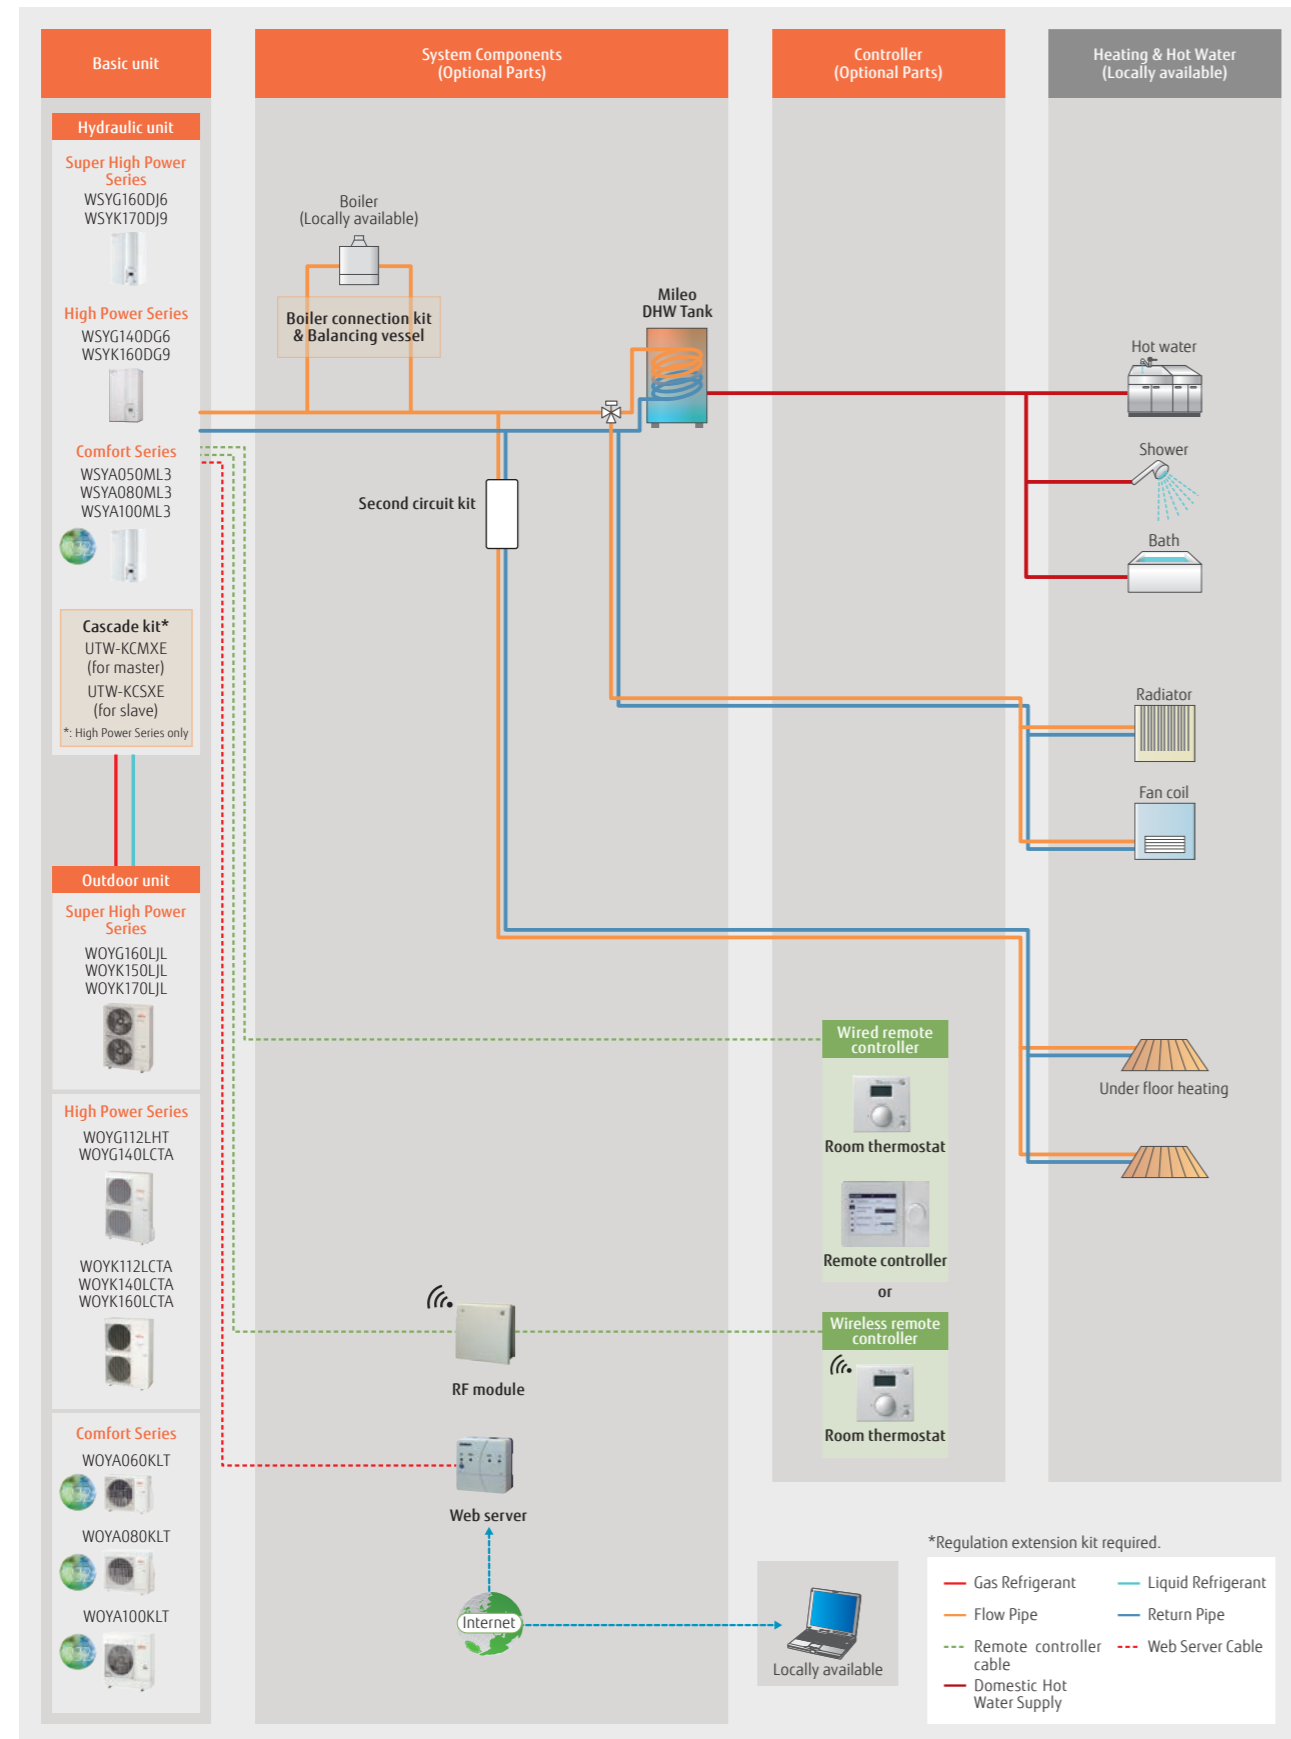


## Split DHW Integrated Type

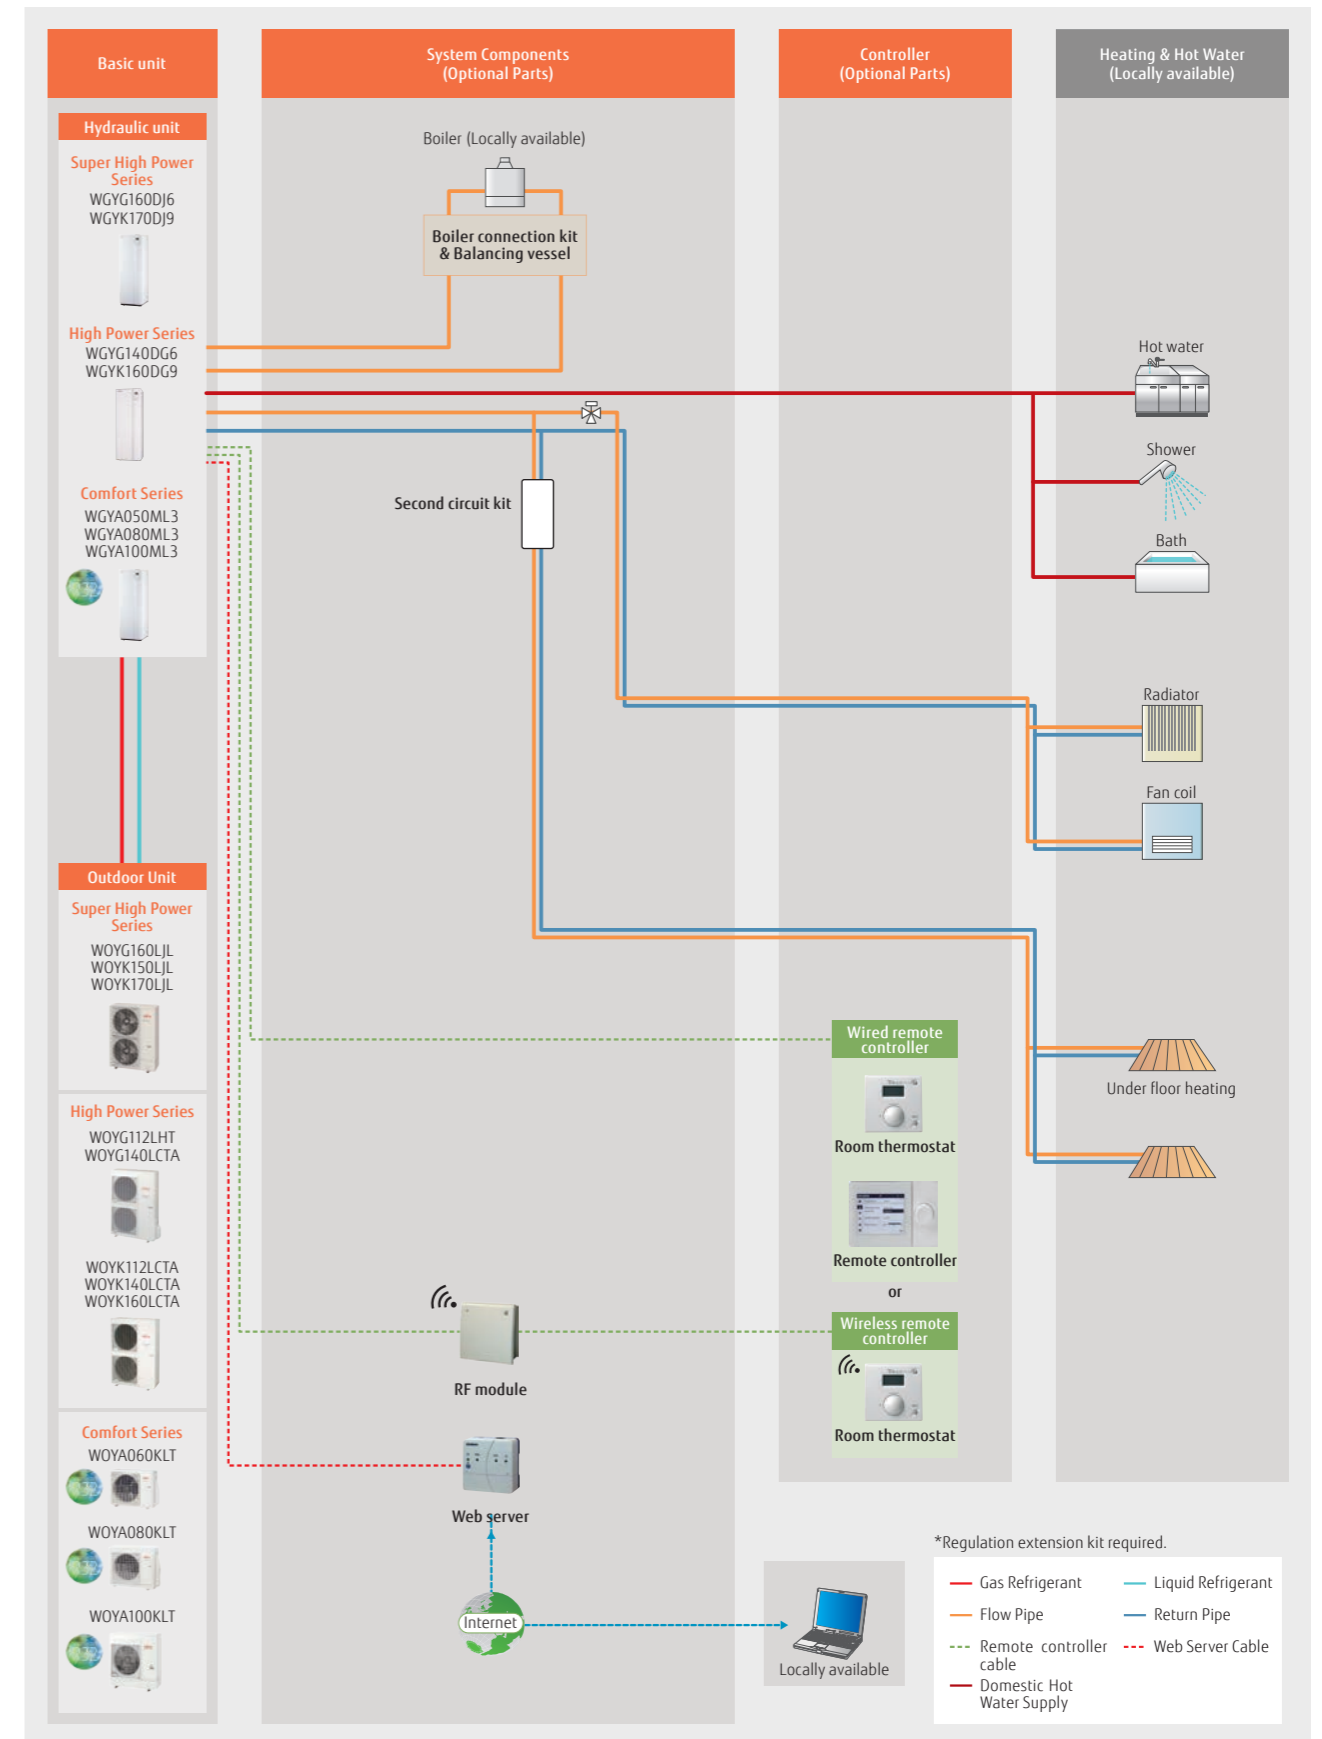


# Case Studies

## Split Type



**2-emitter simultaneous heating (Individual control)**  
Underfloor heating + Radiator

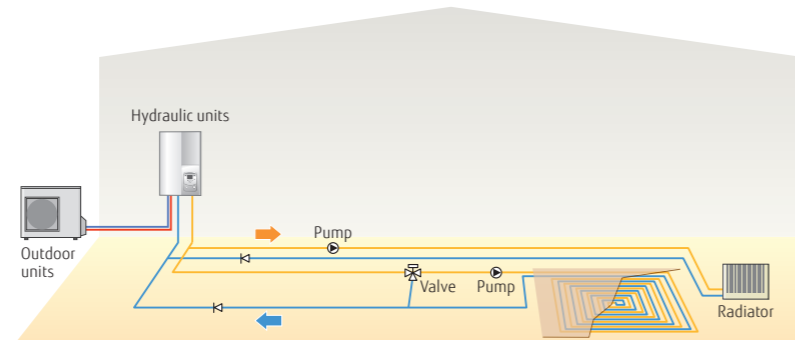

**Boiler connected to heating (Boiler + Heating)**

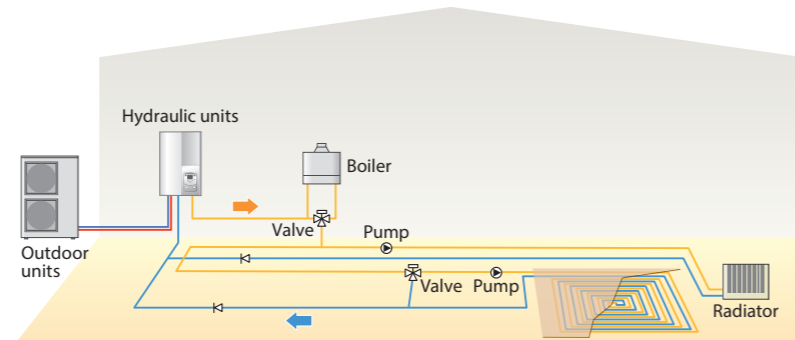


**2-emitter simultaneous heating & domestic hot water supply (Cascade)**

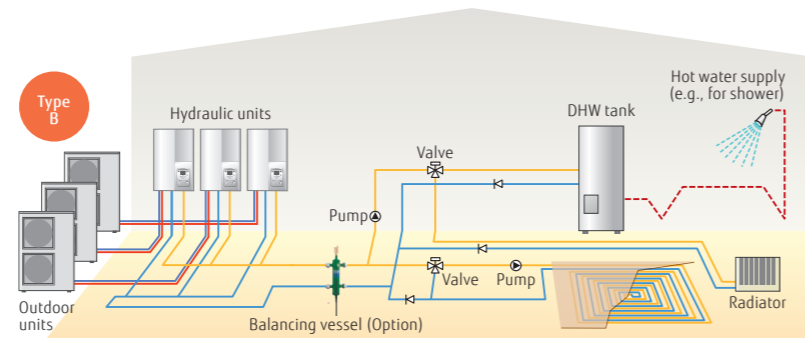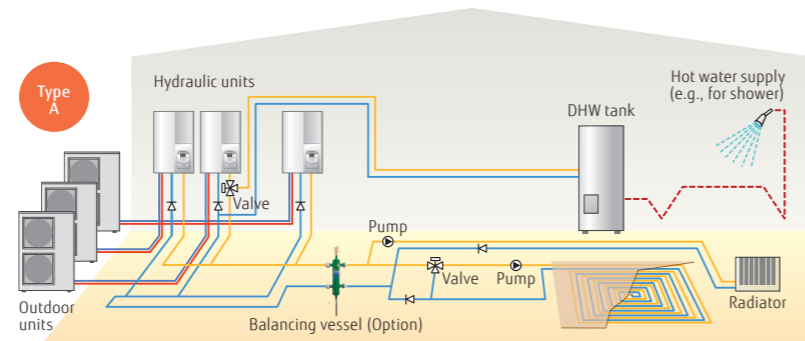


\*The hydraulic layouts shown are mainly representation. Please check with local dealer for actual hydraulic connections.

## Split DHW Integrated Type


**Single heating & domestic hot water supply**  
Radiator + domestic hot water supply

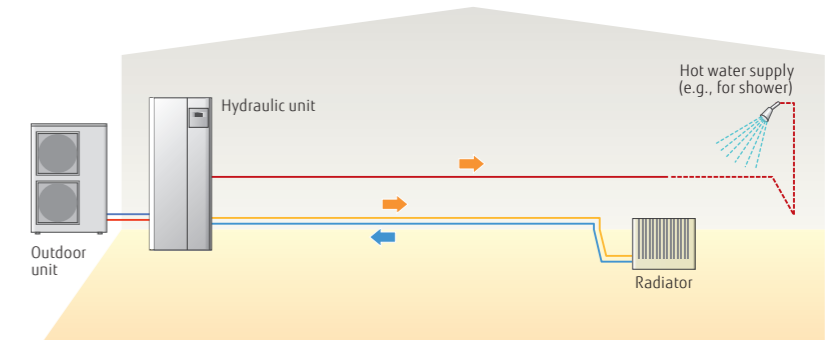

**2-emitter simultaneous heating (Individual control) & domestic hot water supply**  
Radiator + domestic hot water supply

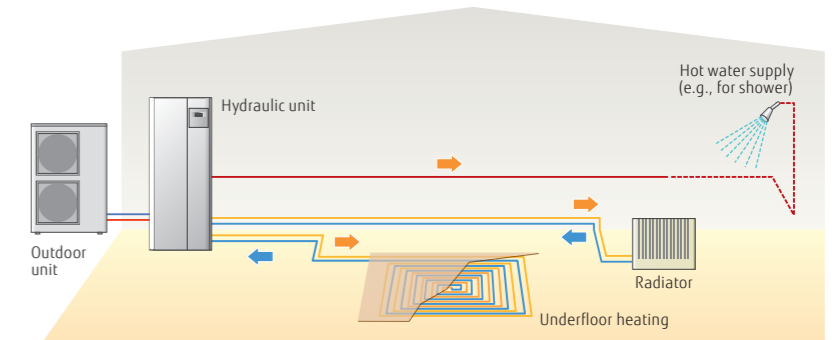

**Boiler connected to heating (Boiler + Heating) and domestic hot water supply**

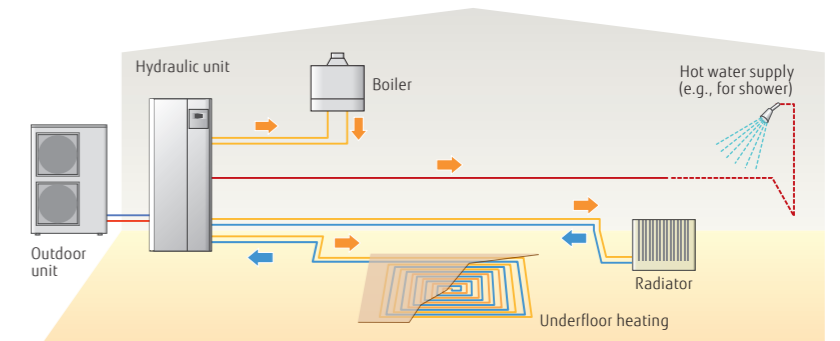


\*The hydraulic layouts shown are mainly representation. Please check with local dealer for actual hydraulic connections.



# Control Overview

To meet the diverse needs of customers, we offer a variety of control options, such as individual control and remote control options.

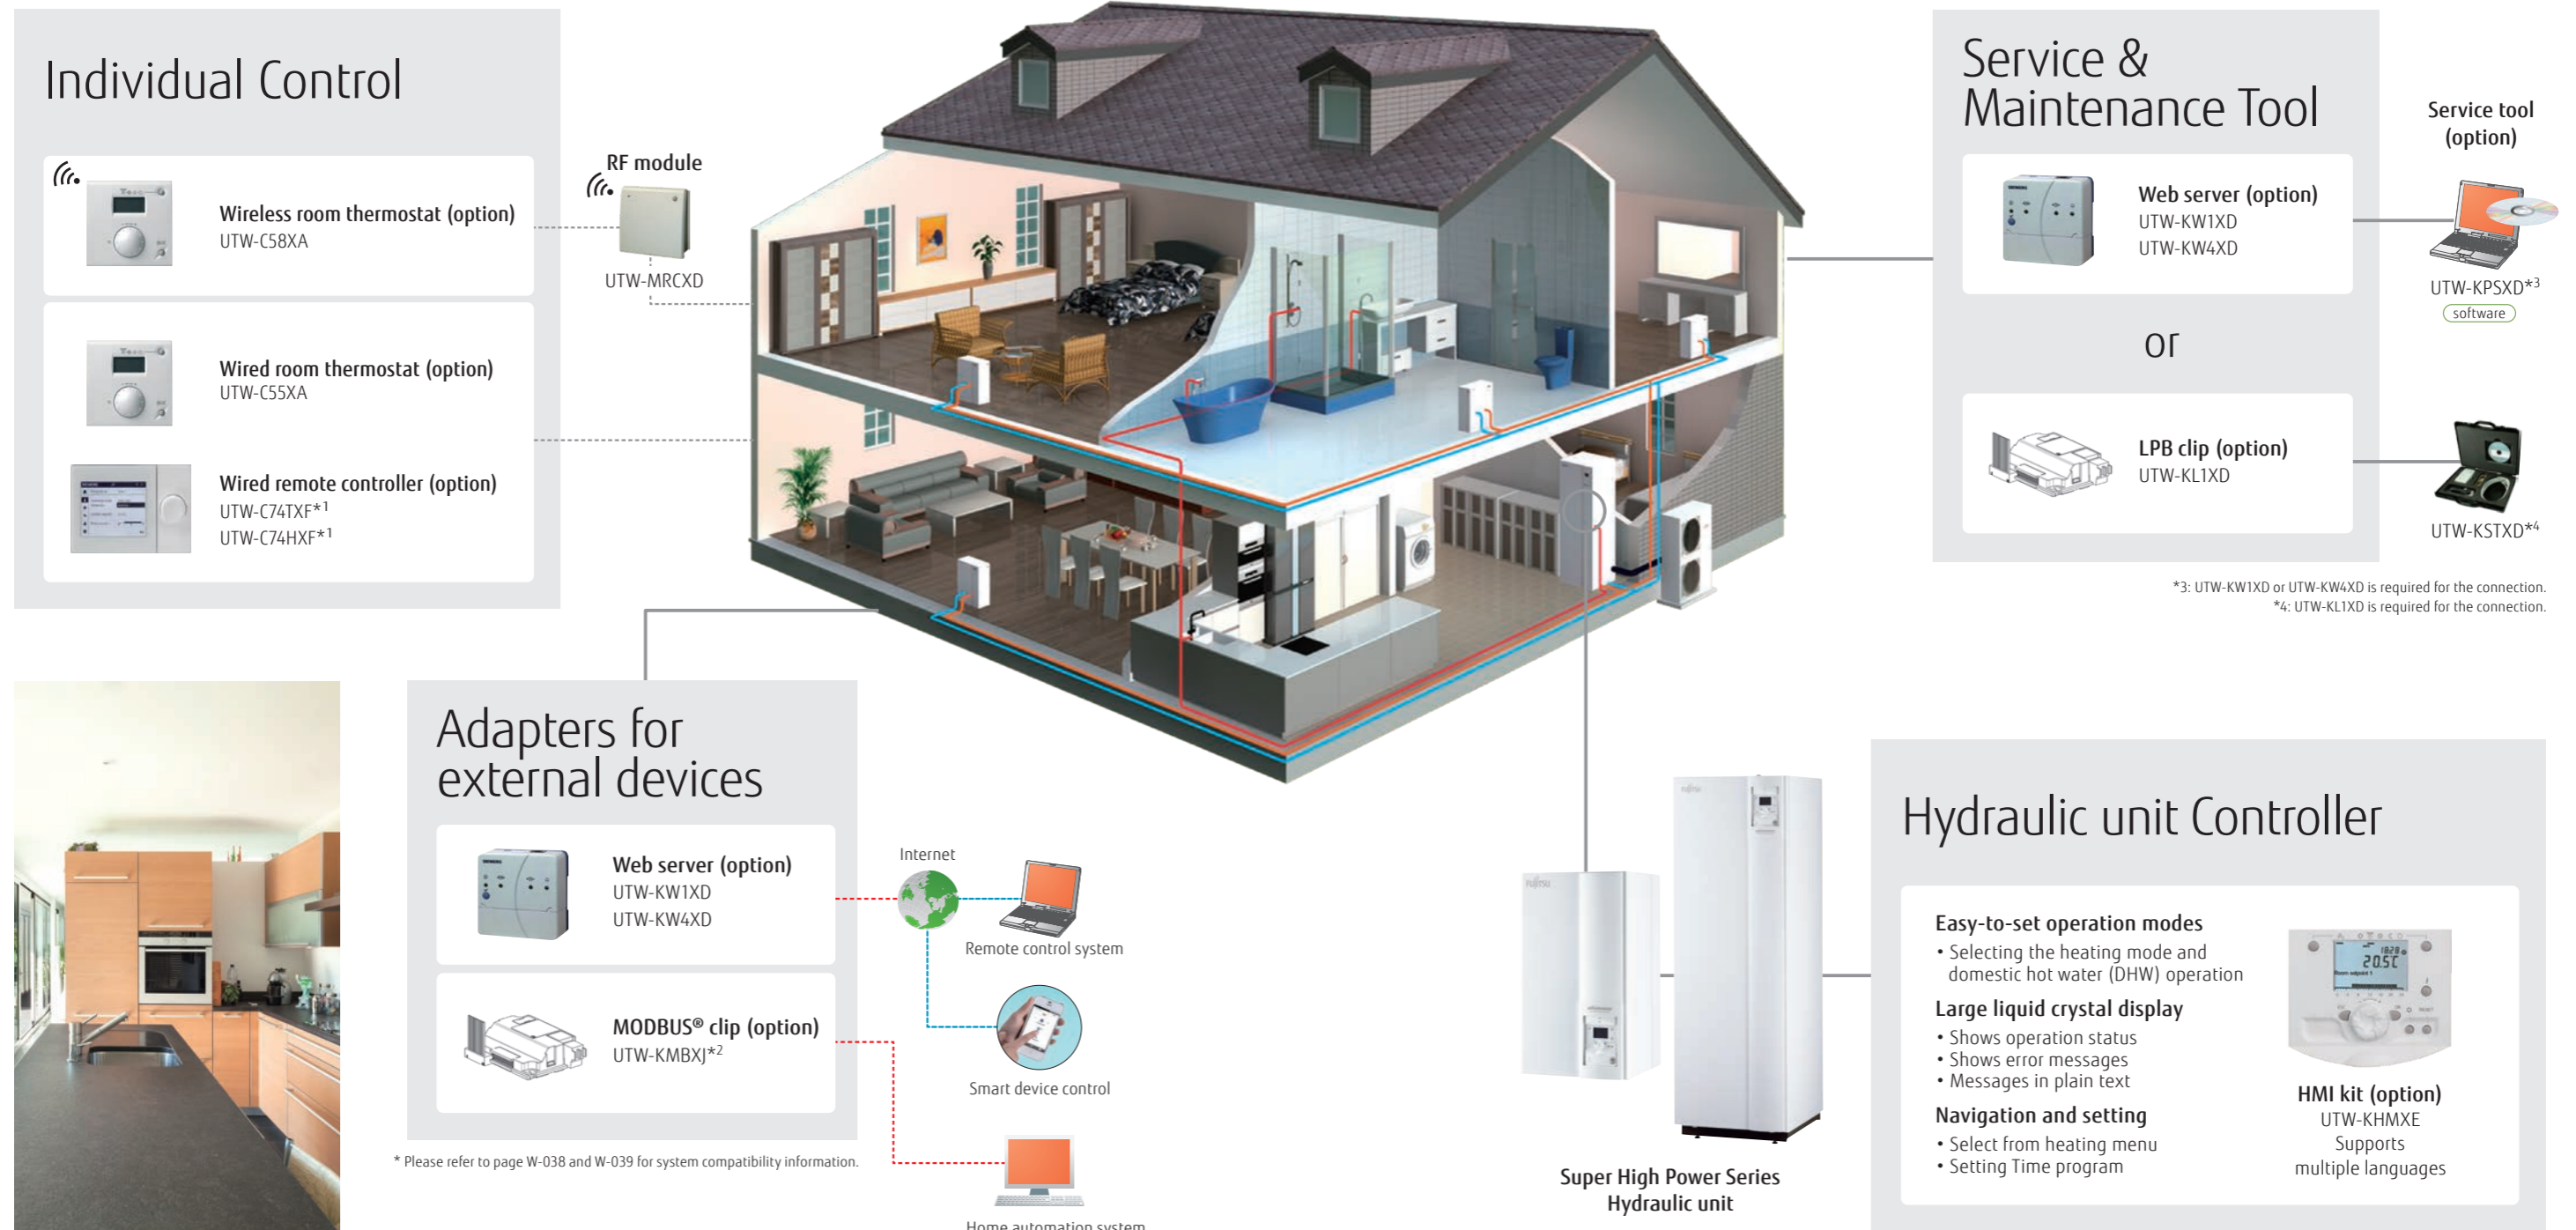

# Optional Parts Overview

Various optional parts are available to use ATW according to needs and environments.



## for Locally units



### Second circuit Kit

It can supply hot water at different temperatures to each two types of heating equipment, such as radiators and underfloor heating.

UTW-KZSXE\*1



UTW-KZDXE\*1



UTW-KZSXJ



UTW-KZDXJ

### Boiler connection kit

It can build hybrid systems using both boilers and heat pumps. Boiler and heat pumps are switched according to outside air temperature.



UTW-KBSXD



UTW-KBDXD



UTW-KBSXJ

\*1: The UTW-KREXD (Regulation extension kit) is not included but is required for connection.



## for Hydraulic unit



### Circulating pump

UTW-PHFYG

The high-output pump for replacement of the standard pump in the hydraulic unit. It can be used in properties with longer and more complex water piping.

### Cascade master/slave kit

Up to 3 hydraulic units can be connected for large-capacity use. It is need to install a primary kit in one unit and a secondary kit in one or two other units.



Cascade master kit (incl. LPB clip)




Cascade slave kit (incl. LPB clip)

### Cooling kit

Required when using ATW also for cooling operation. It is used to prevent condensation occurring in the indoor unit.



UTW-KCLXD



UTW-KCLXL

### Electrical backup heater relay



UTW-KBHL

It allows the backup heater for heating at 3 kW as standard can be used at 6 kW.

## for DHW



### DHW kit

UTW-KDWXD (External)

Required to connect locally purchased DHW tanks to air to water.



### DHW tank

200 Liters: UTW-T20AXH / UTW-T20BXH

300 Liters: UTW-T30AXH / UTW-T30BXH

The BXH series is a more efficient tank than the AXH series.



UTW-KDEXE



UTW-KDEXL

### DHW expansion kit

The expansion vessel(18L) for connection to DHW water piping.

## for Outdoor unit



### Drain pan

UTW-KDPXB

It is used to collect and drain condensation water generated by outdoor units.



### External connect kit

UTY-XWZXZ2 / UTY-XWZXZ3

The signal input (low noise mode, peak cut) and signal output (compressor operation, base pan heater control) for outdoor units are possible externally.




# Optional Parts List

| Product Name                        | Model Name   | Split Type       |    |    |            |     |     |     |             |     |     | Split DHW Integrated Type |    |    |            |     |     |     |             |     |     |     |     |     |     |
|-------------------------------------|--|------------------|----|----|------------|-----|-----|-----|-------------|-----|-----|---------------------------|----|----|------------|-----|-----|-----|-------------|-----|-----|-----|-----|-----|-----|
|                                     |  | Super High Power |    |    | High Power |     |     |     | R32 Comfort |     |     | Super High Power          |    |    | High Power |     |     |     | R32 Comfort |     |     |     |     |     |     |
|                                     |  | 1Ø               | 3Ø |    | 1Ø         | 14  | 3Ø  |     | 1Ø          | 5   | 6   | 8                         | 10 | 1Ø | 3Ø         |     | 1Ø  | 14  | 3Ø          |     | 1Ø  | 5   | 6   | 8   | 10  |
|                                     |  | 16               | 15 | 17 | 11         | 14  | 11  | 14  | 16          | 5   | 6   | 8                         | 10 | 16 | 15         | 17  | 11  | 14  | 11          | 14  | 16  | 5   | 6   | 8   | 10  |
| Second circuit Kit                  | UTW-KZSXE  | -                | -  | -  | •*1        | •*1 | •*1 | •*1 | •*1         | •*1 | •*1 | •*1                       | -  | -  | -          | -   | -   | -   | -           | -   | -   | -   | -   | -   | -   |
|                                     | UTW-KZDXE  | -                | -  | -  | -          | -   | -   | -   | -           | -   | -   | -                         | -  | -  | -          | •*1 | •*1 | •*1 | •*1         | •*1 | •*1 | •*1 | •*1 | •*1 | •*1 |
|                                     | UTW-KZSXJ  | •                | •  | •  | -          | -   | -   | -   | -           | -   | -   | -                         | -  | -  | -          | -   | -   | -   | -           | -   | -   | -   | -   | -   | -   |
|                                     | UTW-KZDXJ  | -                | -  | -  | -          | -   | -   | -   | -           | -   | -   | -                         | -  | •  | •          | •   | -   | -   | -           | -   | -   | -   | -   | -   | -   |
| Boiler connection kit               | UTW-KBSXD  | -                | -  | -  | •          | •   | •   | •   | •           | •   | •   | •                         | -  | -  | -          | -   | -   | -   | -           | -   | -   | -   | -   | -   |     |
|                                     | UTW-KBDXD  | -                | -  | -  | -          | -   | -   | -   | -           | -   | -   | -                         | -  | -  | -          | •   | •   | •   | •           | •   | •   | •   | •   | •   |     |
|                                     | UTW-KBSXJ  | •                | •  | •  | -          | -   | -   | -   | -           | -   | -   | -                         | •  | •  | •          | -   | -   | -   | -           | -   | -   | -   | -   | -   |     |
| Balancing vessel                    | UTW-TEVXA  | •                | •  | •  | •          | •   | •   | •   | •           | •   | •   | •                         | •  | •  | •          | •   | •   | •   | •           | •   | •   | •   | •   | •   |     |
| DHW kit                             | UTW-KDWXD (External)                                 | •                | •  | •  | •          | •   | •   | •   | •           | •   | •   | •                         | •  | •  | •          | •   | •   | •   | •           | •   | •   | •   | •   | •   |     |
| DHW tank                            | 200 Liters<br>300 Liters<br>UTW-T20AXH<br>UTW-T30AXH | •                | •  | •  | •          | •   | •   | •   | •           | •   | •   | •                         | •  | •  | •          | •   | •   | •   | •           | •   | •   | •   | •   | •   |     |
|                                     | 200 Liters<br>300 Liters<br>UTW-T20BXH<br>UTW-T30BXH | •                | •  | •  | •          | •   | •   | •   | •           | •   | •   | •                         | •  | •  | •          | •   | •   | •   | •           | •   | •   | •   | •   | •   |     |
| DHW expansion kit                   | UTW-KDEXE  | -                | -  | -  | -          | -   | -   | -   | -           | -   | -   | -                         | •  | •  | •          | •   | •   | •   | •           | •   | •   | •   | •   | •   |     |
|                                     | UTW-KDEXL  | -                | -  | -  | -          | -   | -   | -   | -           | -   | -   | -                         | -  | -  | -          | -   | -   | -   | -           | -   | •   | •   | •   | •   |     |
| Circulating pump                    | UTW-PHFXG  | •                | •  | •  | •          | •   | •   | •   | •           | •   | •   | •                         | •  | •  | •          | •   | •   | •   | •           | •   | •   | •   | •   | •   |     |
| Cooling kit                         | UTW-KCLXD  | •                | •  | •  | •          | •   | •   | •   | •           | •   | •   | •                         | •  | •  | •          | •   | •   | •   | •           | •   | •   | •   | •   | •   |     |
|                                     | UTW-KCLXL  | -                | -  | -  | -          | -   | -   | -   | -           | -   | -   | -                         | -  | -  | -          | -   | -   | -   | -           | -   | •   | •   | •   | •   |     |
| Regulation extension kit            | UTW-KREXD  | •                | •  | •  | •          | •   | •   | •   | •           | •   | •   | •                         | •  | •  | •          | •   | •   | •   | •           | •   | •   | •   | •   | •   |     |
| Drain pan                           | UTW-KDPXB  | -                | -  | -  | -          | -   | -   | -   | -           | -   | -   | -                         | -  | -  | -          | -   | -   | -   | -           | -   | •   | •   | •   | •   |     |
| Cascade master kit (incl. LPB clip) | UTW-KCMXE  | -                | -  | -  | •          | •   | •   | •   | •           | -   | -   | -                         | -  | -  | -          | -   | -   | -   | -           | -   | -   | -   | -   | -   |     |
| Cascade slave kit (incl. LPB clip)  | UTW-KCSXE  | -                | -  | -  | •          | •   | •   | •   | •           | -   | -   | -                         | -  | -  | -          | -   | -   | -   | -           | -   | -   | -   | -   | -   |     |

| Product Name                        | Model Name             | Split Type       |     |     |            |     |     |     |             |     |     | Split DHW Integrated Type |     |     |            |     |     |     |             |     |     |     |     |     |    |
|-------------------------------------|------------------------|------------------|-----|-----|------------|-----|-----|-----|-------------|-----|-----|---------------------------|-----|-----|------------|-----|-----|-----|-------------|-----|-----|-----|-----|-----|----|
|                                     |                        | Super High Power |     |     | High Power |     |     |     | R32 Comfort |     |     | Super High Power          |     |     | High Power |     |     |     | R32 Comfort |     |     |     |     |     |    |
|                                     |                        | 1Ø               | 3Ø  |     | 1Ø         | 14  | 3Ø  |     | 1Ø          | 5   | 6   | 8                         | 10  | 1Ø  | 3Ø         |     | 1Ø  | 14  | 3Ø          |     | 1Ø  | 5   | 6   | 8   | 10 |
|                                     |                        | 16               | 15  | 17  | 11         | 14  | 11  | 14  | 16          | 5   | 6   | 8                         | 10  | 16  | 15         | 17  | 11  | 14  | 11          | 14  | 16  | 5   | 6   | 8   | 10 |
| HMI kit                             | UTW-KHMXE              | •*3              | •*3 | •*3 | •*3        | •*3 | •*3 | •*3 | •*3         | •*3 | •*3 | •*3                       | •*3 | •*3 | •*3        | •*3 | •*3 | •*3 | •*3         | •*3 | •*3 | •*3 | •*3 | •*3 |    |
| Remote controller                   | Wired<br>UTW-C74TXF    | •*3              | •*3 | •*3 | •*3        | •*3 | •*3 | •*3 | •*3         | •*3 | •*3 | •*3                       | •*3 | •*3 | •*3        | •*3 | •*3 | •*3 | •*3         | •*3 | •*3 | •*3 | •*3 | •*3 |    |
|                                     | Wireless<br>UTW-C74HXF | •*3              | •*3 | •*3 | •*3        | •*3 | •*3 | •*3 | •*3         | •*3 | •*3 | •*3                       | •*3 | •*3 | •*3        | •*3 | •*3 | •*3 | •*3         | •*3 | •*3 | •*3 | •*3 | •*3 |    |
| Room thermostat                     | Wired<br>UTW-C55XA     | •                | •   | •   | •          | •   | •   | •   | •           | •   | •   | •                         | •   | •   | •          | •   | •   | •   | •           | •   | •   | •   | •   | •   |    |
|                                     | Wireless<br>UTW-C58XA  | •*4              | •*4 | •*4 | •*4        | •*4 | •*4 | •*4 | •*4         | •*4 | •*4 | •*4                       | •*4 | •*4 | •*4        | •*4 | •*4 | •*4 | •*4         | •*4 | •*4 | •*4 | •*4 | •*4 |    |
| Outdoor sensor transmitter          | UTW-MOSXD              | •*4              | •*4 | •*4 | •*4        | •*4 | •*4 | •*4 | •*4         | •*4 | •*4 | •*4                       | •*4 | •*4 | •*4        | •*4 | •*4 | •*4 | •*4         | •*4 | •*4 | •*4 | •*4 | •*4 |    |
| RF modules for BSB-Port             | UTW-MRCXD              | •                | •   | •   | •          | •   | •   | •   | •           | •   | •   | •                         | •   | •   | •          | •   | •   | •   | •           | •   | •   | •   | •   | •   |    |
| Web server                          | UTW-KW1XD              | •*5              | •*5 | •*5 | •*5        | •*5 | •*5 | •*5 | •*5         | •*5 | •*5 | •*5                       | •*5 | •*5 | •*5        | •*5 | •*5 | •*5 | •*5         | •*5 | •*5 | •*5 | •*5 | •*5 |    |
|                                     | UTW-KW4XD              | -                | -   | -   | •*5        | •*5 | •*5 | •*5 | •*5         | -   | -   | -                         | -   | -   | -          | -   | -   | -   | -           | -   | -   | -   | -   | -   |    |
| LPB clip                            | UTW-KL1XD              | •                | •   | •   | •          | •   | •   | •   | •           | •   | •   | •                         | •   | •   | •          | •   | •   | •   | •           | •   | •   | •   | •   | •   |    |
| MODBUS® clip                        | UTW-KMBXJ              | -                | -   | -   | •*6        | •*6 | •*6 | •*6 | •*6         | -   | -   | -                         | -   | -   | -          | -   | -   | -   | -           | -   | •*6 | •*6 | •*6 | •*6 |    |
| Service tool (incl. OCI700 Adapter) | UTW-KSTXD              | •*7              | •*7 | •*7 | •*7        | •*7 | •*7 | •*7 | •*7         | •*7 | •*7 | •*7                       | •*7 | •*7 | •*7        | •*7 | •*7 | •*7 | •*7         | •*7 | •*7 | •*7 | •*7 | •*7 |    |
| Service tool software               | UTW-KPSXD              | •*8              | •*8 | •*8 | •*8        | •*8 | •*8 | •*8 | •*8         | •*8 | •*8 | •*8                       | •*8 | •*8 | •*8        | •*8 | •*8 | •*8 | •*8         | •*8 | •*8 | •*8 | •*8 | •*8 |    |
| External connect kit                | UTY-XWZXZ2             | -                | -   | -   | •          | •   | •   | •   | •           | -   | -   | -                         | -   | -   | -          | -   | -   | -   | -           | -   | •   | •   | •   | •   |    |
|                                     | UTY-XWZXZ3             | •                | •   | •   | -          | -   | -   | -   | -           | -   | -   | -                         | -   | -   | -          | -   | -   | -   | -           | -   | -   | -   | -   | •   |    |
| Electrical backup heater relay      | UTW-KBHXL              | -                | -   | -   | -          | -   | -   | -   | -           | -   | -   | -                         | -   | -   | -          | -   | -   | -   | -           | -   | -   | -   | •   |     |    |

• Available - Not Available

\*1: The UTW-KREXD (Regulation extension kit) is not included but is required for connection.  
 \*2: Split DHW integrated type supplies DHW without the DHW kit and DHW tank.  
 \*3: Includes 21 languages with no need to prepare an RC for Eastern Europe separately.  
 C74TXF has a built-in room temperature sensor.  
 C74HXF has a built-in room temperature and humidity sensor.  
 \*4: UTW-MRCXD (RF modules) is required for the connection.  
 \*5: The connection of UTW-KW4XD for simultaneous control of multiple ATW units is only possible for cascade systems.  
 \*6: Additional Spare parts 9708302034 (Analogue interface PCB) and 109696 (connection wire) are required.  
 \*7: UTW-KL1XD (LPB clip) is required for the connection.  
 \*8: UTW-KW1XD or UTW-KW4XD (Web server) is required for the connection.

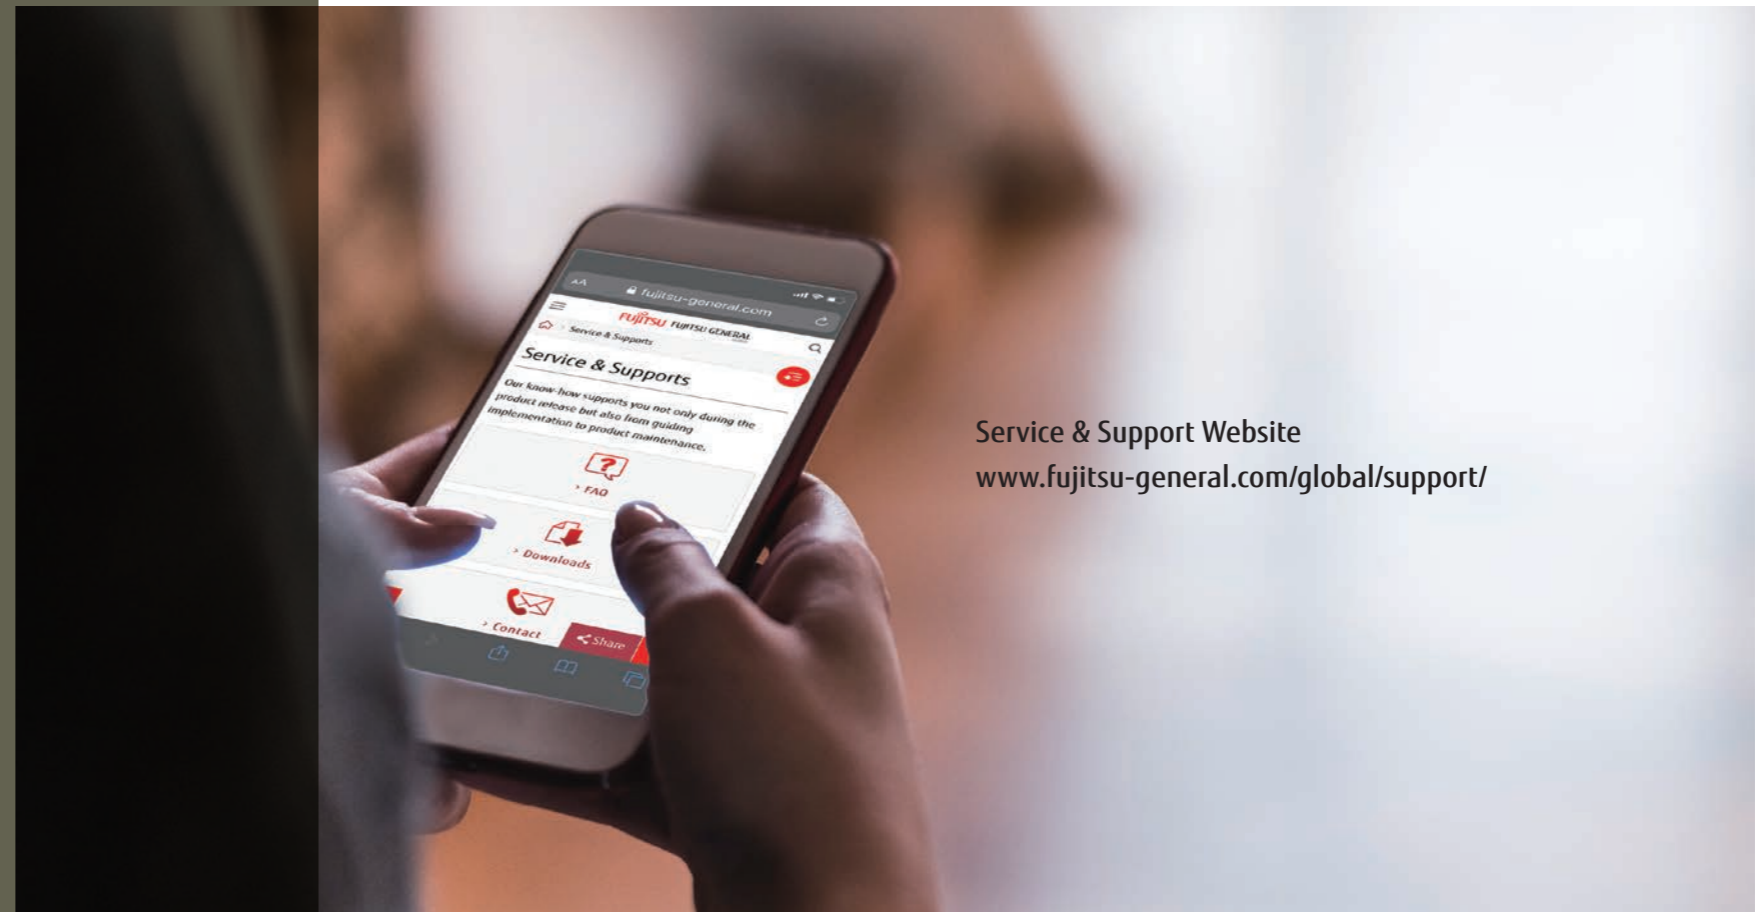

Service & Support Website  
[www.fujitsu-general.com/global/support/](http://www.fujitsu-general.com/global/support/)

# SUPPORT

- Sp-002 VRF Support
- Sp-004 HVAC system design Support Tool
- Sp-006 Air To Water Support Tool
- Sp-008 Quick Service & Maintenance
- Sp-010 Service monitoring tool
- Sp-012 Service Tool
- Sp-013 Web monitoring tool

Our knowledgeable sales and service representatives assist you, from product selection to installation and maintenance.

| Category                      | Information material            |                                     |              |           |                    |                   |                            |                    |             |                     | Tool                 |                |                                    |  |                       |                |                                      |                   |
|-------------------------------|---------------------------------|-------------------------------------|--------------|-----------|--------------------|-------------------|----------------------------|--------------------|-------------|---------------------|----------------------|----------------|------------------------------------|--|-----------------------|----------------|--------------------------------------|-------------------|
|                               | Product sales training material | Product technical training material | Product news | Brochures | Promotional movies | Operation manuals | Design & Technical manuals | Certification data | 2D CAD data | 3D CAD (Revit) data | Installation manuals | Service manual | Air To Water Package label creator | Design simulator (Room air conditioner, Packaged air conditioner, and VRF) | Air To Water proposer | CFD simulation | Service tool and Web monitoring tool | Mobile technician |
| Product training              | ●                               | ●                                   |              |           |                    |                   |                            |                    |             |                     |                      |                |                                    |  |                       |                |                                      |                   |
| Product information seeking   |                                 |                                     | ●            | ●         | ●                  | ●                 | ●                          |                    |             |                     |                      |                |                                    |  |                       |                |                                      |                   |
| Technical information seeking |                                 |                                     |              |           |                    | ●                 | ●                          |                    |             |                     |                      | ●              |                                    |  |                       |                |                                      |                   |
| Model selection               |                                 |                                     |              |           |                    | ●                 |                            |                    |             |                     |                      |                | ●                                  | ●  |                       |                |                                      |                   |
| Design                        |                                 |                                     |              |           |                    | ●                 |                            | ●                  | ●           |                     |                      |                |                                    |  |                       |                |                                      |                   |
| Verification                  |                                 |                                     |              |           |                    |                   |                            |                    |             |                     |                      |                |                                    |  |                       | ●              |                                      |                   |
| Installation                  |                                 |                                     |              |           |                    | ●                 |                            |                    |             | ●                   |                      |                |                                    |  |                       |                |                                      |                   |
| After-sales service           |                                 |                                     |              |           |                    |                   |                            |                    |             |                     | ●                    |                |                                    |  |                       |                | ●                                    | ●                 |

# VRF Support

Fujitsu General provides engineers and consultants with a wide range of product and technical information. In addition, we conduct research on new products and support design activities. We provide a wide range of support services from design to installation to maintain high quality.




## Training facilities

### Technical information

We provide equipment selection software that facilitates the design of air conditioning systems by providing performance data for the units and estimation for model selection.

#### Features

- Design & Technical manuals
- Model selection & estimation
- Certification data
- 2D/3D CAD data




2D/3D CAD data

### Technical support

Technical support is offered at every stage, from design through to installation, to assist in optimizing air conditioning solutions.

#### Features

- CFD simulation
- Guidelines
- Commissioning support

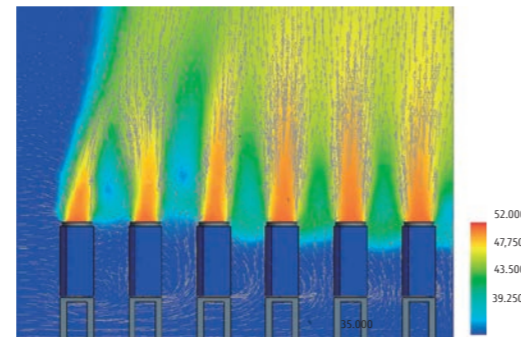

CFD simulation




Commissioning support

### Product information

Information on new models is provided in the form of documents and movies in a timely manner for release, readily downloadable from the private section of our website. Contact your Fujitsu General representative for access information.

#### Features

- Product news
- Brochures & manuals
- Promotional movies

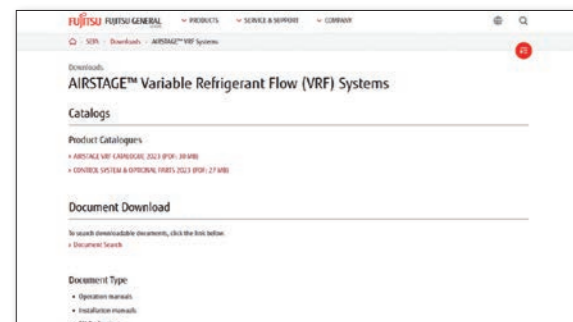

<https://www.fujitsu-general.com/eu/support/downloads/vrf/>



Fujitsu General regularly provides professional product, technical and service training at its training facilities worldwide. These research facilities also support the development of human resources with advanced technical skills.

#### Features

- Designing VRF systems
- On-site training for control systems



- 1 Head office training center in Japan
- 2 Training center in China
- 3 Asia training center in Singapore
- 4 Europe training center in the United Kingdom
- 5 Europe training center in Germany
- 6 America training center in the United States
- 7 Middle East training center in the UAE
- 8 Oceania training center in Australia

# HVAC system design Support tool

Put the charts and pens away and design your projects on a computer using the Design simulator. Everything from selecting indoor and outdoor units, allocating controls and optional parts through to designing the piping and wiring systems is made easier using the program's built-in features. Once the project design is complete, the Export function makes it easy to generate material lists, product specifications, and refrigerant calculations, and more. You can also export in Word, Excel, and Acrobat formats, as well as group CAD data related to your project.



## Design simulator

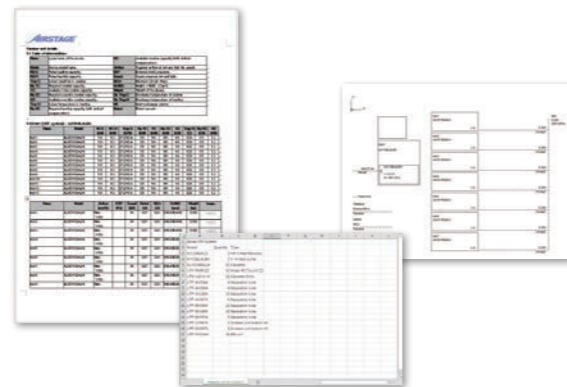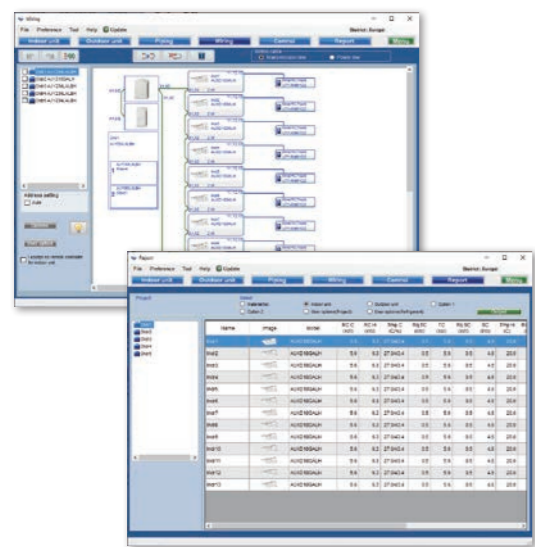


### Outputs in the format that matches the application

You can export your project information in a number of industry standard file formats.

- Word format (rtf) (doc)
- Excel format (csv)
- Acrobat format (pdf)
- 2D CAD data (DXF)

### Automatically create model selection information

- The required performance, type, and temperature conditions for each indoor unit are entered and then dragged and dropped onto the outdoor unit to automatically set each unit.
- Creates piping and wiring diagrams automatically to facilitate branching, grouping, and option settings.
- The additional refrigerant charging is automatically calculated when the pipe length is entered.
- Easy configuration of remote controller groups, central controller, and converters.
- The equipment list including the equipment information is created automatically.

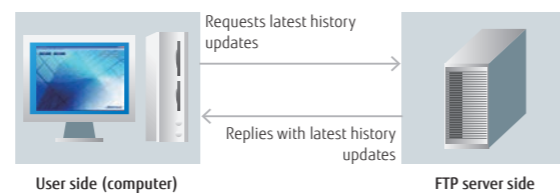

### Update your Design simulator

The database can be updated easily online with the AutoUpdate function using FTP.

## BIM Building information modeling



### BIM files of Fujitsu General's products are available on BIMobject®


Fujitsu General is releasing BIM files of our products on the BIMobject® website BIMobject.com.

#### Outline of BIMobject®

BIMobject® is a game changer for the construction industry, offering development, maintenance, and syndication of objects on the world's largest BIM platform.

#### About BIM files

- BIM files can be viewed in Autodesk Revit® 2018 version or later.
- In each BIM file, the location of the connectors for the refrigerant and drain pipe is different.
- Each BIM file includes several family types.
- A catalog and specification sheet is available in Revit file format for each product.

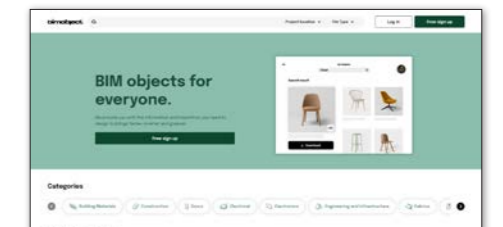

**R RFA (Revit data)**  
A data format available for BIM-designed projects

**A DWG**  
a standard data format used for Autodesk products

#### Data content

- Shape (Size)
- Drain direction
- Pipe direction
- Power supply location
- It contains information about the above specifications.



Type catalog with product specifications




#### DXF

Intermediate data commonly available in CAD products

Data content



- Shape (Size)



\*To learn more about how to use BIM files, refer to the instructional video on each product page. [youtu.be/wfL-hwFQ7dM](https://youtu.be/wfL-hwFQ7dM)

# Air To Water (ATW) Support tool

Fujitsu General's software for ATW automatically creates a combination of ATW equipment by simply providing a few parameters. Supports multiple languages with an automatic update function.

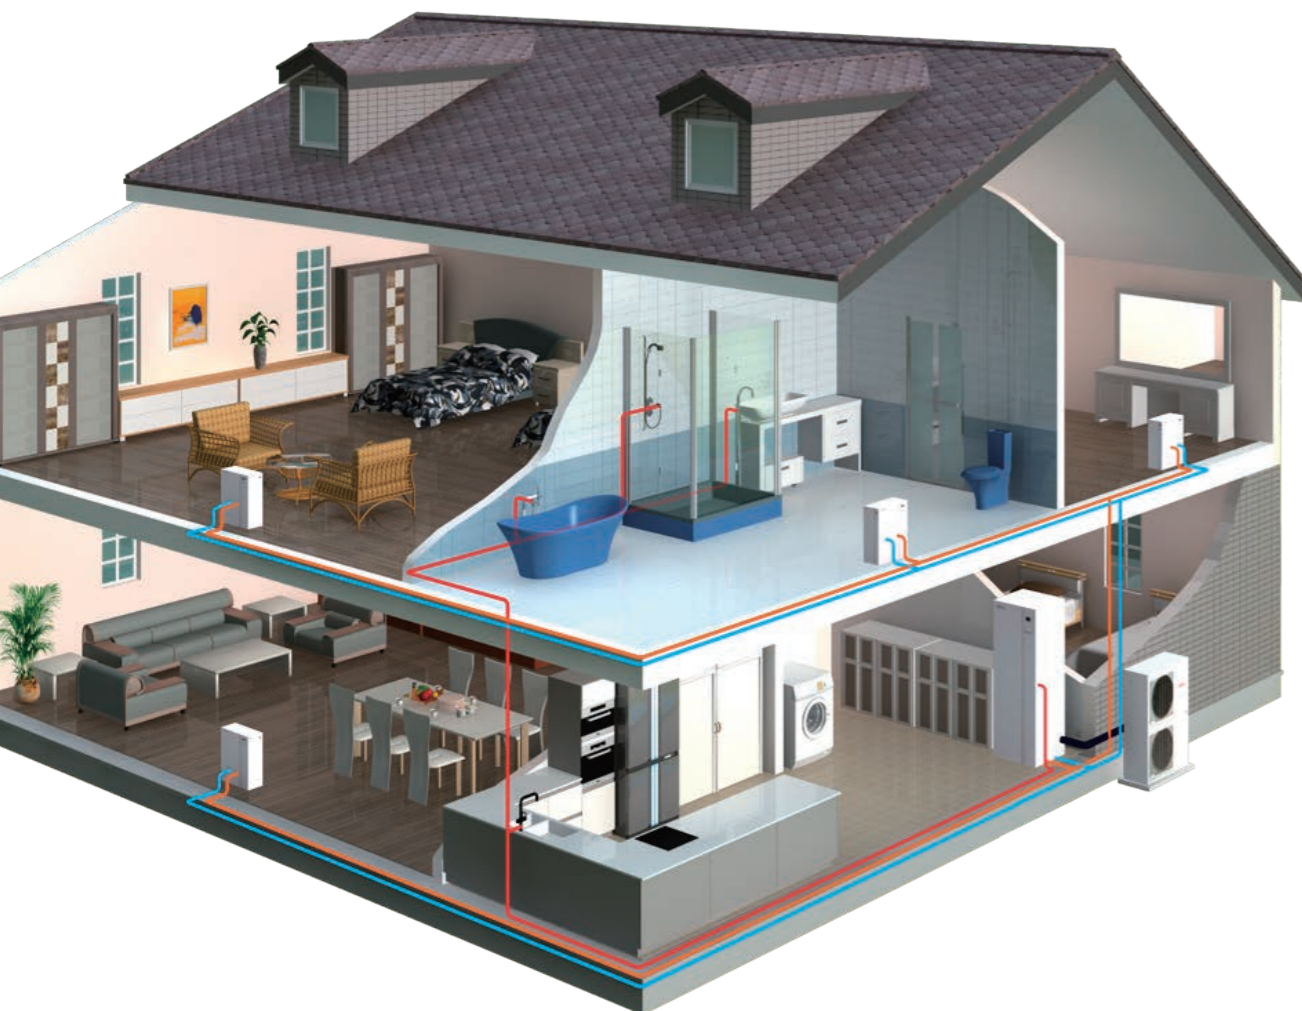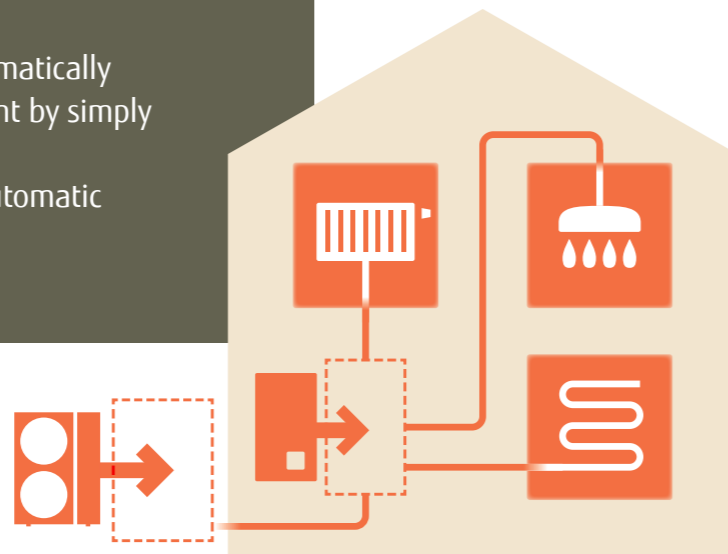


## Air To Water proposer

### Selecting models with detailed technical information

- Simply enter the region where the equipment will be installed, the required heating capacity, the method of heating and other factors, and the software will select the appropriate equipment automatically.

\* From now on, the name will be changed to the new name above.  
The current name is WATERSTAGE Proposer.

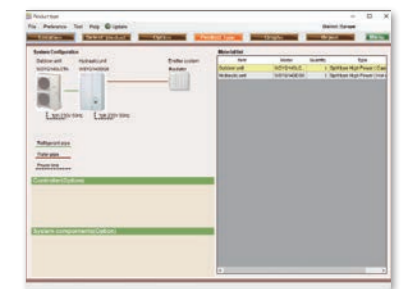

The images of the optional items will help you configure your system correctly. If more than one ATW equipment is required, all relevant option items will be selected automatically.

The selected unit can be modified after reviewing the overall system configuration. The images and the list of devices are displayed at the same time, helping to avoid mistakes in device selection.



## Air To Water Package label creator

### Download Energy labels and Fiches from our website

ErP documents such as Energy labels, Product fiches, Package labels, Package lists, Information sheets, and EC Declarations can be searched for and downloaded from our website.

We will also provide an online service in the future so that installers can easily create various package labels and package fiches for different models.

\* From now on, the name will be changed to the new name above.  
The current name is WATERSTAGE Package label creator.

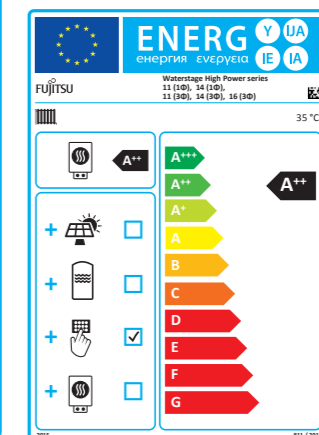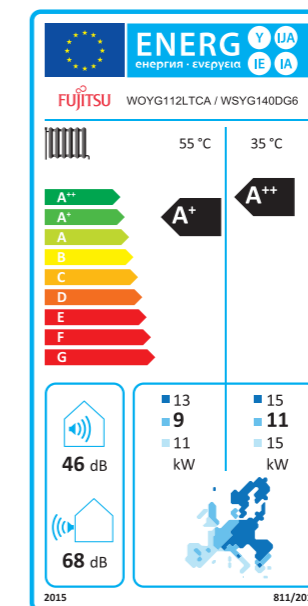

# Quick service & maintenance

In the unlikely event that a problem should occur with the unit or system, a wide variety of support tools are available to assist with prompt service and maintenance anytime, anywhere, including error code displays on the product, service tools to check the detailed status of the entire system, and remote monitoring tools using the internet.




## Easy maintenance & monitoring

### Designed for easy maintenance

The operating status of the air conditioner and detailed trouble conditions are displayed on the 7-segment indicator lamp on the outdoor unit printed circuit board (PCB) and on the screen of the remote controller. Check the status of the unit quickly for a prompt response.


- Display the operation mode at the time.
- Discharge temperature and pressure
- Compressor operation status
- "Address/Type/Number" of the outdoor unit
- Error code

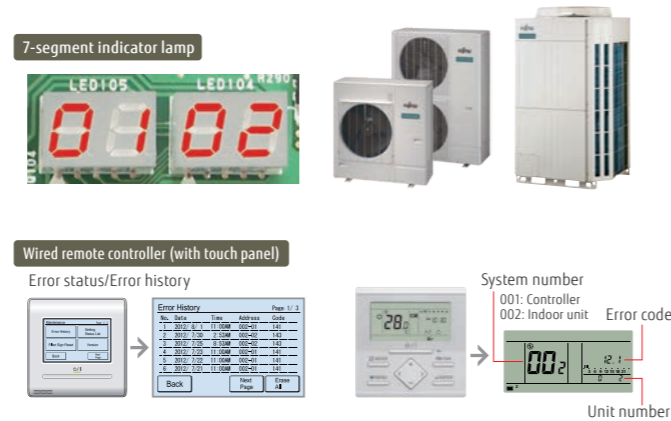

### Error diagnosis by Service tool


Connect Service tool to check the status details of units, from single split to VRF, on a computer screen. Check the errors quickly for prompt countermeasures.

- Operating status/control
- Monitoring operating conditions
- Monitoring sensor data
- Indicating trend graphs
- Error history
- Indicating refrigerant circuit diagrams (for VRF)

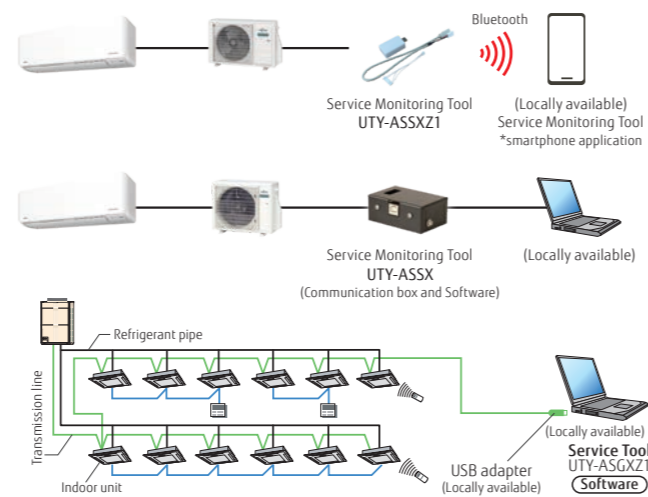

### Remote monitoring


VRF system operating status and trouble status details can be monitored remotely at any time via the internet. Prompt coordination is available with service personnel.

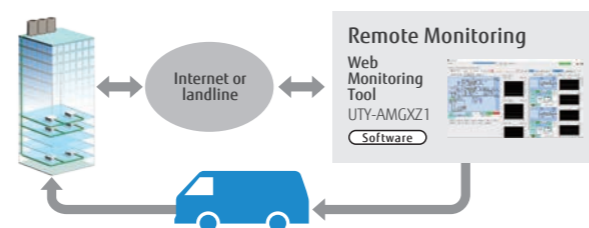

## Mobile troubleshooting App for iOS and Android™ devices

We will release an App for troubleshooting tools for iPhone, iPod touch and other Apple devices, and Android products for Fujitsu General air conditioners (Room air conditioner/ Packaged air conditioners VRF and ATW, "AIRSTAGE Mobile", and R32 calculation of allowable refrigerant capacity)


Use Error Code Check, Troubleshooting, and Sensor Check to understand the status of your air conditioner.

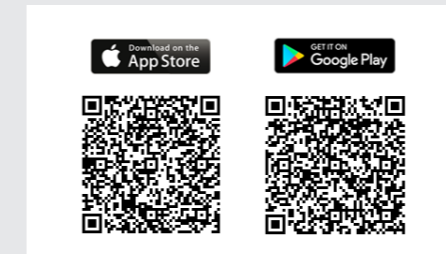

## Service monitoring tool for Single split, Multi-split & Air to water




- A quick overview of the temperature sensor readings and the electronic expansion valves (EEVs), fans, compressors and other control components
- It is not always easy to read the temperature sensor and know the status of the control components. So let the Service monitoring tool judge them.
- Visualizes protected operations
- Troubleshoots intermittent problems effectively
- Provides proof of normal operation to customers during periodical maintenance

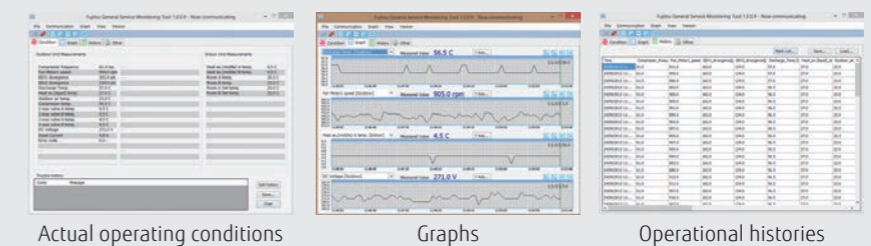

|                             |                |
|-----------------------------|----------------|
|                             | UTY-ASSX       |
| Dimensions (H × W × D) (mm) | 60 × 160 × 160 |
| Weight (g)                  | 500            |



# NEW AIRSTAGE Service Monitor Tool for Single-split, Multi-split, Air to water UTY-ASSXZ1

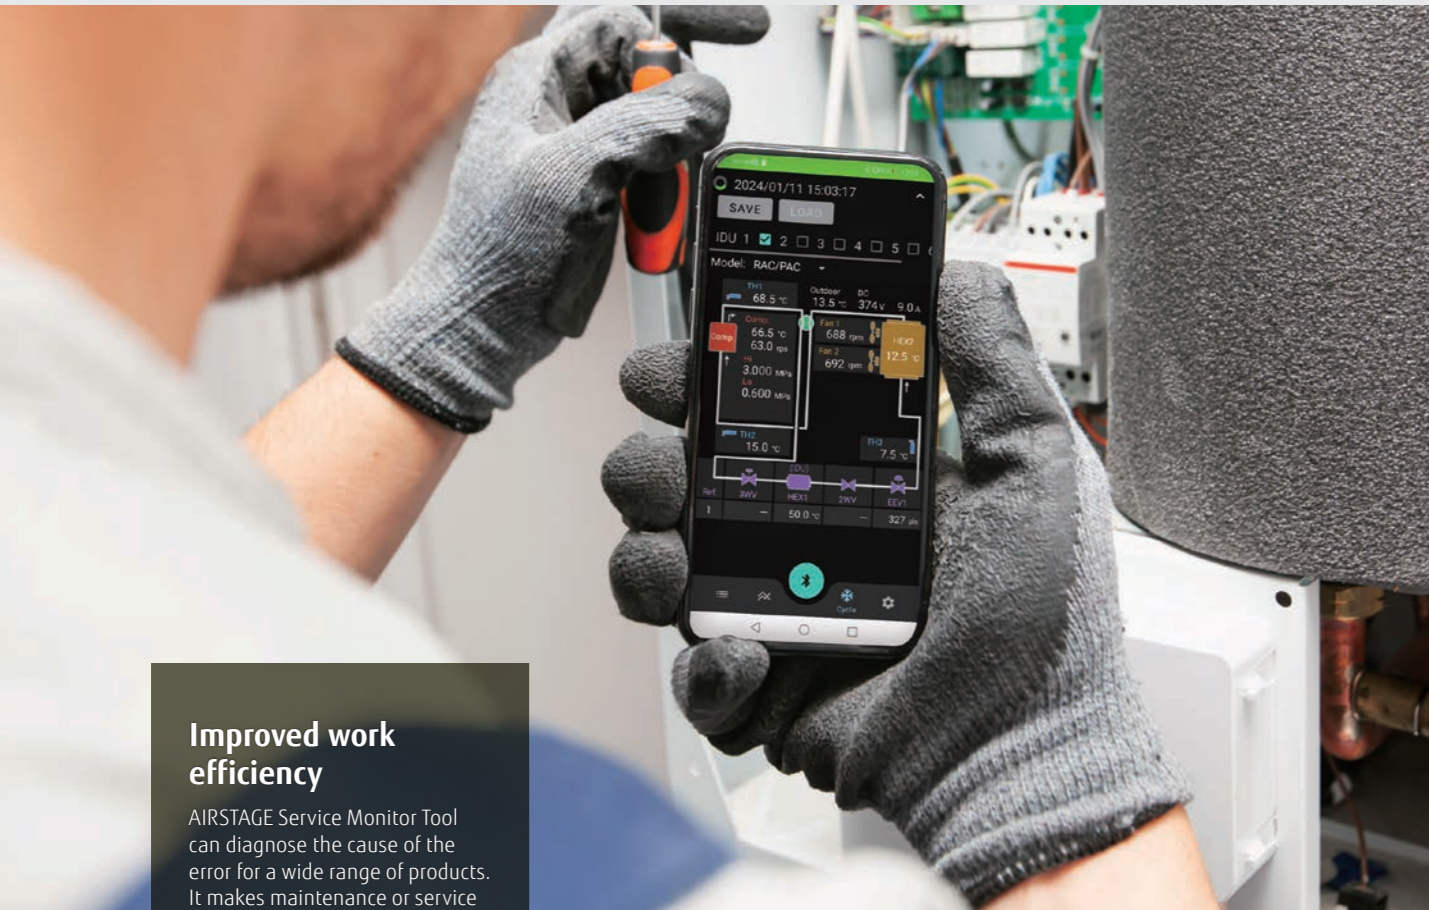


## Improved work efficiency

AIRSTAGE Service Monitor Tool can diagnose the cause of the error for a wide range of products. It makes maintenance or service support faster and can also reduce the number of visits and maintenance costs.

\*The values in the pictures are examples.

## Bluetooth communication

AIRSTAGE Service Monitor Tool can diagnose by the smart device\*1 and reduce the working time compared with diagnosis by PC. No need to connect a PC makes diagnosis easier even in narrow spaces.

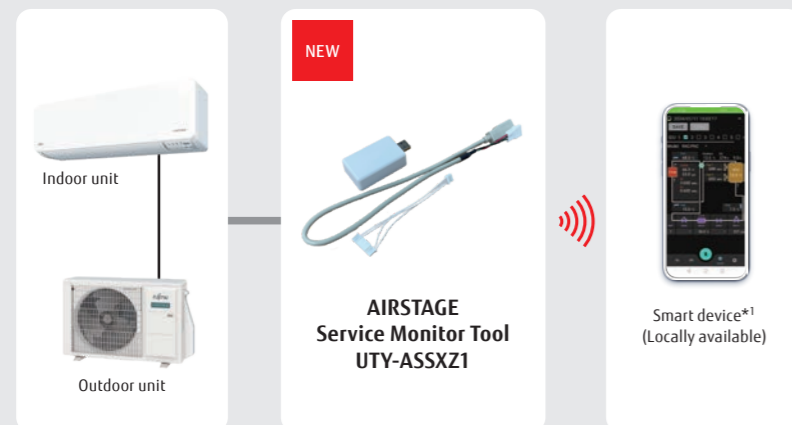

\*1 Android only.  
You need to install the "AIRSTAGE Service Monitor Tool" app on your smart device.

## Compact and lightweight design

New model is easy to carry by compact and lightweight design. The service personnel can visit the maintenance site with small luggage.



## New application with simple design

New application for smart devices has been released. The stylish design makes the application easy to use for everyone.




AIRSTAGE Service Monitor Tool



## Refrigerant cycle diagram display

The operating status can be displayed with a simple, clear diagram\*2 on the smart device. It reduces the time for diagnosis and makes diagnosis easier. It can complement abundant experience and advanced knowledge of refrigerant cycle. This shortens the training time for service personnel.

\*2 list and graph displays are also available

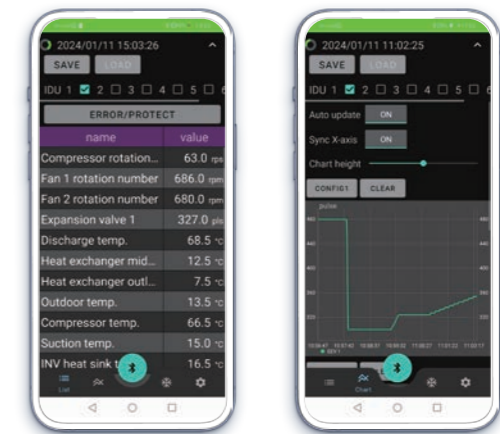

\*The values in the pictures are examples.

## Specifications

|                                 | UTY-ASSXZ1             |
|---------------------------------|------------------------|
| Dimensions (H x W x D) (mm)     | 20 x 35 x 60 (adapter) |
| Communication cable (cm)        | 60                     |
| Weight (g)                      | 25 (adapter)           |
| Communication method            | Bluetooth 5.3          |
| Max. communication distance (m) | 10*3                   |
| Compatible device               | Android8.0 or above    |

\*3 Depends on the environment

## Function List

|                                  |                          | UTY-ASSXZ1                | UTY-ASSX         |
|----------------------------------|--------------------------|---------------------------|------------------|
| Product specification            | Installation             | Outdoor unit PCB          | Outdoor unit PCB |
|                                  | Communication            | Bluetooth                 | Wired            |
| Support product type             | Split                    | ●                         | ●                |
|                                  | Multi-split              | ●                         | ●                |
|                                  | ATW                      | ●                         | ●                |
|                                  | VRF                      | —                         | —                |
|                                  | Product distinction      | ●                         | ●                |
| Function                         | Signal-type distinction  | ●                         | ●                |
|                                  | Operating status display | List                      | ●                |
|                                  |                          | Graph                     | ●                |
|                                  |                          | Refrigerant cycle diagram | ●                |
| Adapter firmware update          | ●                        | —                         |                  |
| Adapter status monitoring        | ●                        | —                         |                  |
| Input and output of history data | ●                        | ●                         |                  |

# Service tool

UTY-ASGXZ1

## Extensive monitoring and analysis functions that make installation and maintenance easier


- The operation status of the system can be monitored and analyzed to detect any malfunctions.
- Data on the operation status of the system can be stored on a computer to allow for remote access.
- Up to 400 indoor units in a single VRF network system can be controlled and monitored for a large building or hotel.
- This software can be connected to any point of transmission line with a USB adapter (locally available).

\* Saved data can be displayed offline. Note that the data saved by the following software applications cannot be displayed.

- UTR-YSTB/UTR-YSTC (Service tool)
- UTR-YMSA (Web monitoring tool)

## Automatic operation check for refrigeration cycles

Once installed, the Service tool automatically checks for refrigeration cycles. The self-diagnosis function determines whether each sensor value is normal, which reduces the need for manual checks. The result of a diagnosis can be provided in a report.

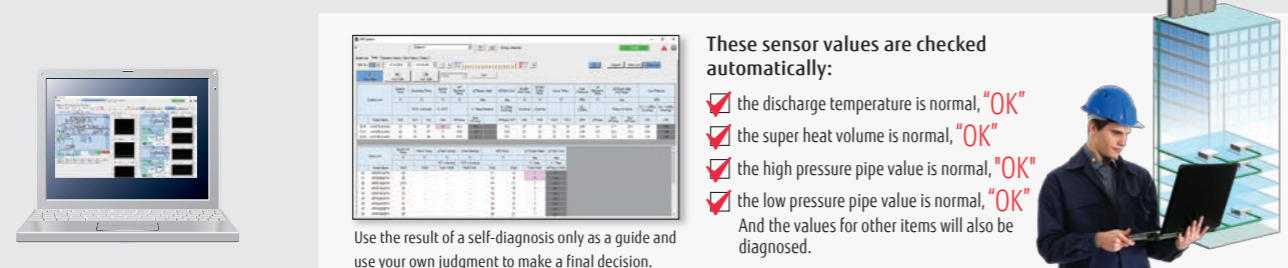

Use the result of a self-diagnosis only as a guide and use your own judgment to make a final decision.


**These sensor values are checked automatically:**

- ✓ the discharge temperature is normal, "OK"
- ✓ the super heat volume is normal, "OK"
- ✓ the high pressure pipe value is normal, "OK"
- ✓ the low pressure pipe value is normal, "OK"

And the values for other items will also be diagnosed.


## Remote technical support and maintenance

On-site check screen can be shared between on-site staff and a service technician in a remote location. When a service technician visits the site for troubleshooting, the system's operation status can be shared in real time with a remote service center for assistance. On-site staff can have an online chat with a remote service center to get further assistance.

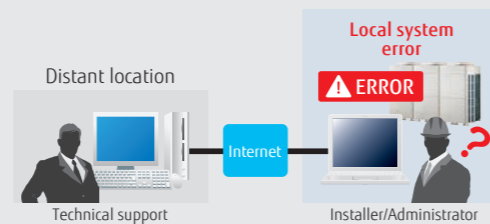

## Trend charts

Previous-generation application could display only 3 sets of data from sensors. However, the current generation of the service tool displays multiple charts simultaneously so that refrigeration cycles can be monitored and checked in greater detail.

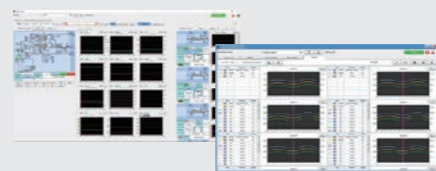

### Computer requirements

| UTY-ASGXZ1        |  |
|-------------------|--|
| Operating system  | • Microsoft® Windows® 7 Professional (32-bit or 64-bit) SP1<br>• Microsoft® Windows® 8.1 Pro (32-bit or 64-bit)<br>• Microsoft® Windows® 10 Pro (32-bit or 64-bit)                     |
| CPU               | 1 GHz or higher  |
| Memory            | • 1 GB or more (for Windows® 7 [32-bit], Windows® 8.1 [32-bit], and Windows® 10 [32-bit])<br>• 2 GB or more (for Windows® 7 [64-bit], Windows® 8.1 [64-bit], and Windows® 10 [64-bit]) |
| HDD               | 40 GB or more of free space  |
| Screen resolution | 1366 × 768 pixels or higher  |
| Interface         | • USB port for U10 USB Network interface and software protection key   |
| Software          | Internet Explorer® 11 or Microsoft Edge  |

### Packing list

| Name                                    | Quantity | Application   |
|---|----------|---|
| White-USB-key (Software protection key) | 1        | Software protection key to be connected to a USB port on a Service tool-installed computer. This software runs only on a computer with WibuKey. |

\*Computer requirements  
•Echelon® U10 USB Network Interface – TP/FT-10 Channel (Model name: 75010R) (Required for each VRF Network)

# Web monitoring tool


UTY-AMGXZ1

## Features

- Troubleshooting is performed by monitoring each air conditioning unit remotely during a periodical system check.
- An error notification is automatically transmitted to several locations via the internet\*1.
- Requires either a dedicated internet connection or landline to operate.
- The occurrence of an error can be confirmed through an error alert and equipment status information obtained from a remote location.
- Monitoring data can be downloaded in a remote location. These data can be accessed and displayed even when the service tool is in offline mode.
- Can be viewed on the monitoring computer's Web browser without installing any special software.

\*1: Internet e-mail access required.


## Web Monitoring System

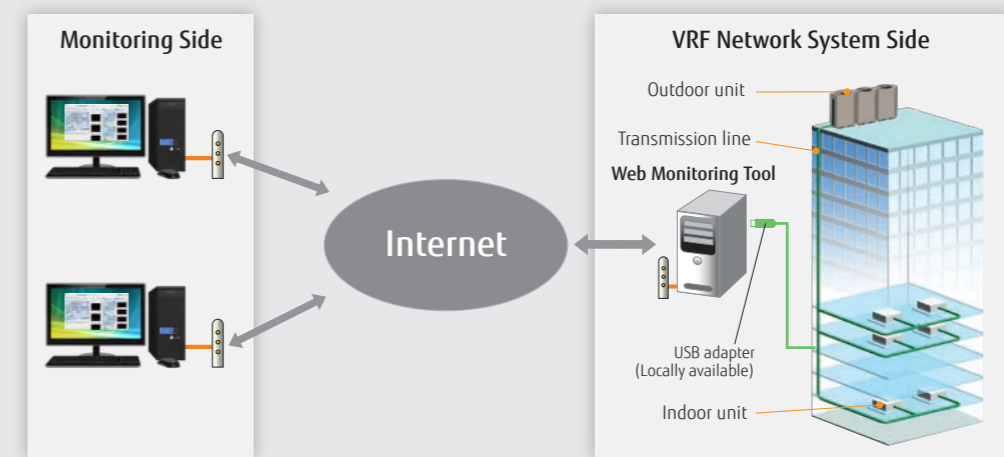

## Supporting up to 4 VRF network systems

Up to 4 USB adapters can be connected to a computer, enabling the monitoring of up to 1,600 indoor units.

Suitable for use in a large building or hotel.

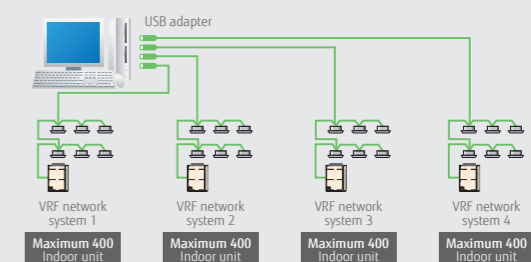

### Computer requirements

| UTY-AMGXZ1        |  |
|-------------------|--|
| Operating system  | • Microsoft® Windows® 7 Professional (32-bit or 64-bit) SP1<br>• Microsoft® Windows® 8.1 Pro (32-bit or 64-bit)<br>• Microsoft® Windows® 10 Pro (32-bit or 64-bit)   |
| CPU               | 1 GHz or higher  |
| Memory            | • 1 GB or more (for Windows® 7 [32-bit], Windows® 8.1 [32-bit], and Windows® 10 [32-bit])<br>• 2 GB or more (for Windows® 7 [64-bit], Windows® 8.1 [64-bit], and Windows® 10 [64-bit])                                     |
| HDD               | 40 GB or more of free space  |
| Screen resolution | 1366 × 768 pixels or higher  |
| Interface         | • USB ports (one for U10 USB Network interface and up to 4 ports for software protection keys)<br>• Interface for remote connection:<br>- Landline: Modem is required.<br>- Internet using LAN: Ethernet port is required. |
| Software          | Internet Explorer® 11 or Microsoft Edge  |

### Packing list

| Name                                    | Quantity | Application   |
|---|----------|---|
| White-USB-key (Software protection key) | 1        | Software protection key to be connected to a USB port on a Service tool-installed computer. This software runs only on a computer with WibuKey. |

\*Computer requirements  
•Echelon® U10 USB Network Interface – TP/FT-10 Channel (Model name: 75010R) (Required for each VRF Network)