

FUJITSU

FUJITSU

PRODUCT CATALOGUE 2023

AIR CONDITIONERS LINEUP



FUJITSU GENERAL LIMITED

Notice regarding specifications

I.U. = Indoor Unit O.U. = Outdoor Unit Qu = Quiet * = Not decided yet


- Specifications and design are subject to change without notice for future improvement.
- For further details, check with our authorized dealers.
- Cooling and heating capacities are based on the following conditions:

Cooling	Indoor temp. : 27°C DB/19°C WB Outdoor temp.: 35°C DB/24°C WB	Heating	Indoor temp. : 20°C DB Outdoor temp.: 7°C DB/6°C WB
---------	--	---------	--

- Performance tests are conducted in accordance with EN14511.
- Seasonal efficiency tests are conducted in accordance with EN14825.
- Sound power tests are conducted in accordance with EN12102.



Fujitsu General (Thailand) Co., Ltd.

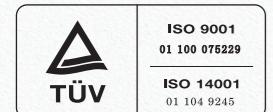

ISO 9001 Certification number: 01 100 075229
ISO 14001 Certification number: 01 104 9245

Fujitsu General (Shanghai) Co., Ltd.



ISO 9001 Certification number: 01 100 79269
ISO 14001 Certification number: CNB312244-UK

Fujitsu General Central Air-conditioner (Wuxi) Co., Ltd.



ISO 9001 Certification number: 15917020073RSM
ISO 14001 Certification number: 15918E20021RSM

- The products and equipment listed in this catalog contain fluorinated greenhouse gases.
- "AIRSTAGE" and "WATERSTAGE" are worldwide trademarks of Fujitsu General Limited, and are registered trademarks in Japan and other countries and regions.
- iPhone and iPod touch are trademarks of Apple Inc., registered in the United States and other countries.
- "Microsoft," "Windows," and "Direct X" are trademarks of Microsoft Corporation in the United States and other countries.
- "Intesis" is a registered trademark of HMS Industrial Networks in the European Union and is trademarked in the rest of the world.
- "IntesisHome" is a registered trademark of Intesis Software S.L.
- "BACnet" is a trademark and registered trademark of the American Society of Heating, Refrigerating and Air-Conditioning Engineers, Inc.
- "MODBUS" is a registered trademark of Schneider Electric.
- "LONWORKS" and "Echelon" are trademarks of Echelon Corporation registered in the United States and other countries.
- "Adobe" and "Acrobat Reader" are either registered trademarks or trademarks of Adobe in the United States and/or other countries.
- "Android" is a trademark of Google LLC.
- Other company and product names mentioned in this document may be the registered trademarks, trademarks or trade names of their respective owners.

Distributed by:

FUJITSU GENERAL LIMITED

3-3-17, Suenaga, Takatsu-ku, Kawasaki, Kanagawa, 213-8502, Japan
www.fujitsu-general.com



Copyright© 2008-2023 Fujitsu General Limited. All rights reserved. 3EF036-2308E

FUJITSU GENERAL LIMITED

The FUJITSU GENERAL Way

Our mission

Living together for our future

Through innovation and technology, we deliver a brighter future with peace of mind to our customers and societies around the world.

Our philosophy

Act spontaneously

We embrace new challenges by investing in ourselves for personal growth, and through continuous creativity with a spontaneous attitude.

Develop our team

We respect and value our people, and optimize their abilities through fostering culture and diversity, and utilizing a collaborative effort focused on communication.

Value integrity

To achieve our goals, we always act with integrity and shared ethics.



CONTENTS

004 **AIRSTAGE**
1000000000 years from now.

006 OUR MESSAGE

- 008 Sustainable
- 010 Cleanliness
- 012 Future
- 014 Comfort
- 016 Control
- 018 Design
- 020 History
- 022 Worldwide locations
- 024 Global business activities
- 026 Project references
- 028 Global development & Production bases
- 030 High-quality development & Production Facilities
- 032 2023 New Products

036 SOLUTIONS

- 038 For Light Commercial Use
- 046 For Commercial Use
- 048 For Apartments & Houses

PRODUCT LINEUP

SPLIT & MULTI-SPLIT

VRF

VENTILATION

CONTROL SYSTEM & OPTIONAL PARTS

AIR TO WATER

SUPPORT

- Sp-002 AIRSTAGE Support
- Sp-004 HVAC System design Support Tool
- Sp-006 WATERSTAGE Support Tool
- Sp-008 Quick Service & Maintenance
- Sp-010 Service Tool
- Sp-011 Web Monitoring Tool

1000000000 years from now.

~ Children smiling under a pleasant blue sky long into the future, a billion years from now ~

We continue to change to sustain a cleaner world.

AIRSTAGE

Air conditioners are now an essential lifeline to 'life'.

Guidelines aimed at achieving a comfortable, healthy, safe, and secure society through manufacturing that is friendly to people and the earth.



OUR MESSAGE



for Sustainable



for Cleanliness



for Future

Innovation
and
Globalization



for Comfort



for Control



for Design

We create comfortable lives for people around the world with "made-in-Japan quality" and innovative manufacturing.



History



Worldwide locations



Global business activities



Project references



Global development & Production bases



High-quality development & Production facilities



Sustainable



Sustainable management

We see the challenge of expanding our business by contributing to the realization of a sustainable society as a core element of our growth strategy, and we are working on "sustainable management," based on the three pillars of "harmonious coexistence with our planet," "social contribution," and "care for employees."

Basic policy on sustainable management

The sustainable development goals (SDGs) of the UN will drive business creation in the coming years. The key principle of the SDGs, "Leave no one behind," is synonymous with our own corporate philosophy of "Living together for our future." The promotion of sustainable management is carried out from a medium- to long-term perspective, with a promise to shape a sustainable society for the children and society of the future. We will pursue business growth by accelerating this transformation.



Key Initiatives





Cleanliness

Think about air quality

Fresh air is essential for comfortable air conditioning. Fujitsu General offers a wide range of air conditioning products with air purification functions, such as ventilation systems equipped with high-performance filters and heat exchangers.





Collecting dust particles to clean the air



Silver Ion Filter

The Silver ion filter helps to keep indoor air free from viruses, bacteria and molds. Notice: Not a result of experiments in an actual use environment. Silver ion filter inhibits activity or growth of microorganism, but do not prevent infection.

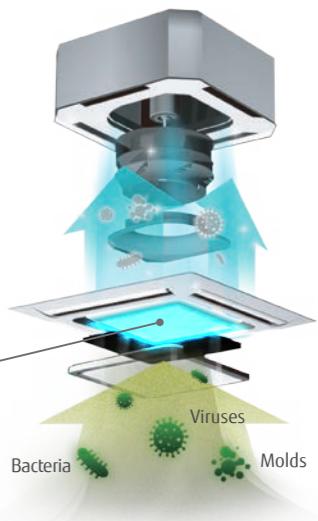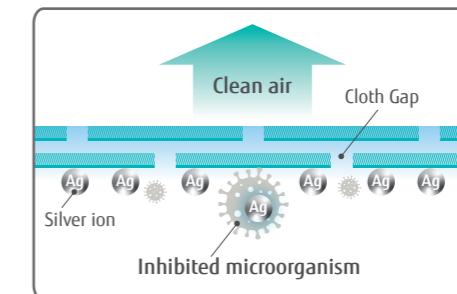


Different filters are used on each side



Ion Deodorization Filter

Deodorizes the air by decomposing absorbed odors using the oxidizing and odor-reducing effects of ions generated by ultra-fine particle ceramic.

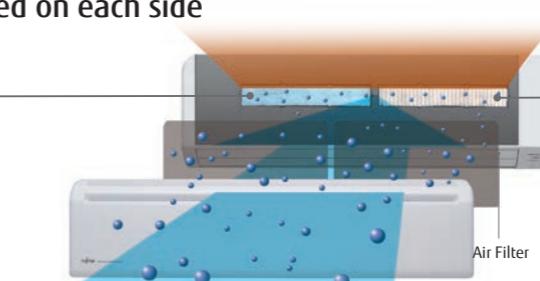


Apple-catechin Filter

The Apple-catechin filter uses static electricity to remove fine particles and dust from the air.

Ventilation with adequate airflow with reduced temperature changes


Heat Exchange Ventilation

When a room is cooled or heated, the exhausted cooling or heating energy is recovered by heat exchange ventilation.

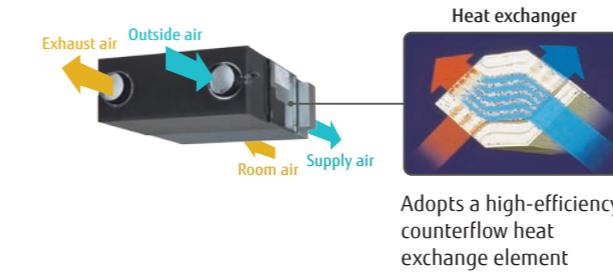

Air handling unit

The Air handling units connected to Fujitsu General's VRF system are equipped with technology that provides high energy efficiency and superior comfort to meet the most stringent air conditioning requirements and installation conditions.

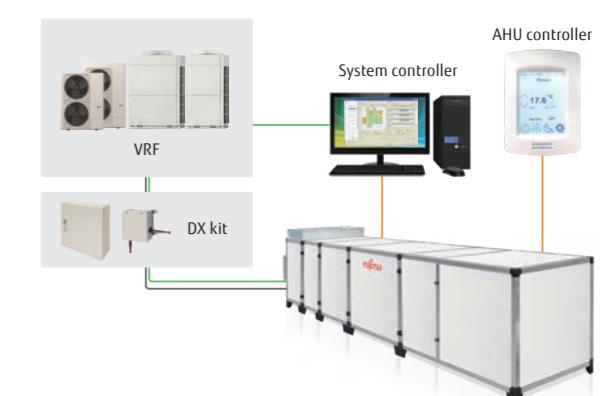



Future

The green refrigerant

Throughout our research and development process, we are constantly striving to create products that we can be proud of in the future. The technologies we have cultivated through these efforts are incorporated into our environmentally friendly products, and are recognized in the European market, which has extremely strict environmental regulations.




R32 refrigerant with reduced global warming potential

- **Zero** Ozone Depletion Potential (ODP^{*1})
- High environmental properties
- High performance
- Economically efficient

*1 ODP (Ozone Depleting Potential): a relative value that indicates the impact per unit weight of ozone-depleting substances released into the atmosphere when CFC-11 (trichlorofluoromethane, CCl₃F) is fixed at 1.0

*2 GWP (Global Warming Potential): a measurement that indicates how much other greenhouse gases are capable of warming the Earth based on carbon dioxide. This is the integrated value of radiant energy given to the Earth (i.e., the estimated impact on global warming) expressed as a ratio to CO₂.

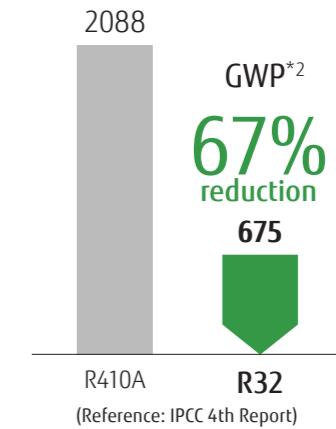

Our pioneering efforts to create a green future

Fujitsu General follows the EU Climate Action Plan 20/20/20 by 2020.

20% Less primary energy use

Fujitsu General's energy-efficient air conditioners are designed to consume less electricity, thus reducing primary energy usage.


20% Less CO₂ emissions

Fujitsu General products closely follow the F-Gas regulation 517/2014/EU.

20% Coming from renewable energy

Fujitsu General is promoting air sourced heat pumps as renewable energy source heating systems

New energy labelling requirement 626/2011/EU
Our air conditioners have reached the "Class A+++" ranking, the highest energy efficiency level that is now shown on energy labels in Europe.

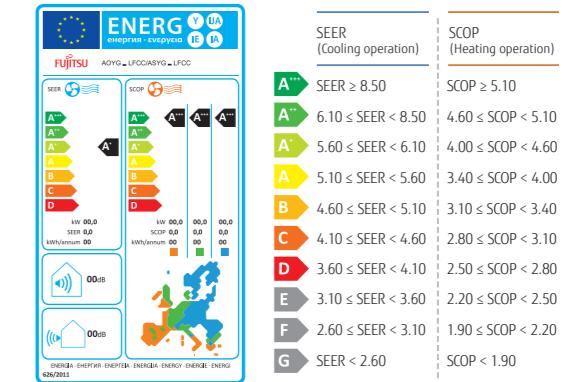

Less is more
Less Space

Improved installation flexibility

Our class-leading compact outdoor units range from 8 to 18 HP, and their flexibility in installation does not detract from the appearance of the building.

Installation area	Weight (18 HP model)	System refrigerant volume
Depth 765 mm ↓ 480 mm	-45% ^{*1} -58 kg ^{*2}	Current model 20.5 kg ↓ 16.8 kg ^{*3} -18% ^{*4}

*1: J-IV Series are compared with V Series 14/16/18 HP models. *2: J-IV Series 18 HP model is compared with V-IV Series 18 HP models. *3: E.g.) when 30 indoor units are connected to 1 system (Outdoor unit: 12 HP; Indoor unit: 1.1 kW × 30; Total pipe length: 277.5 m) • J-IV Series is compared with current Series. *4: J-IVL Series 8 HP model is compared with V Series 8 HP




Less Refrigerant
Less Refrigerant saving design

The compact indoor unit, piping design, and optimization of heat exchanger volume significantly reduce the system refrigerant volume.

Sound power level (8 HP model)
77 dB(A) ↓ 66 dB(A) -11dB ^{*4}


Less Noise
Less Noise
Class-leading low operating sound

The outdoor units in this series are designed to operate extremely quietly. They are an ideal choice for installation in densely populated areas.

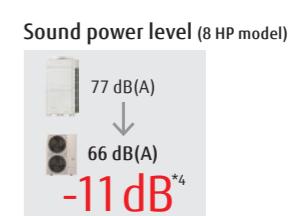



Comfort

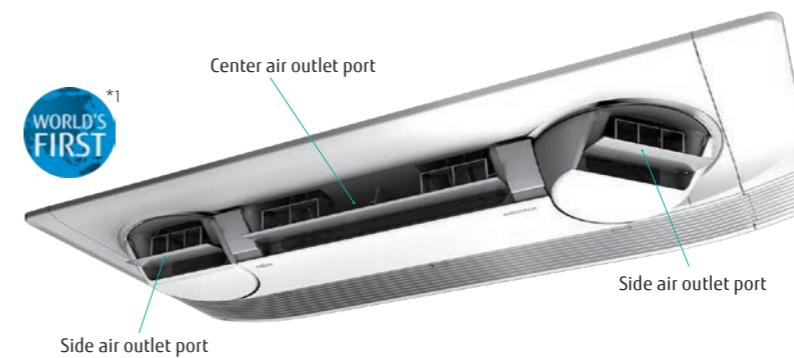

Cassette type 3D flow Series

3 individually controlled air outlet ports

The Comfortable airflow setting enables the right and left air outlet ports as well as the wide center port to work together to provide a comfortable room environment.



Cassette type One-way flow Series

Wide airflow range created by triangle design and large flap

A large flap with a wide range of movements, equipped with louvers arranged triangularly, sends air into every corner of the room.




Cassette type Circular flow Series

Unique circular flow design

This Series realizes a Circular Flow to blow a large airflow in a 360° direction by using a high-performance DC fan motor, turbo fan, and a unique seamless airflow louver design.



Comfort pursued through advanced technologies

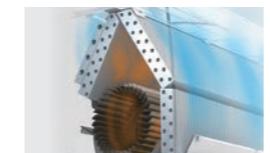

Lambda-shaped heat exchanger^{*3}



Power diffuser^{*4}



Filter auto clean^{*5}



Dual-fans^{*2}



3 Air outlet ports^{*1}

The dual-fans equipped with "nocria X" model in Japan optimally control airflow. The unique form brings a comfortable airflow to every corner of the room. The power diffuser opens the lower flap of the main unit and blows warm air downward to heat the room from the floor, increasing heating efficiency. The Lambda-shaped heat exchanger improves the operating efficiency, contributing to the compactness of the indoor

units. In addition, the automatic filter cleaning function that we have developed ensures ease of maintenance and operating efficiency. The "nocria X" airflow control system is also used in the cassette type, creating a comfortable space with three types of airflow. Fujitsu General's unique technology enables the system to create a comfortable space.

*1: Announced 2018. In room air conditioner for the home (Our company's investigation) *2: Announced 2012. In room air conditioner for the home (Our company's investigation) *3: Announced 1994. In room air conditioner for the home (Our company's investigation) *4: Announced 1991. In room air conditioner for the home (Our company's investigation) *5: Announced 2002. In the category of room air conditioners for the home (Our company's investigation).



Control

Operation from anywhere

Using the Internet of Things (IoT), Fujitsu General is actively providing services that allow users to control their air conditioners from their smartphones. We are also expanding our open co-creation activities with external partners to deepen the development of new functions and services using IoT and artificial intelligence (AI) to develop safe and convenient air conditioners.




NEW
User-friendly screen display
enables easy operation.

With the WLAN adapter and the AIRSTAGE Mobile app, you can control the heating and cooling of your home anytime, anywhere.

Should you forget to turn off the system before you leave home, you don't have to worry.


"AIRSTAGE Mobile" is a software application that allows users to control Fujitsu General air conditioners from anywhere with a mobile device while out or on the move.

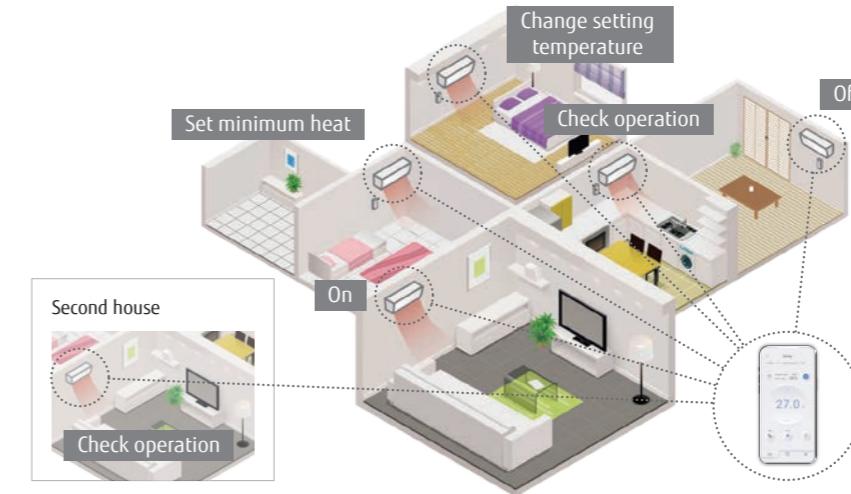

Compact wired remote controller

Large screen and simple display

- Large screen, yet compact in size
- Large, easy-to-read letters are used.
- The controls are simple and easy to understand.

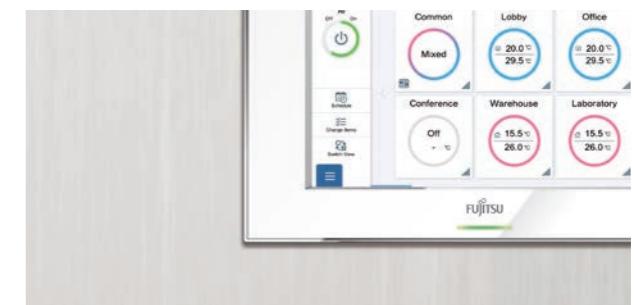

Central remote controller for VRF system

The central remote controller uses a touch panel screen to display multiple menus on the top screen. Just touch the menu you want to operate, and the necessary window will pop up, and allow intuitive operation.



Remote monitoring and operation

The central remote controller enables monitoring and control of a tenant's air conditioner anytime, anywhere.

WLAN adapter

The dedicated WLAN adapter enables the air conditioner to be operated by smartphone or tablet PC from outside the home.




AIRSTAGE
Mobile

Download Free





Design

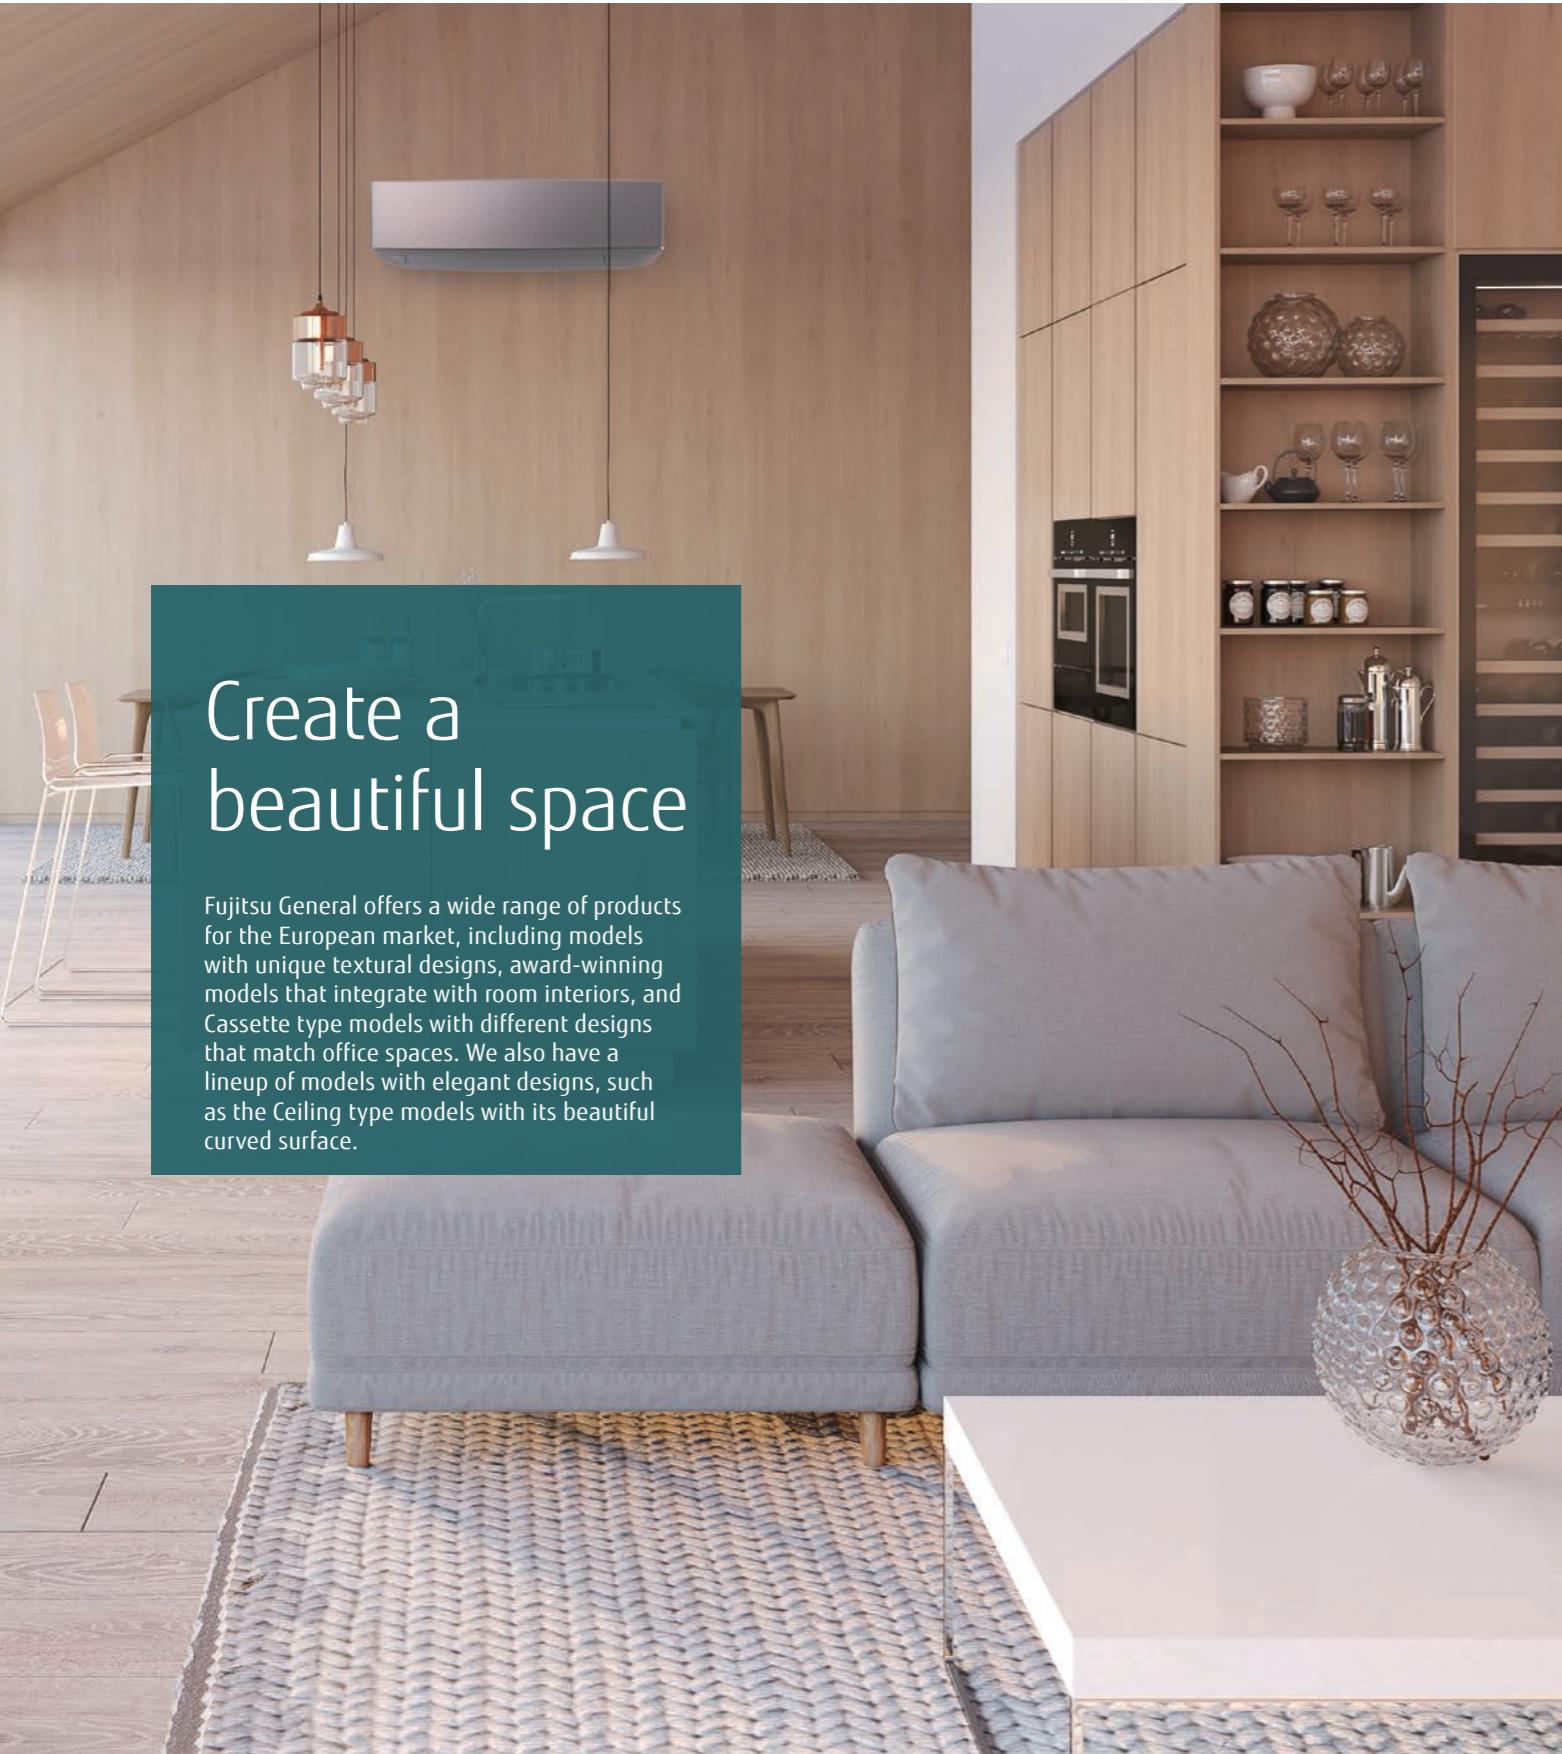KE
Series

Wall-mounted type

KE Designer Series

We have designed this series exclusively for the European market. The exterior design harmonizes beautifully with any decor and adds comfortable elegance to the room. The light, elegant and three-dimensional expression achieved by the curved surface looks beautiful from any angle.

**CMF: Color Material Finish**

The texture of the front panel expresses the craftsmanship of Europe, and changes its expression with the changing light of the day.



Design award-winning products

Wall-mounted type, design Series

KG
Series
 GOOD DESIGNKM
Series
 GOOD DESIGNKP
Series
 reddot award 2019 winner

Light Elegant Design

New Ceiling type design

The light, elegant and three-dimensional expression achieved by the curved surface gives a sense of comfort and well-being.



Different Cassette type Designs



Compatible with grid ceiling systems
Compact cassette Series
for grid ceiling



Beautiful design from any angle
Cassette type Circular flow Series
White panel



For ambience with dimmed lighting
Cassette type Circular flow Series
Black panel



History

Yaou Shoten Ltd. established in 1936

Overseas air conditioning business since 1971

Starts air conditioning business in Japan in 1960

1971 Air conditioner exports to the Middle East.

1977 "Super Power, Super Quiet" Series released

1982 Window type 3 Super Series released



1985 Large wall-mounted type and multi-split air conditioner released.

***1,*2 1991** World's first air conditioner equipped with lambda-shaped heat exchanger

1994 World's first air conditioner with power diffuser

1950 ~

2001 AIRSTAGE Series released VRF air conditioners for large buildings



1970 ~

2004 Standalone Compact VRF AIRSTAGE J Series released



2006 VRF Heat Pump type Maximum 42 HP AIRSTAGE V Series released



2009 VRF Heat Pump Modular type Maximum 48 HP AIRSTAGE V-II Series released



2009 Air to water system released

2000 ~

2006 VRF air conditioner manufacturing, sale, and service company in China

2007 Air Conditioner Technology Building becomes operational on the premises of the Kawasaki Headquarters. Air conditioner R&D Center in Kawasaki

2009 Compressor Factory begins operation in Thailand

For Light commercial use

2011 High energy-saving type AIRSTAGE J-II Series released

2014 Compact & lightweight outdoor unit AIRSTAGE J-IIS equipped with a single fan for improved ease of installation



2016 Compact VRF AIRSTAGE J-III Series with advanced energy efficiency and easy installation released

2017-19 Compact VRF AIRSTAGE J-IIIIL Series for light commercial use released

2020 Compact & lightweight outdoor unit AIRSTAGE J-IVL, J-IV, J-IVS Series released

New cassette style released

3D Flow Cassette



2020 AIRSTAGE Air handling unit released

For Commercial use

2012 Heat Recovery Modular type AIRSTAGE VR-II Series Maximum 48 HP released

2014-15 Heat Pump Modular type AIRSTAGE V-III Series Maximum 54 HP for large buildings released

2020 Heat Recovery type AIRSTAGE VR-IV Series Maximum 48 HP released

For Residential use

2011 Hi-spec Design model LT Series & LU Series released



2017 Flagship Wall-mounted type "nocria X" released

2017-19 Added to this lineup recently are the environment-friendly R32 refrigerant models. (Split & Multi-split type)

2010 ~



2019 New building constructed at Kawasaki Head Office to strengthen development capabilities:

Base for creating new value by combining internal and external knowledge



2023 What's New

2020 Building IoT-based manufacturing

Implementing a real-time IoT system to instantly visualize and analyze various information



Fujitsu General (UK)
Co., Ltd. (UK)

Fujitsu General (EURO) GmbH

Sales & service maintenance company established

1976 North America sales company

1977 Europe sales company (UK)

1978 Australia sales company and Europe sales company (Germany)

1980 Brazil sales company

1997 Asia sales company (Singapore)

1998 Middle East sales company (UAE) and New Zealand sales company

2000 Air conditioner manufacturing and sale technical partnership in India

2002 Taiwan sales company

2006 China sales company

2016 THE AIRSTAGE on Broadway in New York



*1: Announced 1991. In room air conditioner for the home (Our company's investigation) *2: Announced 1994. In the category of room air conditioners for the home (Our company's investigation).

*3: Announced 2002. In the category of room air conditioners for the home (Our company's investigation).

*4: Announced 2018. In room air conditioner for the home (Our company's investigation) *5: Announced 2012. In room air conditioner for the home (Our company's investigation)

VRF V-IV

2022 Release of new products with energy-saving operation.



For Residential use

Split & Multi-split
New products released with new wireless LAN control system.



KM New standard series for large rooms released.

Smart control
New wireless LAN control system released.

AIRSTAGE Mobile





Worldwide locations

Under a system of five bases in Europe, the Middle East, Asia and Oceania, North and South America, and Japan, the company promotes Globalization from a worldwide perspective while emphasizing the actual conditions in each region.



JAPAN Head Office



Technology research building (Japan)

18 Overseas Sales Companies



Fujitsu General Sales & Trading (Shanghai) Co., Ltd.




Fujitsu General (EURO) GmbH (Germany)



Fujitsu General Air Conditioning (UK) Ltd. (U.K.)




Fujitsu General (Italia) S.p.A. (Italy)

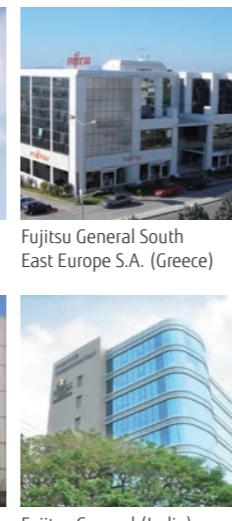


Fujitsu General (India) Private Ltd. (India)




Fujitsu General (Aust.) Pty Limited (Australia)

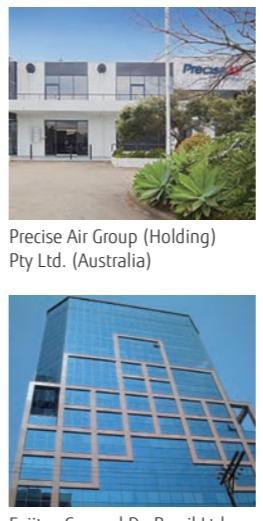

Precise Air Group (Holding) Pty Ltd. (Australia)

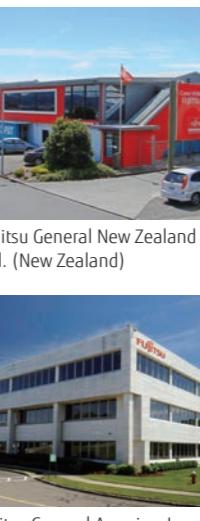

Fujitsu General New Zealand Ltd. (New Zealand)

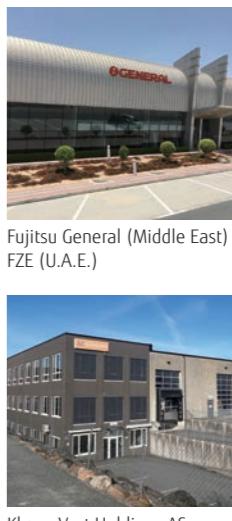

Fujitsu General (Middle East) FZE (U.A.E.)



FUJITSU GENERAL SOLUTION CENTER "THE AIRSTAGE" (U.S.A.)




- Fujitsu General Air Conditioning (UK) Ltd.
 - Kløver Vest Holdings AS
 - Fujitsu General (Euro) GmbH
 - Fujitsu General (Italia) S.p.A.
 - Fujitsu General South East Europe S.A.
- Fujitsu General EMC Laboratory Ltd.
- Fujitsu General Limited
- Fujitsu General (Taiwan) Co., Ltd.
- Fujitsu General (Aust.) Pty Limited
- Precise Air Group (Holding) Pty Ltd.
- Fujitsu General New Zealand Ltd.



Global business activities

We have been recognized for our activities in advertising, human resource development and customer service, as well as for our community-based social contribution activities in each region, winning numerous awards and achieving a high level of customer satisfaction.

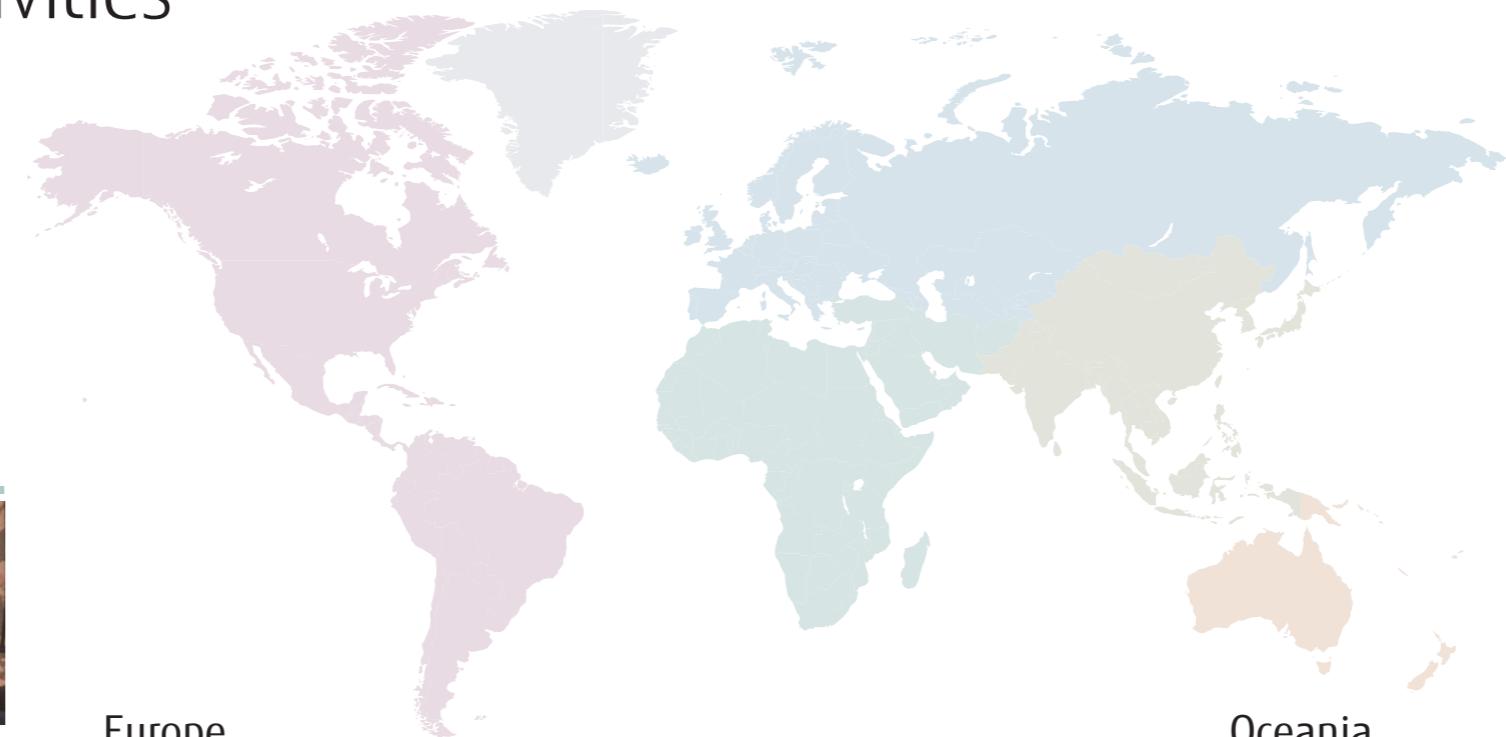

North and South Americas



AHR Expo



HVAC trade shows in Brazil



Distributor conference in USA



Call center

Middle East



Exhibition



Training in Kuwait



Technical seminar



New product seminar in UAE

Europe



HVAC trade show in Germany



Training in Germany



HVAC trade show in Germany



Training seminar in Italy



Event in the United Kingdom

Oceania



HVAC trade show in Australia



Launch event in New Zealand



Launch event in New Zealand

Asia



Thanksgiving party in Taiwan



Training in India



Opening ceremony in India



New product presentation seminar in Singapore



Service training in Vietnam

International authoritative design awards

The NEWS
Dealer Design AwardsGold Award (Category:
HVAC & PLUMBING) in
Reader's Choice AwardsTOP OF MIND 2016 First prize in
"MARCA DE EQUIPAMENTO DE
AR-CONDICIONADO" category of
"CLIMATIZACAO" divisionSuperbrands is the world's
largest independent arbiter of
branding.The iF Product Design Award is given
annually by iF International Forum
Design GmbH for industrial products
from around the world.The Plus X Award is the
world's largest innovation
award for technology,
sports and lifestyle.

reddot winner 2020

A product design competition that has been held since 1955. Products that win the award are given the "Red Dot" seal, a sign of international recognition of quality.



ProductReview.com.au's annual awards are selected from products and services that have been well-rated by the ProductReview community.



Voted by Australians as the
'Most Trusted Brand
- Air Conditioning Category
5 Years Running'



China State
Construction
Engineering Luban
Prize




The Good Design Award is an award sponsored by the Japan Institute of Design Promotion, and is given once a year to items of outstanding design.



Project references

Introduced in over 50 countries worldwide

Highly popular for their excellent quality, energy efficiency, and ease of installation, Fujitsu General's products are installed in a wide range of buildings around the world, including high-rise office buildings, stores, hotels, public facilities, schools, hospitals, and residences.





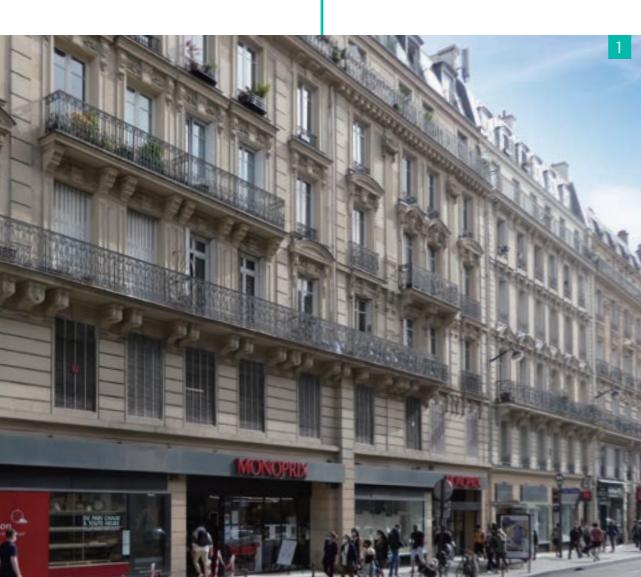


For Light commercial use

- 1 Shop in Europe
- 2 Factory in Europe
- 3 School in Asia
- 4 Hospital in Asia
- 5 Office in Asia
- 6 Shop in Oceania
- 7 Office in Oceania
- 8 School in the Middle East
- 9 Public facility in the United States



- 10 Public Square in Asia
- 11 Office in Asia
- 12 Hotel in Asia
- 13 Public facility in Asia
- 14 Apartment in Oceania
- 15 Apartment in Oceania
- 16 Hotel in the Middle East
- 17 Hotel in the Middle East

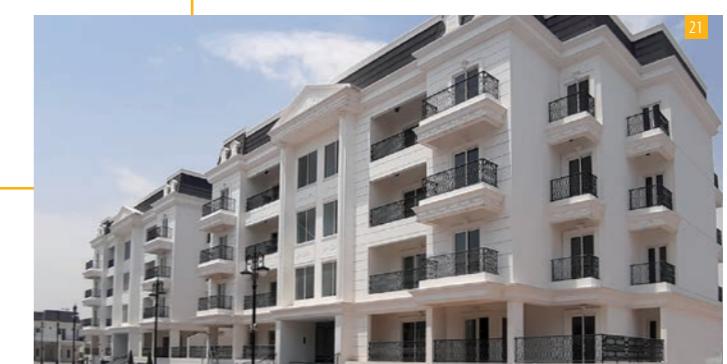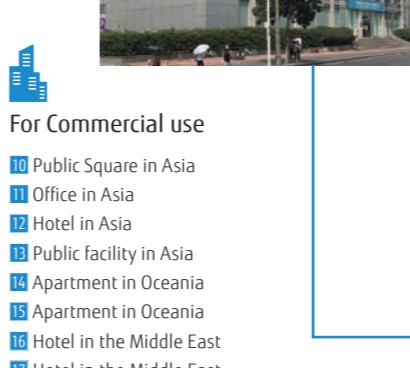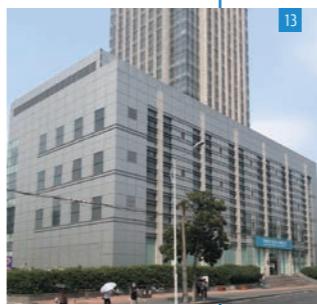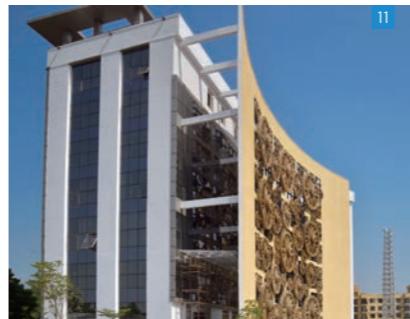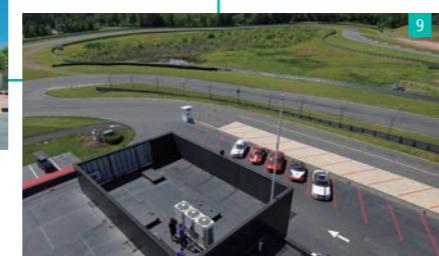

For Commercial use

- 10 Public Square in Asia
- 11 Office in Asia
- 12 Hotel in Asia
- 13 Public facility in Asia
- 14 Apartment in Oceania
- 15 Apartment in Oceania
- 16 Hotel in the Middle East
- 17 Hotel in the Middle East



For Residential use




- 18 Villa in Africa
- 19 Residence in Oceania
- 20 Residence in the United States
- 21 Villa in the Middle East



Global development & Production bases

We have established R&D bases in five countries from Japan, Europe, Asia, China, and North America to pursue environmental properties and comfort according to the needs of each region.

- • Head office
- • R&D center
- • Manufacturing companies

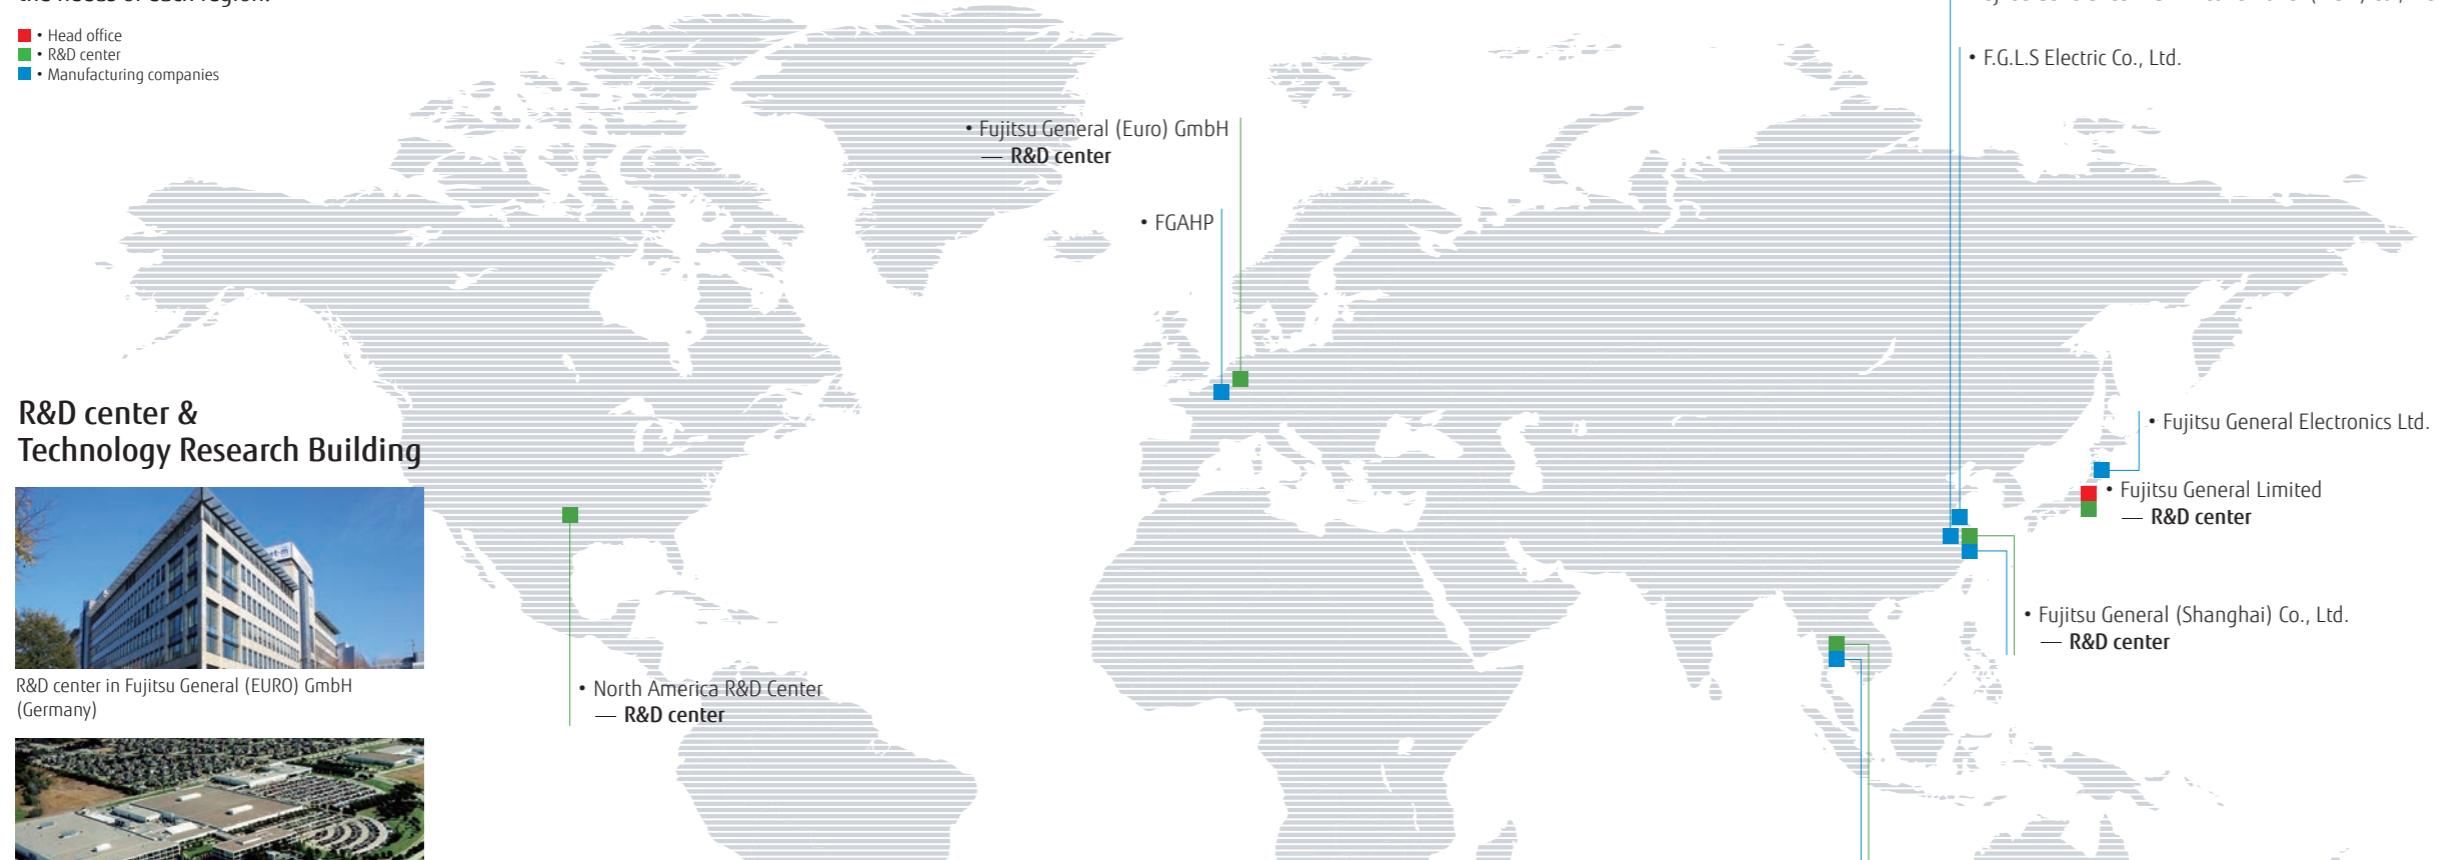

Technology research building
in Japan Head office

Constructing IoT-based manufacturing
We are implementing a real-time IoT-enabled system to immediately visualize and analyze various information such as facility operating status, assembly line production progress, and parts inventory and transportation status. This will further enhance the accuracy of production and shipping forecasts in the Head Office and factory management departments. The system will also help improve activities by employees at production sites, with the aim of improving the efficiency of the production process, the efficiency of parts distribution operations, and the utilization rates of the facilities.



Fujitsu General (Thailand) Co., Ltd. (Thailand)
Factory-2



Fujitsu General (Thailand) Co., Ltd. (Thailand)



FGA (Thailand) Co., Ltd. (Thailand)



TCFG Compressor (Thailand) Co., Ltd. (Thailand)

Overseas manufacturing companies



Fujitsu General (Shanghai) Co., Ltd. (China)



F.G.L.S. Electric Co., Ltd. (China)



Fujitsu General Central Air-conditioner (Wuxi) Co., Ltd. (China)



Fujitsu General Electronics Ltd. (Japan)



High-quality development & Production facilities

Advanced Research Facilities and Equipment

Performance tests



Airflow measurement room

Measure the airflow of air conditioners, from compact room air conditioner models to variable refrigerant flow (VRF) systems.

Calorimeter

Measure the temperature, humidity, and airflow at the inlet and outlet of the air conditioner to evaluate its cooling and heating capacity.

Silent room

Measure the operating sounds of air conditioners on walls and ceilings with reduced sound reflection.

Fujitsu General is one of Japan's leading manufacturers with R&D centers in Japan. The research and development conducted in these facilities contributes to providing our customers with the highest quality and performance.

Reliability tests



Constant temperature room

Verify product performance in cooling and heating operations under various temperature and humidity conditions.

Practical test room

Check whether the performance of the air conditioner can be sustained under the conditions of the actual housing environment.

Shower test room

Check if the electrical box of the outdoor unit is protected from strong wind and rain, such as during a typhoon.

Transportation and Handling Tests



Compressibility test

Vibration test



Technology research building in Japan Head office

Testing laboratory

Fujitsu General EMC Laboratory Limited




60-m Height Difference testing tower

Tests oil circulation in a compressor for reliability.



Certification of ISO 9001 and ISO 14001

ISO 9001
ISO 14001
() Number of companies

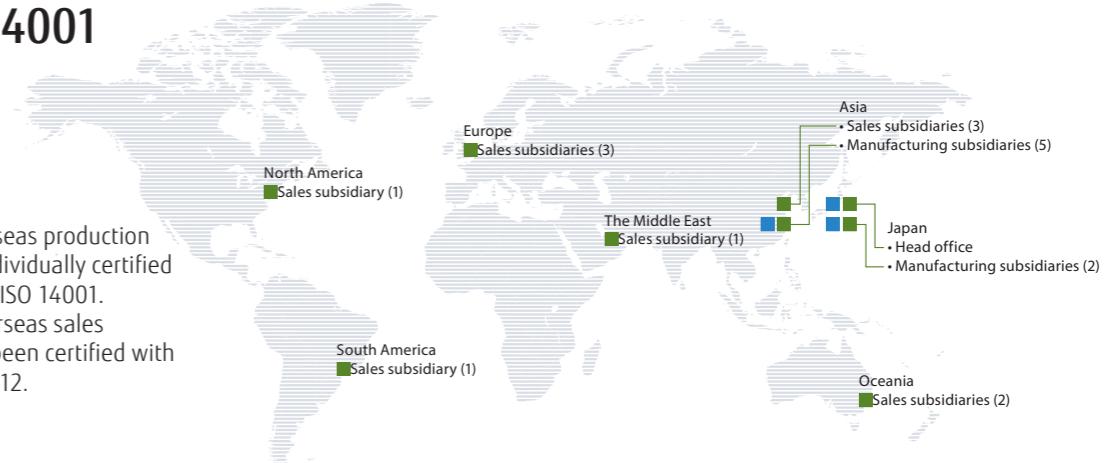

The Group's 5 overseas production subsidiaries are individually certified with ISO 9001 and ISO 14001. The Group's 11 overseas sales subsidiaries have been certified with ISO 14001 since 2012.

Product Quality Assurance


All Fujitsu General plants are ISO 9001 certified and operate under a unified quality control system. We deliver to customers all over the world high-quality products that have passed stringent quality inspections.

Receiving inspection

We require all our parts suppliers to submit test reports to ensure that all parts we receive from them meet our quality standards. Our in-house test department inspects incoming parts to ensure their compliance with RoHS as required by the EU. We also conduct 100% inspection of main parts to prevent defective parts from making it to assembly lines.

Quality inspection of products

We carry out stringent quality inspections in all production processes performed in our plants. To keep the quality of our products high, inspectors check their quality from start to finish on production lines.

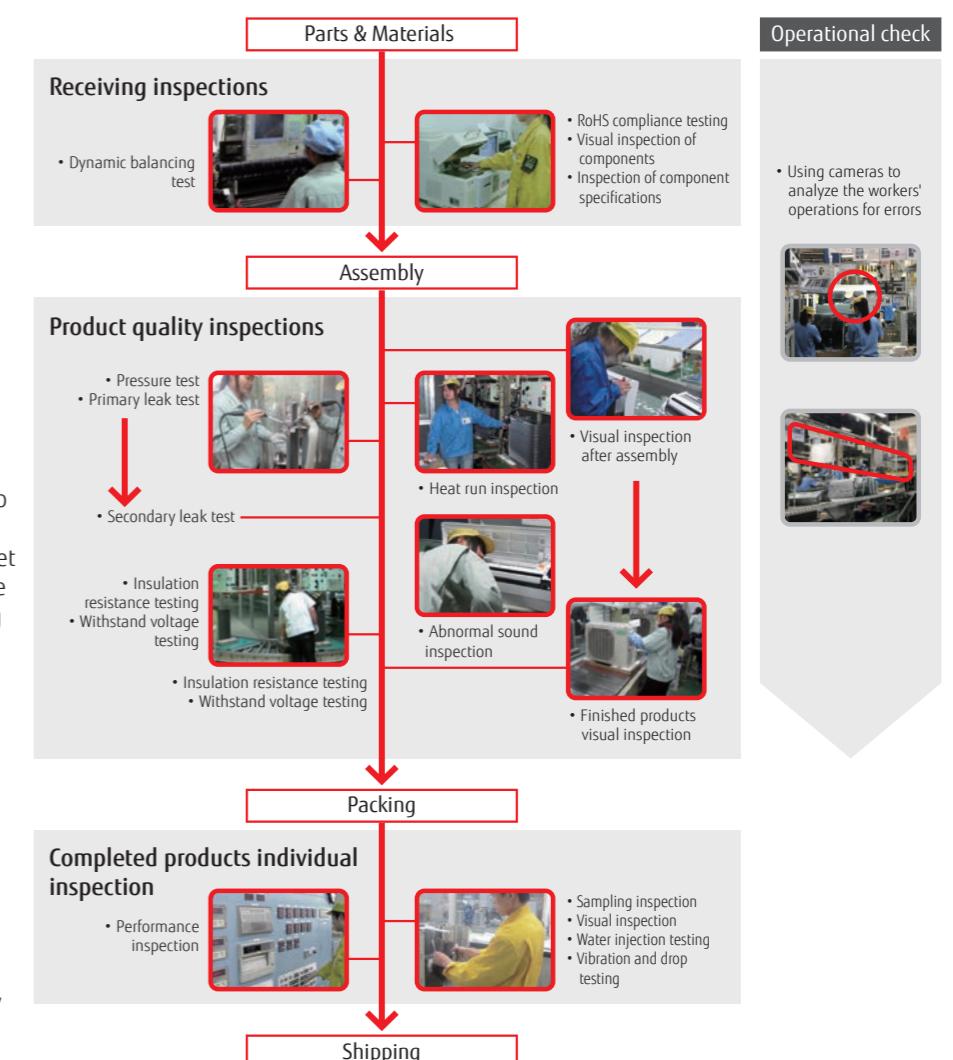



2023 New Products

KE
Designer Series
Cool Beauty Design



Wall-mounted type Built-in W-LAN adapter models

Designer Series, Standard Series

S-014-019


- 7-14 classes, 16 models
- High energy saving
- New built in WLAN adapter
- Comfortable airflow & Quiet operation
- R32 refrigerant & low refrigerant volume
- Easy access to the flare pipe connection



KG
Designer Series
High Spec & Design



KE
Designer Series
Cool Beauty Design

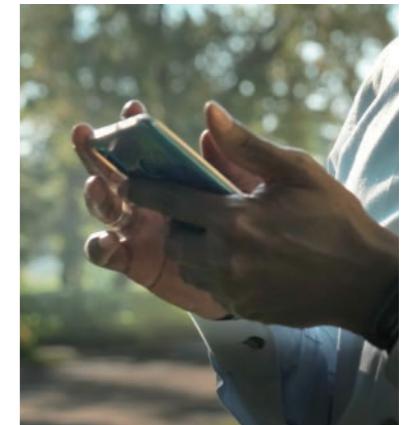

Smart Device control
You need to install the "AIRSTAGE Mobile" app on your smart device in order to control the air conditioner.



KM
Standard Series
High Efficiency & Large Room

Wall-mounted type

Standard Series (High-Efficiency & Large Rooms)

S-022-023

- 30 and 36 classes
- Small, lightweight outdoor unit
- Occupancy Sensor
- R32 refrigerant & low refrigerant volume
- New WLAN adapter (Option)
- New Refrigerant Cycle Monitor (Option)

KM
Standard Series
High Efficiency & Large Room




CONTROL SYSTEM
AIRSTAGE Mobile**C-018**

- Operation from anywhere
- Multiple air conditioning management
- Group management
- User friendly for everyone
- New design
- Increases the number of accounts
- Paring with smart speaker


**MODBUS® interface****C-035**

MODBUS® interface enables air conditioners to be fully integrated into a **MODBUS®** network.


- Small, compact, and easy to install.
- No separate external power supply required.
- MODBUS® interface enables central monitoring and control of air conditioners from BMS.

**BACnet® interface****C-037**

- BACnet® interface connects BMS and a Fujitsu General split/multi-split/VRF system.
- Compatible with BACnet® (ANSI/ASHRAE-135-2012) application-specific controller (B-ASC)
- Compatible with BACnet®/IP over Ethernet.

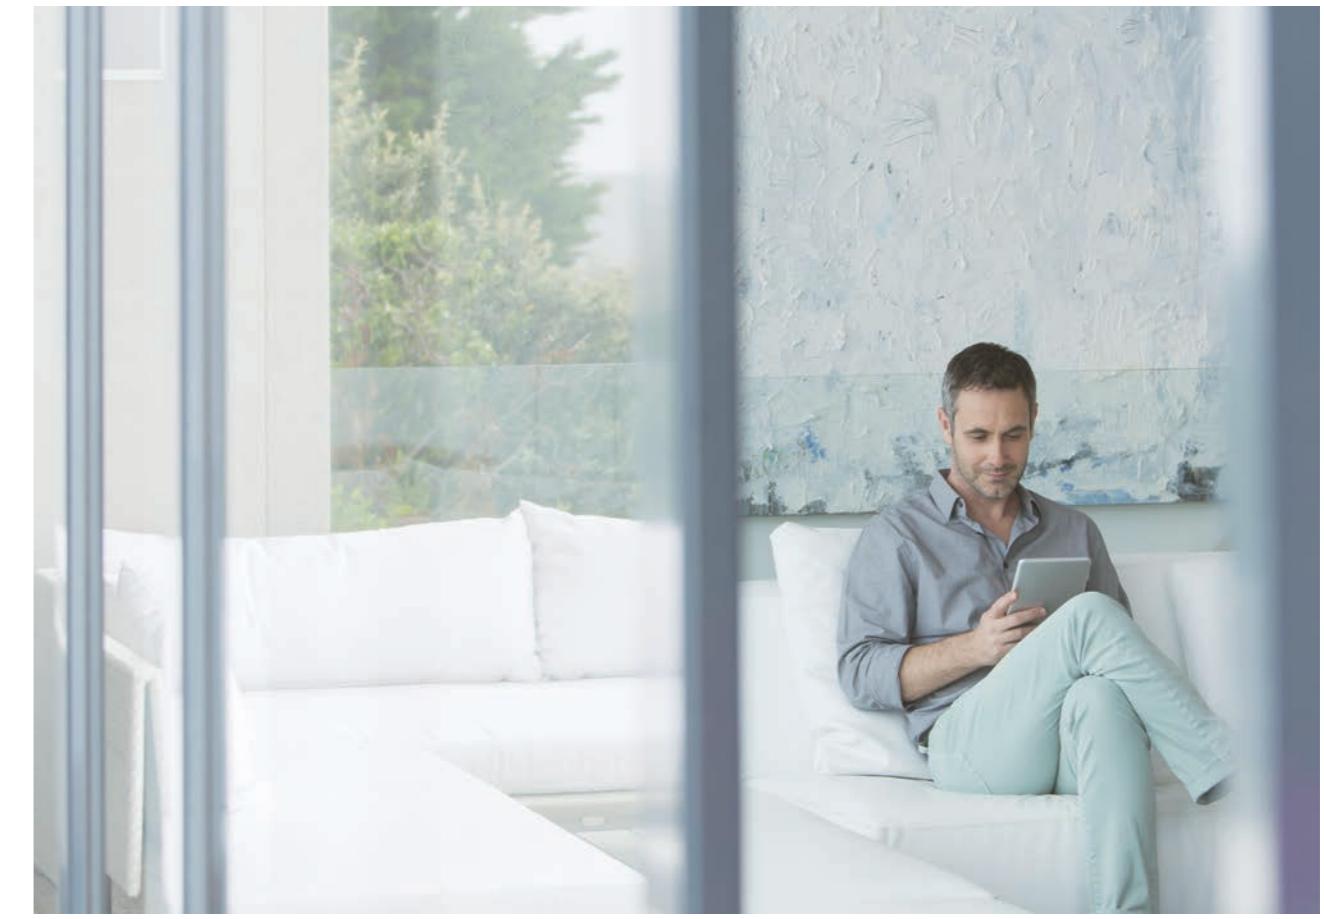


From Business to private spaces SOLUTIONS

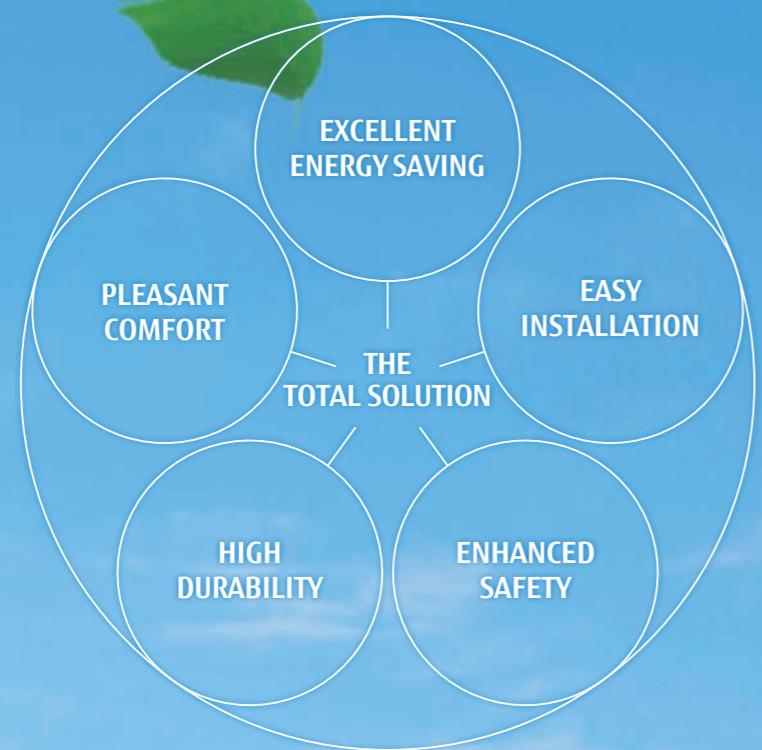

Key solution points

Fujitsu General's total solutions are tailored to each property's unique needs.

Fujitsu General provides the best control solutions for buildings.

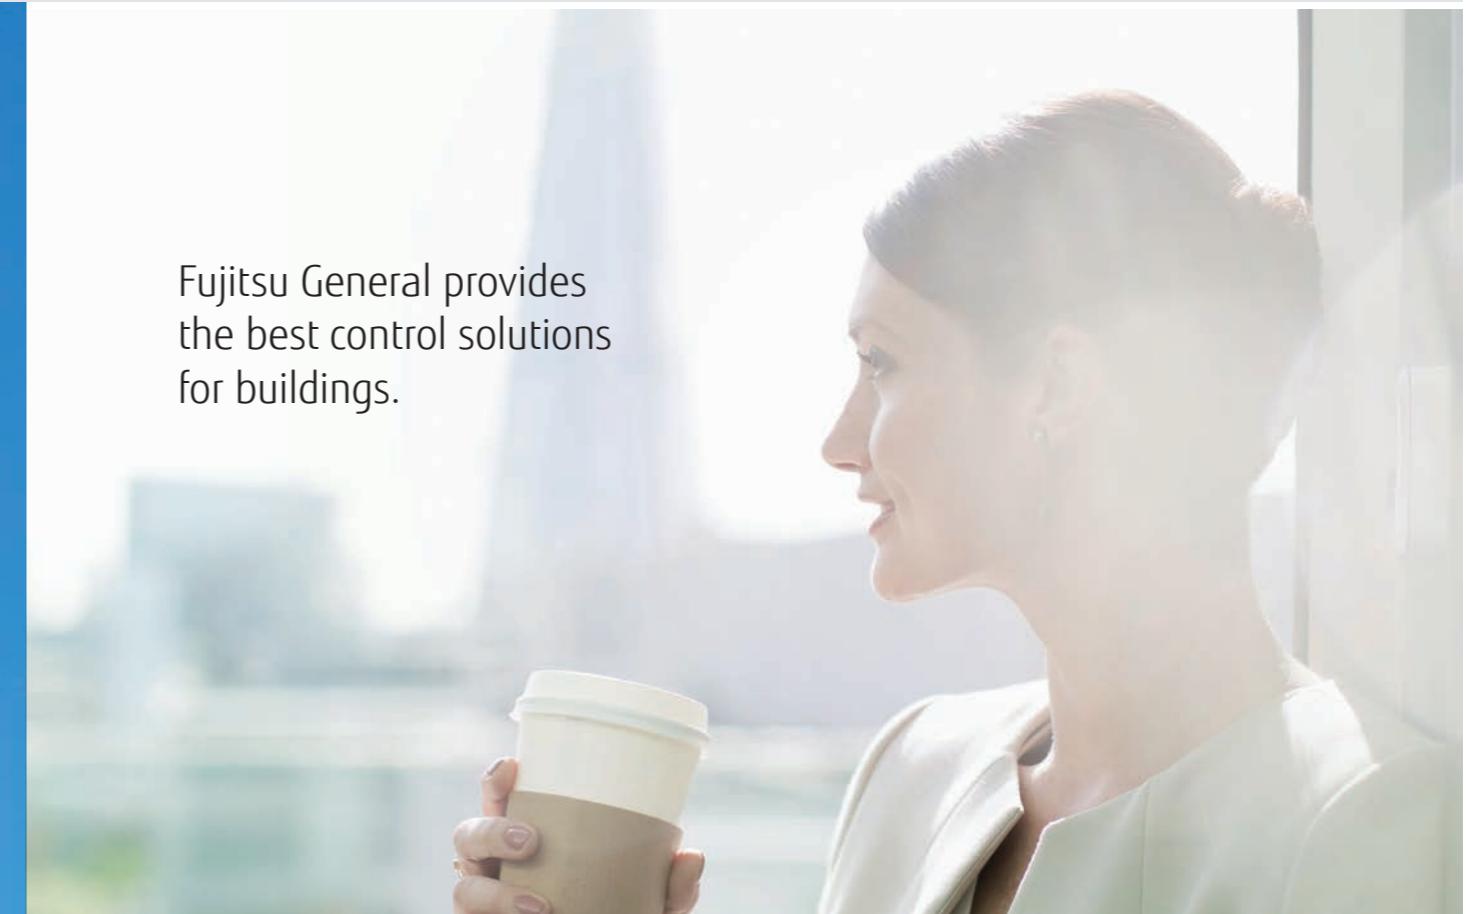

Target buildings



For Light commercial use

Comfortable and economical air conditioning systems, ideal for small and midsize commercial buildings

- 038 Shops and Restaurants
- 040 Small offices
- 042 Hotels
- 044 Schools



For Commercial use

Single and modular VRF systems for high efficiency, comfort, design flexibility, ease of installation, and high reliability

- 046 Large Buildings



For Residences

Smart air conditioning systems with extensive control options for comfort and convenience of use


- 048 Residences



Restaurant, shops


For Light commercial use

Fujitsu General provides perfect total air conditioning systems that offer seamless support by tenant, by purpose, and by customer visit frequency in shops and restaurants with multiple lighting and a high density of customers.

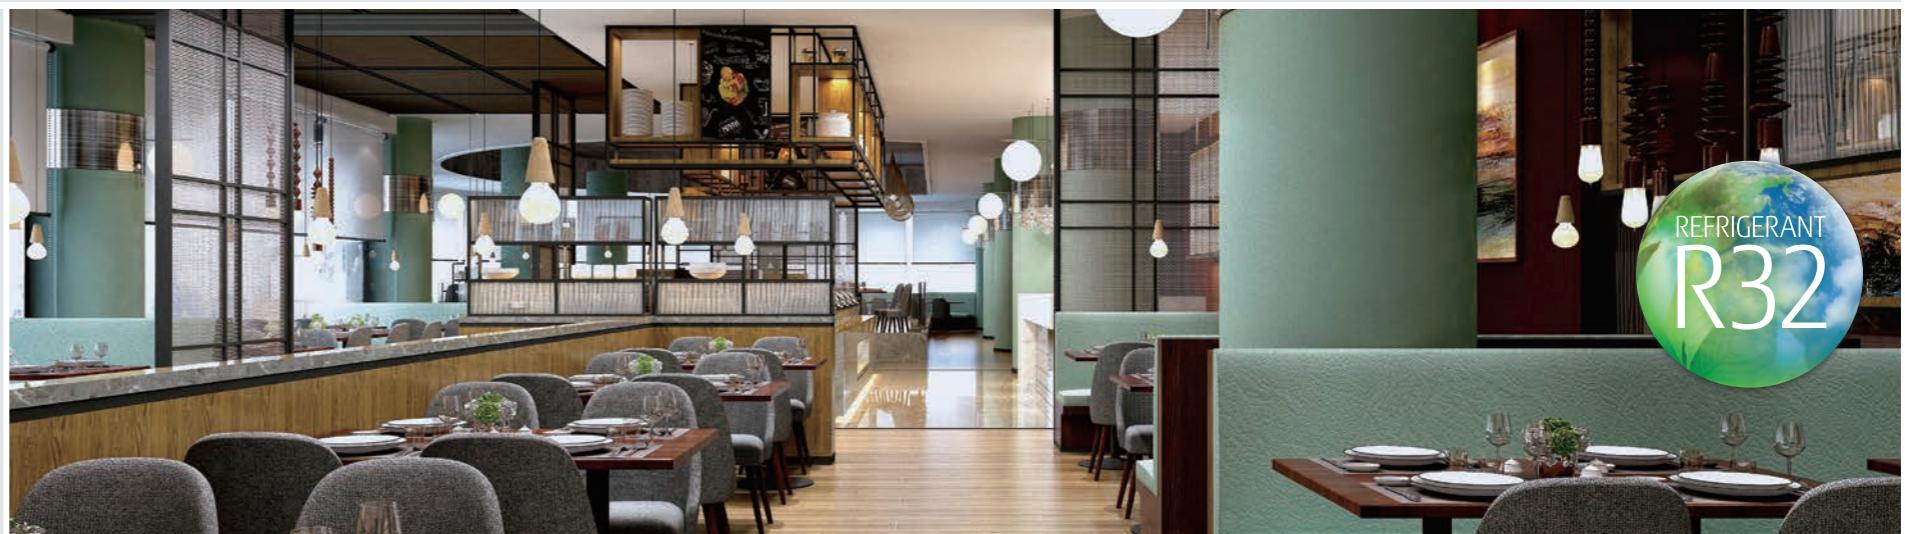


REFRIGERANT
R32

Single split For Restaurants

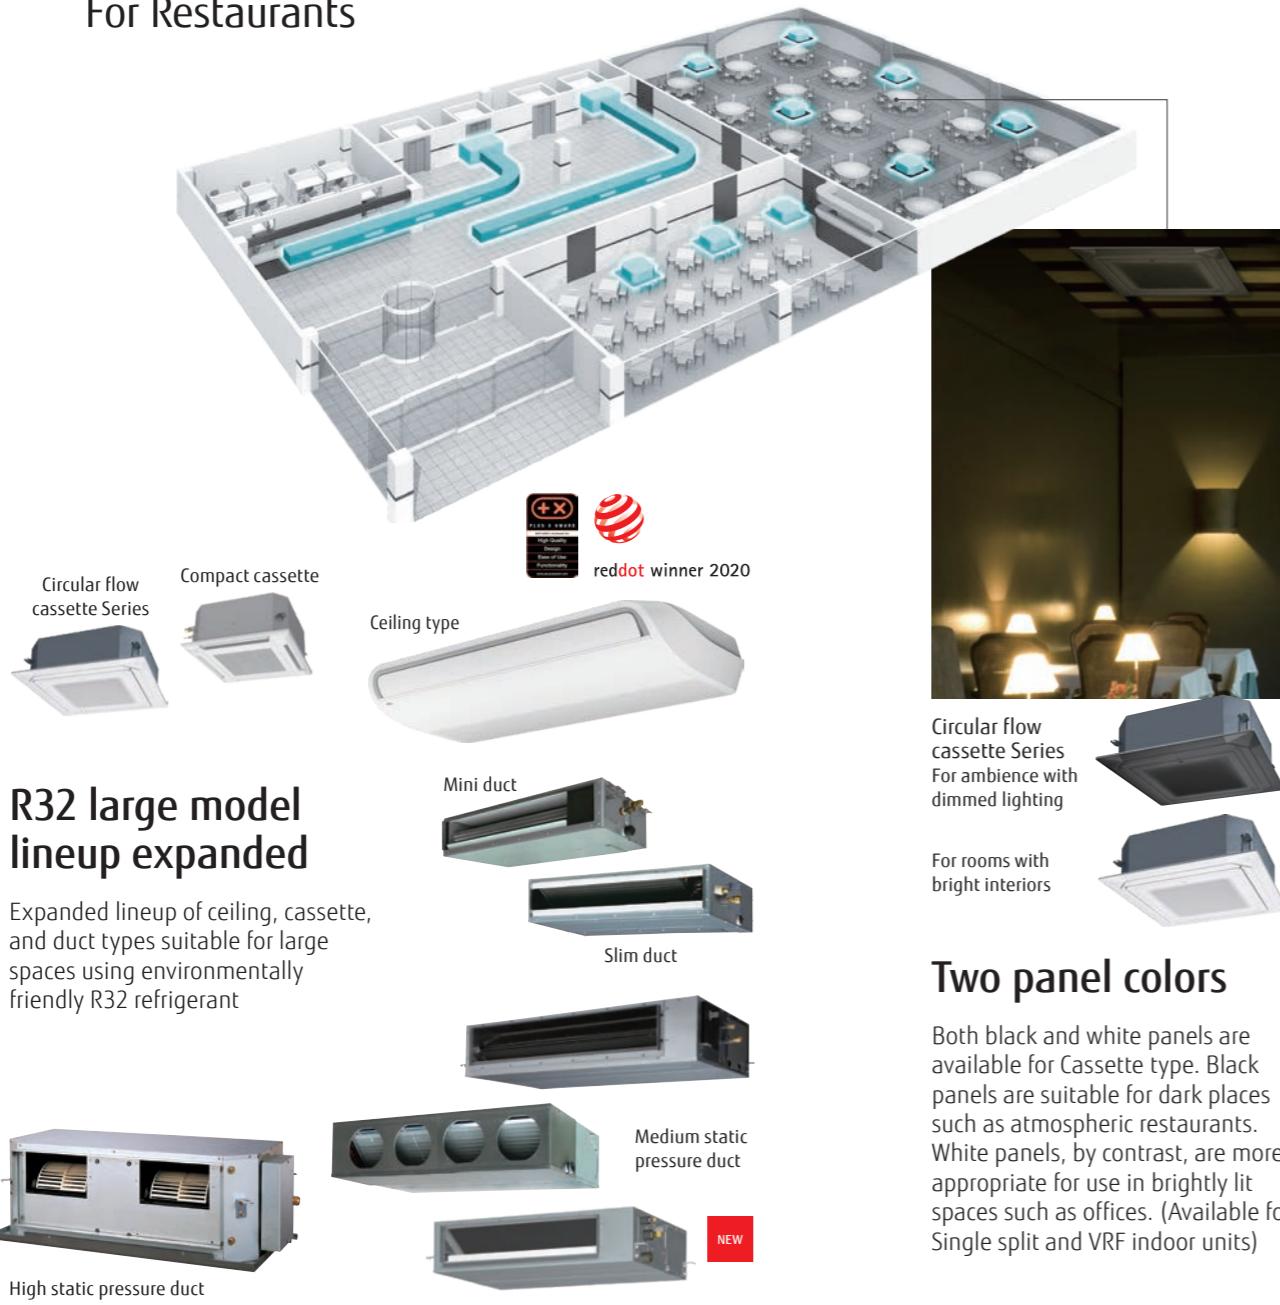


Simultaneous multi-split For Shops

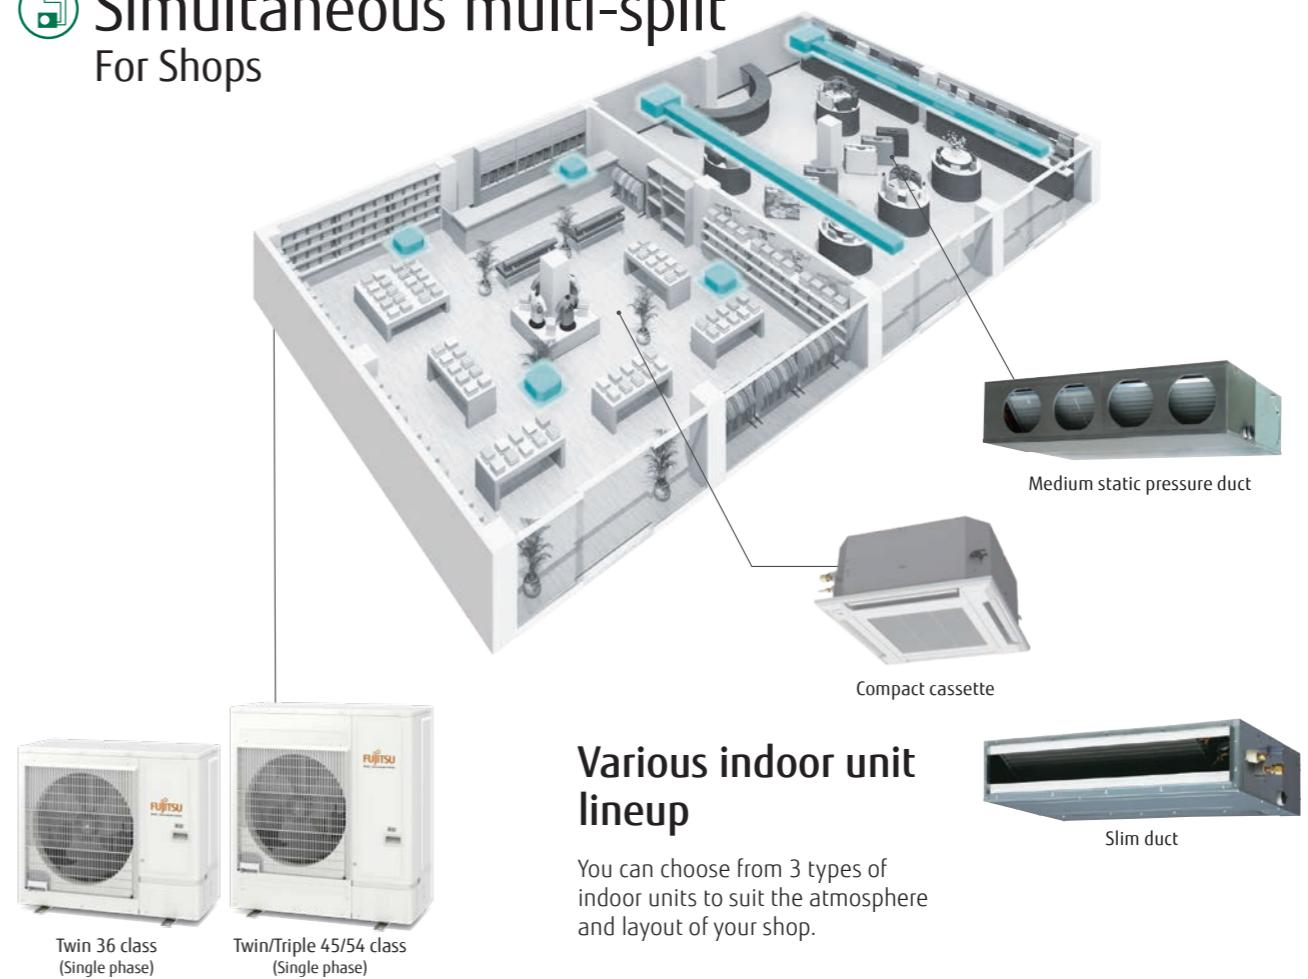

Small, lightweight outdoor unit




Models equipped with the new R32 refrigerant Compared to current models, the outdoor unit is more compact and easier to install. (45/54 models)
Compact cassette Series for grid ceiling were added to the lineup of indoor units to improve ease of installation.

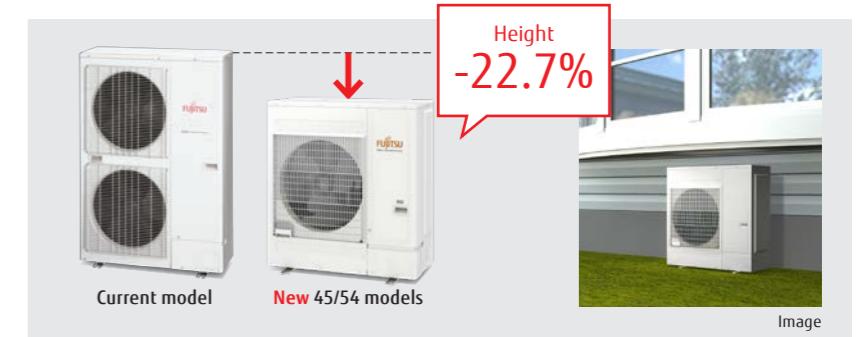

Small offices

For Light commercial use

Fujitsu General offers a perfect total air conditioning system for small office buildings with multiple small rooms, taking into consideration energy savings, low noise, comfortable air volume, usage and purpose, and centralized control.

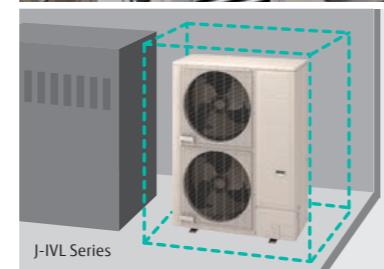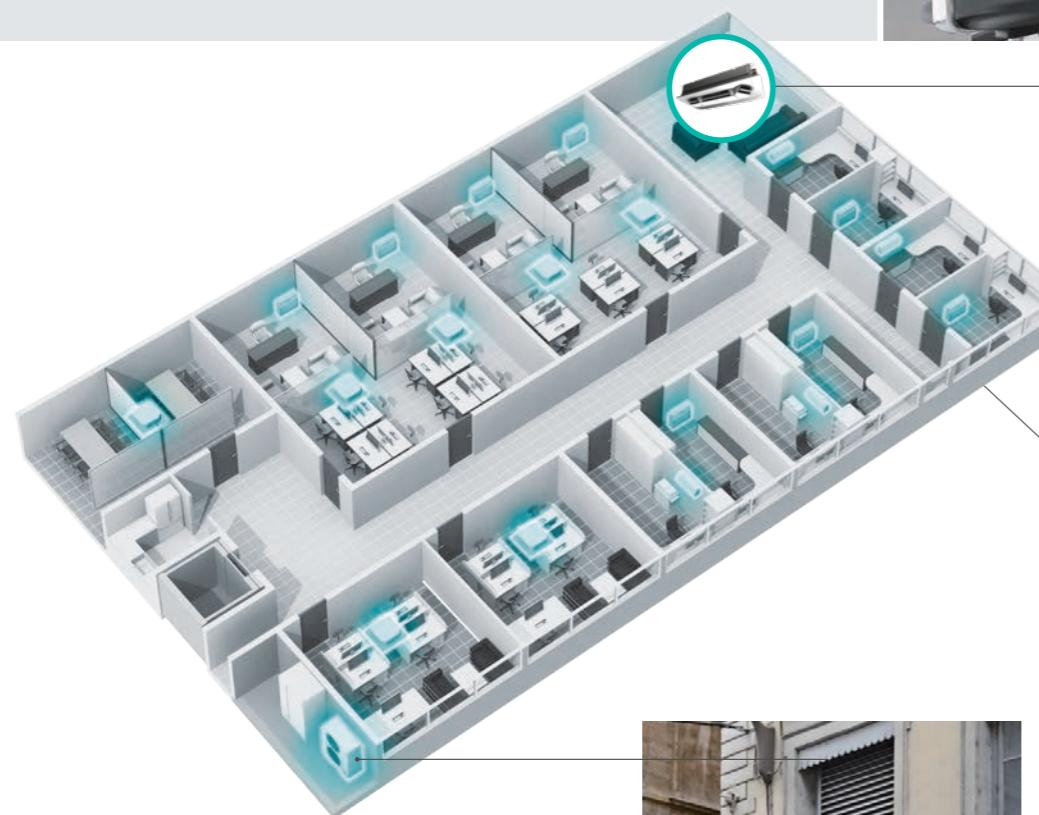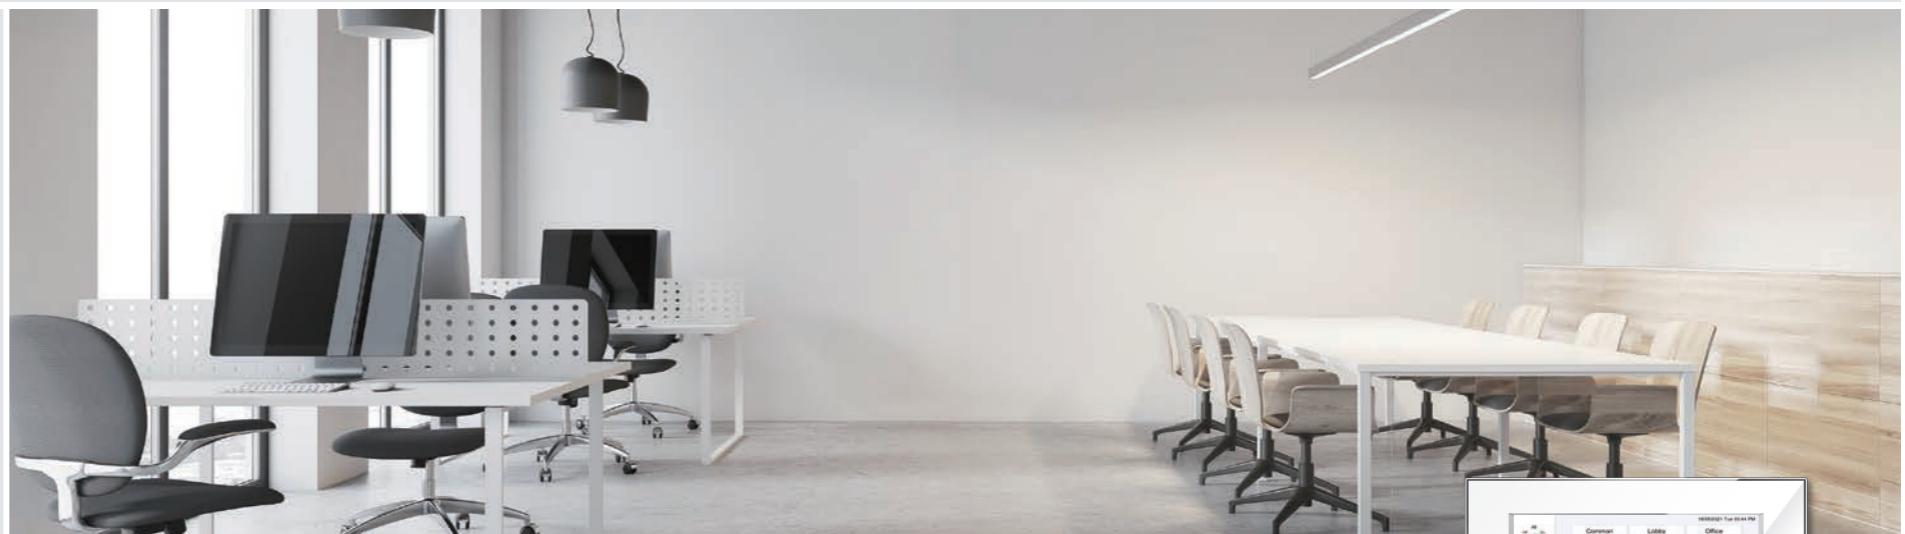

VRF J Series compact outdoor units with up to 18 HP

Suitable for the buildings with multiple small rooms. Up to 42 indoor units* can be connected.

*Only J-IVL Series 18 HP model

Compact outdoor unit with low noise design

Takes up little space even when installed in a machine room or on the roof. Sufficient static pressure can be maintained even with louvers. Low-noise mode suffices even for nighttime operations at low noise levels.

Breakthrough 3D flow cassette with innovative pursuit of comfort

The left and right air outlet ports with a maximum rotation angle of 100° and the wide central air outlet port create a comfortable space with less uneven temperature.



Wide lineup of indoor units of low-capacity class

Various low-capacity 1.1 kW indoor units are available for small rooms and spaces.



Compact cassette Series for grid ceiling



Central remote controller UTY-DCGYZ2



Central remote controller with improved operability

Controls the temperature of each room easily, and manages and sets the operation control for a week. Energy-saving management by setting upper and lower temperature limits and operating prohibitions.

LAN



Computer



Static IP address and IP forwarding to open ports required



Tablet PC
Smartphone

Control and monitoring

You can operate the main unit from your desk. Non-administrators can also operate the air conditioners with a computer, smartphone or tablet PC.

*Wireless LAN will be supported in the future.




Compact wired remote controller

Compact size with a large screen for easy operation. The stylish design harmonizes with the interior.

Hotels

For Light commercial use

Fujitsu General offers total air conditioning systems perfect for low-rise, small hotels that take into account energy savings, external appearance, safety, and ease of installation.

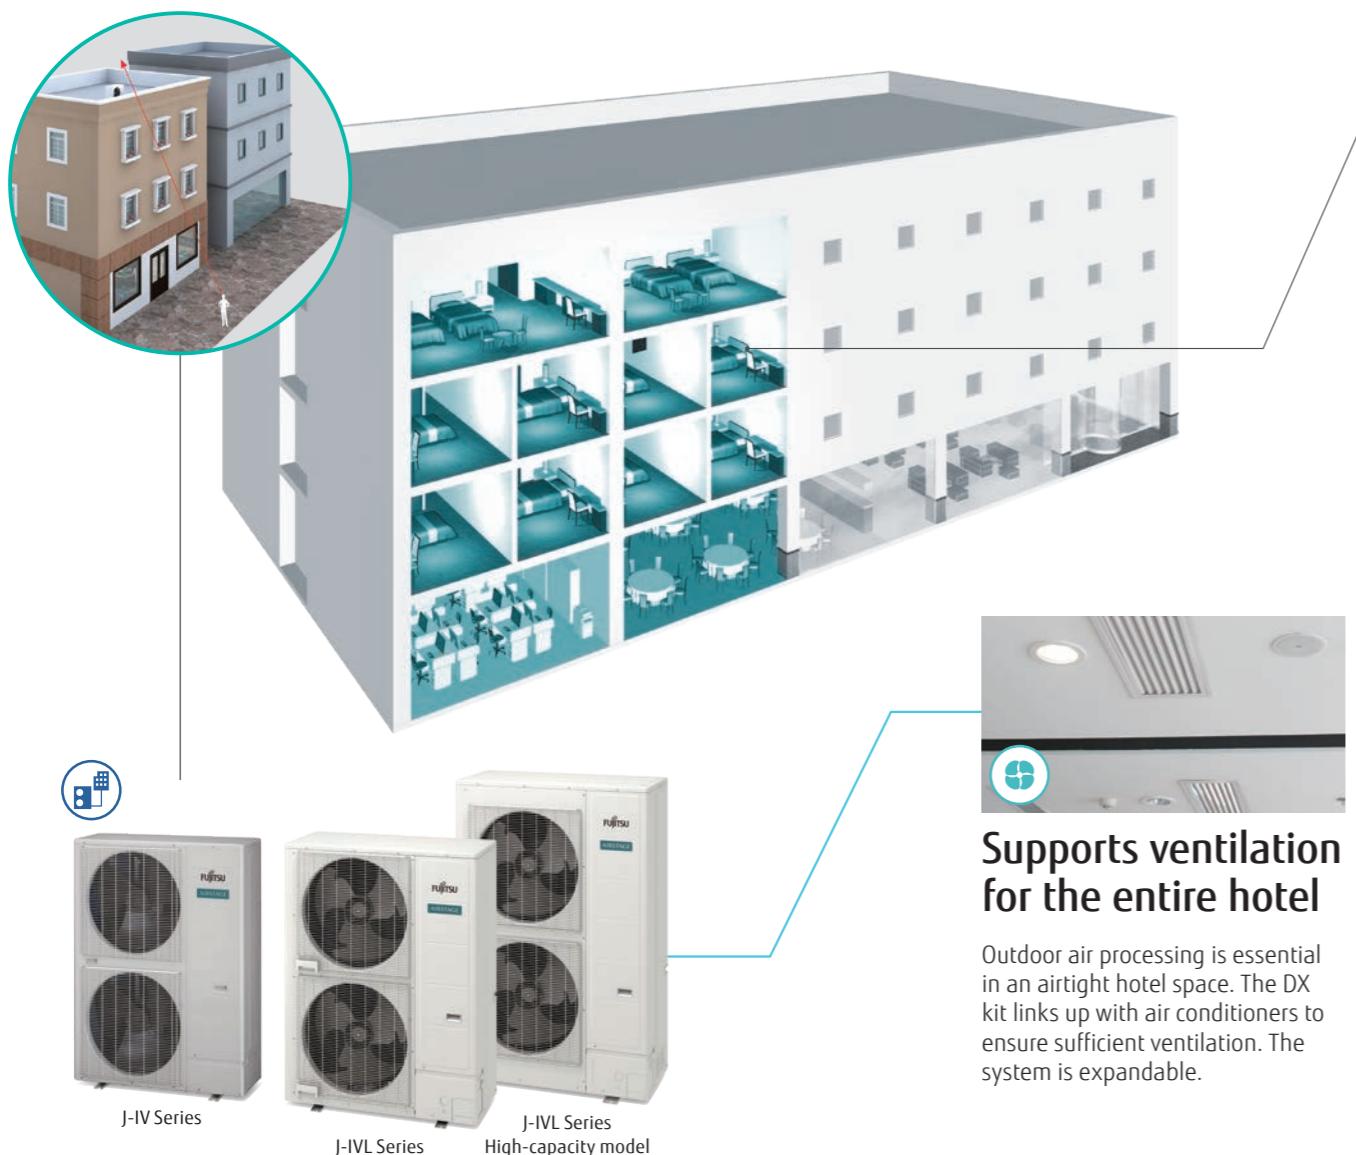

VRF J Series compact outdoor unit with appearance-conscious design

The class-leading compact design will not detract from the appearance of the hotel.



Guest room air conditioning with superior comfort, energy efficiency, and ease of installation

Space saving
Mini duct type with a height of 198 mm and a depth of 450 mm. Easily installed in a narrow ceiling space.



Card key switch available
Linked to a card key to prevent people from forgetting to turn off the air conditioner.



Comfortable airflow by switching the up/down airflow direction
The Auto louver grille kit creates comfortable airflow by adjusting the air direction.



One-way flow cassette Series
Compact chassis with low noise operation
The low operating noise makes the model ideal for use in hotel rooms.



Centralized control of air conditioning for shared spaces

Lobbies, hallways, and other common spaces are centrally controlled for air conditioning. Temperature and operating conditions can be managed without any adjustments by the guests.



Simple remote controller with sophisticated design

The ease of operation makes it an ideal choice for use in hotels or offices. Simple buttons and a white backlit large LCD screen make it easy to operate in the dark.




Large space air conditioning for the reception area and lobby

Duct type Big duct Series suitable for large spaces with high ceilings

Schools


For Light commercial use

Fujitsu General offers indoor units that allow multiple connections with a compact design that reduces the installation area and increases the flexibility for selecting installation locations, making them perfect for midsize educational institutions. One single outdoor unit is able to cover an entire school building.

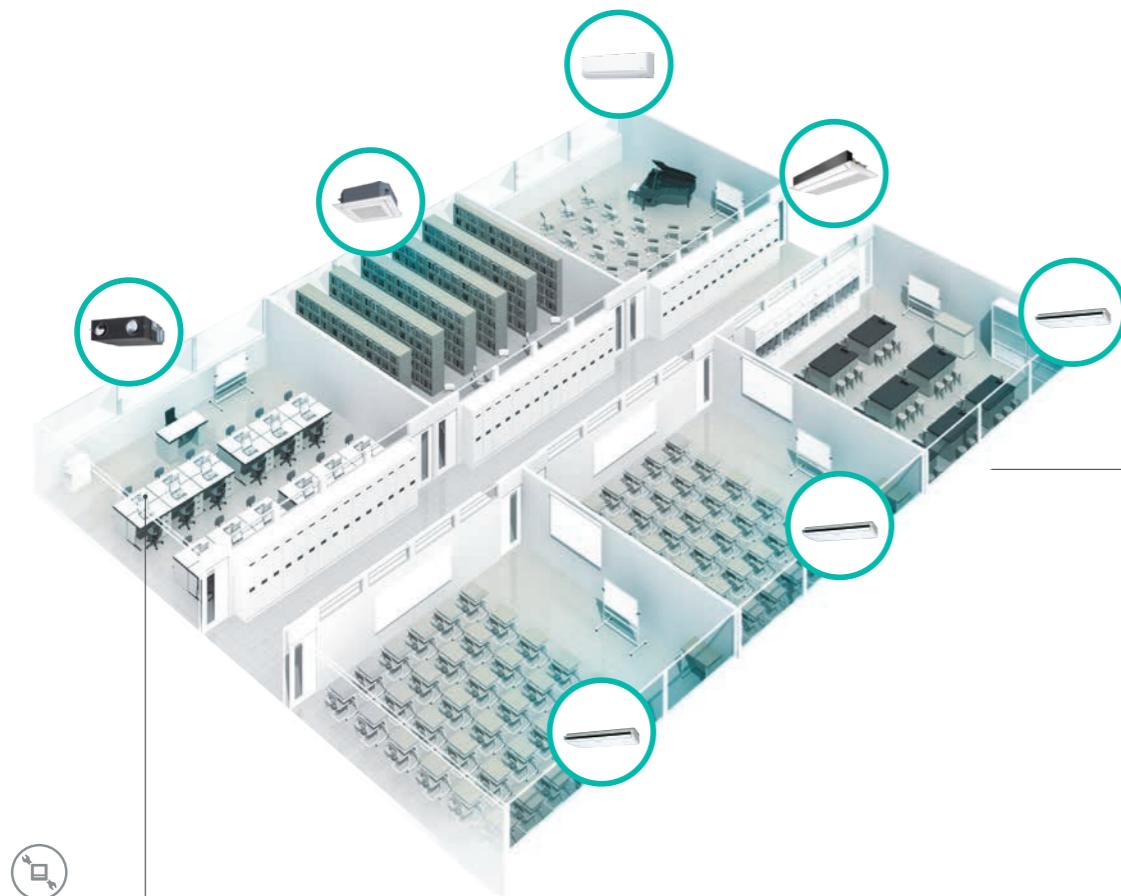

Centralized control of both air conditioning and ventilation equipment

Centralized control is also possible to stop the operation of not only air conditioners but also lighting and ventilation equipment. These features are useful for managing the energy efficiency of the entire building.

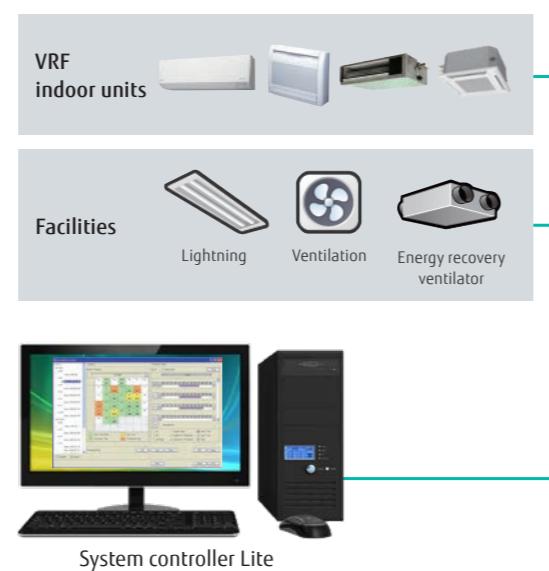

One-way flow cassette Series



Mini duct



Ceiling type



Wall-mounted type



Circular flow cassette Series

Comfortable room air conditioning without airflow sensation

Circular flow cassette blows air in all directions at a uniform temperature.



Individual airflow direction control to prevent people from being exposed to airflow




Wide variety of indoor units

Support complex applications for regular classrooms, special classrooms and auditoriums. Ventilators can also be added easily.



Energy recovery ventilator

Energy-saving operation when unattended, in conjunction with a Occupancy sensor.

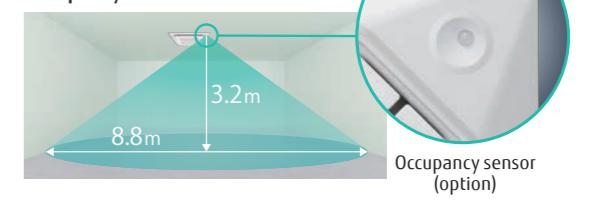

Occupancy sensor (option)



Large buildings

For Commercial use

Fujitsu General offers modular VRF systems that pursue high efficiency, comfort, design flexibility, ease of installation, and reliability for high-rise buildings.



Abundant lineup optimized for the operating environment

The VRF system meets a variety of needs, including energy-saving models and models with compatibility to outdoor temperatures of up to 46°C.



VRF VR-IV

Smart, cutting-edge design Extensive lineup from 8 HP to 48 HP with the capacity ratio of indoor units connectable up to 150%.


34 models with 8 to 48 HP

- Space saving combination: 21 models from 8 to 48 HP
- Energy efficient combination: 13 models from 16 to 44 HP

VRF V-IV

34 models from 8 to 48 HP

- Space saving combination: 21 models from 10 to 48 HP
- Energy efficient combination: 13 models from 16 to 46 HP

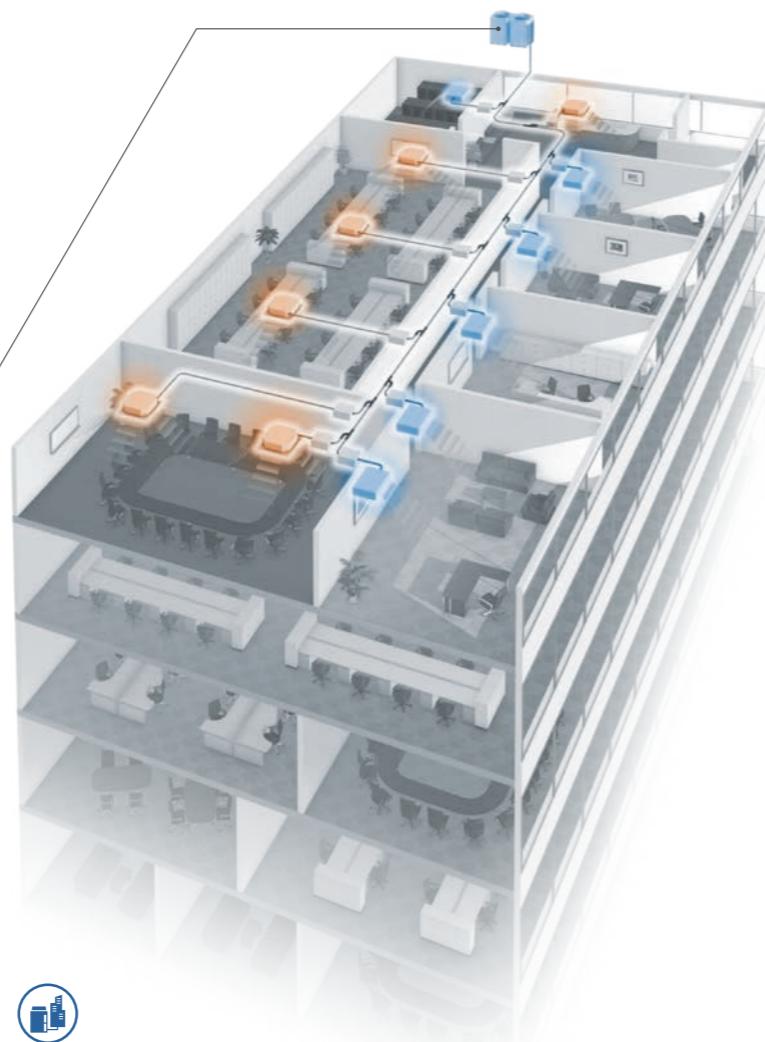

Height difference up to 110 m


The height difference between the outdoor unit and the indoor unit is normally 50 m for the V-IV Series, but can be extended to 110 m by installing the Pressure sensor kit.

* Can only be connected to the V-IV Series




Centralized control

Not only indoor units in the building, but also facilities such as ventilation can be controlled easily by anyone

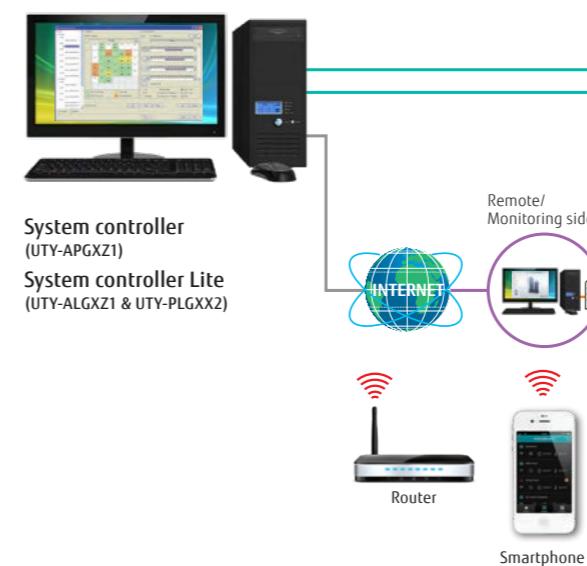

Linkage with various BMS

Linking with MODBUS®, BACnet®, KNX® and other interfaces allows centralized control of equipment other than air conditioning.


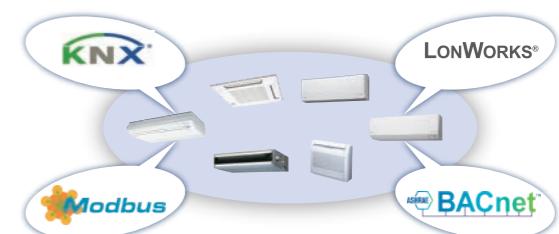


High system flexibility

The industry-leading high static pressure, long pipe design, and connection capacity enable flexible installation on each floor and installation of various indoor units.


82* Pa

*: V-IV Series, 80Pa for VR-IV Series

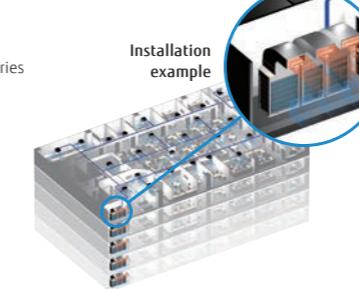

Prompt service support

Web monitoring tool and System controller remotely monitor the air conditioning of the entire building. Self-diagnosis in cooperation with the management company enables quick response in case of an emergency.

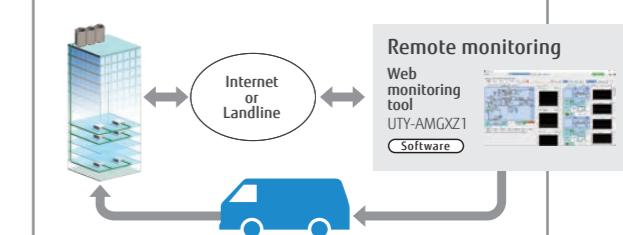



Residences

For Apartments & Houses

From the living room, where the whole family relaxes, to bedrooms, children's rooms and other small rooms, Fujitsu General has designed systems suited to spaces that reflect the rhythm of life.



REFRIGERANT
R32



A variety of indoor units to suit the characteristics of each room



For Living & Dining room

KE
Series

Cool beauty design Series

This series features a special European-style design. The light, elegant and three-dimensional expression achieved by the curved surface is beautiful from all angles.



For Large rooms

KM
Series

Standard & Comfort Series

The basic functions and powerful, comfortable airflow volume controls are optimal for large spaces.



KG
Series
GOOD DESIGN

KP



reddot award 2019
winner



For Primary bedrooms or Living rooms



KM
Series
GOOD DESIGN

Good Design Award winning, Quiet Series
High performance, low noise with emphasis on design

For Bedrooms or Home offices

Standard & ECO Range Series

High performance and compact design suitable for bedrooms, home offices and other small spaces



3-unit, 4-unit, 5-unit
Multi-split

Outdoor units suitable for residential environments



R32 Multi-split type released


Models are now available with environment-friendly R32 refrigerant. A number of products with improved external design have been added to the indoor unit lineup.



Wall-mounted type



Ceiling type

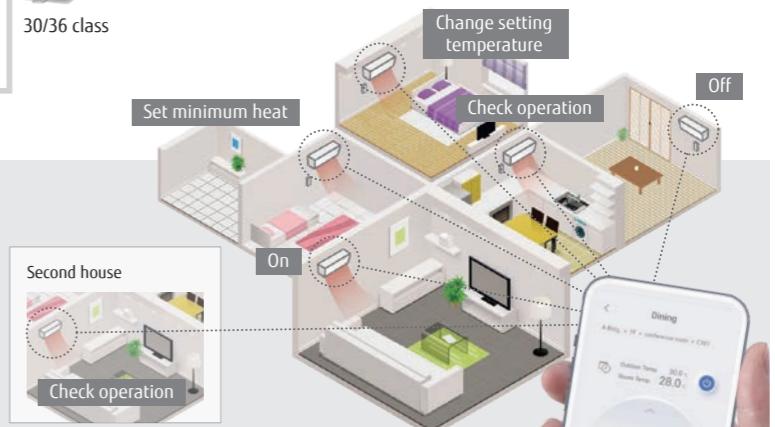

Operation from anywhere

With a single smartphone, you can check the operating status of not only your home air conditioner, but also the air conditioners in your second house or in your parents' house (up to 24 air conditioners).



WLAN adapter
(USB)



WLAN adapter
(USB)

AIRSTAGE
Mobile

Download Free
Download on the
App Store Google play

With the WLAN adapter and the AIRSTAGE Mobile app, you can control the heating and cooling of your home anytime, anywhere.

Light Commercial & Residential SPLIT & MULTI-SPLIT

Energy saving design to provide a comfortable indoor environment while being environment-friendly.

These are air conditioners that are both user-friendly and environment-friendly. Fujitsu General air conditioners cater to a wide range of needs, from living rooms, bedrooms, stores, small offices, through to hotels.

SPLIT

- Refrigerant R32 models
 - Wall-mounted type
 - Cassette
 - Duct
 - Floor
 - Ceiling
- Refrigerant R410A models
 - Duct

MULTI-SPLIT

- Refrigerant R32 models
 - 2-unit to 5-unit Multi-split
 - Simultaneous Multi-split Twin/Triple
- Refrigerant R410A models
 - 6-unit Multi-split
 - Simultaneous Multi-split Twin/Triple/Double Twin



**SPLIT &
MULTI-SPLIT**
Light Commercial &
Residential



Light Commercial & Residential SPLIT

- S-004 Split Overview
- S-006 Indoor Units Lineup
- S-008 Features
- S-013 Features Explanation
- S-050 Wall-mounted W-LAN Adapter Option Models Specifications
- S-052 ECO Series Lineup Specifications
- S-056 Feature Summary



Refrigerant R32 models

Wall-mounted type - Built in W-LAN adapter model

- S-014 Designer Series
 - High Spec & Design
 - Cool Beauty Design
- S-018 Standard Series
 - High-Efficiency & Comfort

Wall-mounted type

- S-020 Standard Series
 - High-Efficiency & Large Rooms
- S-024 ECO Series
 - Compact Size
 - Comfort for Large Rooms

Cassette

- S-028 Compact 4-way Flow Series - Compact Size
- S-030 Circular Flow Series - Comfort for Large Rooms

Duct

- S-032 Slim Duct - Slim Design
- S-034 Medium Static Pressure Duct
 - High-Efficiency & Comfort
 - Compact Size
 - Standard
- S-040 High Static Pressure Duct

Floor, Ceiling

- S-046 Floor - Compact Size
- S-048 Ceiling



Refrigerant R410A models

Duct

- S-042 High Static Pressure Duct
- S-044 Big Duct



Split Overview

Fujitsu General provides its customers with 5 types and 149 models of air conditioning systems perfect for various customer applications and layouts. Added to this lineup recently are the environment-friendly R32 refrigerant models.



Wall-mounted type, Designer Series, Cool Beauty Design



Ceiling



Wall-mounted type

Simple and easy to install, all models, are expertly designed to control airflow and save energy. The design, with its flat and simple appeal, perfectly matches room interiors. Many of the models in the lineup adopt the new environmentally friendly R32 refrigerant.



Duct

The main unit is hidden in the wall, making the room look neat and tidy. Mini Duct and Slim Duct models are also available for installation in narrow spaces between beams or above the ceiling. Large models, suitable for air conditioning vast spaces, allow multiple outlets to be installed in just one unit, and are perfect for atypical room layouts.



Cassette

The Cassette type, which blends in perfectly with the interior design, blows air in all four directions to create an even air-conditioning for the entire space. We have a variety of series including Compact models with a uniquely designed panel to match grid ceilings, and Circular Flow models that send airflow in a 360° direction.



Floor

The compact and slim design makes this model suitable for installation in commercial as well as residential buildings. This model is also recommended as a heating device because it delivers a warm airflow from both the top and bottom outlets.



Ceiling

As with the wall-mounted unit, ceiling installation is very easy, and the unit's thin structure with a height of just 240 mm allows neat installation. The powerful airflow that can reach far away from the wide outlet is perfect for large meeting rooms, audiovisual rooms, and other rectangular spaces with a lot of depth.

Indoor Units Lineup



FUJITSU GENERAL (Euro) GmbH participates in the ECP program for AC.
Check ongoing validity of certificate:
www.eurovent-certification.com

Type	Series	Refrigerant	Model	Class								Class								
				7	9	12	14	18	22	24	30	36	45	54	60	72	90			
Wall-mounted type Built in W-LAN adapter model	Designer Series High Spec & Design			ASYG07KGTF	ASYG09KGTF	ASYG12KGTF	ASYG14KGTF													
	Designer Series Cool Beauty Design			ASYG07KETF	ASYG09KETF	ASYG12KETF	ASYG14KETF													
	Standard Series High-Efficiency & Comfort			ASYG07KMCF	ASYG09KMCF	ASYG12KMCF	ASYG14KMCF													
Wall-mounted type	Standard Series High-Efficiency & Large Rooms							ASYG18KMTE		ASYG24KMTE										
	Standard Series High-Efficiency & Large Rooms											ASYH30KMTB	ASYH36KMTB							
	ECO Series Compact Size			ASYG07KPCE	ASYG09KPCE	ASYG12KPCE														
	ECO Series Comfort for Large Rooms							ASYG18KLCA		ASYG24KLCA										
	Designer Series High Spec & Design			ASYG07KGTE	ASYG09KGTE	ASYG12KGTE	ASYG14KGTE													
	Designer Series Cool Beauty Design			ASYG07KETE	ASYG09KETE	ASYG12KETE	ASYG14KETE													
	Standard Series High-Efficiency & Comfort			ASYG07KMCE	ASYG09KMCE	ASYG12KMCE	ASYG14KMCE													
Cassette	Compact 4-way Flow Series Compact Size				AUXG09KVLA	AUXG12KVLA	AUXG14KVLA	AUXG18KVLA	AUXG22KVLA	AUXG24KVLA										
	Circular Flow Series Comfort for Large Rooms			18/22/24	30/36/45/54			AUXG18KRLB	AUXG22KRLB	AUXG24KRLB	AUXG30KRLB	AUXG36KRLB	AUXG45KRLB	AUXG54KRLB						
Duct	Slim Duct			09/12/14	18	ARXG09KLLAP	ARXG12KLLAP	ARXG14KLLAP	ARXG18KLLAP											
	Medium Static Pressure Duct High-Efficiency & Comfort			22/24	30/36/45/54					ARXH22KMTAP	ARXH24KMTAP	ARXH30KMTAP	ARXH36KMTAP	ARXH45KMTAP	ARXH54KMTAP					
	Medium Static Pressure Duct Compact Size			12/14	18/22/24/30	36/45/54	ARXG12KHTAP	ARXG14KHTAP	ARXG18KHTAP	ARXG22KHTAP	ARXG24KHTAP	ARXG30KHTAP	ARXG36KHTAP	ARXG45KHTAP	ARXG54KHTAP					
	Medium Static Pressure Duct Standard									ARXG22KMLB	ARXG24KMLA	ARXG30KMLA	ARXG36KMLA	ARXG45KMLA						
	High Static Pressure Duct														ARXG45KHTB	ARXG54KHTB				
																ARYG60LHTA				
	Big Duct																ARYG72LHTA	ARYG90LHTA		
Floor Compact & Comfort					AGYG09KVCA	AGYG12KVCA	AGYG14KVCA													
Ceiling				18/22	24/30	36/45/54				ABYG18KRTA	ABYG22KRTA	ABYG24KRTA	ABYG30KRTA	ABYG36KRTA	ABYG45KRTA	ABYG54KRTA				

Features


High-Efficiency

ALL DC All DC Inverter Technology



DC twin-rotary compressor

A high-efficiency 2-cylinder rotary compressor with a DC inverter optimizes the internal structure of the compressor to achieve higher energy efficiency compared to similar compressors.

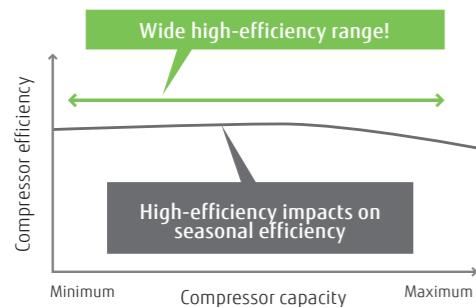


DC fan motor

The DC fan motor produces high power, a wide operating range, and high-efficiency.



Sine-wave DC inverter control

High-efficiency operation is realized by using sine-wave DC inverter control.




Heat Exchanger for Wall-mounted type

High-density multipath heat exchanger

Thinner and denser heat exchangers and multipath efficiency technology have substantially improved heat exchange performance.

High-performance sub-cool heat exchanger


A counter-type bypass circuit has been incorporated to achieve a higher performance. (Large multi-split type, VRF)

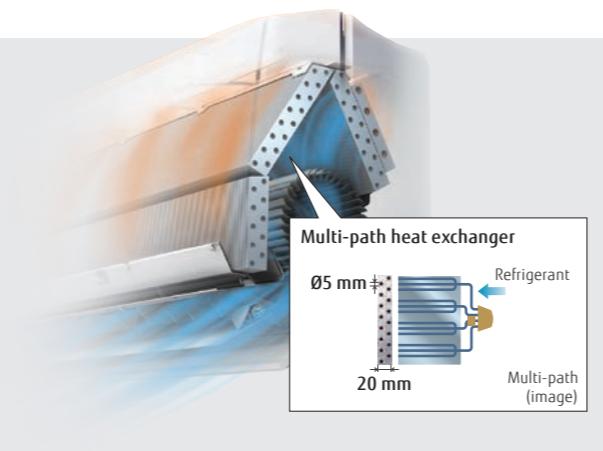

High Energy Saving


Occupancy sensor control

The Occupancy sensor monitors the movements of people in a room and operates the air conditioner at a lower capacity when people leave the room. When people come back to the room, it automatically returns to the previous operating mode.

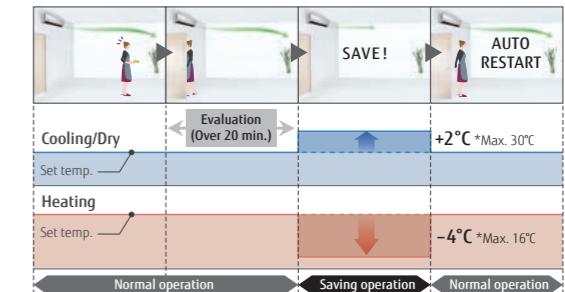


Economy operation

Limits maximum operation, reducing the power consumption, and thereby suppressing the maximum load.

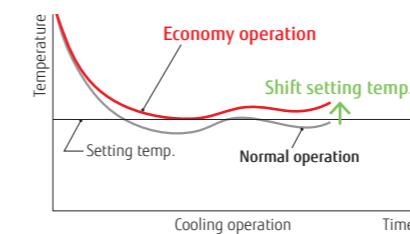


Setting temperature range limitation

The minimum and maximum temperature range can be set giving further energy savings while considering the comfort of the occupants.

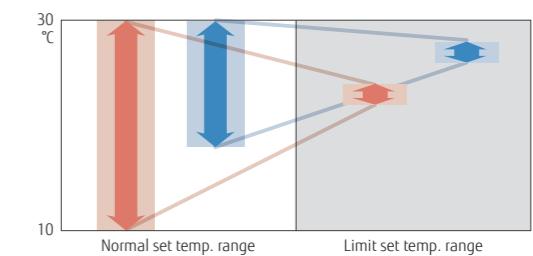


Set temperature auto return

- The set temperature automatically returns to the previously set temperature.
- The time range in which the set temperature can be changed is from 10 to 120 minutes.

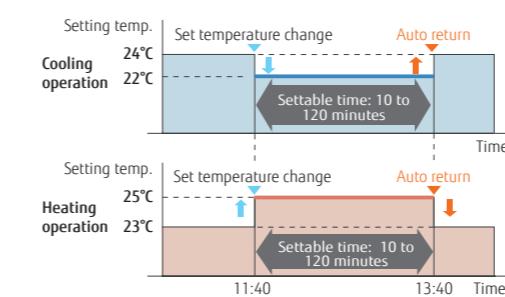

Auto-off timer

- The indoor unit is automatically turned off when it reaches a preset operating time frame.
- The time frame of the Auto-off timer can be flexibly scheduled.
- Auto-off times can be set from 30 to 240 minutes.

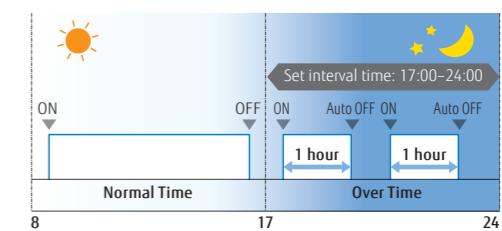


More Comfort




Power diffuser

These three technologies enable precise wind direction control and improve ventilation efficiency; our airflow control offers a more comfortable environment.

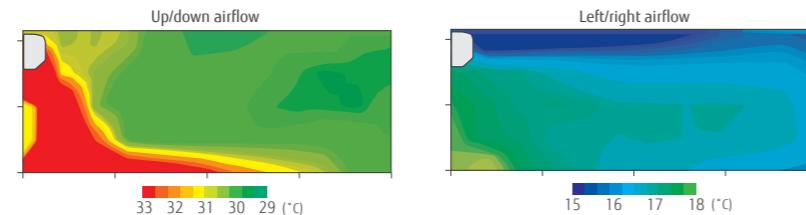


Wireless LAN control

Users can control their air conditioners from anywhere with their mobile devices while out or on the move.

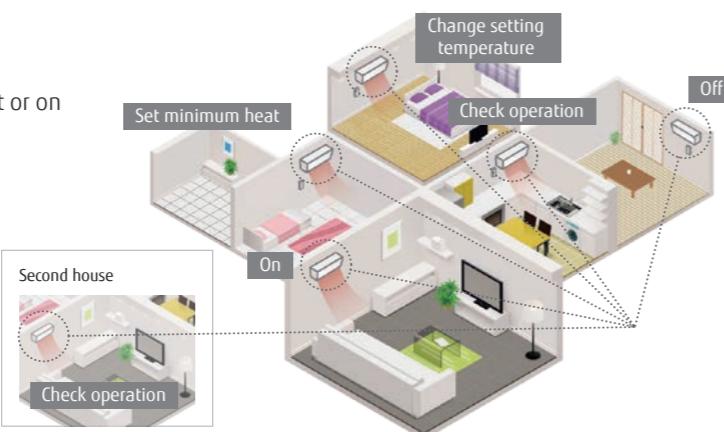



Powerful operation

Maximum airflow and maximum compressor speed are maintained for the period necessary to reach the set temperature quickly.

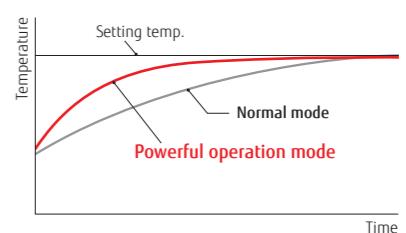

10°C heat

After a person has left the room, the system switches to minimum heating operation to maintain the room temperature. (Maintained at 10°C)

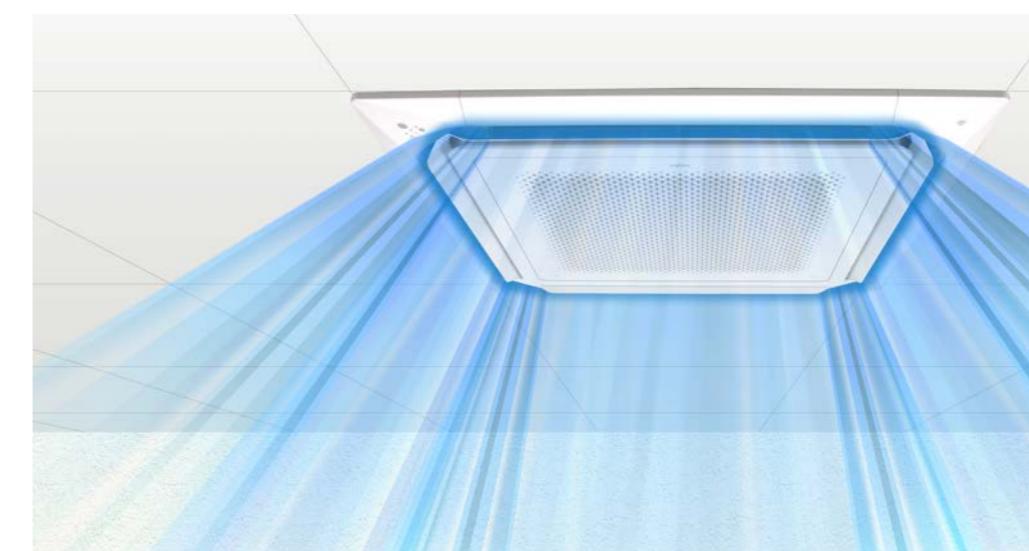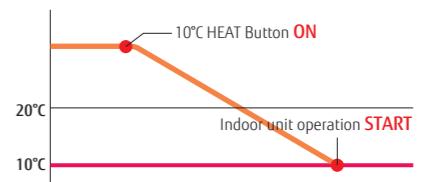

Uniform air conditioning

Circular airflow to achieve uniform air conditioning without temperature unevenness in workspaces




Quiet and Comfort Control

Low Noise Technology


Outdoor unit fan

Outdoor unit fan design with a small separation vortex, minimized air volume by fan control, and top-class low noise

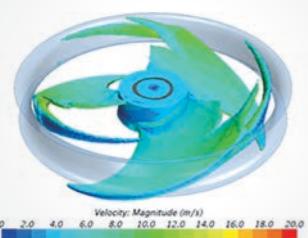


Air stabilizer in Duct

Low-noise duct structure with a built-in air stabilizer

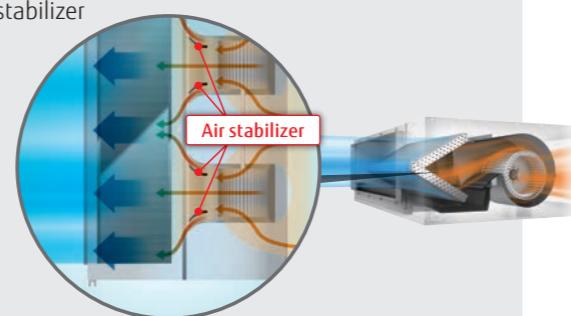


Outdoor unit low noise operation

Users can choose low noise levels, depending on the installation environment. Operation time can be set by timer.

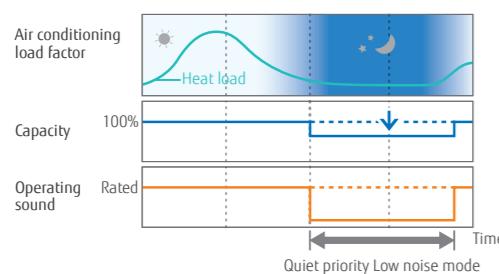

Auto changeover

In an auto setting, the system automatically switches between cooling and heating modes according to the set temperature and room temperature.

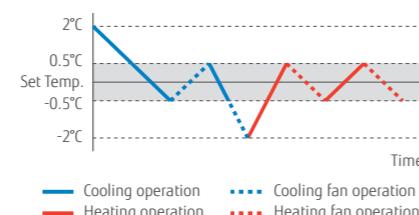

Fresh air intake

Fresh air is taken in by a fan connected to an external control unit.



Feature Explanation

Energy-Saving Features



Save Occupancy sensor

The Occupancy sensor (option) detects the movement of people in the room and determines whether to switch to energy saving operation.



Setting temperature range limitation

Sets the minimum and maximum limits on room temperature to establish the right balance between energy saving and a comfortable environment.



Occupancy sensor control

The Occupancy sensor (option) detects movement of people in the room and decides whether to save energy or stop the unit.



Set temperature auto return

The setting temperature automatically returns to the previously set temperature.



Economy operation

The thermostat setting is adjusted automatically according to the room temperature to avoid unnecessary cooling or heating.

Features for Comfort



Power diffuser

An additional louver that opens based on input from monitoring sensors to quickly enhance immediate comfort needs.



Outdoor unit low noise operation

The noise level of the outdoor unit can be selected.



Double swing automatic

Complex swing action of the louver enables automatic swing in both the left/right and up/down directions.



Connectable fresh air duct

Outside air can be introduced by attaching a locally purchased duct to the fresh air knockout and an optional part.



Individual airflow direction control

Each louver of a 4-way Cassette type can be controlled individually to provide comfortable airflow.



Powerful operation

Operation at maximum air flow and compressor speed, that quickly makes the room comfortable.



Auto changeover

The unit automatically switches between heating and cooling modes based on the temperature setting and the room temperature.



Automatic fan speed

A micro-computer automatically adjusts the airflow to follow the changes in room temperature.



Fresh air intake

Fresh air can be taken in by a fan connected to an external control unit.



Connectable distributing duct

Locally purchased branch ducts can be attached to the systems to distribute the airflow.

Convenience Features



Auto-off timer

Automatically stops operation when a fixed time has elapsed from the start of operation.



Sleep timer

A micro-computer gradually changes the room temperature automatically to promote a comfortable night's sleep.



Weekly timer

Different ON-OFF times can be set for each day.



External error output

External ON/OFF input



Multi System Control

Operation using "Lead Lag Operation", "Back up operation", "Lag Operation" is possible. (Page C-011)



Special Cooling

"Special Cooling" is a function that supports the operation of "Multi System Control".



Program timer

This digital timer allows selection of one of four options: ON, OFF, ON > OFF, or OFF > ON.



Filter sign

Indicates the filter cleaning period by blinking.



Wireless LAN control

The optional WLAN adapter enables the air conditioner to be operated by smartphone or tablet PC from outside the home.

Clean Features



Ion deodorization filter

The filter deodorizes by powerfully decomposing absorbed odors using the oxidizing and reducing effects of ions generated by an ultra-fine-particle ceramic.



Apple-catechin filter

The Apple-catechin filter uses static electricity to clean fine particles and dust from the air.



Washable panel

Since the front panel is easy to remove, maintenance is also easy.



Silver Ion Filter

The Silver ion filter helps to keep indoor air free from viruses, bacteria and molds.



Long-life filter

Installation / Support



Automatic airflow adjustment

Automatically detects required airflow in each application case and adjusts the volume.



Drain pump as standard



Blue fin

All DC models

NEW

Wall-mounted type

Built-in W-LAN adapter model
Designer Series
Cool Beauty Design



ALL DC



Cool beauty design

We have designed this series exclusively for the European market. The exterior design harmonizes beautifully with any decor and adds comfortable elegance to the room. The light, elegant and three-dimensional expression achieved by the curved surface is beautiful from any angle.




CMF: COLOR MATERIAL FINISH

The texture of the front panel expresses the craftsmanship of Europe, and changes its expression with the changing light of the day.

High energy saving

Top class high efficiency is achieved by high efficient lambda-shaped heat exchanger, large cross flow fan and new refrigerant.

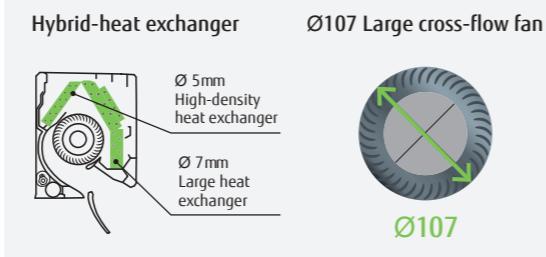

Comfortable airflow & Quiet operation

The large louver and the new air-blowing structure create a comfortable air flow that spreads all the way down to the user's feet with quiet operation.




20 dB(A)
Cooling only

Smart device control

With the WLAN adapter installed in the air conditioner, you can control it from anywhere with your smart device.

* For more information about smart device control, please refer to the page C-018.

You need to install the AIRSTAGE Mobile app on your smart device in order to control the air conditioner.

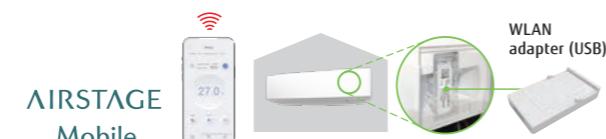

Model: ASYG07KETF / ASYG09KETF / ASYG12KETF / ASYG14KETF (Pearl white X White)
ASYG07KETF-B / ASYG09KETF-B / ASYG12KETF-B / ASYG14KETF-B (Silver X Dark gray)



Pearl white X White



Silver X Dark gray



WLAN adapter (Built-in)



Wireless RC



For ASYG07/09/12KETF ASYG07/09/12KETF-B



For ASYG14KETF ASYG14KETF-B

Specifications

Model name	Indoor unit		ASYG07KETF ASYG07KETF-B	ASYG09KETF ASYG09KETF-B	ASYG12KETF ASYG12KETF-B	ASYG14KETF ASYG14KETF-B
	Outdoor unit		AOYG07KETA	AOYG09KETA	AOYG12KETA	AOYG14KETA
Power Source						
Capacity	Cooling	kW	2.0 (0.9 - 3.0)	2.5 (0.9 - 3.2)	3.4 (0.9 - 3.9)	4.2 (0.9 - 4.4)
	Heating		2.5 (0.9 - 3.4)	2.8 (0.9 - 4.0)	4.0 (0.9 - 5.3)	5.4 (0.9 - 6.0)
Input Power	Cooling/Heating	kW	0.450/0.555	0.630/0.620	0.935/0.960	1.220/1.410
EER	Cooling	W/W	4.43	3.97	3.65	3.44
COP	Heating		4.52	4.52	4.17	3.83
Pdesign	Cooling/Heating (-10°C)	kW	2.0/2.3	2.5/2.4	3.4/2.5	4.2/4.0
SEER	Cooling		7.40	7.40	7.30	6.90
SCOP	Heating (Average)	W/W	4.10	4.10	4.40	4.10
Energy Efficiency Class	Cooling		A++	A++	A++	A++
	Heating (Average)		A+	A+	A+	A+
Max. Operating Current	Cooling/Heating	A	6.5/9.0	6.5/9.0	6.5/9.0	6.5/9.0
Annual Energy Consumption	Cooling	kWh/a	95	118	163	213
	Heating		785	819	795	1,367
Moisture Removal		l/h	1.0	1.3	1.8	2.1
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	38/33/29/20	40/34/29/20	40/35/30/20	43/36/30/20
	Indoor (Heating)	H/M/L/Q	41/35/31/22	42/36/31/22	42/38/33/22	44/39/33/24
	Outdoor (Cooling/Heating)	High	46/46	46/46	50/50	50/50
Sound Power Level	Indoor (Cooling/Heating)	High	54/56	55/57	55/58	57/59
	Outdoor (Cooling/Heating)	High	61/61	61/62	65/65	65/66
Airflow Rate	Indoor/Outdoor (Cooling)	m³/h	650/1,650	700/1,650	700/1,700	770/1,680
	Indoor/Outdoor (Heating)		720/1,450	750/1,450	770/1,470	800/1,580
Net Dimensions	Indoor	mm			295 × 950 (wall side: 840) × 230	
H x W x D	Outdoor	mm	541 × 663 × 290	541 × 663 × 290	541 × 663 × 290	542 × 799 × 290
Weight	Indoor	kg	11	11	11	11
	Outdoor	kg	23	23	25	31
Connection Pipe Diameter (Liquid/Gas)		mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/9.52
Drain Hose Diameter (I.D./O.D.)		mm	13.8/15.0 to 16.8	13.8/15.0 to 16.8	13.8/15.0 to 16.8	13.8/15.0 to 16.8
Max. Pipe Length (Pre-Charge)		m	20 (15)	20 (15)	20 (15)	20 (15)
Max. Height Difference			15	15	15	15
Operating Range	Cooling	°CDB	-10 to 46	-10 to 46	-10 to 46	-10 to 46
	Heating		-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)		R32 (675)	R32 (675)	R32 (675)	R32 (675)
Charge	kg (CO ₂ eq-T)		0.6 (0.405)	0.6 (0.405)	0.7 (0.473)	0.85 (0.574)

Optional parts


Compact wired remote controller:	UTY-RCRYZ1	Communication kit:	UTY-TWRXZ2	Network Convertor for single split (DC power supply type):	UTY-VTGX
Wired remote controller (touch panel):	UTY-RNRYZ5	External input and output PCB*:	UTY-XCSZ2	Network Convertor for single split (AC power supply type):	UTY-VTXV
Wired remote controller:	UTY-RLRY	External connect kit:	UTY-XWZX	Silver Ion filter:	UTR-FA16-5
Simple remote controller (without operation mode):	UTY-RHRY	UTY-XWZXZ5			
Simple remote controller:	UTY-RSRY	External switch controller:	UTY-TERX		

* For optional parts compatibility of Intesis devices, refer to the optional parts compatibility list Page C-048.

*1 It is required when 2 or more external input and output ports are used.

Dimensions

(Unit: mm)

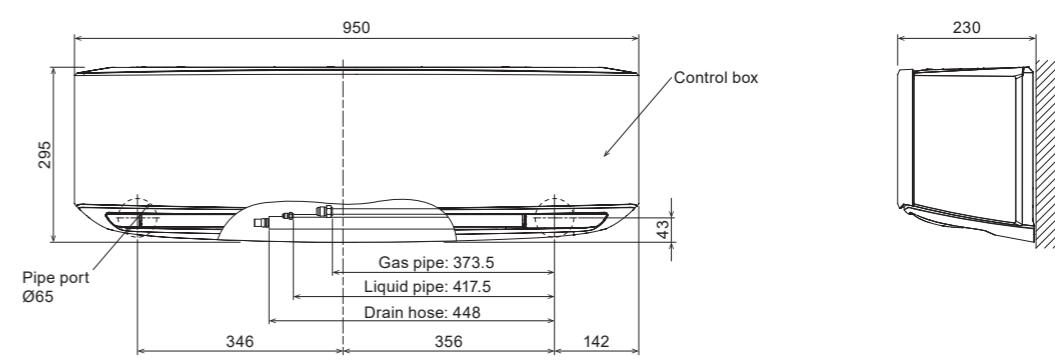

NEW

Wall-mounted type

Built-in W-LAN adapter model
Standard Series
High-Efficiency & Comfort




ALL DC



Slim & stylish square design

The slim and stylish square design of this indoor unit is realized by using a high-density, multipath heat exchanger and a high-efficiency wind blower.

Hybrid-heat exchanger

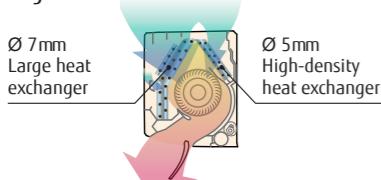

High energy saving

High-efficiency has been achieved by the lambda-shaped heat exchanger, large cross-flow fan, and the new refrigerant.

Rank *1
Cooling A++
Heating A+

SEER 7.4 *1

SCOP 4.4 *2

*1: 07/09 models

*2: 12 model

Comfortable airflow & Quiet operation

The large louver and the new air-blowing structure create a comfortable air flow that spreads all the way down to the user's feet with quiet operation.




Smart device control

With the WLAN adapter installed in the air conditioner, you can control it from anywhere with your smart device.

* For more information about smart device control, please refer to the page G-018.


You need to install the AIRSTAGE Mobile app on your smart device in order to control the air conditioner.

AIRSTAGE
Mobile

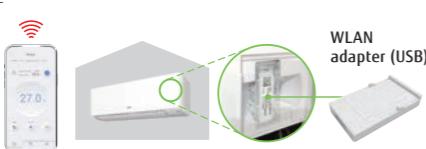

Easy access to the flare pipe connection

Installation when left outlet piping is easier by removable under cover of the indoor unit chassis. Installation when center outlet piping is easier by design change of wall hook bracket.

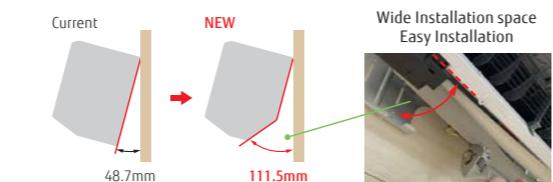

Model: ASYG07KMCF / ASYG09KMCF / ASYG12KMCF / ASYG14KMCF



Specifications

Model name	Indoor unit		ASYG07KMCF	ASYG09KMCF	ASYG12KMCF	ASYG14KMCF
	Outdoor unit		AOYG07KMCC	AOYG09KMCC	AOYG12KMCC	AOYG14KMCC
Power Source						
Capacity	Cooling	kW	2.0 (0.9-3.0)	2.5 (0.9-3.2)	3.4 (0.9-3.2)	4.2 (0.9-4.4)
	Heating		2.5 (0.9-3.4)	2.8 (0.9-4.0)	4.0 (0.9-5.3)	5.4 (0.9-6.0)
Input Power	Cooling/Heating	kW	0.450/0.555	0.630/0.620	0.935/0.960	1.220/1.410
EER	Cooling	W/W	4.43	3.97	3.65	3.44
COP	Heating		4.52	4.52	4.17	3.83
Pdesign	Cooling/Heating (-10°C)	kW	2.0/2.3	2.5/2.4	3.4/2.5	4.2/4.0
SEER	Cooling	W/W	7.40	7.40	7.30	6.90
SCOP	Heating (Average)		4.10	4.10	4.40	4.10
Energy Efficiency Class	Cooling		A++	A++	A++	A++
	Heating (Average)		A+	A+	A+	A+
Max. Operating Current	Cooling/Heating	A	6.5/9.0	6.5/9.0	6.5/9.0	6.5/9.0
Annual Energy Consumption	Cooling	kWh/a	95	118	163	213
	Heating		785	819	795	1,366
Moisture Removal		l/h	1.0	1.3	1.8	2.1
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	38/33/29/20	40/34/29/20	40/35/30/20	43/36/30/20
	Indoor (Heating)	H/M/L/Q	41/35/31/22	42/36/31/22	42/38/33/22	44/39/33/24
Sound Power Level	Outdoor (Cooling/Heating)	High	46/46	46/46	50/50	50/50
	Indoor (Cooling/Heating)	High	54/56	55/57	55/58	57/59
Airflow Rate	Outdoor (Cooling/Heating)	High	61/61	61/62	65/65	65/66
	Indoor/Outdoor (Cooling)	High	650/1,650	700/1,650	700/1,700	770/1,680
Net Dimensions H x W x D	Indoor	mm	270 x 834 x 222			
	Outdoor	mm	541 x 663 x 290	541 x 663 x 290	541 x 663 x 290	542 x 799 x 290
Weight	Indoor	kg	10	10	10	10
	Outdoor	kg	22	22	24	31
Connection Pipe Diameter (Liquid/Gas)		mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/9.52
Drain Hose Diameter (I.D./O.D.)		mm	13.8/15.0 to 16.8	13.8/15.0 to 16.8	13.8/15.0 to 16.8	13.8/15.0 to 16.8
Max. Pipe Length (Pre-Charge)		m	20 (15)	20 (15)	20 (15)	20 (15)
Max. Height Difference		m	15	15	15	15
Operating Range	Cooling	°CDB	-10 to 46	-10 to 46	-10 to 46	-10 to 46
	Heating		-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)		R32 (675)	R32 (675)	R32 (675)	R32 (675)
	Charge	kg (CO ₂ eq-T)	0.6 (0.405)	0.6 (0.405)	0.7 (0.473)	0.85 (0.574)

* For optional parts compatibility of Intesis devices, refer to the optional parts compatibility list Page C-048.


Optional parts

Compact wired remote controller:	UTY-RCRYZ1	Communication kit:	UTY-TWRXZ2	Network Convertor for single split (DC power supply type): UTY-VTGX
Wired remote controller (touch panel):	UTY-RNRYZ5	External input and output PCB ¹ :	UTY-XCSZ2	Network Convertor for single split (AC power supply type): UTY-VTGXV
Wired remote controller:	UTY-RLRY	External connect kit:	UTY-XWZX	Silver Ion filter:
Simple remote controller (without operation mode):	UTY-RHRY	UTY-XWZXZ5		UTR-FA16-5
Simple remote controller:	UTY-RSRY	External switch controller:	UTY-TERX	

¹ It is required when 2 or more external input and output ports are used.

Dimensions

(Unit: mm)

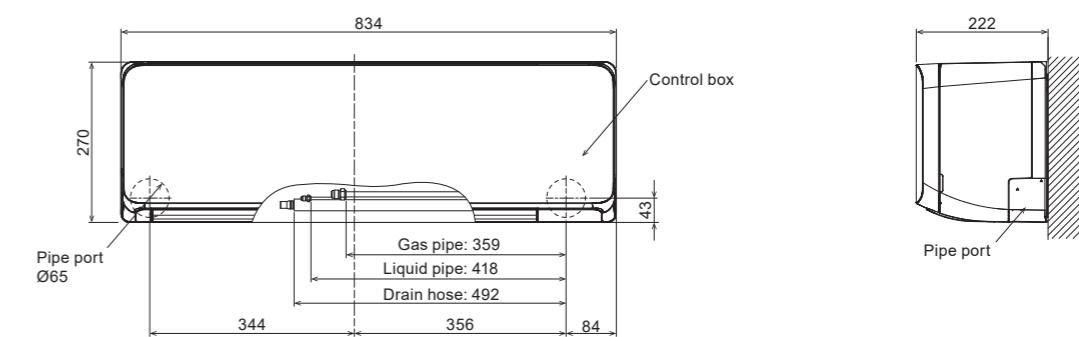

Wall-mounted type

Standard Series

High-Efficiency & Large Rooms



ALL DC




High energy saving

Top class high efficiency is achieved by high efficient lambda-shaped heat exchanger, large cross flow fan and new refrigerant.

SEER
7.8^{*1} **SCOP**
4.6^{*1}

*18 model

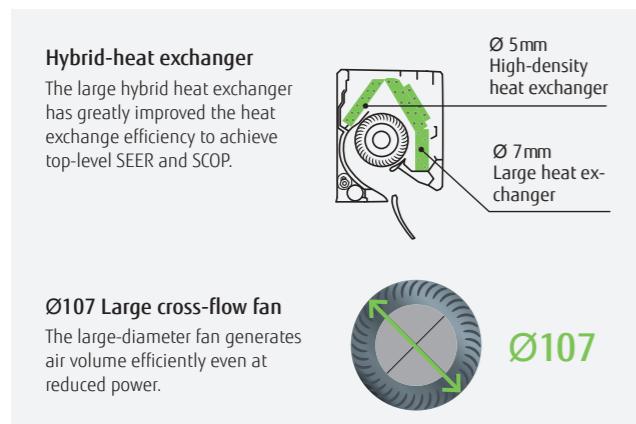



Smart device control (Option)

With the optional WLAN adapter installed in the air conditioner, you can control it from anywhere with your smart device. WLAN adapter can be installed easily without specialized installation work.

* For more information about smart device control, please refer to the page C-018.


You need to install the AIRSTAGE Mobile app on your smart device in order to control the air conditioner.

AIRSTAGE
Mobile

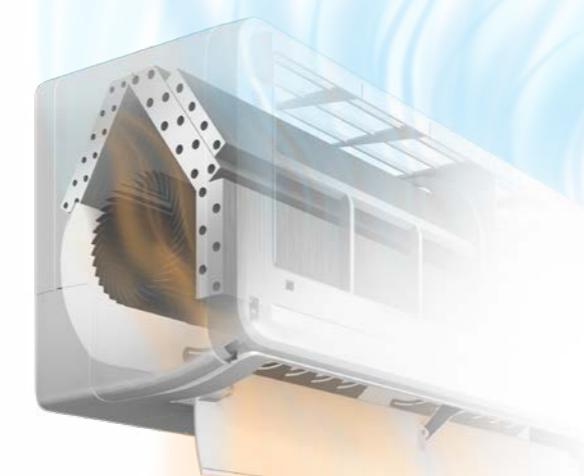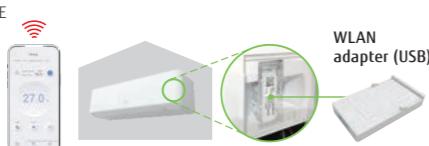

Easy access to the flare pipe connection

Installation when left outlet piping is easier by removable under cover of the indoor unit chassis. Installation when center outlet piping is easier by design change of wall hook bracket.

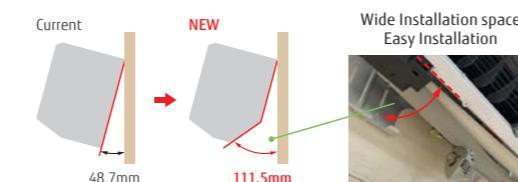

Model: ASYG18KMTE / ASYG24KMTE



For ASYG18KMTE



For ASYG24KMTE

Specifications

Model name	Indoor unit		ASYG18KMTE	ASYG24KMTE
	Outdoor unit		AOYG18KMTA	AOYG24KMTA
Power Source			Single phase, ~230 V, 50 Hz	
Capacity	Cooling	kW	5.2 (0.9-6.0)	7.1 (0.9-8.3)
	Heating		6.3 (0.9-8.7)	8.0 (0.9-10.1)
Input Power	Cooling/Heating	kW	1.39/1.56	2.08/1.91
EER	Cooling		3.74	3.41
COP	Heating		4.04	4.19
Pdesign	Cooling/Heating (-10°C)	kW	5.2/4.8	7.1/7.1
SEER	Cooling		7.77	7.30
SCOP	Heating (Average)		4.60	4.20
Energy Efficiency Class	Cooling		A++	A++
	Heating (Average)		A++	A+
Max. Operating Current	Cooling/Heating	A	9.5/13.5	13.5/16.0
Annual Energy Consumption	Cooling	kWh/a	234	340
	Heating		1,460	2,362
Moisture Removal		I/h	1.7	2.7
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	45/40/35/29	49/40/35/29
	Indoor (Heating)	H/M/L/Q	46/40/35/29	49/40/35/29
	Outdoor (Cooling/Heating)	High	50/50	54/52
Sound Power Level	Indoor (Cooling/Heating)	High	60/61	65/65
	Outdoor (Cooling/Heating)	High	65/65	67/66
Airflow Rate	Indoor/Outdoor (Cooling)	High	980/2,350	1,170/3,240
	Indoor/Outdoor (Heating)	High	1,020/2,100	1,170/2,820
Net Dimensions	Indoor	mm	280 × 980 × 240	280 × 980 × 240
H x W x D	Outdoor	mm	632 × 799 × 290	716 × 820 × 315
Weight	Indoor	kg	12.5	12.5
	Outdoor	kg	36	42
Connection Pipe Diameter (Liquid/Gas)		mm	6.35/12.70	6.35/12.70
Drain Hose Diameter (I.D./O.D.)		mm	13.8/15.8 to 16.7	13.8/15.8 to 16.7
Max. Pipe Length (Pre-Charge)		m	25 (15)	30 (15)
Max. Height Difference		m	20	25
Operating Range	Cooling	°CDB	-10 to 46	-10 to 46
	Heating		-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)		R32 (675)	R32 (675)
	Charge	kg (CO ₂ eq-T)	1.02 (0.689)	1.32 (0.891)

Optional parts



Compact wired remote controller:	UTY-RCRYZ1	Communication kit:	UTY-TWRX22	Network Converter for single split (DC power supply type):	UTY-VTGX
Wired remote controller (touch panel):	UTY-RNRYZ5	External input and output PCB*1:	UTY-XCSX22	Network Converter for single split (AC power supply type):	UTY-VTGXV
Wired remote controller:	UTY-RLRY	WLAN adapter:	UTY-TFSXF2	Silver Ion filter:	UTY-FA16-5
Simple remote controller (without operation mode):	UTY-RHRY	UTY-TFSXH3	UTY-TERX	External switch controller:	UTY-XWZXZ5
Simple remote controller:	UTY-RSRY	FG-AC-WIFZ1	External connect kit:	UTY-XWZXZ5	

* For optional parts compatibility of Intesis devices, refer to the optional parts compatibility list Page C-048.

*1 It is required when 2 or more external input and output ports are used.

Dimensions

(Unit: mm)

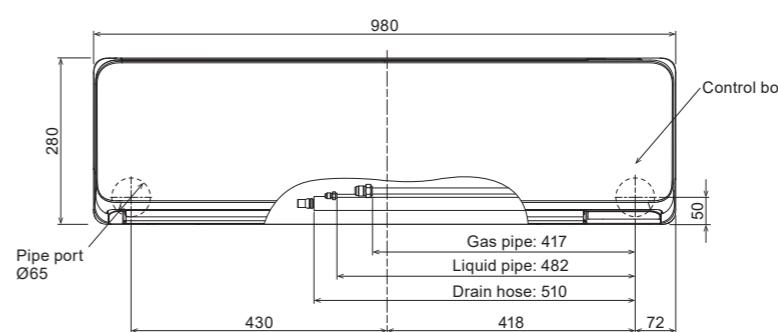

NEW

Wall-mounted type Standard Series

High-Efficiency & Large Rooms



Special Cooling

When it is necessary to be constantly cooled such as rooms with a high heat load, it is possible to operate the cooling with keeping performance even when the outside temperature is low.

*Wired remote controller (UTY-RNRYZ5) is required.


*Please note that we will not provide compensation for any damages suffered to your appliances or data as a result of using this function.

*Please use it in low-humidity environments.
Condensation and other problems may be caused when used in high-humidity environments.



Occupancy sensor


The Occupancy sensor monitors the movements of people in a room and operates the air conditioner at a lower capacity when people leave the room. When people come back to the room, it automatically returns to the previous operating mode.

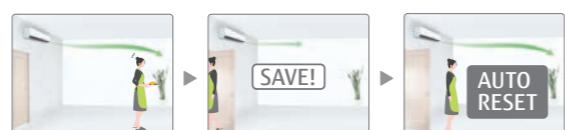

Refrigerant cycle monitor (Option)

Wired Remote Controller (Touch Panel) will support to display some sensor values for maintenance and service support.

*Wired remote controller (UTY-RNRYZ5) is required.

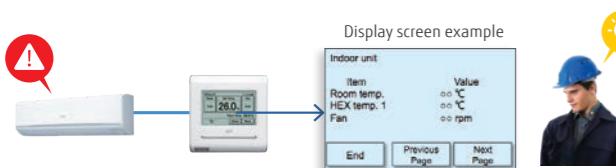

Smart device control (Option)

With the optional WLAN adapter installed in the air conditioner, you can control it from anywhere with your smart device. WLAN adapter can be installed easily without specialized installation work.

* For more information about smart device control, please refer to the page C-018.

You need to install the AIRSTAGE Mobile app on your smart device in order to control the air conditioner.



Model: ASYH30KMTB / ASYH36KMTB



Specifications

Model name	Indoor unit		ASYH30KMTB	ASYH36KMTB
	Outdoor unit		AOYH30KMTB	AOYH36KMTB
Power Source			Single phase, ~230V, 50Hz	
Capacity	Cooling	kW	8.0 (2.9-9.0)	9.4 (2.9-10.0)
	Heating		8.8 (2.2-11.8)	10.1 (2.7-12.6)
Input Power	Cooling/Heating	kW	2.33/2.20	3.16/2.73
EER	Cooling		3.43	2.97
COP	Heating		4.00	3.70
Pdesign	Cooling/Heating (-10°C)	kW	8.0/6.5	9.4/7.1
SEER	Cooling		6.68	6.10
SCOP	Heating (Average)		4.50	4.50
Energy Efficiency Class	Cooling		A++	A++
	Heating (Average)		A+	A+
Max. Operating Current	Cooling/Heating	A	21.0/21.0	21.5/21.5
Annual Energy Consumption	Cooling	kWh/a	419	534
	Heating		1,994	2,189
Moisture Removal		I/h	2.6	3.8
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	50/44/40/33	50/44/40/33
	Indoor (Heating)	H/M/L/Q	49/44/39/33	49/44/39/33
	Outdoor (Cooling/Heating)	High	53/55	55/55
Sound Power Level	Indoor (Cooling/Heating)	High	65/65	65/65
	Outdoor (Cooling/Heating)	High	68/69	70/70
Airflow Rate	Indoor/Outdoor (Cooling)	High	1,330/3,750	1,330/3,750
	Indoor/Outdoor (Heating)	High	1,330/3,750	1,330/3,750
Net Dimensions H x W x D	Indoor	mm	340 x 1,150 x 280	340 x 1,150 x 280
	Outdoor	mm	788 x 940 x 320	788 x 940 x 320
Weight	Indoor	kg	18.5	18.5
	Outdoor	kg	52.0	52.0
Connection Pipe Diameter (Liquid/Gas)		mm	9.52/15.88	9.52/15.88
Drain Hose Diameter (I.D./O.D.)		mm	13.8/15.8 to 16.7	13.8/15.8 to 16.7
Max. Pipe Length (Pre-Charge)		m	50(30)	50(30)
Max. Height Difference		m	30	30
Operating Range	Cooling	°CDB	-15 to 46	-15 to 46
	Heating		-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)		R32(675)	R32(675)
	Charge	kg (CO ₂ eq-T)	1.90(1.283)	1.90(1.283)

Optional parts



* For optional parts compatibility of Intesis devices, refer to the optional parts compatibility list Page C-048.

Compact wired remote controller:	UTY-RCRYZ1	External connect kit:	UTY-XWZXZ5	Network Convertor for single split (DC power supply type): UTY-VTGX
Wired remote controller (touch panel):	UTY-RNRYZ5	External input and output PCB*1:	UTY-XCSXZ2	Network Convertor for single split (AC power supply type): UTY-VTGKV
Wired remote controller:	UTY-RLRY	WLAN adapter:	UTY-TFSXF2	Silver Ion Filter:
Simple remote controller (without operation mode):	UTY-RHY		UTY-TFSXH3	External switch controller:
Simple remote controller:	UTY-RSRY		FG-AC-WIF1Z1	Communication kit:

*1 It is required when 2 or more external input and output ports are used.

Dimensions

(Unit: mm)

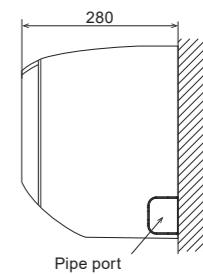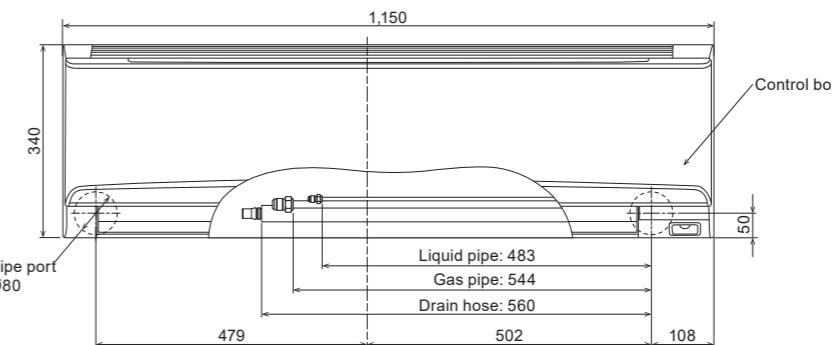

Wall-mounted type

ECO Series

Compact Size



ALL DC



Slim & stylish square design

The slim and stylish square design of this indoor unit is realized by using a high-density, multipath heat exchanger and a high-efficiency wind blower.

High energy saving

High-efficiency has been achieved by the lambda-shaped heat exchanger, large cross-flow fan, and the new refrigerant.



Comfortable airflow & Quiet operation


The large louver and the new air-blowing structure create a comfortable air flow that spreads all the way down to the user's feet with quiet operation.



Smart device control (Option)

With the optional WLAN adapter installed in the air conditioner, you can control it from anywhere with your smart device. WLAN adapter can be installed easily without specialized installation work.

* For more information about smart device control, please refer to the page C-018.

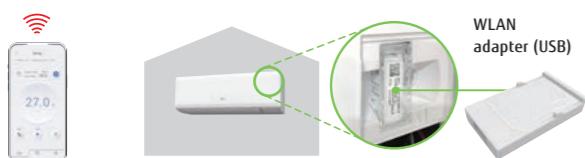

Easy access to the flare pipe connection

Installation when left outlet piping is easier by removable under cover of the indoor unit chassis. Installation when center outlet piping is easier by design change of wall hook bracket.



Model: ASYG07KPCE / ASYG09KPCE / ASYG12KPCE



Specifications

Model name	Indoor unit		ASYG07KPCE	ASYG09KPCE	ASYG12KPCE
	Outdoor unit		AOYG07KPCA	AOYG09KPCA	AOYG12KPCA
Power Source					
Capacity	Cooling	kW	2.0 (0.9-2.8)	2.5 (0.9-3.0)	3.4 (0.9-3.7)
	Heating		2.5 (0.9-3.4)	2.8 (0.9-3.8)	3.8 (0.9-4.8)
Input Power	Cooling/Heating	kW	0.48/0.63	0.71/0.79	1.00/1.14
EER	Cooling		4.17	3.52	3.40
COP	Heating		3.97	3.54	3.33
Pdesign	Cooling/Heating (-10°C)	kW	2.0/2.2	2.5/2.4	3.4/2.5
SEER	Cooling		6.70	6.70	6.30
SCOP	Heating (Average)		4.00	4.00	4.10
Energy Efficiency Class	Cooling		A++	A++	A++
	Heating (Average)		A+	A+	A+
Max. Operating Current	Cooling/Heating	A	6.5/9.0	6.5/9.0	6.5/9.0
Annual Energy Consumption	Cooling	kWh/a	104	131	189
	Heating		769	840	853
Moisture Removal	I/h		1.0	1.3	1.8
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	45/38/31/22	45/38/31/22	46/40/33/22
	Indoor (Heating)	H/M/L/Q	45/40/36/26	45/40/36/26	46/40/35/27
Sound Power Level	Outdoor (Cooling/Heating)	High	45/46	47/47	49/51
	Indoor (Cooling/Heating)	High	57/58	58/58	59/59
Airflow Rate	Outdoor (Cooling/Heating)	High	57/58	59/59	62/62
	Indoor/Outdoor (Cooling)	High	580/1,650	580/1,650	630/1,700
Net Dimensions	Indoor	mm	270 × 784 × 224	270 × 784 × 224	270 × 784 × 224
	Outdoor	mm	541 × 663 × 290	541 × 663 × 290	541 × 663 × 290
Weight	Indoor	kg	8	8	8
	Outdoor	kg	23	23	25
Connection Pipe Diameter (Liquid/Gas)		mm	6.35/9.52	6.35/9.52	6.35/9.52
Drain Hose Diameter (I.D./O.D.)		mm	11.8/15.0 to 16.8	11.8/15.0 to 16.8	11.8/15.0 to 16.8
Max. Pipe Length (Pre-Charge)		m	20 (15)	20 (15)	20 (15)
Max. Height Difference			15	15	15
Operating Range	Cooling	°CDB	-10 to 46	-10 to 46	-10 to 46
	Heating		-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)		R32 (675)	R32 (675)	R32 (675)
	Charge	kg (CO ₂ eq-T)	0.55 (0.371)	0.55 (0.371)	0.59 (0.398)



* For optional parts compatibility of Intesis devices, refer to the optional parts compatibility list Page C-048.

Optional parts

WLAN adapter: UTY-TFSXF2
 UTY-TFSXH3
 Silver Ion Filter: UTR-FA16-5

Dimensions

(Unit: mm)

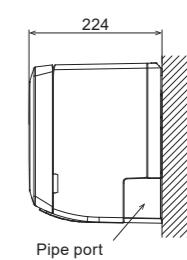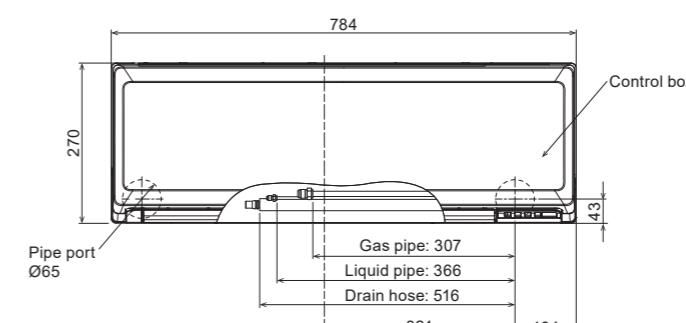

Wall-mounted type ECO Series

Comfort for Large Rooms



ALL DC




Narrow width & Compact design

Compact and versatile. Powerful airflow is realized despite the 790-mm width compact design for small spaces such as bedrooms or home offices.




Economy operation

Set temperature automatically increases or decreases by 1°C. The thermostat setting is adjusted automatically according to the room temperature to avoid unnecessary cooling or heating.

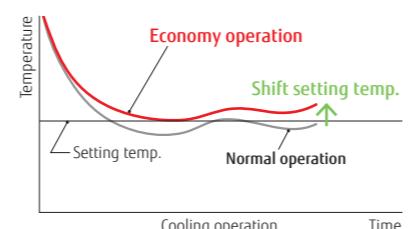

Powerful operation


In powerful operation mode, the compressor operates at maximum speed for 20 minutes to provide a powerful airflow. Rapid cooling and heating makes the room comfortable quickly.

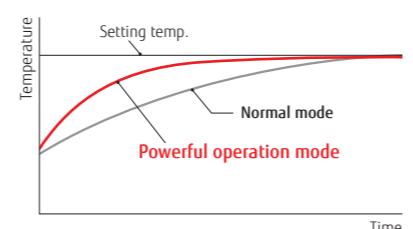

ON-OFF programmable timer

You can set ON/OFF or OFF/ON times depending on your lifestyle needs.
(Setting time: 0.5, 1, 1.5, 2, 2.5, ----9.5, 10, 11, 12 hours)

Low ambient operation

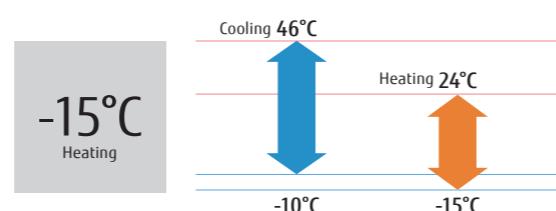

Model: ASYG18KLCA / ASYG24KLCA



Wireless RC



For ASYG18KLCA

For ASYG24KLCA

Specifications

Model name	Indoor unit		ASYG18KLCA	ASYG24KLCA
	Outdoor unit		AOYG18KLCA	AOYG24KLCA
Power Source				
Capacity	Cooling	kW	5.2 (0.9-5.5)	7.1 (0.9-7.7)
	Heating		6.3 (0.6-7.6)	8.0 (0.9-9.0)
Input Power	Cooling/Heating	kW	1.685/1.80	2.42/2.225
EER	Cooling	W/W	3.09	2.93
COP	Heating		3.50	3.60
Pdesign	Cooling/Heating (-10°C)	kW	5.20/4.80	7.10/7.10
SEER	Cooling	W/W	7.20	7.10
SCOP	Heating (Average)		4.30	4.00
Energy Efficiency Class	Cooling		A++	A++
	Heating (Average)		A+	A+
Max. Operating Current	Cooling/Heating	A	9.5/13.5	13.5/17.5
Annual Energy Consumption	Cooling	kWh/a	253	350
	Heating		1563	2485
Moisture Removal		l/h	1.9	3.1
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	47/44/40/35	51/45/38/33
	Indoor (Heating)	H/M/L/Q	50/45/41/37	52/45/41/37
Sound Power Level	Outdoor (Cooling/Heating)	High	50/56	55/57
	Indoor (Cooling/Heating)	High	60/65	64/65
Airflow Rate	Outdoor (Cooling/Heating)	High	61/66	65/67
	Indoor/Outdoor (Cooling)	High	865/1,830	1,040/2,885
Net Dimensions H x W x D	Indoor	mm	293 x 790 x 249	293 x 790 x 249
	Outdoor	mm	542 x 799 x 290	632 x 799 x 290
Weight	Indoor	kg	9.5	10.0
	Outdoor	kg	33	38
Connection Pipe Diameter (Liquid/Gas)		mm	6.35/9.52	6.35/12.70
Drain Hose Diameter (I.D./O.D.)		mm	13.8/15.8 to 16.7	13.8/15.8 to 16.7
Max. Pipe Length (Pre-Charge)		m	25 (15)	30 (15)
Max. Height Difference		m	20	25
Operating Range	Cooling	°CDB	-10 to 46	-10 to 46
	Heating		-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)		R32 (675)	R32 (675)
	Charge	kg (CO ₂ eq-T)	0.85 (0.574)	1.10 (0.743)



* For optional parts compatibility of Intesis devices, refer to the optional parts compatibility list Page C-048.

Optional parts

Silver Ion Filter: UTR-FA16-5

Dimensions

(Unit: mm)

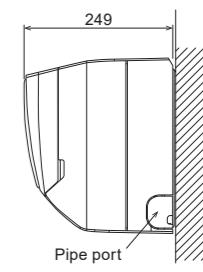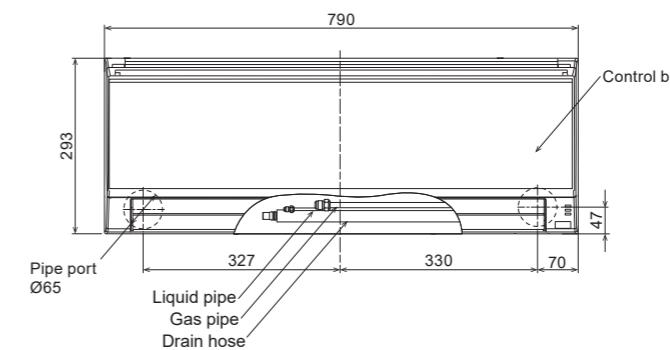

Compact Cassette

Compact 4-way Flow Series

Compact Size




ALL DC




Compact and stylish panel design

The compact and stylish panel fits nicely into a grid-type ceiling. Its linear design is a perfect fit into a grid of 620 mm × 620 mm in the ceiling.

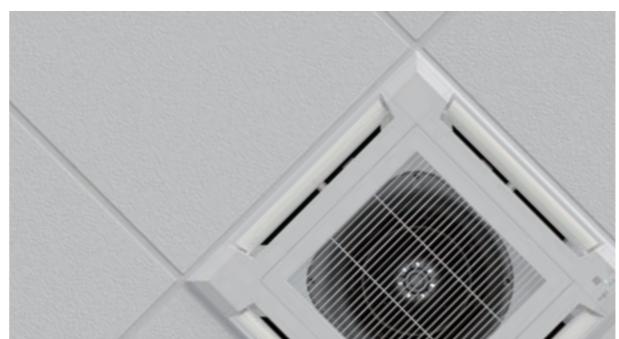

Easy maintenance

You can access the unit for maintenance simply by removing a ceiling panel next to the grille. As no inspection hole needs to be cut through the ceiling, no additional construction cost is incurred.

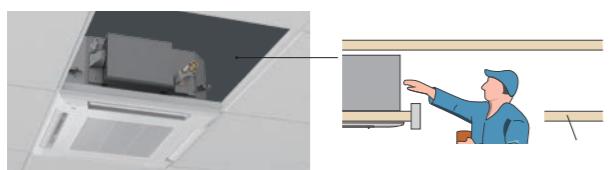

The air inlet grille can be installed to open in any direction for easy maintenance.



Flexible installation

The unit fits nicely into the decor of a grid-type ceiling and can be installed near the lighting or a ventilation opening.



Link up with a variety of central control system (Option)

Centralized control including facilities and equipment in addition to air conditioning is possible by linking up with MODBUS, KNX interfaces.



Model: AUXG09KVLA / AUXG12KVLA / AUXG14KVLA / AUXG18KVLA / AUXG22KVLA / AUXG24KVLA



For AUXG9/12/14KVLA

For AUXG18/22KVLA

For AUXG24KVLA

Specifications

Model name	Indoor unit		AUXG09KVLA	AUXG12KVLA	AUXG14KVLA	AUXG18KVLA	AUXG22KVLA	AUXG24KVLA
	Outdoor unit		AOYG09KBTB	AOYG12KBTB	AOYG14KBTB	AOYG18KBTB	AOYG22KBTB	AOYG24KBTB
Power Source								Single phase, ~230 V, 50 Hz
Capacity	Cooling	kW	2.5 (0.9-3.2)	3.5 (0.9-4.4)	4.3 (0.9-5.4)	5.2 (0.9-5.9)	6.0 (0.9-6.7)	6.8 (0.9-8.0)
	Heating		3.2 (0.9-4.7)	4.1 (0.9-5.7)	5.0 (0.9-6.5)	6.0 (0.9-7.5)	7.0 (0.9-8.0)	7.5 (0.9-9.1)
Input Power	Cooling/Heating	kW	0.55/0.79	0.93/1.08	1.28/1.32	1.60/1.66	1.82/1.87	2.21/2.03
EER	Cooling		4.57	3.76	3.36	3.25	3.30	3.08
COP	Heating	W/W	4.05	3.80	3.79	3.61	3.74	3.69
Pdesign	Cooling/Heating (-10°C)	kW	2.5/2.6	3.5/3.4	4.3/3.8	5.2/4.4	6.0/4.8	6.8/6.0
SEER	Cooling		6.70	6.60	6.50	6.60	6.60	6.10
SCOP	Heating (Average)	W/W	4.40	4.30	4.40	4.20	4.30	4.00
Energy Efficiency Class	Cooling		A++	A++	A++	A++	A++	A++
	Heating (Average)		A+	A+	A+	A+	A+	A+
Max. Operating Current	Cooling/Heating	A	7.9/7.9	9.7/9.7	10.2/10.2	12.1/12.1	12.6/12.6	13.6/13.6
Annual Energy Consumption	Cooling	kWh/a	131	186	231	275	318	390
	Heating		826	1,106	1,208	1,466	1,562	2,097
Moisture Removal		l/h	0.6	1.2	1.5	2.2	2.6	2.7
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	33/31/29/27	37/34/30/27	38/34/30/27	38/34/30/26	44/42/36/30	49/44/36/30
	Indoor (Heating)	H/M/L/Q	34/32/29/27	37/34/31/29	43/38/34/30	43/38/34/30	45/43/40/33	49/45/40/33
	Outdoor (Cooling/Heating)	High	46/46	47/47	49/49	50/50	51/51	53/54
Sound Power Level	Indoor (Cooling/Heating)	High	46/47	49/49	50/55	50/55	56/57	59/61
	Outdoor (Cooling/Heating)	High	59/59	61/61	62/62	62/62	63/63	65/66
Airflow Rate	Indoor/Outdoor (Cooling)	m³/h	540/1,480	600/1,580	680/1,670	680/2,160	830/2,240	930/2,700
	Indoor/Outdoor (Heating)		540/1,410	600/1,520	800/1,580	800/1,830	860/1,960	930/2,700
Net Dimensions H × W × D	Indoor	mm	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570
	Outdoor	mm	542 × 799 × 290	542 × 799 × 290	542 × 799 × 290	542 × 799 × 290	632 × 799 × 290	716 × 820 × 315
Weight	Indoor	kg	15	15	15	15	16	16
	Outdoor	kg	32	33	33	36	38	42
Connection Pipe Diameter (Liquid/Gas)		mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/12.70	6.35/12.70	6.35/12.70
Drain Hose Diameter (I.D./O.D.)		mm	25/32	25/32	25/32	25/32	25/32	25/32
Max. Pipe Length (Pre-Charge)		m	20 (15)	25 (15)	25 (15)	30 (20)	30 (20)	30 (20)
Max. Height Difference			15	20	20	20	25	25
Operating Range	Cooling	°CDB	-15 to 46					
	Heating		-15 to 24					
Refrigerant	Type (Global Warming Potential)		R32 (675)					
	Charge	kg (CO ₂ eq-T)	0.85 (0.574)	0.85 (0.574)	0.85 (0.574)	1.02 (0.689)	1.25 (0.844)	1.25 (0.844)
Cassette Grille	Model name		UTG-UFYF-W	UTG-UFYF-W	UTG-UFYF-W	UTG-UFYF-W	UTG-UFYF-W	UTG-UFYF-W
	Dimensions (H × W × D)	mm	49 × 620 × 620	49 × 620 × 620	49 × 620 × 620	49 × 620 × 620	49 × 620 × 620	49 × 620 × 620
	Weight	kg	2.3	2.3	2.3	2.3	2.3	2.3


* For optional parts compatibility of Intesis devices, refer to the optional parts compatibility list Page C-048.

Optional parts

Compact wired remote controller:	UTY-RCRY1	External switch controller:	UTY-TERX	Network Convertor for single split (DC power supply type):	UTY-VTGX
Wired remote controller (touch panel):	UTY-RNRYZ5	WLAN adapter:	UTY-TFSX1	Network Convertor for single split (AC power supply type):	UTY-VTGV
Wired remote controller:	UTY-RLRY	FG-RC-WIFIZ2		Insulation kit for high humidity:	UTZ-KXGC
	UTY-RNNYRM	UTY-TFSX13		External input and output PCB:	UTY-XCSX
	UTY-RVNYM	FG-AC-WIFIZ1		External input and output PCB box:	UTZ-GXRA
Simple remote controller (without operation mode):	UTY-RHRY	Air Outlet Shutter Plate:	UTR-YDZB	Silver Ion Filter:	UTD-HFAA
Simple remote controller:	UTY-RSRY	External connect kit:	UTY-XWZXZG		
	UTY-RSNYM	Cassette Grille:	UTG-UFYF-W		
Wireless remote controller:	UTY-LNTY	Fresh air intake kit:	UTZ-VXA		

Dimensions

(Unit: mm)

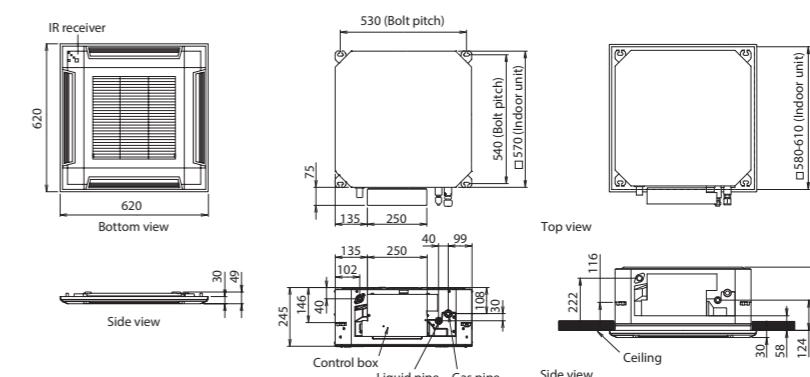

Cassette Circular Flow Series

Comfort for Large Rooms




ALL DC



Unique circular flow design

The Cassette model realizes a Circular Flow to blow a large airflow in a 360° direction by using a high-performance DC fan motor, turbo fan, and a unique seamless airflow louver design.

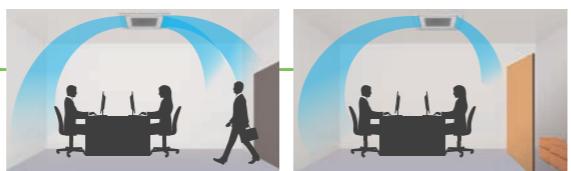

Airflows avoid blowing cool air directly at the occupants in the room, providing more comfortable air conditioning.

Provides efficient air conditioning based on the room layout


Individual louver control

Each louver can be controlled individually with a wired remote controller equipped with a touch panel to provide different directional airflows according to the room layout.

*Wired remote controller (touch panel) (UTY-RNRYZ3) only

Compact and lightweight outdoor unit

The outdoor units for the 45,000 BTU and 54,000 BTU models have been completely redesigned. Easier installation is achieved for this compact and lightweight outdoor unit.

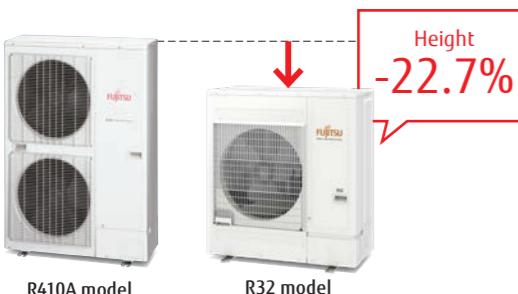

Link up with a variety of central control system (Option)

Centralized control including facilities and equipment in addition to air conditioning is possible by linking up with MODBUS, KNX interfaces.



Various cassette grilles

Both black and white grilles are available. Three types of grilles are available: a white grille with a remote controller; a white grille without a remote controller; and a black grille without a remote controller. Select to match the atmosphere and/or usage of the room.



Model: AUXG18KRLB / AUXG22KRLB / AUXG24KRLB / AUXG30KRLB / AUXG36KRLB / AUXG45KRLB / AUXG54KRLB
AUXG36KRLB [3-phase] / AUXG45KRLB [3-phase] / AUXG54KRLB [3-phase]



Specifications

Model name	Indoor unit		AUXG18KRLB	AUXG22KRLB	AUXG24KRLB	AUXG30KRLB	AUXG36KRLB	AUXG45KRLB	AUXG54KRLB	AUXG36KRLB	AUXG45KRLB	AUXG54KRLB	
	Outdoor unit		AOYG18KBTB	AOYG22KBTB	AOYG24KBTB	AOYG30KBTB	AOYG36KBTB	AOYG45KBTB	AOYG54KBTB	AOYG36KRTA	AOYG45KRTA	AOYG54KRTA	
Power Source													
Capacity	Cooling	kW	5.2 (0.9-5.9)	6.0 (0.9-6.7)	6.8 (0.9-8.0)	8.5 (2.8-10.0)	9.5 (2.8-11.2)	12.1 (4.0-14.0)	13.4 (4.5-14.5)	9.5 (2.8-11.2)	12.1 (4.0-14.0)	13.4 (4.5-14.5)	
	Heating	kW	6.0 (0.9-7.5)	7.0 (0.9-8.0)	7.5 (0.9-9.1)	10.0 (2.7-12.2)	10.8 (2.7-12.7)	13.5 (4.2-16.2)	15.5 (4.7-16.5)	10.8 (2.7-12.7)	13.5 (4.2-16.2)	15.5 (4.7-16.5)	
Input Power	Cooling/Heating	kW	1.36/1.58	1.71/1.82	1.89/1.90	2.44/2.51	2.91/2.45	3.6/3.21	4.41/4.16	2.91/2.45	3.6/3.21	4.41/4.16	
EER	Cooling	W/W	3.82	3.51	3.60	3.49	3.26	3.35	3.04	3.26	3.35	3.04	
COP	Heating	W/W	3.80	3.85	3.95	3.98	4.40	4.20	3.73	4.40	4.20	3.73	
Pdesign	Cooling/Heating (-10°C)	kW	5.2/4.4	6.0/4.8	6.8/6.0	8.5/8.0	9.5/8.7	-	-	9.5/8.7	-	-	
SEER	Cooling	W/W	7.00	7.00	6.60	6.70	6.55	-	-	6.55	-	-	
SCOP	Heating (Average)	W/W	4.30	4.40	4.20	4.30	-	-	4.30	-	-	-	
Energy Efficiency Class	Cooling		A++	A++	A++	A++	A++	-	-	A++	-	-	
	Heating (Average)		A+	A+	A+	A+	A+	-	-	A+	-	-	
Max. Operating Current	Cooling/Heating	A	12.1/12.1	12.6/12.6	13.6/13.6	22.6/22.6	22.6/22.6	28.5/28.5	28.5/28.5	10.5/10.5	14.0/14.0	14.0/14.0	
Annual Energy Consumption	Cooling	kWh/a	260	300	360	444	507	-	-	507	-	-	
	Heating	kWh/a	1,431	1,527	1,999	2,601	2,828	-	-	2,828	-	-	
Moisture Removal		l/h	1.5	2.2	2.7	2.5	3.3	4.5	5.0	3.3	4.5	5.0	
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	33/32/31/28	33/32/31/28	40/38/36/33	44/41/38/34	46/42/39/35	47/43/40/36	44/41/38/34	46/42/39/35	47/43/40/36	46/42/39/35	47/43/40/36
	Indoor (Heating)	H/M/L/Q	33/32/31/28	33/32/31/28	35/33/32/29	40/38/36/33	44/41/38/34	46/42/39/35	47/43/40/36	44/41/38/34	46/42/39/35	47/43/40/36	45/55
Sound Power Level	Outdoor (Cooling/Heating)	High	50/50	51/51	53/54	53/55	55/55	57/57	57/59	55/55	57/57	57/59	
	Indoor (Cooling/Heating)	High	47/47	49/49	49/49	54/54	58/58	60/60	61/61	58/58	60/60	61/61	
Airflow Rate	Outdoor (Cooling/Heating)	High	62/62	63/63	65/66	68/69	70/70	71/71	73/73	70/70	71/71	73/73	
	Indoor/Outdoor (Cooling)	High	1,050/2,160	1,050/2,40	1,150/2,700	1,600/3,750	1,870/3,750	2,000/4,450	2,100/4,450	1,870/3,750	2,000/4,450	2,100/4,450	
	Indoor/Outdoor (Heating)	High	1,050/1,830	1,050/1,960	1,150/2,700	1,600/3,750	1,870/3,750	2,000/4,450	2,100/4,450	1,870/3,750	2,000/4,450	2,100/4,450	
Net Dimensions H x W x D	Indoor	mm	246 × 840 × 840	246 × 840 × 840	246 × 840 × 840	288 × 840 × 840	288 × 840 × 840	288 × 840 × 840	288 × 840 × 840	288 × 840 × 840	288 × 840 × 840	288 × 840 × 840	
	Outdoor	mm	632 × 799 × 290	632 × 799 × 290	716 × 820 × 315	788 × 940 × 320	988 × 940 × 320	998 × 940 × 320	998 × 940 × 320	998 × 940 × 320	998 × 940 × 320	998 × 940 × 320	
Weight	Indoor	kg	23	23	24	26	29	29	29	29	29	29	
	Outdoor	kg	36	38	42	52	52	67	67	53	67	67	
Connection Pipe Diameter (Liquid/Gas)		mm	6.35/12.70	6.35/12.70	6.35/12.70	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	
Drain Hose Diameter (I.D./O.D.)		mm	25/32	25/32	25/32	25/32	25/32	25/32	25/32	25/32	25/32	25/32	
Max. Pipe Length (Pre-Charge)		m	30 (20)	30 (20)	30 (20)	50 (30)	50 (30)	50 (30)	50 (30)	50 (30)	50 (30)	50 (30)	
Max. Height Difference			20	25	25	30	30	30	30	30	30	30	
Operating Range	Cooling	°CDB	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	
	Heating	°CDB	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	
Refrigerant	Type (Global Warming Potential)		R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	
	Charge	kg (CO ₂ eq-T)	1.02 (0.689)	1.25 (0.844)	1.25 (0.844)	1.90 (1.283)	1.90 (1.283)	2.70 (1.823)	2.70 (1.823)	1.90 (1.283)	2.70 (1.823)	2.70 (1.823)	
Cassette Grille	Variation		UTG-UKYA-W: White wired remote controller (touch panel) UTG-UKYC-W: White/UTG-UKYA-B*: Black										
	Dimensions (H × W × D)	mm	53 × 950 × 950	53 × 950 × 950	53 × 950 × 950	53 × 950 × 950	53 × 950 × 950	53 × 950 × 950	53 × 950 × 950	53 × 950 × 950	53 × 950 × 950	53 × 950 × 950	
	Weight	kg	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	

*1: IR Receiver kit and Occupancy sensor kit cannot be connected.

Optional parts

* For optional parts compatibility of Intesis devices, refer to the optional parts compatibility list Page C-048.

Compact wired remote controller:	UTY-RCRYZ1	WLAN adapter:	UTY-TFSXZ1	Cassette Grille

Slim Duct

Slim Design



ALL DC



Slim design

The slim design fits nicely into narrow spaces under the ceiling.
Drain hose as standard accessory



Compact and lightweight outdoor unit

The compact and lightweight outdoor unit offers greater flexibility in the choice of installation location. This makes it easier to use this outdoor unit.



Wide range of static pressures

The use of a DC fan motor makes it possible to adjust the static pressure between 0 and 90 Pa.
The static pressure range can be changed by a remote controller.



Static pressure range
0 to 90 Pa

Auto louver grille kit (Option)

The optional clean-looking flat Auto louver blends into any interior and provides a comfortable airflow.



Link up with a variety of central control system (Option)

Centralized control including facilities and equipment in addition to air conditioning is possible by linking up with MODBUS, KNX interfaces.



Model: ARXG09KLLAP / ARXG12KLLAP / ARXG14KLLAP / ARXG18KLLAP



ARXG09/12/14KLLAP

ARXG18KLLAP



For ARXG09/12/14KLLAP



For ARXG18KLLAP

Specifications

Model name	Indoor unit		ARXG09KLLAP	ARXG12KLLAP	ARXG14KLLAP	ARXG18KLLAP
	Outdoor unit		A0Y09KBTB	A0Y12KBTB	A0Y14KBTB	A0Y18KBTB
Power Source						Single phase, ~230 V, 50 Hz
Capacity	Cooling	kW	2.5 (0.9-3.2)	3.5 (0.9-4.4)	4.3 (0.9-5.4)	5.2 (0.9-5.9)
	Heating		3.2 (0.9-4.7)	4.1 (0.9-5.7)	5.0 (0.9-6.5)	6.0 (0.9-7.5)
Input Power	Cooling/Heating	kW	0.60/0.79	0.93/1.08	1.28/1.32	1.55/1.62
EER	Cooling	W/W	4.17	3.76	3.36	3.35
COP	Heating		4.05	3.80	3.79	3.70
Pdesign	Cooling/Heating (-10°C)	kW	2.5/2.6	3.5/3.4	4.3/3.8	5.2/4.4
SEER	Cooling		6.20	6.10	5.80	6.20
SCOP	Heating		4.30	4.00	3.90	4.10
Energy Efficiency Class	Cooling		A++	A++	A+	A++
	Heating		A+	A+	A	A+
Max. Operating Current	Cooling/Heating	A	7.9/7.9	9.7/9.7	10.2/10.2	12.1/12.1
Annual Energy Consumption	Cooling	kWh/a	141	201	259	293
	Heating		845	1,189	1,362	1,501
Moisture Removal		l/h	0.7	1.3	1.5	2.0
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	28/27/26/25	29/28/26/25	32/30/28/26	32/30/29/27
	Indoor (Heating)	H/M/L/Q	28/26/25/24	29/28/26/24	32/30/28/25	32/30/29/27
	Outdoor (Cooling/Heating)	High	46/46	47/47	49/49	50/50
Sound Power Level	Indoor (Cooling/Heating)	High	57/57	58/58	60/60	58/58
	Outdoor (Cooling/Heating)	High	59/59	61/61	62/62	62/62
Airflow Rate	Indoor/Outdoor (Cooling)	High	600/1,480	650/1,580	800/1,670	940/2,160
	Indoor/Outdoor (Heating)	High	600/1,410	650/1,520	800/1,580	940/1,830
Static pressure range (Standard)		Pa	0 to 90 (25)			
Net Dimensions H x W x D	Indoor	mm	198 x 700 x 620	198 x 700 x 620	198 x 700 x 620	198 x 900 x 620
	Outdoor	mm	542 x 799 x 290	542 x 799 x 290	542 x 799 x 290	632 x 799 x 290
Weight	Indoor	kg	17	17	17	20
	Outdoor	kg	32	33	33	36
Connection Pipe Diameter (Liquid/Gas)		mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/12.70
Drain Hose Diameter (I.D./O.D.)		mm	25/32	25/32	25/32	25/32
Max. Pipe Length (Pre-Charge)		m	20 (15)	25 (15)	25 (15)	30 (20)
Max. Height Difference			15	20	20	20
Operating Range	Cooling	°CDB	-15 to 46	-15 to 46	-15 to 46	-15 to 46
	Heating		-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)		R32 (675)	R32 (675)	R32 (675)	R32 (675)
Charge	kg (CO ₂ eq-T)		0.85 (0.574)	0.85 (0.574)	0.85 (0.574)	1.02 (0.689)


* For optional parts compatibility of Intesis devices, refer to the optional parts compatibility list Page C-048.

Optional parts

Compact wired remote controller:	UTY-RCRY1	WLAN adapter:	UTY-TFSXZ1	Network Converter for single split (DC power supply type):	UTY-VTGX
Wired remote controller (touch panel):	UTY-RNRYZ5	FG-RC-WIFIZ2	FG-RC-WIFIZ2	Network Converter for single split (AC power supply type):	UTY-VTGXV
Wired remote controller:	UTY-RLRY	UTY-TFSXJ3	UTY-TFSXJ3	External connect kit:	UTY-XWZXG
	UTY-RNNYM	FG-AC-WIFIZ1	FG-AC-WIFIZ1	Remote sensor unit:	UTY-XSZX1
	UTY-RVNYM	UTD-HFTA (09-14)	UTD-HFTA (09-14)	IR receiver unit:	UTY-LBTYM
Simple remote controller (without operation mode):	UTY-RHRY	UTD-HFTB (18)	UTD-HFTB (18)	External switch controller:	UTY-TERX
Simple remote controller:	UTY-RSRY	Auto Louver Grille Kit:	UTD-GXTA-W (09-14)		
	UTY-RSNYM		UTD-GXTB-W (18)		

Dimensions

(Unit: mm)

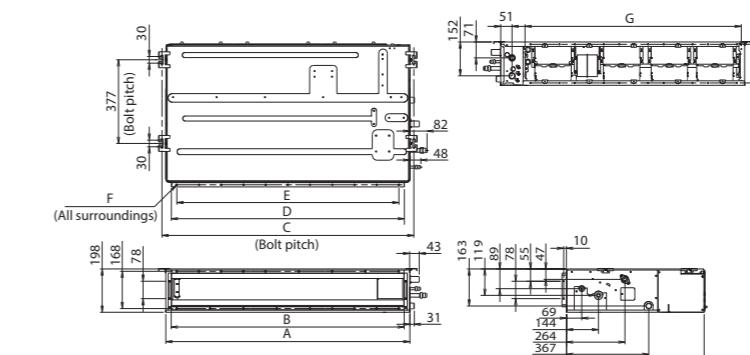

	ARXG09/12/14KLLAP	ARXG18KLLAP
A	700	900
B	650	850
C	734	934
D	650	850
E	P100 × 6 = 600	P100 × 8 = 800
F	18 × Ø5	22 × Ø5
G	574	774

Medium Static Pressure Duct

High-Efficiency & Comfort




ALL DC



Slim & Compact design

The new product has reduced the height to 240 mm, making it more compact. The slim design fits nicely into narrow spaces under the ceiling.

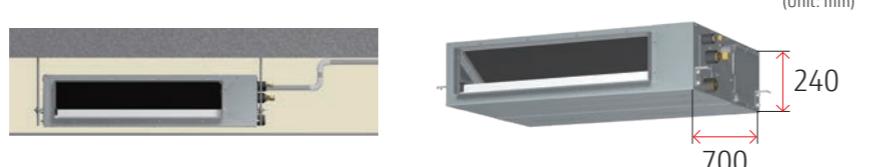

High energy saving

The new model has achieved high energy efficiency rank with a compact design.

Rank
Cooling
A++
Heating
A+

SEER
6.50^{*1}
SCOP
4.20^{*2}

^{*1: 22 model}^{*2: 22/24 models}

Easy maintenance

The indoor units have large panels on both sides providing easy maintenance in narrow spaces.



Drain hose as standard

A drain hose is a standard accessory, making it easy to design drainage even in narrow spaces under the ceiling.



Wide range of static pressures

Static pressures can be changed in the range of 30 to 150 Pa.

Static pressure range
30 to 150 Pa

Model: ARXH22KMTAP / ARXH24KMTAP / ARXH30KMTAP / ARXH36KMTAP / ARXH45KMTAP / ARXH54KMTAP
ARXH36KMTAP [3-phase] / ARXH45KMTAP [3-phase] / ARXH54KMTAP [3-phase]



ARXH22/24KMTAP

ARXH30/36/45/54KMTAP

For ARXH22KMTAP

For ARXH24KMTAP

For ARXH30/36KMTAP

For ARXH45/54KMTAP



Specifications


Model name	Indoor unit		ARXH22KMTAP	ARXH24KMTAP	ARXH30KMTAP	ARXH36KMTAP	ARXH45KMTAP	ARXH36KMTAP	ARXH45KMTAP	ARXH54KMTAP
	Outdoor unit	A0YG22KBTB	A0YG24KBTB	A0YG30KBTB	A0YG36KBTB	A0YG45KBTB	A0YG36KRTA	A0YG45KRTA	A0YG54KRTA	3-phase, ~400 V, 50 Hz
Power Source										
Capacity	Cooling	kW	6.0 (0.9-6.7)	6.8 (0.9-8.0)	8.5 (2.8-10.0)	9.5 (2.8-11.2)	12.1 (4.0-13.5)	9.5 (2.8-11.2)	12.1 (4.0-13.5)	13.4 (4.5-14.5)
	Heating		7.0 (0.9-8.0)	7.5 (0.9-9.1)	10.0 (2.7-11.2)	10.8 (2.7-12.7)	13.5 (4.2-16.2)	10.8 (2.7-12.7)	13.5 (4.2-16.2)	15.5 (4.7-16.5)
Input Power	Cooling/Heating	kW	1.67 / 1.84	1.89 / 1.87	2.57 / 2.50	2.97 / 2.70	3.87 / 3.73	2.97 / 2.70	3.87 / 3.73	4.62 / 4.65
EER	Cooling	W/W	3.60	3.60	3.31	3.20	3.13	3.20	3.13	2.90
COP	Heating		3.80	4.01	4.00	4.00	3.62	4.00	3.62	3.33
Pdesign	Cooling/Heating (-10°C)	kW	6.0 / 4.8	6.8 / 6.0	8.5 / 8.0	9.5 / 8.7	-	9.5 / 8.7	-	-
SEER	Cooling		6.50	6.40	6.23	6.10	-	6.10	-	-
SCOP	Heating (Average)		4.20	4.20	4.00	4.10	-	4.10	-	-
Energy Efficiency Class	Cooling		A++	A++	A++	A++	-	A++	-	-
	Heating (Average)		A+	A+	A+	A+	-	A+	-	-
Max. Operating Current	Cooling/Heating	A	12.6 / 12.6	13.6 / 13.6	22.6 / 22.6	22.6 / 22.6	28.5 / 28.5	10.5 / 10.5	14.0 / 14.0	14.0 / 14.0
Annual Energy Consumption	Cooling	kWh/a	331	380	485	553	-	553	-	-
	Heating		1,598	1,999	2,795	2,970	-	2,970	-	-
Moisture Removal		I/h	1.5	2.2	1.8	2.0	4.0	2.0	4.0	5.0
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	32 / 28 / 25 / 24	34 / 30 / 28 / 26	38 / 34 / 31 / 28	38 / 34 / 31 / 28	40 / 36 / 32 / 29	38 / 34 / 31 / 28	40 / 36 / 32 / 29	40 / 36 / 32 / 29
	Indoor (Heating)	H/M/L/Q	32 / 28 / 25 / 24	34 / 30 / 28 / 26	38 / 34 / 31 / 28	38 / 34 / 31 / 28	40 / 36 / 32 / 29	38 / 34 / 31 / 28	40 / 36 / 32 / 29	40 / 36 / 32 / 29
	Outdoor (Cooling/Heating)	High	51 / 51	53 / 54	53 / 55	55 / 55	57 / 57	55 / 55	57 / 57	57 / 59
Sound Power Level	Indoor (Cooling/Heating)	High	58 / 58	60 / 60	64 / 64	65 / 65	67 / 67	65 / 65	67 / 67	67 / 67
	Indoor/Outdoor (Cooling)	High	63 / 63	65 / 66	68 / 69	70 / 70	71 / 71	70 / 70	71 / 71	73 / 73
Airflow Rate	Indoor/Outdoor (Heating)	High	1,150 / 2,240	1,230 / 2,700	1,950 / 3,750	2,070 / 3,750	2,160 / 4,450	2,070 / 3,750	2,160 / 4,450	2,160 / 4,450
	Indoor/Outdoor (Cooling)	High	1,150 / 1,960	1,230 / 2,700	1,950 / 3,750	2,070 / 3,750	2,160 / 4,450	2,070 / 3,750	2,160 / 4,450	2,160 / 4,450
Static pressure range (Standard)		Pa	30 to 150 (40)	30 to 150 (50)	30 to 150 (50)	30 to 150 (60)				
Net Dimensions	Indoor	mm	240 × 1,000 × 700	240 × 1,000 × 700	240 × 1,400 × 700	240 × 1,400 × 700	240 × 1,400 × 700	240 × 1,400 × 700	240 × 1,400 × 700	240 × 1,400 × 700
	Outdoor		632 × 799 × 290	716 × 820 × 315	788 × 940 × 320	998 × 940 × 320	788 × 940 × 320	998 × 940 × 320	998 × 940 × 320	998 × 940 × 320
Weight	Indoor	kg	31	31	42	42	42	42	42	42
	Outdoor	kg	38	42	52	52	67	53	67	67
Connection Pipe Diameter (Liquid/Gas)		mm	6.35 / 12.70	6.35 / 12.70	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
Drain Hose Diameter (I.D./O.D.)		mm	25 / 32	25 / 32	25 / 32	25 / 32	25 / 32	25 / 32	25 / 32	25 / 32
Max. Pipe Length (Pre-Charge)		m	30 (20)	30 (20)	50 (30)	50 (30)	50 (30)	50 (30)	50 (30)	50 (30)
Max. Height Difference			25	25	30	30	30	30	30	30
Operating Range	Cooling	°CDB	-15 to 46							
	Heating		-15 to 24							
Refrigerant	Type (Global Warming Potential)		R32 (675)							
	Charge	[kg (CO ₂ eq-T)]	1.25 (0.844)	1.25 (0.844)	1.90 (1.283)	1.90 (1.283)	2.70 (1.823)	1.90 (1.283)	2.70 (1.823)	2.70 (1.823)

Optional parts

Compact wired remote controller:	UTD-RCRYZ1	Silver ion filter:	UTD-HFNB (22/24)	External input and output PCB:	UTY-XCSX
Wired remote controller:	UTY-RNRYZ5	Long-life filter:	UTD-HFNA (30/36/45/54)	External input and output PCB bracket:	UTZ-GXDA
Wired remote controller:	UTY-RLRY	UTD-LFDB (22/24)	UTD-LFDA (30/36/45/54)	Network Convertor for single split (DC power supply type):	UTY-VTGX
Simple remote controller (without operation mode):	UTY-RHRY	MODBUS converter:	UTY-VMSX	Network Convertor for single split (AC power supply type):	UTY-VTGXV
Simple remote controller:	UTY-RSRY	KNX converter:	UTY-VKSX	(Outdoor unit 30/36/45/54)	UTY-VTGXV
IR receiver unit:	UTY-LBTYM	WLAN adapter:	UTY-TFSXZ1	External connect kit:	UTY-XWZXZ3
Remote sensor unit:	UTY-XSZX	WLAN adapter:	UTY-TFSXJ3		
External switch controller:	UTY-TERX	External connect kit:	UTY-XWZXZG		

Dimensions

(Unit: mm)

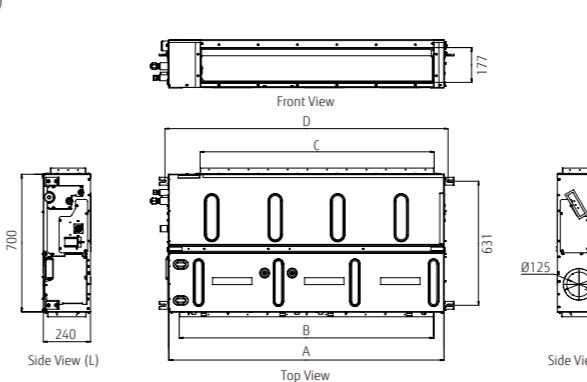

Medium Static Pressure Duct

Compact Size




ALL DC



High-efficiency & Quiet operation

The combination of the V-shaped heat exchanger, air stabilizer, and the high-efficiency DC fan motor enable high-efficiency and quiet operation.

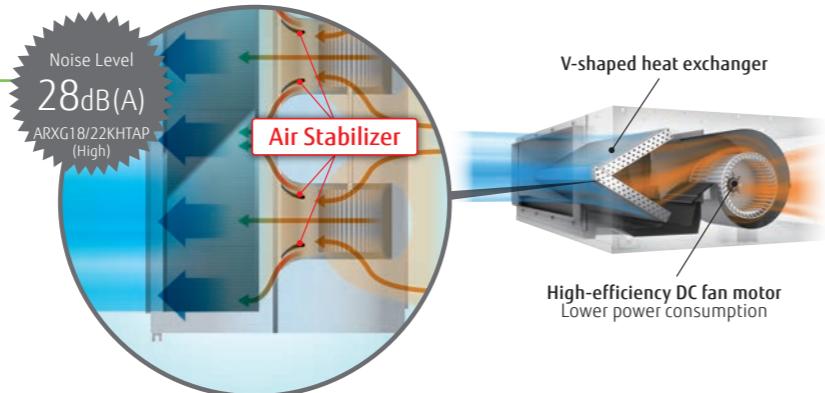

Small, lightweight outdoor unit

The outdoor unit in this series is smaller and lighter than previous-generation outdoor units. It can be installed in a narrow space.



Automatic airflow adjustment function

This unique and innovative function detects required air flow in each application case and automatically adjust the volume.



Link up with a variety of central control system (Option)

Centralized control including facilities and equipment in addition to air conditioning is possible by linking up with MODBUS, KNX interfaces.



Model: ARXG12KHTAP / ARXG14KHTAP / ARXG18KHTAP / ARXG22KHTAP / ARXG24KHTAP
ARXG30KHTAP / ARXG36KHTAP / ARXG45KHTAP / ARXG54KHTAP
ARXG36KHTAP [3-phase] / ARXG45KHTAP [3-phase] / ARXG54KHTAP [3-phase]



Specifications

Model name	Indoor unit		ARXG12KHTAP	ARXG14KHTAP	ARXG18KHTAP	ARXG22KHTAP	ARXG24KHTAP	ARXG30KHTAP	ARXG36KHTAP	ARXG45KHTAP	ARXG54KHTAP	ARXG36KHTAP	ARXG45KHTAP	ARXG54KHTAP
	Outdoor unit		A0Y12KBTB	A0Y14KBTB	A0Y18KBTB	A0Y22KBTB	A0Y24KBTB	A0Y30KBTB	A0Y36KBTB	A0Y45KBTB	A0Y54KBTB	A0Y36KRTA	A0Y45KRTA	A0Y54KRTA
Single phase, ~230 V, 50 Hz														
Capacity	Cooling	kW	3.5 (0.9-4.4)	4.3 (0.9-5.4)	5.2 (0.9-5.9)	6.0 (0.9-6.7)	6.8 (0.9-8.0)	8.5 (2.8-10.0)	9.5 (2.8-11.2)	12.1 (4.0-14.0)	13.4 (4.5-14.5)	9.5 (2.8-11.2)	12.1 (4.0-14.0)	13.4 (4.5-14.5)
	Heating	kW	4.1 (0.9-5.7)	5.0 (0.9-6.5)	6.0 (0.9-7.5)	7.0 (0.9-8.0)	7.5 (0.9-9.1)	10.0 (2.7-11.2)	10.8 (2.7-12.7)	13.5 (4.2-16.2)	15.5 (4.7-16.5)	10.8 (2.7-12.7)	13.5 (4.2-16.2)	15.5 (4.7-16.5)
Input Power	Cooling/Heating	kW	0.87/1.00	1.17/1.25	1.36/1.56	1.71/1.81	1.89/1.85	2.65/2.63	2.86/2.48	3.53/3.37	4.42/3.89	2.86/2.48	3.53/3.37	4.42/3.89
EER	Cooling	W/W	4.02	3.68	3.82	3.51	3.60	3.21	3.32	3.43	3.03	3.32	3.43	3.03
COP	Heating	W/W	4.10	4.00	3.85	3.87	4.06	3.80	4.35	4.01	3.98	4.35	4.01	3.98
Pdesign	Cooling/Heating (-10°C)	kW	3.5/3.4	4.3/3.8	5.2/4.4	6.0/4.8	6.8/6.0	8.5/8.0	9.5/8.7	-	-	9.5/8.7	-	-
SEER	Cooling	W/W	6.30	6.20	6.50	6.50	6.23	6.10	-	-	-	6.10	-	-
SCOP	Heating (Average)	W/W	4.10	4.00	4.10	4.20	4.10	4.00	4.20	-	-	4.20	-	-
Energy Efficiency Class	Cooling	A++	A++	A++	A++	A++	A++	A++	-	-	A++	-	-	-
	Heating (Average)	A+	A+	A+	A+	A+	A+	A+	-	-	A+	-	-	-
Max. Operating Current	Cooling/Heating	A	9.7/9.7	10.2/10.2	12.1/12.1	12.6/12.6	13.6/13.6	22.6/22.6	22.6/22.6	28.5/28.5	28.5/28.5	10.5/10.5	14.0/14.0	14.0/14.0
Annual Energy Consumption	Cooling	kWh/a	194	243	280	323	366	477	544	-	-	544	-	-
	Heating	kWh/a	1,159	1,328	1,501	1,587	2,048	2,796	2,898	-	-	2,898	-	-
Moisture Removal		I/h	0.7	0.9	1.2	1.5	1.8	2.3	2.0	2.6	3.7	2.0	2.6	3.7
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	32/27/26/24	33/28/27/25	28/25/22/20	28/25/22/20	32/28/24/21	36/33/30/29	36/31/28/26	39/35/31/29	39/35/31/29	36/31/28/26	39/35/31/29	39/35/31/29
	Indoor (Heating)	H/M/L/Q	32/27/26/24	33/28/27/25	28/25/22/20	28/25/22/20	32/28/24/21	36/33/30/29	36/31/28/26	39/35/31/29	39/35/31/29	33/31/28/26	39/35/31/29	39/35/31/29
Sound Power Level	Outdoor (Cooling/Heating)	High	47/47	48/49	50/50	51/51	53/54	53/55	55/55	57/57	57/59	55/55	57/57	57/59
	Indoor (Cooling/Heating)	High	57/58	59/60	54/54	57/57	63/65	64/63	68/69	70/70	71/71	64/63	67/69	67/69
Airflow Rate	Indoor/Outdoor (Cooling)	m³/h	850/1,580	950/1,670	1,050/2,160	1,050/2,240	1,360/2,700	1,700/3,750	2,050/3,750	2,550/4,450	2,550/4,450	2,050/3,750	2,550/4,450	2,550/4,450
	Indoor/Outdoor (Heating)	m³/h	850/1,520	950/1,580	1,050/2,120	1,050/2,100	1,360/2,700	1,700/3,750	2,050/3,750	2,550/4,450	2,550/4,450	2,050/3,750	2,550/4,450	2,550/4,450
Static pressure range (Standard)		Pa	30 to 200 (35)	30 to 200 (35)	30 to 200 (35)	30 to 200 (35)	30 to 200 (35)	30 to 200 (47)	30 to 200 (60)	30 to 200 (60)	30 to 200 (47)	30 to 200 (60)	30 to 200 (60)	30 to 200 (60)
Net Dimensions	Indoor	mm	300 × 700 × 700	300 × 700 × 700	300 × 1,000 × 700	300 × 1,000 × 700	300 × 1,000 × 700	300 × 1,400 × 700	300 × 1,400 × 700	300 × 1,400 × 700	300 × 1,400 × 700	300 × 1,400 × 700	300 × 1,400 × 700	300 × 1,400 × 700
	Outdoor	mm	542 × 799 × 290	542 × 799 × 290	632 × 799 × 290	632 × 799 × 290	716 × 820 × 315	788 × 940 × 320	998 × 940 × 320	998 × 940 × 320	788 × 940 × 320	998 × 940 × 320	998 × 940 × 320	998 × 940 × 320
Weight	Indoor	kg	27	27	35	35	36	46	46	46	46	46	46	46
	Outdoor	kg	33	33	36	38	42	52	67	67	67	67	67	67
Connection Pipe Diameter (Liquid/Gas)		mm	6.35/9.52	6.35/9.52	6.35/12.70	6.35/12.70	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88
Drain Hose Diameter (I.D./O.D.)		mm	25/32	25/32	25/32	25/32	25/32	25/32	25/32	25/32	25/32	25/32	25/32	25/32
Max. Pipe Length (Pre-Charge)		m	25 (15)	25 (15)	30 (20)	30 (20)	30 (20)	50 (30)	50 (30)	50 (30)	50 (30)	50 (30)	50 (30)	50 (30)
Max. Height Difference		m	20	20	20	25	25	30	30	30	30	30	30	30
Operating Range	Cooling	°CDB	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46
	Heating	°CDB	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)		R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)
	Charge	[kg (CO ₂ eq-T)]	0											

Medium Static Pressure Duct Standard




ALL DC



Easy maintenance

Structural improvement is attained by making the bottom panel in two pieces—front and rear. The internal fan casing is also manufactured in two pieces—upper and lower. As a result, the motor and fan can be easily accessed and maintained by removing the rear panel and the lower casing while leaving the main chassis in place.

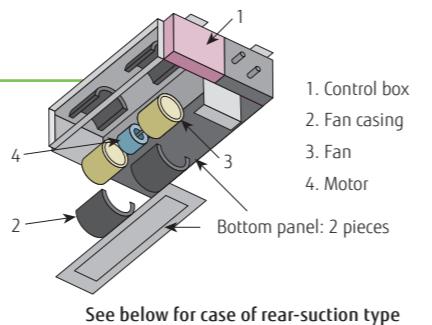


See below for case of rear-suction type

Slim & Compact design

Indoor Unit

The slim and compact design of the indoor unit, with the control box mounted on the side, allows installation in narrow spaces.

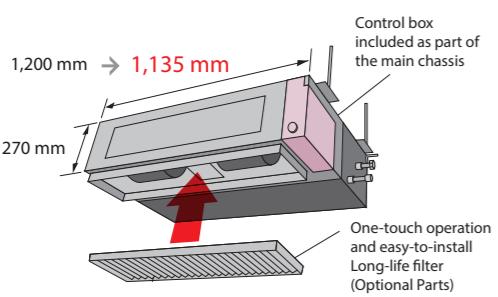


Outdoor Unit

The outdoor units for the 45,000 BTU and 54,000 BTU models have been completely redesigned. Easier installation is achieved for this compact and lightweight outdoor unit.



Two-direction drain piping

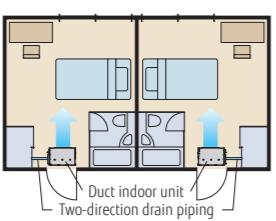

Link up with a variety of central control system (Option)

Centralized control including facilities and equipment in addition to air conditioning is possible by linking up with MODBUS, KNX interfaces.



Model: ARXG22KMLB / ARXG24KMLA / ARXG30KMLA / ARXG36KMLA / ARXG45KMLA
ARXG36KMLA [3-phase] / ARXG45KMLA [3-phase]



For ARXG22KMLB For ARXG24KMLA For ARXG30/36KMLA For ARXG45KMLA

Specifications

Model name	Indoor unit		ARXG22KMLB	ARXG24KMLA	ARXG30KMLA	ARXG36KMLA	ARXG45KMLA	ARXG36KMLA	ARXG45KMLA
	Outdoor unit	AOYG22KBTB	AOYG24KBTB	AOYG30KBTB	AOYG36KBTB	AOYG45KBTB	AOYG36KRTA	AOYG45KRTA	3-phase, ~400 V, 50 Hz
Power Source									
Capacity	Cooling	kW	6.0 (0.9-6.7)	6.8 (0.9-8.0)	8.5 (2.8-10.0)	9.5 (2.8-11.2)	12.1 (4.0-13.0)	9.5 (2.8-11.2)	12.1 (4.0-13.0)
	Heating	kW	7.0 (0.9-8.0)	7.5 (0.9-9.1)	10.0 (2.7-11.2)	10.8 (2.7-12.7)	13.5 (4.2-15.2)	10.8 (2.7-12.7)	13.5 (4.2-15.2)
Input Power	Cooling/Heating	kW	1.78/1.87	2.14/1.97	2.65/2.63	2.97/2.88	4.22/3.84	2.97/2.88	4.22/3.84
EER	Cooling	W/W	3.37	3.18	3.21	3.20	2.87	3.20	2.87
COP	Heating	W/W	3.74	3.80	3.80	3.75	3.52	3.75	3.52
Pdesign	Cooling/Heating (-10°C)	kW	6.0/4.8	6.8/6.0	8.5/8.0	9.5/8.7	-	9.5/8.7	-
SEER	Cooling	kWh/a	6.10	6.20	6.23	6.10	-	6.10	-
SCOP	Heating	kWh/a	4.10	4.10	4.00	4.00	-	4.00	-
Energy Efficiency Class	Cooling		A++	A++	A++	A++	-	A++	-
	Heating		A+	A+	A+	A+	-	A+	-
Max. Operating Current	Cooling/Heating	A	12.6/12.6	13.6/13.6	22.6/22.6	22.6/22.6	28.5/28.5	10.5/10.5	14.0/14.0
Annual Energy Consumption	Cooling	kWh/a	344	384	477	545	-	545	-
	Heating	kWh/a	1,637	2,045	2,797	3,044	-	3,044	-
Moisture Removal		l/h	2.1	2.5	2.5	3.0	4.0	3.0	4.0
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	31/29/27/25	31/29/27/25	39/35/30/26	39/35/30/26	42/38/32/28	39/35/30/26	42/38/32/28
	Indoor (Heating)	H/M/L/Q	31/29/27/25	31/29/27/25	42/35/30/26	42/35/30/26	42/38/32/28	42/35/30/26	42/38/32/28
	Outdoor (Cooling/Heating)	High	51/51	53/54	53/55	55/55	57/57	55/55	57/57
Sound Power Level	Indoor (Cooling/Heating)	High	60/62	60/62	65/69	65/70	68/70	65/70	68/70
	Outdoor (Cooling/Heating)	High	63/63	65/66	68/69	70/70	71/71	70/70	71/71
Airflow Rate	Indoor/Outdoor (Cooling)	m³/h	1,100/2,240	1,100/2,700	1,900/3,750	1,900/3,750	2,100/4,450	1,900/3,750	2,100/4,450
	Indoor/Outdoor (Heating)	m³/h	1,100/1,960	1,100/2,700	2,100/3,750	2,100/3,750	2,100/4,450	2,100/3,750	2,100/4,450
Static pressure range (Standard)		Pa	30 to 150 (35)	30 to 150 (35)	30 to 150 (47)	30 to 150 (47)	30 to 150 (60)	30-150 (47)	30-150 (60)
Net Dimensions H x W x D	Indoor	mm	270 × 1,135 × 700	270 × 1,135 × 700	270 × 1,135 × 700	270 × 1,135 × 700	270 × 1,135 × 700	270 × 1,135 × 700	270 × 1,135 × 700
	Outdoor	mm	632 × 799 × 290	716 × 820 × 315	788 × 940 × 320	788 × 940 × 320	998 × 940 × 320	788 × 940 × 320	998 × 940 × 320
Weight	Indoor	kg	35	35	38	38	39	38	39
	Outdoor	kg	38	42	52	52	67	53	67
Connection Pipe Diameter (Liquid/Gas)		mm	6.35/12.70	6.35/12.70	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88
Drain Hose Diameter (I.D./O.D.)		mm	35.7/38.1	35.7/38.1	35.7/38.1	35.7/38.1	35.7/38.1	35.7/38.1	35.7/38.1
Max. Pipe Length (Pre-Charge)		m	30 (20)	30 (20)	50 (30)	50 (30)	50 (30)	50 (30)	50 (30)
Max. Height Difference		m	25	25	30	30	30	30	30
Operating Range	Cooling	°CDB	-15 to 46						
	Heating	°CDB	-15 to 24						
Refrigerant	Type (Global Warming Potential)		R32 (675)						
	Charge	kg (CO ₂ eq-T)	1.25 (0.844)	1.25 (0.844)	1.90 (1.283)	1.90 (1.283)	2.70 (1.823)	1.90 (1.283)	2.70 (1.823)


* For optional parts compatibility of Intesis devices, refer to the optional parts compatibility list Page C-048.

Optional parts

Compact wired remote controller:	UTY-RCRY1	WLAN adapter:	UTY-TFSX21	Network Convertor for single split (DC power supply type):	UTY-VTGX
Wired remote controller (touch panel):	UTY-RNRYZ5		FG-RC-WIF1Z2	Network Convertor for single split (AC power supply type):	UTY-VGXF
Wired remote controller:	UTY-RLRY		UTY-TFSX3	Drain pump unit:	UTZ-PX1NBA
	UTY-RNNYM		FG-AC-WIF1Z1	Long-life filter:	UTD-LF25NA
	UTY-RVNYM		UTD-RF204	Silver Ion Filter:	UTD-HFND
Simple remote controller (without operation mode):	UTY-RHRY	Flange (Round):	UTD-SFO45T	(Outdoor unit 30/36/45)	UTY-XWZX3
Simple remote controller:	UTY-RSRY	Flange (Square):	UTY-LFTY	External connect kit:	UTY-XWZX2G
	UTY-RSNYM	IR receiver unit:	UTY-LBTYM		
External switch controller:	UTY-TERX	Remote sensor unit:	UTY-SZSX21		
			UTY-TERX	External connect kit:	UTY-XWZX2G

Dimensions

(Unit: mm)

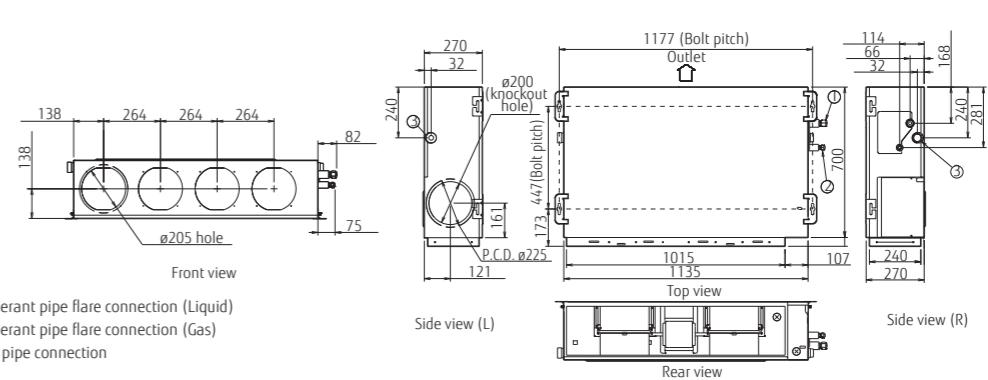

High Static Pressure Duct



Easy installation (Compact & Lightweight)

The indoor and outdoor units are designed to be compact and light by reducing the basic chassis size and the overall material weight.




Design also suits high static pressure



Low noise

Slanted corners at the top help reduce turbulent airflow. Low noise is realized by adopting a plastic case and a plastic fan.

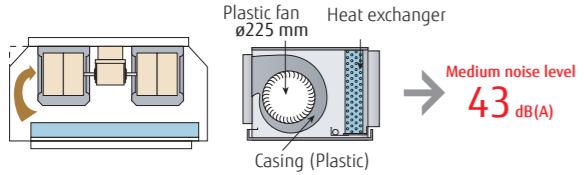

Medium noise level
43 dB(A)

Link up with a variety of central control system (Option)

Centralized control including facilities and equipment in addition to air conditioning is possible by linking up with MODBUS, KNX interfaces.



Model: ARXG45KHTB / ARXG54KHTB
ARXG45KHTB [3-phase] / ARXG54KHTB [3-phase]



Specifications

Model name	Indoor unit		ARXG45KHTB	ARXG54KHTB	ARXG45KHTB	ARXG54KHTB
	Outdoor unit		AOYG45KBTB	AOYG54KBTB	AOYG45KRTA	AOYG54KRTA
Power Source			Single phase, ~230 V, 50 Hz		3-phase, ~400 V, 50 Hz	
Capacity	Cooling	kW	12.1 (4.0-14.0)	13.4 (5.0-14.5)	12.1 (4.0-14.0)	13.4 (5.0-14.5)
	Heating		13.5 (5.0-16.2)	15.5 (5.5-18.0)	13.5 (5.0-16.2)	15.5 (5.5-18.0)
Input Power	Cooling/Heating	kW	4.16/3.61	4.77/4.18	4.16/3.61	4.77/4.18
EER	Cooling	W/W	2.91	2.81	2.91	2.81
COP	Heating		3.74	3.71	3.74	3.71
Pdesign	Cooling/Heating (-10°C)	kW	-	-	-	-
SEER	Cooling		-	-	-	-
SCOP	Heating		-	-	-	-
Energy Efficiency Class	Cooling		-	-	-	-
	Heating		-	-	-	-
Max. Operating Current	Cooling/Heating	A	28.5/28.5	28.5/28.5	14.0/14.0	14.0/14.0
Annual Energy Consumption	Cooling	kWh/a	-	-	-	-
	Heating		-	-	-	-
Moisture Removal		l/h	1.5	2.0	1.5	2.0
Sound Pressure Level	Indoor (Cooling)	H/M/L	47/43/40	47/43/40	47/43/40	47/43/40
	Indoor (Heating)	H/M/L	47/43/40	47/43/40	47/43/40	47/43/40
	Outdoor (Cooling/Heating)	High	57/57	57/59	57/57	57/59
Sound Power Level	Indoor (Cooling/Heating)	High	75/74	75/74	75/74	75/74
	Outdoor (Cooling/Heating)	High	71/71	73/73	71/71	73/73
Airflow Rate	Indoor/Outdoor (Cooling)	High	3,350/4,450	3,350/4,450	3,350/4,450	3,350/4,450
	Indoor/Outdoor (Heating)	High	3,350/4,450	3,350/4,450	3,350/4,450	3,350/4,450
Static pressure range (Standard)		Pa	100 to 250 (100)	100 to 250 (100)	100 to 250 (100)	100 to 250 (100)
Net Dimensions H x W x D	Indoor	mm	400 × 1,050 × 500	400 × 1,050 × 500	400 × 1,050 × 500	400 × 1,050 × 500
	Outdoor	mm	998 × 940 × 320	998 × 940 × 320	998 × 940 × 320	998 × 940 × 320
Weight	Indoor	kg	46	46	46	46
	Outdoor	kg	67	67	67	67
Connection Pipe Diameter (Liquid/Gas)		mm	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88
Drain port Diameter (I.D./O.D.)		mm	23.4/25.4	23.4/25.4	23.4/25.4	23.4/25.4
Max. Pipe Length (Pre-Charge)		m	50 (30)	50 (30)	50 (30)	50 (30)
Max. Height Difference			30	30	30	30
Operating Range	Cooling	°CDB	-15 to 46	-15 to 46	-15 to 46	-15 to 46
	Heating		-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)		R32 (675)	R32 (675)	R32 (675)	R32 (675)
	Charge	kg (CO ₂ eq-T)	2.70 (1.823)	2.70 (1.823)	2.70 (1.823)	2.70 (1.823)


* For optional parts compatibility of Intesis devices, refer to the optional parts compatibility list Page C-048.

Optional parts

Compact wired remote controller:	UTY-RCRYZ1	Remote sensor unit:	UTY-XSXZ1	Network Convertor for single split (DC power supply type):	UTY-VTGX
Wired remote controller (touch panel):	UTY-RNRYZ5	Long-life filter:	UTD-LF60KA	Network Convertor for single split (AC power supply type):	UTY-VGKV
Wired remote controller:	UTY-RLRY	External switch controller:	UTY-TERX	Silver Ion Filter:	UTD-HFKB
Simple remote controller:	UTY-RSRY	WLAN adapter:	UTY-TFSXZ1	(Outdoor unit)	
IR Receiver unit:	UTY-RHRY		UTY-TFSXJ3	External connect kit:	UTY-XWZXZ3
External connect kit:	UTY-LBTYM		FG-AC-WIF1Z1		
	UTY-XWZXZG	External input and output PCB:	UTY-XCSX+UTZ-GXEA		

Dimensions

(Unit: mm)

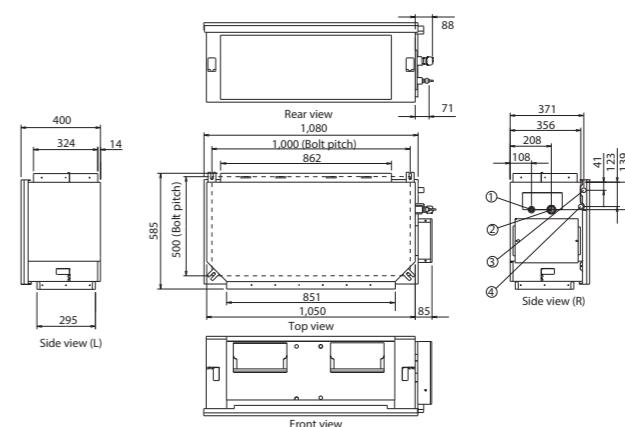

High Static Pressure Duct




ALL DC



High energy efficiency

Much greater efficiency is achieved by the use of all-DC inverter technology.

Design also corresponding to high static pressure

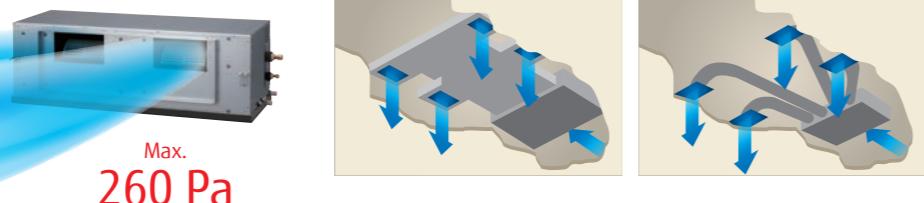


Easy installation (Compact & Lightweight)

The indoor unit is designed to be compact and light by reducing the basic chassis size and the overall material weight.



Low noise

Slanted corners at the top help reduce turbulent airflow. Low noise is realized by adopting a plastic case and a plastic fan.

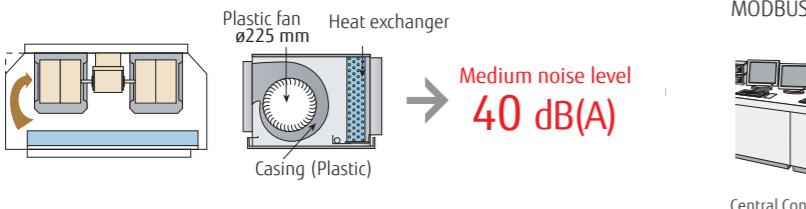

Link up with a variety of central control system (Option)

Centralized control including facilities and equipment in addition to air conditioning is possible by linking up with MODBUS, KNX interfaces.



Model: ARYG60LHTA [3-phase]



Specifications

Model name	Indoor unit		ARYG60LHTA
	Outdoor unit		
Power Source			
Capacity	Cooling	kW	15.0 (6.2-17.5)
	Heating		18.0 (6.2-20.0)
Input Power	Cooling/Heating	kW	4.70/5.15
EER	Cooling		3.19
COP	Heating		3.50
Max. Operating Current	Cooling/Heating	A	12.5 /12.5
Moisture Removal		l/h	2.0
Sound Pressure	Indoor (Cooling)	H/M/L/Q	45/40/36/-
	Indoor (Heating)	H/M/L/Q	45/40/36/-
Airflow Rate	Outdoor (Cooling/Heating)	High	56/58
	Indoor/Outdoor (Cooling)	High	3,550/6,900
Static pressure range (Standard)	Indoor/Outdoor (Heating)	High	3,550/7,300
			60 to 260 (60)
Net Dimensions H x W x D	Indoor	mm	425 x 1,250 x 490
	Outdoor	mm	1,290 x 900 x 330
Weight	Indoor	kg	54
	Outdoor	kg	104
Connection Pipe Diameter (Liquid/Gas)		mm	9.52/15.88
Drain Hose Diameter (I.D./O.D.)			23.4/25.4
Max. Pipe Length (Pre-Charge)		m	75 (30)
Max. Height Difference			30
Operating Range	Cooling	°CDB	-15 to 46
	Heating		-15 to 24
Refrigerant	Type (Global Warming Potential)		R410A (2,088)
	Charge	kg (CO ₂ eq-T)	3.45 (7.204)


* For optional parts compatibility of Intesis devices, refer to the optional parts compatibility list Page C-048.

Optional parts

Wired remote controller:	UTY-RNNYM	Network Convertor for single split (DC power supply type): UTY-VTGX
Wired remote controller:	UTY-RVNYM	Network Convertor for single split (AC power supply type): UTY-VTGXV
Simple remote controller:	UTY-RSNYM	External connect kit: UTD-ECS5A
External switch controller:	UTY-TERX	IR receiver unit: UTY-LRHYM
WLAN adapter:	UTY-TFNXZ1	
	FG-RC-WIFIZ2	
Remote sensor unit:	UTY-XSZXZ1	(Outdoor unit) External connect kit: UTY-XWZXZ2

Dimensions

(Unit: mm)

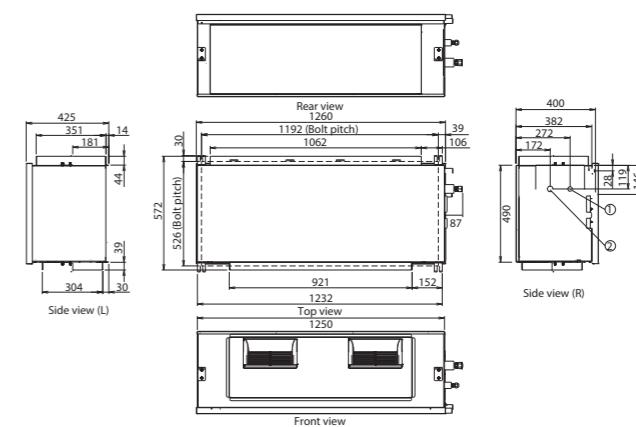

Big Duct




ALL DC




Splittable, lightweight, and compact design

The indoor unit can be split into a fan unit and a heat exchanger unit to make installation easier.

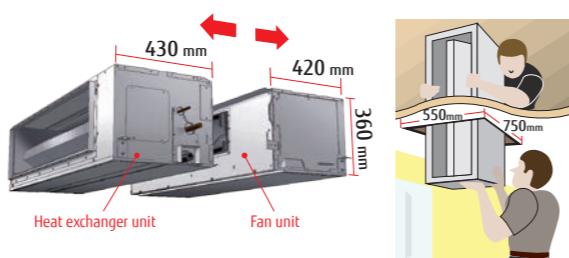

Quiet operation

The combination of a V-shaped heat exchanger, an air stabilizer, and a high-efficiency DC fan motor enables this compact unit to operate quietly.

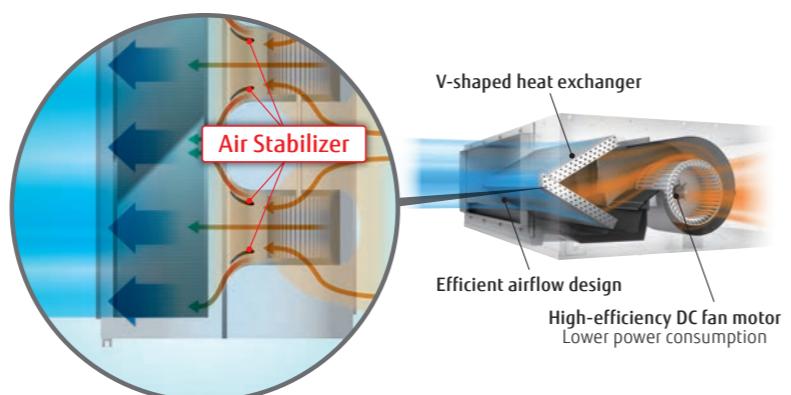

Automatic airflow adjustment function

The optimum airflow can be set automatically to facilitate faster installation.



Link up with a variety of central control system (Option)

Centralized control including facilities and equipment in addition to air conditioning is possible by linking up with MODBUS, KNX interfaces.



Model: ARYG72LHTA / ARYG90LHTA



Specifications

Model name	Indoor unit		ARYG72LHTA	ARYG90LHTA
	Indoor	Outdoor	AOYG72LRLA	AOYG90LRLA
Power Source			Single phase, ~230 V, 50 Hz	3-phase, ~400 V, 50 Hz
Capacity	Cooling	kW	19.0 (8.4-20.9)	22.0 (10.3-24.2)
	Heating		22.4 (7.2-24.6)	27.0 (8.5-29.7)
Input Power	Cooling/Heating	kW	6.46/6.59	7.77/8.18
EER	Cooling		2.94	2.83
COP	Heating		3.40	3.30
Max. Operating Current	Indoor (Cooling/Heating)	A	-	-
	Outdoor (Cooling/Heating)		-	-
Moisture Removal		l/h	4.5	6.0
Sound Pressure	Indoor (Cooling)	H/M/L/Q	46/43/41/39	47/44/42/40
	Indoor (Heating)	H/M/L/Q	46/43/41/39	47/44/42/40
	Outdoor (Cooling/Heating)	High	55/55	55/57
Airflow Rate	Indoor/Outdoor (Cooling)	High	4,300/8,400	4,300/8,400
	Indoor/Outdoor (Heating)	High	4,300/8,400	4,300/9,000
Static pressure range (Standard)		Pa	50 to 150 (72)	50 to 200 (72)
Net Dimensions H x W x D	Indoor	mm	360 x 1,400 x 850	360 x 1,400 x 850
	Outdoor	mm	1,428 x 1,080 x 480	1,428 x 1,080 x 480
Weight	Indoor	kg	69	80
	Outdoor	kg	165	174
Connection Pipe Diameter (Liquid/Gas)		mm	12.7/25.4	12.7/25.4
Drain Hose Diameter (I.D./O.D.)			25/32	25/32
Max. Pipe Length (Pre-Charge)		m	100 (30)	100 (30)
Max. Height Difference			30	30
Operating Range	Cooling	°CDB	-15 to 46	-15 to 46
	Heating		-20 to 24	-20 to 24
Refrigerant	Type (Global Warming Potential)		R410A (2,088)	R410A (2,088)
	Charge	kg (CO2eq-T)	5.6 (11.693)	7.1 (14.825)


Optional parts

Compact wired remote controller:	UTY-RCRYZ1	WLAN adapter:	UTY-TFSXZ1	Network Converter for single split (DC power supply type): UTY-VTGX
Wired remote controller (touch panel):	UTY-RNRYZ5	UTY-RC-WIF122	FG-RC-WIF122	Network Converter for single split (AC power supply type): UTY-VTGV
Wired remote controller:	UTY-RLRY	UTY-TFSXJ3	UTY-TFSXJ3	IR receiver unit: UTY-LBTYM
	UTY-RNRYM	FG-AC-WIF1Z1	FG-AC-WIF1Z1	UTY-LRHYM
	UTY-RVNYM			UTD-HFKA
Simple remote controller (without operation mode):	UTY-RHRY	External input and output PCB: UTY-XCSX	UTY-XSZZ1	Silver Ion Filter: (Outdoor unit)
Simple remote controller:	UTY-RSRY	Remote sensor unit: UTY-XSZZ1	UTY-XSZZ1	External connect kit: UTY-XWZXZG
	UTY-RSNYM	Long-life filter: UTD-LFKA	UTD-LFKA	External connect kit: UTY-XWZXZ3
External switch controller:	UTY-TERX	External connect kit: UTY-XWZXZG	UTY-XWZXZG	
		Drain pump unit: UTY-PX1NAB	UTY-PX1NAB	

* For optional parts compatibility of Intesis devices, refer to the optional parts compatibility list Page C-048.

Dimensions

(Unit: mm)

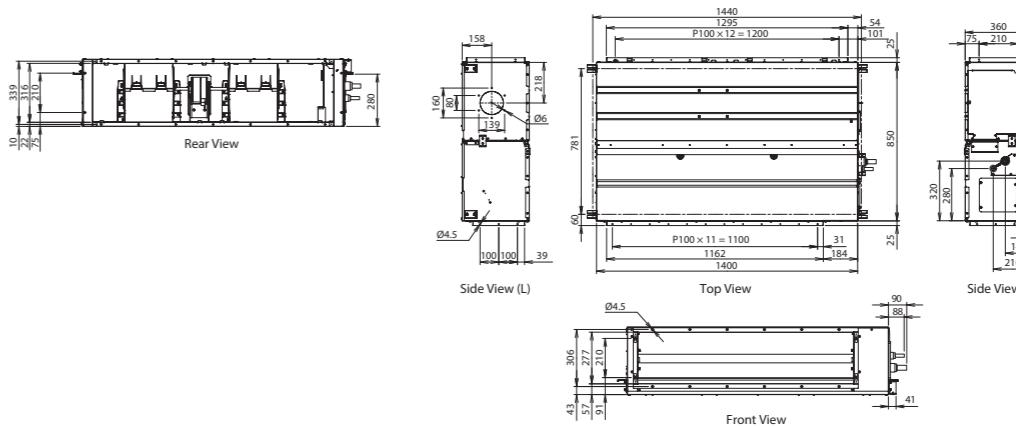

Floor

Compact Size

ALL
DC

High energy saving

The Floor 09 class achieves a top-class SEER of 8.50 and an A+++ seasonal efficiency rank for cooling.

The Floor 09 class achieves an improved SCOP of 4.30 and an A+ seasonal efficiency rank for heating.




SEER
8.50^{*1} SCOP
4.30^{*1}

^{*1: 09 model}


Flexible & easy installation

The compact and whole-surface suction design provides flexible installation options, including floor-standing, embedded, half concealed, and wall mount installation to match the room layout.

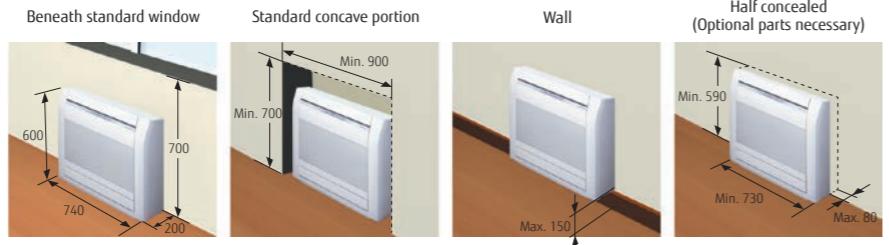^{*} Concaved position installation with concealment is prohibited.

Low ambient operation

Factory-guaranteed cooling operation down to -10°C ambient temperature.

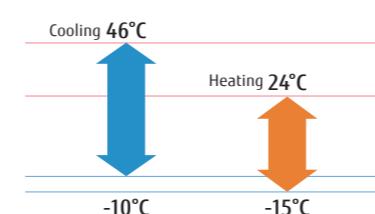


Smart device control (Option)

With the optional WLAN adapter installed in the air conditioner, you can control it from anywhere with your smart device. WLAN adapter can be installed easily without specialized installation work.



10°C heat

The room temperature can be set to go no lower than 10°C, thus ensuring that the room does not get too cold when not occupied.

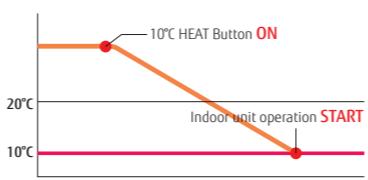

Model: AGYG09KVCA / AGYG12KVCA / AGYG14KVCA



Specifications

Model name	Indoor unit		AGYG09KVCA	AGYG12KVCA	AGYG14KVCA
	Outdoor unit		AOYG09KVCA	AOYG12KVCA	AOYG14KVCA
Power Source					
Capacity	Cooling	kW	2.5 (0.9-3.5)	3.5 (0.9-4.0)	4.2 (0.9-5.2)
	Heating		3.5 (0.9-5.1)	4.5 (0.9-5.3)	5.2 (0.9-6.3)
Input Power	Cooling/Heating	kW	0.53/0.81	0.88/1.22	1.06/1.41
EER	Cooling		4.70	4.00	3.95
COP	Heating		4.30	3.70	3.70
Pdesign	Cooling/Heating (-10°C)	kW	2.50/2.60	3.50/3.50	4.20/4.20
SEER	Cooling		8.50	8.20	8.10
SCOP	Heating (Average)		4.30	4.10	4.00
Energy Efficiency Class	Cooling		A+++	A++	A++
	Heating (Average)		A+	A+	A+
Max. Operating Current	Cooling/Heating	A	7.0/8.5	7.0/8.5	11.0/12.0
Annual Energy Consumption	Cooling	kWh/a	103	149	181
	Heating (Average)		845	1,192	1,466
Moisture Removal		l/h	1.3	1.8	2.1
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	40/35/29/22	40/35/29/22	44/38/31/22
	Indoor (Heating)	H/M/L/Q	41/35/29/22	41/35/29/22	43/37/29/22
Sound Power Level	Outdoor (Cooling/Heating)	High	43/47	45/51	51/50
	Indoor (Cooling/Heating)	High	53/54	53/54	57/56
Airflow Rate	Outdoor (Cooling/Heating)	High	58/61	61/64	63/63
	Indoor/Outdoor (Cooling)	High	570/1,530	570/1,530	650/2,210
Net Dimensions H x W x D	Indoor	mm	600 × 740 × 200	600 × 740 × 200	600 × 740 × 200
	Outdoor	mm	542 × 799 × 290	542 × 799 × 290	632 × 799 × 290
Weight	Indoor	kg	14	14	14
	Outdoor	kg	31	31	38
Connection Pipe Diameter (Liquid/Gas)					
Drain Hose Diameter (I.D./O.D.)		mm	6.35/9.52	6.35/9.52	6.35/9.52
			13.8/15.8 to 16.7	13.8/15.8 to 16.7	13.8/15.8 to 16.7
Max. Pipe Length (Pre-Charge)		m	20 (15)	20 (15)	20 (15)
			15	15	15
Max. Height Difference	Cooling	°CDB	-10 to 46	-10 to 46	-10 to 46
	Heating		-15 to 24	-15 to 24	-15 to 24
Operating Range	Type (Global Warming Potential)		R32 (675)	R32 (675)	R32 (675)
	Charge	kg (CO ₂ eq-T)	0.85 (0.574)	0.85 (0.574)	0.94 (0.635)


Optional parts

* For optional parts compatibility of Intesis devices, refer to the optional parts compatibility list Page C-048.

Compact wired remote controller:	UTY-RCRY21	External switch controller:	UTY-TERX	Network Converter for single split (DC power supply type):	UTY-VTGX
Wired remote controller (touch panel):	UTY-RNRYZ5	WLAN adapter:	UTY-TFSX21	Network Converter for single split (AC power supply type):	UTY-VTGV
Wired remote controller:	UTY-LRLY	FG-AC-WIF121	UTY-TFSXJ3	Silver Ion Filter:	UTR-FA03-5
Simple remote controller (without operation mode):	UTY-RHRY	UTY-STA	Communication kit:	UTY-XWZXZ5	
Simple remote controller:	UTY-RSRY			UTY-TWRXZ3	

Dimensions

(Unit: mm)

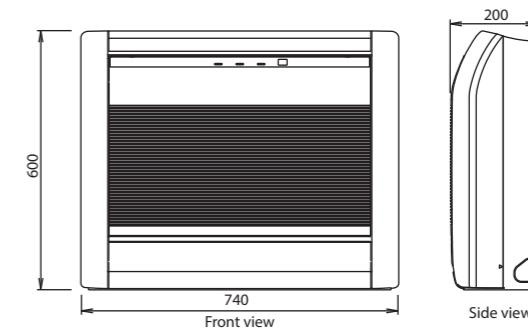

Ceiling



ALL DC



Light elegant design

The light-elegant, gently curved surface gives a sense of comfort and well-being.



Easy installation

The indoor unit can be easily installed under the ceiling thanks to the uniquely designed mounting kit.

1. Set mounting brackets



2. Hold up the ceiling unit and fit to the mounting brackets



3. Attach with screws



Easy maintenance

The front panel can be opened without removing it for safe & speedy maintenance.



The drain pan can be removed for cleaning.



Components in the control box can be easily accessed from the wide side opening.



Flexible installation

The drain hose and pipe can be contained in the casing and connected in the right, left, angled, or downward direction.



Link up with a variety of central control system (Option)

Centralized control including facilities and equipment in addition to air conditioning is possible by linking up with MODBUS, KNX interfaces.



Model: ABYG18KRTA / ABYG22KRTA / ABYG24KRTA / ABYG30KRTA / ABYG36KRTA / ABYG45KRTA
ABYG36KRTA [3-phase] / ABYG45KRTA [3-phase] / ABYG54KRTA [3-phase]



ABYG18/22KRTA



ABYG24/30KRTA



ABYG36/45/54KRTA



For ABYG18/22KRTA



For ABYG24KRTA



For ABYG30/36KRTA



For ABYG45/54KRTA

Specifications

Model name	Indoor unit		ABYG18KRTA	ABYG22KRTA	ABYG24KRTA	ABYG30KRTA	ABYG36KRTA	ABYG45KRTA	ABYG36KRTA	ABYG45KRTA	ABYG54KRTA
	Outdoor unit		AOYG18KBTB	AOYG22KBTB	AOYG24KBTB	AOYG30KBTB	AOYG36KBTB	AOYG45KBTB	AOYG36KRTA	AOYG45KRTA	AOYG54KRTA
Power Source											
Capacity	Cooling	kW	5.2 (0.9-5.9)	6.0 (0.9-6.7)	6.8 (0.9-8.0)	8.5 (2.8-10.0)	9.5 (2.8-11.2)	12.1 (4.0-13.5)	9.5 (2.8-11.2)	12.1 (4.0-13.5)	13.4 (4.5-14.5)
	Heating		6.0 (0.9-7.5)	7.0 (0.9-8.0)	7.5 (0.9-9.1)	10.0 (2.7-11.2)	10.8 (2.7-12.7)	13.5 (4.2-16.2)	10.8 (2.7-12.7)	13.5 (4.2-16.2)	15.5 (4.7-16.5)
Input Power	Cooling/Heating	kW	1.55/1.62	1.87/1.95	2.14/1.97	2.65/2.77	2.96/2.88	4.22/3.84	2.96/2.88	4.22/3.84	4.45/4.43
EER	Cooling	W/W	3.35	3.21	3.18	3.21	3.21	2.87	3.21	2.87	3.01
COP	Heating		3.70	3.59	3.81	3.61	3.75	3.52	3.75	3.52	3.50
Pdesign	Cooling/Heating (-10°C)	kW	5.2/4.4	6.0/4.8	6.8/6.0	8.5/8.0	9.5/8.7	-	9.5/8.7	-	-
SEER	Cooling	W/W	6.2	6.1	6.2	6.1	6.37	-	6.37	-	-
SCOP	Heating (Average)		4.1	4.0	4.1	4.0	4.21	-	4.21	-	-
Energy Efficiency Class	Cooling	A++	A++	A++	A++	A++	A++	A++	A++	A++	-
	Heating (Average)	A+	A+	A+	A+	A+	A+	A+	A+	A+	-
Max. Operating Current	Cooling/Heating	A	12.1/12.1	12.6/12.6	13.6/13.6	22.6/22.6	22.6/22.6	28.5/28.5	10.5/10.5	14.0/14.0	14.0/14.0
Annual Energy Consumption	Cooling	kWh/a	293	344	384	486	524	-	524	-	-
	Heating		1,301	1,677	2,042	2,796	2,904	-	2,904	-	-
Moisture Removal	I/h		2.0	2.5	2.2	3.0	2.6	4.5	2.6	4.5	5.0
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	38/36/33/31	42/37/34/31	41/36/32/29	45/40/35/32	44/40/37/32	45/41/39/34	44/40/37/32	45/41/39/34	48/44/41/38
	Indoor (Heating)	H/M/L/Q	38/36/33/31	42/37/34/31	41/36/32/29	45/40/35/32	44/40/37/32	45/41/39/34	44/40/37/32	45/41/39/34	48/44/41/38
Sound Power Level	Outdoor (Cooling/Heating)	High	50/50	51/51	53/54	53/55	55/55	57/57	55/55	57/57	57/59
	Indoor (Cooling/Heating)	High	53/53	57/57	56/56	60/60	59/59	60/60	59/59	60/60	63/63
Airflow Rate	Indoor/Outdoor (Cooling)	High	840/2,160	900/2,240	1,230/2,700	1,400/3,750	1,850/3,750	1,900/4,450	1,850/3,750	1,900/4,450	2,100/4,450
	Indoor/Outdoor (Heating)	High	840/1,830	900/1,960	1,230/2,700	1,400/3,750	1,800/3,750	1,850/4,450	1,800/3,750	1,850/4,450	2,100/4,450
Net Dimensions H x W x D	Indoor	mm	235 × 1,080 × 705	235 × 1,080 × 705	235 × 1,390 × 705	235 × 1,390 × 705	235 × 1,700 × 705	235 × 1,700 × 705	235 × 1,700 × 705	235 × 1,700 × 705	235 × 1,700 × 705
	Outdoor	mm	632 × 799 × 290	632 × 799 × 290	716 × 820 × 315	788 × 940 × 320	788 × 940 × 320	998 × 940 × 320	788 × 940 × 320	998 × 940 × 320	998 × 940 × 320
Weight	Indoor	kg	24	24	31	31	38	38	38	38	38
	Outdoor	kg	36	38	42	52	52	67	53	67	67
Connection Pipe Diameter (Liquid/Gas)		mm	6.35/12.7	6.35/12.7	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88
Drain Hose Diameter (I.D./O.D.)		mm	25/32	25/32	25/32	25/32	25/32	25/32	25/32	25/32	25/32
Max. Pipe Length (Pre-Charge)		m	30 (20)	30 (20)	30 (20)	50 (30)	50 (30)	50 (30)	50 (30)	50 (30)	50 (30)
Max. Height Difference		m	20	25	25	30	30	30	30	30	30
Operating Range	Cooling	°CDB	-15 to 46								
	Heating		-15 to 24								
Refrigerant	Type (Global Warming Potential)		R32 (675)								
	Charge	kg (CO ₂ eq-T)	1.02 (0.689)	1.25 (0.844)	1.25 (0.844)	1.90 (1.283)	1.90 (1.283)	2.70 (1.823)	1.90 (1.283)	2.70 (1.823)	2.70 (1.823)

* For optional parts compatibility of Intesis devices, refer to the optional parts compatibility list Page C-048.

Compact wired remote controller:	UTY-RCRY1	WLAN adapter:	UTY-TFSXZ1	Network Convertor for single split (DC power supply type): UTY-VTGX
Wired remote controller (touch panel):	UTY-RNRY25	UTY-TFSXJ3	FG-AC-WIF121	Network Convertor for single split (AC power supply type): UTY-VGKV
Wired remote controller:	UTY-RLRY	UTR-DBP24T	External switch controller:	UTY-TERX
Simple remote controller (without operation mode):	UTY-RHRY	UTY-LBTYH	(Outdoor unit 30/36/45/54)	UTY-X

Wall-mounted W-LAN Adapter Option Models Specifications



Designer Series
High Spec & Design

Model name	Indoor unit		ASYG07KGTE	ASYG09KGTE	ASYG12KGTE	ASYG14KGTE
	Outdoor unit		AOYG07KGCA	AOYG09KGCA	AOYG12KGCA	AOYG14KGCA
Power Source						
Capacity	Cooling	kW	2.0 (0.9-3.2)	2.5 (0.9-3.4)	3.4 (0.9-4.1)	4.2 (0.9-4.5)
	Heating		2.5 (0.9-5.2)	2.8 (0.9-5.4)	4.0 (0.9-6.1)	5.4 (0.9-6.4)
Input Power	Cooling/Heating	kW	0.400/0.500	0.555/0.560	0.805/0.910	1.175/1.350
EER	Cooling		5.00	4.50	4.22	3.57
COP	Heating		5.00	5.00	4.40	4.00
Pdesign	Cooling/Heating (-10°C)	kW	2.0/2.3	2.5/2.4	3.4/2.5	4.2/4.0
SEER	Cooling		9.10	9.20	9.20	8.30
SCOP	Heating (Average)		5.30	5.20	5.20	4.50
Energy Efficiency Class	Cooling	A+++	A+++	A+++	A++	
	Heating (Average)	A+++	A+++	A+++	A+	
Max. Operating Current	Cooling/Heating	A	6.5/9.0	6.5/9.0	6.5/9.0	9.0/10.5
Annual Energy Consumption	Cooling	kWh/a	77	95	129	177
	Heating		607	645	672	1,242
Moisture Removal		I/h	1.0	1.3	1.8	2.1
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	38/33/29/19	40/34/29/19	40/35/30/19	43/36/30/20
	Indoor (Heating)	H/M/L/Q	41/35/31/21	42/36/31/21	42/38/33/21	44/39/33/24
	Outdoor (Cooling/Heating)	High	46/46	46/48	50/50	50/50
Sound Power Level	Indoor (Cooling/Heating)	High	54/56	55/57	56/58	57/59
	Outdoor (Cooling/Heating)	High	61/62	61/63	65/66	65/66
Airflow Rate	Indoor/Outdoor (Cooling)	High	650/1,610	700/1,610	700/1,680	770/1,680
	Indoor/Outdoor (Heating)	High	720/1,560	750/1,610	770/1,580	800/1,580
Net Dimensions H x W x D	Indoor	mm	270 × 834 × 215	270 × 834 × 215	270 × 834 × 215	270 × 834 × 215
	Outdoor	mm	542 × 799 × 290	542 × 799 × 290	542 × 799 × 290	542 × 799 × 290
Weight	Indoor	kg	10	10	10	10
	Outdoor	kg	30	30	31	32
Connection Pipe Diameter (Liquid/Gas)		mm	6.35/9.52			
Drain Hose Diameter (I.D./O.D.)		mm	13.8/15.0 to 16.8			
Max. Pipe Length (Pre-Charge)		m	20 (15)			
Max. Height Difference			15			
Operating Range	Cooling	°CDB	-10 to 46			
	Heating		-15 to 24			
Refrigerant	Type (Global Warming Potential)		R32 (675)			
Charge	kg (CO2eq-T)		0.75 (0.506)	0.75 (0.506)	0.85 (0.574)	0.85 (0.574)

Designer Series
Cool Beauty Design

Model name	Indoor unit		ASYG07KETE ASYG07KETE-B	ASYG09KETE ASYG09KETE-B	ASYG12KETE ASYG12KETE-B	ASYG14KETE ASYG14KETE-B
	Outdoor unit		AOYG07KETA	AOYG09KETA	AOYG12KETA	AOYG14KETA
Single phase, ~230 V, 50 Hz						
Capacity	Cooling	kW	2.0 (0.9-3.0)	2.5 (0.9-3.2)	3.4 (0.9-3.9)	4.2 (0.9-4.4)
	Heating		2.5 (0.9-5.2)	2.8 (0.9-5.4)	4.0 (0.9-6.1)	5.4 (0.9-6.4)
Input Power	Cooling/Heating	kW	0.400/0.500	0.555/0.560	0.805/0.910	1.175/1.350
EER	Cooling		5.00	4.50	4.22	3.57
COP	Heating		5.00	5.00	4.40	4.00
Pdesign	Cooling/Heating (-10°C)	kW	2.0/2.3	2.5/2.4	3.4/2.5	4.2/4.0
SEER	Cooling		9.10	9.20	9.20	8.30
SCOP	Heating (Average)		5.30	5.20	5.20	4.50
Energy Efficiency Class	Cooling	A+++	A+++	A+++	A++	
	Heating (Average)	A+++	A+++	A+++	A+	
Max. Operating Current	Cooling/Heating	A	6.5/9.0	6.5/9.0	6.5/9.0	9.0/10.5
Annual Energy Consumption	Cooling	kWh/a	77	95	129	177
	Heating		607	645	672	1,242
Moisture Removal		I/h	1.0	1.3	1.8	2.1
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	38/33/29/19	40/34/29/19	40/35/30/19	43/36/30/20
	Indoor (Heating)	H/M/L/Q	41/35/31/21	42/36/31/21	42/38/33/21	44/39/33/24
	Outdoor (Cooling/Heating)	High	46/46	46/48	50/50	50/50
Sound Power Level	Indoor (Cooling/Heating)	High	54/56	55/57	56/58	57/59
	Outdoor (Cooling/Heating)	High	61/62	61/63	65/66	65/66
Airflow Rate	Indoor/Outdoor (Cooling)	High	650/1,610	700/1,610	700/1,680	770/1,680
	Indoor/Outdoor (Heating)	High	720/1,560	750/1,610	770/1,580	800/1,580
Net Dimensions H x W x D	Indoor	mm	270 × 834 × 215	270 × 834 × 215	270 × 834 × 215	270 × 834 × 215
	Outdoor	mm	542 × 799 × 290	542 × 799 × 290	542 × 799 × 290	542 × 799 × 290
Weight	Indoor	kg	10	10	10	10
	Outdoor	kg	30	30	31	32
Connection Pipe Diameter (Liquid/Gas)		mm	6.35/9.52			
Drain Hose Diameter (I.D./O.D.)		mm	13.8/15.0 to 16.8			
Max. Pipe Length (Pre-Charge)		m	20 (15)			
Max. Height Difference			15			
Operating Range	Cooling	°CDB	-10 to 46			
	Heating		-15 to 24			
Refrigerant	Type (Global Warming Potential)		R32 (675)			
Charge	kg (CO2eq-T)		0.75 (0.506)	0.75 (0.506)	0.85 (0.574)	0.85 (0.574)



Standard Series
High-Efficiency & Comfort

Model name	Indoor unit		ASYG07KMCE	ASYG09KMCE	ASYG12KMCE	ASYG14KMCE
	Outdoor unit		AOYG07KMCC	AOYG09KMCC	AOYG12KMCC	AOYG14KMCC
Single phase, ~230 V, 50 Hz						
Capacity	Cooling	kW	2.0 (0.9-3.0)	2.5 (0.9-3.2)	3.4 (0.9-3.9)	4.2 (0.9-4.4)
	Heating		2.5 (0.9-5.2)	2.8 (0.9-5.4)	4.0 (0.9-6.1)	5.4 (0.9-6.4)
Input Power	Cooling/Heating	kW	0.450/0.555	0.630/0.620	0.935/0.960	1.220/1.410
EER	Cooling		4.43	3.97	3.65	3.44
COP	Heating		4.52	4.52	4.17	3.83
Pdesign	Cooling/Heating (-10°C)	kW	2.0/2.3	2.5/2.4	3.4/2.5	4.2/4.0
SEER	Cooling		7.40	7.40	7.30	6.90
SCOP	Heating (Average)		4.10	4.10	4.40	4.10
Energy Efficiency Class	Cooling	A++	A++	A++	A++	A++
	Heating (Average)	A+	A+	A+	A+	A+
Max. Operating Current	Cooling/Heating	A	6.5/9.0	6.5/9.0	6.5/9.0	6.5/9.0
Annual Energy Consumption	Cooling	kWh/a	95	118	163	213
	Heating		785	819	795	1,367
Moisture Removal		I/h	1.0	1		

ECO Series Lineup Specifications



Compact Cassette

Model name	Indoor unit		AUXG09KVLA	AUXG12KVLA	AUXG14KVLA	AUXG18KVLA	AUXG22KVLA	AUXG24KVLA
	Outdoor unit		AOYG09KATA	AOYG12KATA	AOYG14KATA	AOYG18KATA	AOYG22KATA	AOYG24KATA
Power Source								
Capacity	Cooling	kW	2.5 (0.9-2.7)	3.5 (0.9-3.7)	4.3 (0.9-4.5)	5.2 (0.9-5.4)	6.0 (0.9-6.3)	6.8 (0.9-7.4)
	Heating		3.2 (0.9-3.9)	4.1 (0.9-4.4)	5.0 (0.9-5.3)	6.0 (0.9-6.3)	7.0 (0.9-7.4)	7.5 (0.9-8.6)
Input Power	Cooling/Heating	kW	0.68/0.88	1.09/1.17	1.37/1.42	1.69/1.72	1.95/2.00	2.26/2.08
EER	Cooling	W/W	3.68	3.21	3.14	3.08	3.08	3.01
COP	Heating		3.64	3.50	3.52	3.49	3.50	3.61
Pdesign	Cooling/Heating (-10°C)	kW	2.5/2.3	3.5/2.8	4.3/3.2	5.2/3.8	6.0/4.4	6.8/5.4
SEER	Cooling	W/W	6.2	6.1	6.1	6.1	6.1	5.9
SCOP	Heating		4.0	4.0	4.0	3.9	3.9	3.8
Energy Efficiency Class	Cooling		A++	A++	A++	A++	A++	A+
	Heating		A+	A+	A+	A	A	A
Max. Operating Current	Cooling/Heating	A	6.9/6.9	7.7/7.7	9.2/9.2	10.1/10.1	11.6/11.6	12.6/12.6
Annual Energy Consumption	Cooling	kWh/a	141	201	247	298	344	403
	Heating		804	979	1,120	1,362	1,578	1,988
Moisture Removal		l/h	0.6	1.2	1.5	2.2	2.6	2.7
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	33/31/29/27	37/34/30/27	38/34/30/27	38/34/30/26	44/42/36/30	49/44/36/30
	Indoor (Heating)	H/M/L/Q	34/32/29/27	37/34/31/29	43/38/34/30	43/38/34/30	45/43/40/33	49/45/40/33
	Outdoor (Cooling/Heating)	High	47/48	49/50	50/51	51/52	52/53	54/55
Sound Power Level	Indoor (Cooling/Heating)	High	46/47	49/49	50/55	50/55	56/57	59/61
	Outdoor (Cooling/Heating)	High	60/60	62/62	63/63	63/64	64/65	66/67
Airflow Rate	Indoor/Outdoor (Cooling)	High	540/1,610	600/1,630	680/1,670	680/1,710	830/2,240	930/2,885
	Indoor/Outdoor (Heating)	High	540/1,550	600/1,410	800/1,580	800/1,840	860/2,240	930/2,350
Net Dimensions H x W x D	Indoor	mm	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570
	Outdoor	mm	541 × 663 × 290	541 × 663 × 290	542 × 799 × 290	542 × 799 × 290	632 × 799 × 290	632 × 799 × 290
Weight	Indoor	kg	15	15	15	15	16	16
	Outdoor	kg	23	25	32	33	36	38
Connection Pipe Diameter (Liquid/Gas)		mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/12.70	6.35/12.70	6.35/12.70
Drain port Diameter (I.D./O.D.)			25/32	25/32	25/32	25/32	25/32	25/32
Max. Pipe Length (Pre-Charge)		m	15 (15)	15 (15)	20 (15)	20 (15)	25 (15)	25 (20)
Max. Height Difference			15	15	15	15	20	20
Operating Range	Cooling	°CDB	-10 to 46					
	Heating		-15 to 24					
Refrigerant	Type (Global Warming Potential)		R32 (675)					
Charge	kg (CO ₂ eq-T)		0.6 (0.405)	0.7 (0.473)	0.85 (0.574)	0.9 (0.608)	1.1 (0.743)	1.25 (0.844)
Cassette Grille	Model name		UTG-UFYF-W	UTG-UFYF-W	UTG-UFYF-W	UTG-UFYF-W	UTG-UFYF-W	UTG-UFYF-W
Dimensions (H × W × D)	mm	49 × 620 × 620	49 × 620 × 620	49 × 620 × 620	49 × 620 × 620	49 × 620 × 620	49 × 620 × 620	49 × 620 × 620
Weight	kg	2.3	2.3	2.3	2.3	2.3	2.3	2.3

Circular Cassette

Model name	Indoor unit		AUXG18KRLB	AUXG22KRLB	AUXG24KRLB	AUXG30KRLB	AUXG36KRLB	AUXG45KRLB	AUXG54KRLB	AUXG36KRLB	AUXG45KRLB	AUXG54KRLB
	Outdoor unit		AOYG18KATA	AOYG22KATA	AOYG24KATA	AOYG30KATA	AOYG36KATA	AOYG45KATA	AOYG54KATA	AOYG36KATA	AOYG45KATA	AOYG54KATA
Power Source												
Capacity	Cooling	kW	5.2 (0.9-5.4)	6.0 (0.9-6.3)	6.8 (0.9-7.4)	8.5 (2.8-9.6)	9.5 (2.8-10.6)	12.1 (4.0-12.6)	13.4 (4.5-13.8)	9.5 (2.8-10.6)	12.1 (4.0-12.6)	13.4 (4.5-13.8)
	Heating		6.0 (0.9-6.3)	7.0 (0.9-7.4)	7.5 (0.9-8.6)	10.0 (2.7-10.8)	10.8 (2.7-12.5)	13.5 (4.2-15.0)	15.5 (4.7-16.0)	10.8 (2.7-12.5)	13.5 (4.2-15.0)	15.5 (4.7-16.0)
Input Power	Cooling/Heating	kW	1.60/1.66	1.85/1.93	2.12/1.97	2.56/2.64	3.06/2.58	4.32/3.77	4.87/4.86	3.06/2.58	4.32/3.77	4.87/4.86
EER	Cooling	W/W	3.25	3.24	3.21	3.32	3.10	2.80	2.75	3.10	2.80	2.75
COP	Heating		3.61	3.63	3.81	3.79	4.19	3.58	3.19	4.19	3.58	3.19
Pdesign	Cooling/Heating (-10°C)	kW	5.2/3.8	6.0/4.4	6.8/5.4	8.5/8.0	9.5/8.7	-	-	9.5/8.7	-	-
SEER	Cooling	W/W	6.2	6.2	6.1	6.1	6.1	-	-	6.1	-	-
SCOP	Heating		4.1	4.1	4.0	4.0	4.0	-	-	4.0	-	-
Energy Efficiency Class	Cooling		A++	A++	A++	A++	A++	-	-	A++	-	-
	Heating		A+	A+	A+	A+	A+	-	-	A+	-	-
Max. Operating Current	Cooling/Heating	A	10.1/10.1	11.6/11.6	12.6/12.6	22.5/22.5	22.5/22.5	28.1/28.1	28.1/28.1	10.5/10.5	13.6/13.6	13.6/13.6
Annual Energy Consumption	Cooling	kWh/a	293	338	390	488	545	-	-	545	-	-
	Heating		1,297	1,502	1,887	2,794	3,044	-	-	3,044	-	-
Moisture Removal		l/h	1.5	2.2	2.7	2.5	3.3	4.5	5.0	3.3	4.5	5.0
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	33/32/31/28	33/32/31/28	35/33/32/29	40/38/36/33	44/41/38/34	46/42/39/35	47/43/40/36	44/41/38/34	46/42/39/35	47/43/40/36
	Indoor (Heating)	H/M/L/Q	33/32/31/28	33/32/31/28	35/33/32/29	40/38/36/33	44/41/38/34	46/42/39/35	47/43/40/36	44/41/38/34	46/42/39/35	47/43/40/36
	Outdoor (Cooling/Heating)	High	51/52	52/53	54/55	53/55	55/55	58/59	58/61	55/55	60/60	61/61
Sound Power Level	Indoor (Cooling/Heating)	High	47/47	49/49	49/49	54/54	58/58	60/60	61/61	58/58	-/-	-/-
	Outdoor (Cooling/Heating)	High	63/64	64/65	66/67	68/69	70/70	72/73	74/75	70/70	72/73	74/75
Airflow Rate	Indoor/Outdoor (Cooling)	High	1,050/1,710	1,050/2,400	1,150/2,885	1,600/3,7						

Slim Duct



Model name	Indoor unit		ARXG09KLLAP	ARXG12KLLAP	ARXG14KLLAP	ARXG18KLLAP
	Outdoor unit		AOYG09KATA	AOYG12KATA	AOYG14KATA	AOYG18KATA
Power Source						
Capacity	Cooling	kW	2.5 (0.9-2.7)	3.5 (0.9-3.7)	4.3 (0.9-4.5)	5.2 (0.9-5.4)
	Heating		3.2 (0.9-3.9)	4.1 (0.9-4.4)	5.0 (0.9-5.3)	6.0 (0.9-6.3)
Input Power	Cooling/Heating	kW	0.69/0.88	1.09/1.17	1.37/1.42	1.66/1.71
EER	Cooling	W/W	3.62	3.21	3.14	3.13
COP	Heating		3.64	3.50	3.52	3.51
Pdesign	Cooling/Heating (-10°C)	kW	2.5/2.3	3.5/2.8	4.3/3.2	5.2/3.8
SEER	Cooling	W/W	5.9	5.8	5.6	5.8
SCOP	Heating		3.8	3.8	3.8	3.8
Energy Efficiency Class	Cooling	A+	A+	A+	A+	A+
Max. Operating Current	Cooling/Heating	A	6.9/6.9	7.7/7.7	9.2/9.2	10.1/10.1
Annual Energy Consumption	Cooling	kWh/a	148	211	269	313
Heating			847	1,031	1,177	1,398
Moisture Removal		I/h	0.7	1.3	1.5	2.0
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	28/27/26/25	29/28/26/25	32/30/28/26	32/30/29/27
	Indoor (Heating)	H/M/L/Q	28/26/25/24	29/28/26/24	32/30/28/25	32/30/29/27
	Outdoor (Cooling/Heating)	High	47/48	49/50	50/51	51/52
Sound Power Level	Indoor (Cooling/Heating)	High	57/57	58/58	60/60	58/58
	Outdoor (Cooling/Heating)	High	60/60	62/62	63/63	63/64
	Indoor/Outdoor (Cooling)	High	600/1,610	650/1,630	800/1,670	940/1,710
Airflow Rate	Indoor/Outdoor (Heating)	High	600/1,550	650/1,410	800/1,580	940/1,840
Static pressure range (Standard)		Pa	0 to 90 (25)			
Net Dimensions H x W x D	Indoor	mm	198 × 700 × 620	198 × 700 × 620	198 × 900 × 620	198 × 900 × 620
	Outdoor	mm	541 × 663 × 290	541 × 663 × 290	542 × 799 × 290	542 × 799 × 290
Weight	Indoor	kg	17	17	17	20
	Outdoor	kg	23	25	32	33
Connection Pipe Diameter (Liquid/Gas)		mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/12.70
Drain port Diameter (I.D./O.D.)		mm	25/32	25/32	25/32	25/32
Max. Pipe Length (Pre-Charge)		m	15 (15)	15 (15)	20 (15)	20 (15)
Max. Height Difference			15	15	15	15
Operating Range	Cooling	°CDB	-10 to 46	-10 to 46	-10 to 46	-10 to 46
	Heating		-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)		R32 (675)	R32 (675)	R32 (675)	R32 (675)
Charge	kg (CO ₂ eq-T)		0.6 (0.405)	0.7 (0.473)	0.85 (0.574)	0.9 (0.608)

Medium Static Pressure Duct (Standard)



Model name	Indoor unit		ARXG22KMLB	ARXG24KMLA	ARXG30KMLA	ARXG36KMLA	ARXG45KMLA	ARXG36KMLA	ARXG45KMLA
	Outdoor unit		AOYG22KATA	AOYG24KATA	AOYG30KATA	AOYG36KATA	AOYG45KATA	AOYG36QTA	AOYG45QTA
Power Source									
Capacity	Cooling	kW	2.5 (0.9-6.3)	3.5 (0.9-7.4)	4.5 (0.9-10.6)	5.5 (0.9-12.6)	6.0 (0.9-12.6)	6.8 (0.9-12.6)	7.5 (0.9-12.6)
	Heating		3.2 (0.9-3.9)	4.1 (0.9-4.4)	5.0 (0.9-5.3)	6.0 (0.9-6.3)	7.0 (0.9-7.4)	7.5 (0.9-8.6)	10.0 (2.7-10.8)
Input Power	Cooling/Heating	kW	0.69/0.88	1.09/1.17	1.37/1.42	1.66/1.71	1.92/2.00	2.19/2.00	2.78/2.77
EER	Cooling	W/W	3.62	3.21	3.14	3.13	3.13	3.11	3.06
COP	Heating		3.64	3.50	3.52	3.51	3.50	3.75	3.61
Pdesign	Cooling/Heating (-10°C)	kW	2.5/2.3	3.5/2.8	4.3/3.2	5.2/3.8	6.0/4.4	6.8/5.4	8.5/8.0
SEER	Cooling	W/W	5.9	5.8	5.6	5.8	5.8	5.9	5.6
SCOP	Heating		3.8	3.8	3.8	3.8	3.8	3.9	3.9
Energy Efficiency Class	Cooling	A+	A+	A+	A+	A+	A+	A+	A+
Max. Operating Current	Cooling/Heating	A	6.9/6.9	7.7/7.7	9.2/9.2	10.1/10.1	11.6/11.6	12.6/12.6	22.5/22.5
Annual Energy Consumption	Cooling	kWh/a	148	211	269	313	531	594	-
Heating			847	1,031	1,177	1,398	1,935	2,871	3,122
Moisture Removal		I/h	0.7	1.3	1.5	2.0	2.1	2.5	3.0
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	28/27/26/25	29/28/26/25	32/30/28/26	32/30/29/27	31/29/27/25	31/29/27/25	39/35/30/26
	Indoor (Heating)	H/M/L/Q	28/26/25/24	29/28/26/24	32/30/28/25	32/30/29/27	31/29/27/25	31/29/27/25	42/35/30/26
	Outdoor (Cooling/Heating)	High	47/48	49/50	50/51	51/52	52/53	54/55	55/55
Sound Power Level	Indoor (Cooling/Heating)	High	57/57	58/58	60/60	58/58	60/62	65/69	65/70
	Outdoor (Cooling/Heating)	High	60/60	62/62	63/63	63/64	64/65	68/69	70/70
	Indoor/Outdoor (Cooling)	High	600/1,610	650/1,630	800/1,670	940/1,710	1,100/2,240	1,100/2,285	1,900/3,750
Airflow Rate	Indoor/Outdoor (Heating)	High	600/1,550	650/1,410	800/1,580	940/1,840	1,100/2,240	1,100/2,350	2,100/3,750
Static pressure range (Standard)		Pa	0 to 90 (25)	30 - 150 (35)	30 - 150 (35)	30 - 150 (47)			
Net Dimensions H x W x D	Indoor	mm	198 × 700 × 620	198 × 700 × 620	198 × 900 × 620	198 × 900 × 620	270 × 1,135 × 700	270 × 1,135 × 700	270 × 1,135 × 700
	Outdoor	mm	541 × 663 × 290	541 × 663 × 290	542 × 799 × 290	542 × 799 × 290	632 × 799 × 290	632 × 799 × 290	788 × 940 × 320
Weight	Indoor	kg	17	17	17	20	35	35	38
	Outdoor	kg	23	25	32	33	36	38	52
Connection Pipe Diameter (Liquid/Gas)		mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/12.70	6.35/12.70	6.35/12.70	6.35/12.70
Drain port Diameter (I.D./O.D.)		mm	25/32	25/32	25/32	25/32	25/32	25/32	25/32
Max. Pipe Length (Pre-Charge)		m	15 (15)	15 (15)	20 (15)	20 (15)	25 (20)	30 (30)	30 (30)
Max. Height Difference			15	15	15	15	20	30	30
Operating Range	Cooling	°CDB	-10 to 46	-10 to 46	-10 to 46				
	Heating		-15 to 24	-15 to 24	-15 to 24				
Refrigerant	Type (Global Warming Potential)		R32 (675)	R32 (675)	R32 (675)				
Charge	kg (CO ₂ eq-T)		1.0 (0.743)	1.25 (0.844)	1.90 (1.283)	2.40 (1.620)	1.90 (0.743)	1.25 (0.844)	1.90 (1.283)

Ceiling



<tbl

Feature Summary

Type	Wall-mounted type				Wall-mounted type		
Series	Designer Series		Standard Series		ECO Series		
Model name							
	ASYG07/09/12/14KGTF, ASYG07/09/12/14KGTE	ASYG07/09/12/14KETF ASYG07/09/12/14KETF-B, ASYG07/09/12/14KETE ASYG07/09/12/14KETE-B	ASYG07/09/12/14KMCF, ASYG07/09/12/14KMCE	ASYG18/24KMTE	ASYH30/36KMTB	ASYG07/09/12KPCE	ASYG18/24KLCA
Energy-Saving Features		●			●		
		●	●	●	●	●	●
		○	○	○	○	○	
		○	○	○	○		
Features for Comfort							
		●	●	●	●	●	●
		●	●	●	●	●	
		●	●	●	●	●	
		●	●	●	●	●	●
		●	●	●		●	●
					●	●	
		●	●	●	●	●	●
		●	●	●	●	●	●
		○	○	○	○	○	
Convenience Features		●	●	●	●	●	●
		●	●	●	●	●	●
		●	●	○	●	●	
		○	○	○	○	○	
		●	●	●	●	●	●
		○	○	○	○	○	
		○	○	○	○	○	
		● (KGTF) ○ (KGTE)	● (KETF, KETF-B) ○ (KETE, KETE-B)	● (KMCF) ○ (KMCE)	○	○	○
						○	
						●	
Clean Features		●	●	●	●	●	
		●	●	●	●	●	
		●	●	●	●	●	●
		○	○	○	○	○	○
Installation/ Support							
					●		
					○		

*1 For details of Multi System Control function, refer to C-011. *2 Wired remote controller (UTY-RNRYZ5) is required to use Special Cooling function.

O: Optional function

Feature Summary

Type	Cassette			Duct			Duct			Floor	Ceiling
Series	Compact 4-way Flow Series	Circular Flow Series	Slim (With drain pump)	Medium Static Pressure (High-Efficiency & Comfort)	Medium Static Pressure (Compact size)	Medium Static Pressure (Standard)	High Static Pressure	Big			
Model name	AUXG 09/12/14/18/22/24 KVLA	AUXG 18/22/24/30/36/45/54 KRLB	ARXG 09/12/14/18 KLLAP	ARXH 22/24/30/36/45/54 KMTAP	ARXG 12/14/18/22/ 24/30/36/45/54 KHTAP	ARXG22KMLB ARXG24/30/36/45KMLA	ARXG45/54KHTB	ARYG60LHTA	ARYG72/90LHTA	AGYG09/12/14KVCA	ABYG 18/22/24/30/36/45/54 KRTA
Energy-Saving Features											
Features for Comfort											
Convenience Features											
Clean Features											
Installation/Support											

*1 For details of Multi System Control function, refer to C-011. *2 Wired remote controller (UTY-RNRYZ5) is required to use Special Cooling function.

O: Optional function



Light Commercial & Residential MULTI-SPLIT

- M-002 Multi-split Overview
- M-004 Multi-split Outdoor Units Lineup
- M-006 2-unit to 5-unit Multi-split Connectable Indoor Units
- M-007 6-unit Multi-split Connectable Indoor Units
- M-008 Simultaneous Multi-split Connectable Indoor Units
- M-040 Feature Summary



Refrigerant type R32 models

- M-010 2-unit to 5-unit Multi-split
- M-016 Simultaneous Multi-split Twin/Triple

M-020 2-unit to 5-unit Multi-split Indoor Units Specifications

M-024 2-unit to 5-unit Multi-split Combination Table



Refrigerant type R410A models

6-unit Multi-split


- M-014 6-unit Multi-split

Simultaneous Multi-split Type

- M-018 Simultaneous Multi-split Twin/Triple/Double Twin

M-022 6-unit Multi-split Indoor Units Specifications

M-034 6-unit Multi-split Combination Table

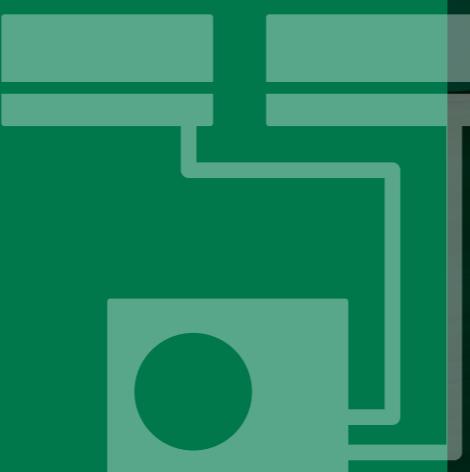

A single outdoor unit drives multiple indoor units, offering greater flexibility in system configuration.


If you wish to keep an entire floor or two or more rooms comfortable, we recommend you choose a multi-split air conditioning system with a single outdoor unit. Choose one that meets your air conditioning requirements from the variety of models we offer. You can mix and match indoor and outdoor units as you wish to build the system that best suits your needs.

Multi-split Overview

Multi-split's space-saving outdoor unit allows for connections of up to eight indoor units for multiple rooms. Added to the lineup are models compatible with the new R32 refrigerant, offering environmentally friendly comfort in homes, offices, stores, and various other settings.



3-unit, 4-unit, 5-unit Multi-split Types

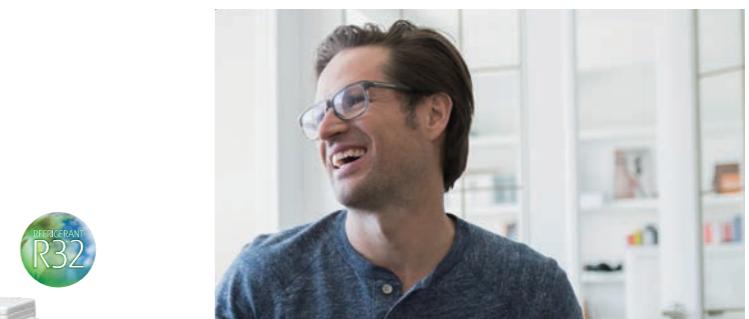

2-unit Multi-split



2-unit to 6-unit Multi-split

Recommended for residences, offices, and other situations where multiple rooms require air conditioning. Each of the 2 to 6 connected indoor units can also be operated individually. Operation control, time scheduling for each room, and energy-saving options can be set on both individual and central remote controllers. The outdoor unit is designed to save space and is flexible enough to be installed on a balcony or underneath a waist-high window.



Twin/Triple



Simultaneous Multi-split Type

Suitable for a small building, the entrance hall of a small office, meeting rooms, educational facilities, and other roomy areas where multiple indoor units need to be operated simultaneously. Up to 4 indoor units can be operated simultaneously, making the system perfect for air conditioning not only offices with large spaces, but also spaces with atypical layouts.



Multi-split Outdoor Units Lineup



FUJITSU GENERAL (Euro) GmbH participates in the ECP program for AC.
Check ongoing validity of certificate:
www.eurovent-certification.com
*Models so marked are not ECC certified.

		Class Cooling rated capacity (kW)	14 4.0	18 5.0	18 5.4	24 6.8	30 8.0	36 10.0	45 12.5	45 14.0	54 14.0	72 19.0	90 22.0
2-unit, 3-unit, 4-unit, 5-unit Multi-split	2-unit Multi-split Up to 2 units			AOYG14KBTAA2	AOYG18KBTAA2								
	3-unit Multi-split Up to 3 units					AOYG18KBTAA3	AOYG24KBTAA3						
	4-unit Multi-split Up to 4 units							AOYG30KBTAA4					
	5-unit Multi-split Up to 5 units								AOYG36KBTAA5*1				
6-unit Multi-split	6-unit Multi-split Up to 6 units									AOYG45LBLA6*			
Simultaneous Multi-split	Twin Single-phase								AOYG36KBTB	AOYG45KBTB			
	Twin 3-phase								AOYG36KRTA	AOYG45KRTA			
	Twin/Triple Single-phase										AOYG54KBTB		
	Twin/Triple 3-phase										AOYG54KRTA		
	Twin/Triple/ Double Twin 3-phase											AOYG72LRLA	AOYG90LRLA

Notes: **1. 2-unit Multi-split:** Connectable indoor units are 2 units.

AOYG14KBTAA2: Total capacity of indoor units connected must be between 4.0 kW and 6.0 kW.

AOYG18KBTAA2: Total capacity of indoor units connected must be between 4.0 kW and 7.5 kW.

2. 3-unit Multi-split: Connectable indoor units are 2 to 3 units.

AOYG18KBTAA3: Total capacity of indoor units connected must be between 4.0 kW and 8.5 kW.

AOYG24KBTAA3: Total capacity of indoor units connected must be between 4.0 kW and 10.5 kW.

3. 4-unit Multi-split: Connectable indoor units are 2 to 4 units.

AOYG30KBTAA4: Total capacity of indoor units connected must be between 7.5 kW and 14.0 kW.

4. 5-unit Multi-split: Connectable indoor units are 2 to 5 units

AOYG36KBTAA5: Total capacity of indoor units connected must be between 7.5 kW and 15.5 kW.

5. 6-unit Multi-split: Connectable indoor units are 2 to 6 units.

AOYG45LBLA6: Total capacity of indoor units connected must be between 9.5 kW and 18.0 kW.

Cooling rated capacity: *1: 9.5 kW

2-unit to 5-unit Multi-split Connectable Indoor Units



Type	2-unit		3-unit		4-unit		5-unit	
Model name	AOYG14KBTa2	AOYG18KBTa2	AOYG18KBTa3	AOYG24KBTa3	AOYG30KBTa4	AOYG36KBTa5		
Multi-split Type Outdoor Unit								
Capacity (kW)	Cooling	4.0	5.0	5.4	6.8	8.0	9.5	
	Heating	4.4	5.6	6.8	8.0	9.6	10.6	
Indoor Unit		BTU	kW Class					
	7,000	2.0	●	●	●	●	●	
	9,000	2.5	●	●	●	●	●	
	12,000	3.5	●	●	●	●	●	
	14,000	4.0	—	●	●	●	●	
	18,000	5.0	—	—	●	●	●	
	22,000	6.0	—	—	—	●	●	
	24,000	7.0	—	—	—	●	●	
	9,000	2.5	●	●	●	●	●	
	12,000	3.5	●	●	●	●	●	
	14,000	4.0	—	●	●	●	●	
	7,000	2.0	●	●	●	●	●	
	9,000	2.5	●	●	●	●	●	
	12,000	3.5	●	●	●	●	●	
	14,000	4.0	—	●	●	●	●	
	18,000	5.0	—	—	●	●	●	
	22,000	6.0	—	—	—	●	●	
	7,000	2.0	●	●	●	●	●	
	9,000	2.5	●	●	●	●	●	
	12,000	3.5	●	●	●	●	●	
	14,000	4.0	—	●	●	●	●	
	18,000	5.0	—	—	●	●	●	
	7,000	2.0	●	●	●	●	●	
	9,000	2.5	●	●	●	●	●	
	12,000	3.5	●	●	●	●	●	
	14,000	4.0	—	●	●	●	●	
	18,000	5.0	—	—	●	●	●	
	22,000	6.0	—	—	—	●	●	
	18,000	5.0	—	—	—	●	●	
	22,000	6.0	—	—	—	●	●	

6-unit Multi-split Connectable Indoor Units



Type	6-unit	
Model name	AOYG45LBLA6	
Multi-split Type Outdoor Unit		
Capacity (kW)	Cooling	12.5
	Heating	13.5
Indoor Unit		BTU
	7,000	2.0
	9,000	2.5
	12,000	3.5
	14,000	4.0
	18,000	5.0
	24,000	7.0
	9,000	2.5
	12,000	3.5
	14,000	4.0
	7,000	2.0
	9,000	2.5
	12,000	3.5
	14,000	4.0
	18,000	5.0
	14,000	4.0
	18,000	5.0
	7,000	2.0
	9,000	2.5
	12,000	3.5
	14,000	4.0
	18,000	5.0
	7,000	2.0
	9,000	2.5
	12,000	3.5
	14,000	4.0
	18,000	5.0

Simultaneous Multi-split Connectable Indoor Units



Type	4HP		5HP		6HP	
Model name	AOYG36KBTB	AOYG36KRTA	AOYG45KBTB	AOYG45KRTA	AOYG54KBTB	AOYG54KRTA
Simultaneous Multi-split Type Outdoor Unit						
Capacity (kW)	Cooling	9.5	12.1	13.4	13.4	
	Heating	10.8	13.5	15.5	15.5	
Indoor Unit	BTU	kW Class	Twin	Triple	Double Twin	
	18,000	5.0	● × 2	–	–	● × 3
	22,000	6.5	–	● × 2	–	–
	24,000	7.0	–	–	● × 2	–
	18,000	5.0	● × 2	–	–	● × 3
	22,000	6.5	–	● × 2	–	–
	24,000	7.0	–	–	● × 2	–
	18,000	5.0	● × 2	–	–	● × 3
	22,000	6.5	–	● × 2	–	–
	24,000	7.0	–	–	● × 2	–
Separation tube	UTP-SX236A (18/22/24)			UTP-SX354A (18)		

Note : Please be aware that 2-wired group control is not possible with Simultaneous Multi-split.



Type	8HP		10HP		
Model name	AOYG72LRLA		AOYG90LRLA		
Simultaneous Multi-split Outdoor Unit					
Capacity (kW)	Cooling	19.0	22.0		
	Heating	22.4	27.0		
Indoor Unit	BTU	kW Class	Twin	Triple	
	18,000	5.0	–	–	
	22,000	6.5	–	–	
	24,000	7.0	–	● × 3	
	30,000	8.8	–	–	
	36,000	10.6	● × 2	–	
	45,000	12.5	–	–	
	18,000	5.0	–	–	
	24,000	7.0	● × 4	–	
	30,000	8.8	–	–	
	36,000	10.6	● × 2	–	
	45,000	12.5	–	–	
	24,000	7.0	● × 3	–	
	30,000	8.8	–	–	
	36,000	10.6	● × 2	–	
	45,000	12.5	–	–	
	18,000	5.0	–	● × 4	
	22,000	6.5	–	–	
	24,000	7.0	● × 3	–	
	30,000	8.8	–	–	
	36,000	10.6	● × 2	–	
	45,000	12.5	–	–	
Separation tube	UTP-SX272A × 1	UTP-SX372A × 1	UTP-SX272A × 1, UTP-SX236A × 2	UTP-SX272A × 1	UTP-SX372A × 1

2-unit, 3-unit, 4-unit, 5-unit, Multi-split

ALL
DC


High energy saving

With the adoption of a high-efficiency DC twin-rotary compressor, all models achieved an energy efficiency scale of A+++ for cooling and A++ for heating.

Rank
Cooling
A+++
Heating
A++

SEER
8.7*
SCOP
4.7

*: 2-unit 14 class

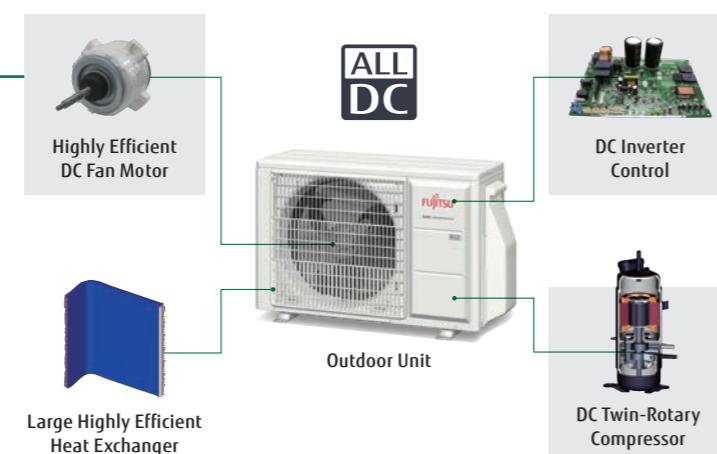


R32 refrigerant model

In addition to its high energy efficiency, the R32 refrigerant has a larger volumetric capacity than the R410A refrigerant, which means the R32 refrigerant models require less refrigerant charge than the R410A models.

	Pre-charge refrigerant amount (kg)	
	R32	R410A
2-unit 14 class	0.9	1.25
2-unit 18 class	1.02	1.30
3-unit 18 class	1.8	2.2
3-unit 24 class	1.8	2.2
4-unit 30 class	2.2	3.3
5-unit 36 class	2.5	4.0

Quiet operation

The sound power level is reduced by up to 7 dB compared to the current R410 models.

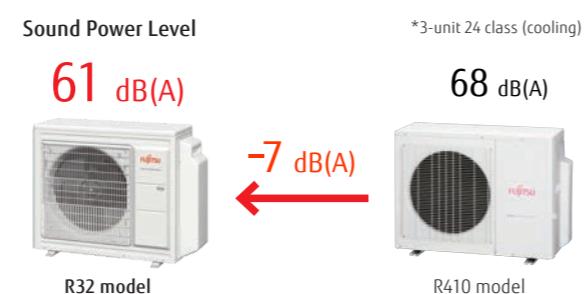


Space-saving installation

Multiple indoor units can be connected to 1 outdoor unit by long piping as well. Unlike a single type, the outdoor unit can be installed in the most space-saving location.




Compact design

Unlike a single type, the outdoor unit can be installed in the most space-saving location.

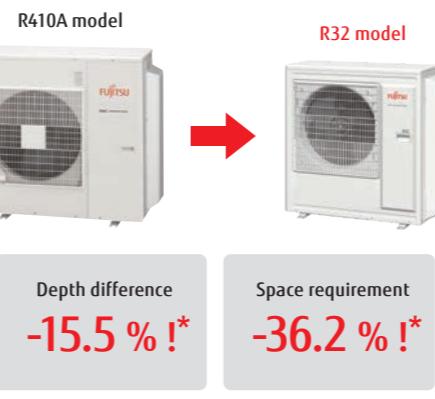

Easy evacuation

All connected pipes and indoor units can be evacuated quickly via our centralized valve method. Requires evacuation only once.

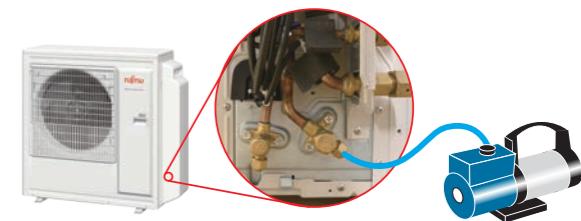

Wide range of indoor units with various models

We offer 41 models in 5 types in a capacity range from 2.0 kW to 6.0 kW. Wide range of requirements can be realized from private homes through to large shops and hotels.



Models equipped with the New R32 Refrigerant

Wall-mounted type with sophisticated design

Designer Series



Standard Series



Middle and small capacity models are available. This makes installation easier in small spaces.



MULTI-SPLIT
2-unit: Aoyg14Kbta2 / Aoyg18Kbta2
3-unit: Aoyg18Kbta3 / Aoyg24Kbta3
4-unit: Aoyg30Kbta4
5-unit: Aoyg36Kbta5

Specifications (2-unit)

Model name	AOYG14KBTA2		AOYG18KBTA2	
Power Source	Single phase, ~230 V, 50 Hz			
Rated Capacity (Min. - Max.)	Cooling kW	4.0 (1.4-4.6)	5.0 (1.7-5.8)	
	Heating	4.4 (1.1-5.5)	5.6 (1.8-6.6)	
EER	Cooling W/W	4.12	4.03	
COP	Heating	4.63	4.59	
Sound Pressure Level (High)	Cooling dB(A)	47	47	
	Heating	49	50	
Sound Power Level (High)	Cooling	60	60	
	Heating	62	62	
Airflow Rate	Cooling/Heating m³/h	1,670/1,670	1,960/2,020	
Net Dimensions H × W × D	mm	542 × 799 × 290	632 × 799 × 290	
Weight	kg	33	37	
Connection Pipe Diameter	Liquid mm	6.35 × 2	6.35 × 2	
	Gas	9.52 × 2	9.52 × 2	
Max. Pipe Length	Total/Each m	30/20	30/20	
Max. Height Difference	Between Outdoor Unit and Each Indoor Unit m	15	15	
	Between Indoor Units	10	10	
Operating Range	Cooling °CDB	-10 to 46	-10 to 46	
	Heating	-15 to 24	-15 to 24	
Refrigerant	Type (Global Warming Potential)	R32 (675)	R32 (675)	
Charge	kg (CO ₂ eq-T)	0.9 (0.608)	1.02 (0.689)	

Specifications (3-unit)

Model name	AOYG18KBTA3		AOYG24KBTA3	
Power Source	Single phase, ~230 V, 50 Hz			
Rated Capacity (Min. - Max.)	Cooling kW	5.4 (1.8-7.0)	6.8 (1.8-8.5)	
	Heating	6.8 (2.0-8.0)	8.0 (2.0-9.2)	
EER	Cooling W/W	4.78	3.90	
COP	Heating	4.89	4.40	
Sound Pressure Level (High)	Cooling dB(A)	46	48	
	Heating	49	53	
Sound Power Level (High)	Cooling	59	61	
	Heating	61	67	
Airflow Rate	Cooling/Heating m³/h	2,220/2,160	2,270/2,730	
Net Dimensions H × W × D	mm	716 × 820 × 315	716 × 820 × 315	
Weight	kg	46	46	
Connection Pipe Diameter	Liquid mm	6.35 × 3	6.35 × 3	
	Gas	9.52 × 3	9.52 × 2, 12.70 × 1 adapter [12.70 → 9.52] × 1	
Max. Pipe Length	Total/Each m	50/25	50/25	
Max. Height Difference	Between Outdoor Unit and Each Indoor Unit m	15	15	
	Between Indoor Units	10	10	
Operating Range	Cooling °CDB	-10 to 46	-10 to 46	
	Heating	-15 to 24	-15 to 24	
Refrigerant	Type (Global Warming Potential)	R32 (675)	R32 (675)	
Charge	kg (CO ₂ eq-T)	1.8 (1.215)	1.8 (1.215)	















Specifications (4-unit, 5-unit)

Model name	AOYG30KBTA4		AOYG36KBTA5	
Power Source	Single phase, ~230 V, 50 Hz			
Rated Capacity (Min. - Max.)	Cooling kW	8.0 (2.4-10.1)	9.5 (3.0-11.0)	
	Heating	9.6 (3.0-11.2)	10.6 (3.5-12.0)	
EER	Cooling W/W	3.90	3.80	
COP	Heating	4.55	4.50	
Sound Pressure Level (High)	Cooling dB(A)	50	52	
	Heating	54	55	
Sound Power Level (High)	Cooling	63	65	
	Heating	66	68	
Airflow Rate	Cooling/Heating m³/h	2,400/2,950	2,450/2,900	
Net Dimensions H × W × D	mm	884 × 820 × 315	884 × 820 × 315	
Weight	kg	55	59	
Connection Pipe Diameter	Liquid mm	6.35 × 4	6.35 × 5	
	Gas	9.52 × 2, 12.70 × 2 adapter [12.70 → 9.52] × 2	9.52 × 3, 12.70 × 2 adapter [12.70 → 9.52] × 2 adapter [9.52 → 12.70] × 1	
Max. Pipe Length*	Total/Each m	70/25	75/25	
Max. Height Difference	Between Outdoor Unit and Each Indoor Unit m	15	15	
	Between Indoor Units	10	10	
Operating Range	Cooling °CDB	-10 to 46	-10 to 46	
	Heating	-15 to 24	-15 to 24	
Refrigerant	Type (Global Warming Potential)	R32 (675)	R32 (675)	
Charge	kg (CO ₂ eq-T)	2.2 (1.485)	2.5 (1.688)	

*Length not applicable when floor units are connected. For details, refer to the installation manual.

Dimensions

(Unit: mm)

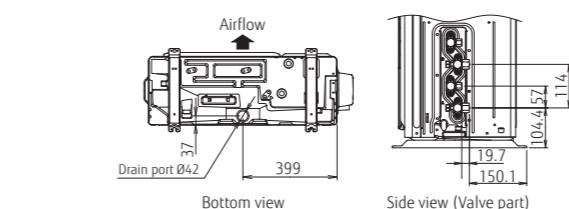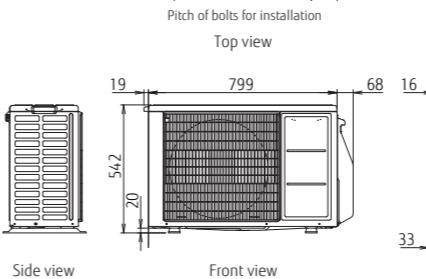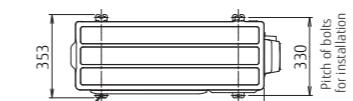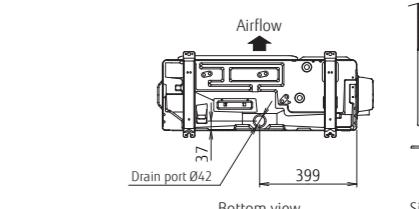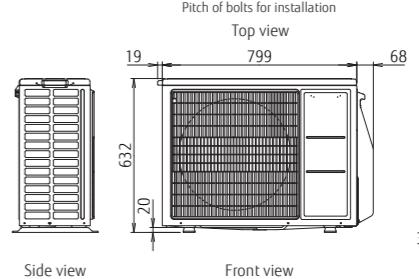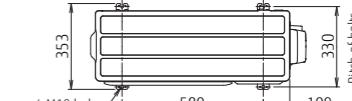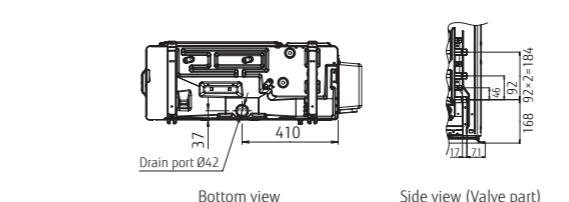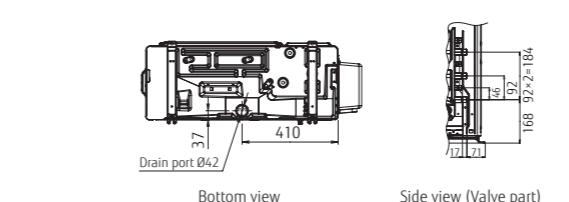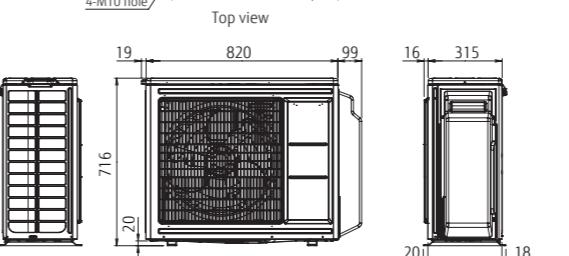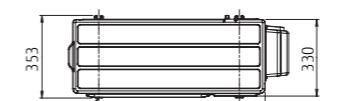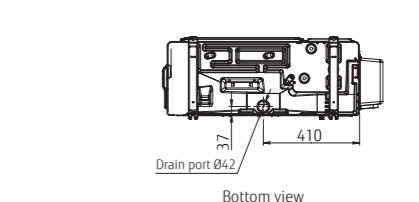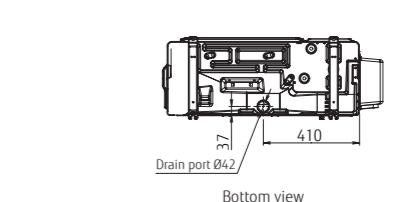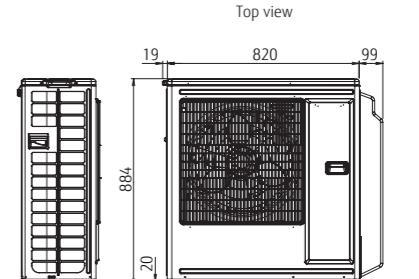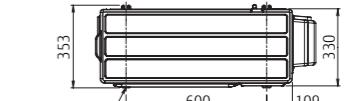2-unit: Aoyg14Kbta2

2-unit: Aoyg18Kbta2

3-unit: Aoyg18Kbta3 / Aoyg24Kbta3

4-unit: Aoyg30Kbta4
5-unit: Aoyg36Kbta5


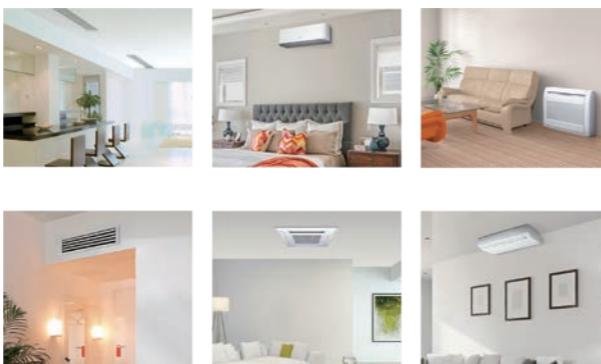
6-unit Multi-split



ALL
DC

A wide variety of models to choose from

We offer 16 models in 4 types in a capacity range from 2.0 kW to 4.0 kW. Wide range of requirements can be realized from private homes through to large shops and hotels.




Compact design

Multiple indoor units can be connected to 1 outdoor unit by long piping as well. Unlike a single type, the outdoor unit can be installed in the most space-saving location.



Easy installation

All connected pipes and indoor units can be evacuated quickly via our centralized valve method. Requires evacuation only once.

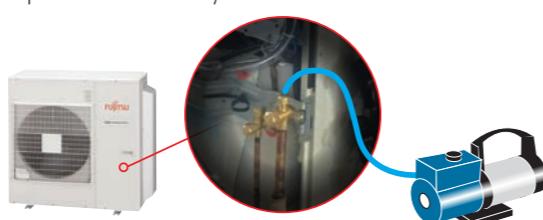

Central & Individual control

- Batched control of up to 8 indoor units. Unified setting of room temperature, airflow volume, and local control restrictions across units.
- Language can be selected from English, French, German, Greek, Italian, Portuguese, Russian, Spanish, or Turkish.
- Large backlit LED screen
- Large easy-to-see operation panel

Max. Controllable
1 multi-system
Max. Controllable
6 indoor units



6-unit: AOYG45LBLA6




Specifications (5-unit, 6-unit)


Model name	AOYG45LBLA6	
Power Source	Single phase, ~230 V, 50 Hz	
Rated Capacity (Min. - Max.)	Cooling	kW
	Heating	
EER	Cooling	
	Heating	
COP	Cooling	
	Heating	
Sound Pressure Level (High)	Cooling	
	Heating	
Sound Power Level (High)	Cooling	
	Heating	
Airflow Rate	Cooling/Heating	m³/h
Net Dimensions H × W × D	mm	998 × 970 × 370
Weight	kg	94
Connection Pipe Diameter	Liquid	6.35 × 6
	Gas	9.52 × 4, 12.70 × 2
Max. Pipe Length	Total/Each	80/25
Max. Height Difference	Between Outdoor Unit and Each Indoor Unit.	15
	Between Indoor Units.	10
Operating Range	Cooling	°CDB
	Heating	-10 to 46
Refrigerant	Type (Global Warming Potential)	R410A (2,088)
	Charge kg (CO ₂ eq-T)	4.00 (8.352)

Dimensions


(Unit: mm)

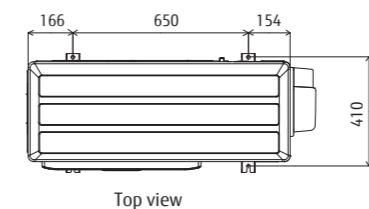


Top view

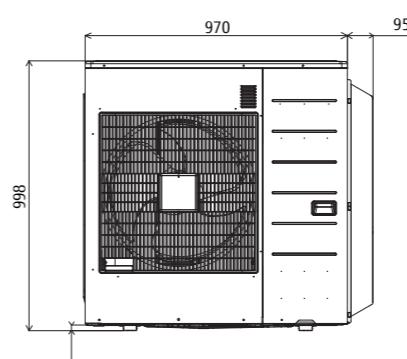

Front view

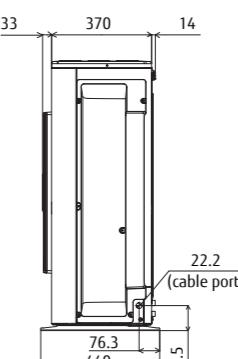

Side view

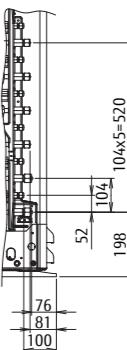


Simultaneous Multi-split Type Twin/Triple

ALL
DC


Meets a variety of installation needs from offices to commercial spaces, with up to 3 indoor units in the same room connected to an outdoor unit.

Select indoor units according to floor layout and heat load estimated by the number of people working in the room and the direction and intensity of sunlight entering the room. Perfect airflow distribution can be achieved for optimum comfort.

Installation according to floor layout



Installation according to lighting conditions



Design flexibility


Slim & Compact Design

The outdoor unit in this series is 22.7%* shorter* than a twin-fan outdoor unit. The reduced height makes it easy to install in tight spaces.



Flexible installation

Pipe length of up to 50 m and a height difference of up to 30 m can be accommodated. Multi-split systems can be installed in large residences and multi-story buildings.

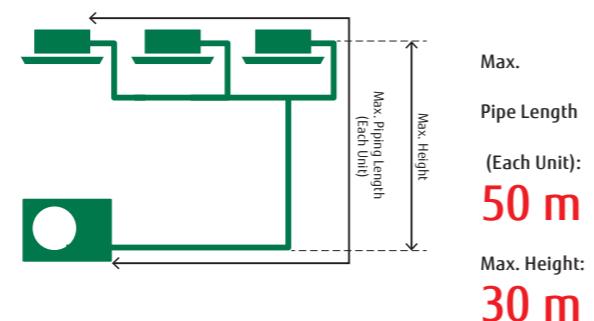

New lineup of indoor units

The indoor units, available in 6 models of 3 types, can be selected according to room size and conditions.



Compact Cassette



Slim Duct



Duct

Note : Please be aware that 2-wired group control is not possible with Simultaneous Multi-split.

**Model: AOYG36KBTB / AOYG45KBTB / AOYG54KBTB
AOYG36KRTA [3-phase] / AOYG45KRTA [3-phase] / AOYG54KRTA [3-phase]**



36

45/54

Specifications (Indoor units/Outdoor units)

Indoor Units Model name	Compact Cassette		
	AUXG18KVLA	AUXG22KVLA	AUXG24KVLA
Power Source			Single phase, ~230 V, 50 Hz
Airflow Rate	Cooling H/M/L/Q Heating H/M/L/Q	m³/h	680/580/490/410 800/680/580/450
Net Dimensions H × W × D	mm	245 × 570 × 570	245 × 570 × 570
Weight	kg	15	16
Cassette Grille		UTG-UFYF-W	UTG-UFYF-W

Indoor Units Model name	Duct		
	ARXG18KLLAP	ARXG22KMLB	ARXG24KMLA
Power Source			Single phase, ~230 V, 50 Hz
Airflow Rate	Cooling H/M/L/Q Heating H/M/L/Q	m³/h	940/880/820/750 940/880/820/750
Net Dimensions H × W × D	mm	1,100 × 910 × 750/580	1,100 × 910 × 750/580
Weight	kg	20	35

Outdoor Units Model name	AOYG36KBTB			AOYG45KBTB	AOYG54KBTB	AOYG36KRTA	AOYG45KRTA	AOYG54KRTA
	Cooling	Heating	kW	9.5	12.1	13.4	9.5	12.1
Power Source								3-phase, ~400 V, 50 Hz
Pdesign	Cooling Heating (-10°C)	kW	9.5 8.7	-	-	9.5 8.7	-	-
SEER	Cooling	W/W	6.10	-	-	6.10	-	-
SCOP	Heating		4.00	-	-	4.00	-	-
Annual Energy Consumption	Cooling Heating	kWh/a	545 3,044	-	-	545 3,044	-	-
Energy Efficiency Class	Cooling Heating		A++ A+	-	-	A++ A+	-	-
Sound Pressure Level (High)	Cooling Heating	dB(A)	55 55	57 57	57 59	55 57	57 59	57 59
Sound Power Level (High)	Cooling Heating		70 70	71 71	73 73	70 71	71 73	70 73
Airflow Rate	Cooling/Heating	m³/h	3,750/3,750	4,450/4,450	4,450/4,450	3,750/3,750	4,450/4,450	4,450/4,450
Net Dimensions H × W × D	mm	788 × 940 × 320	998 × 940 × 320	998 × 940 × 320	998 × 940 × 320	788 × 940 × 320	998 × 940 × 320	998 × 940 × 320
Weight	kg	52	67	67	67	53	67	67
Connection Pipe Diameter (Liquid/Gas)	mm	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88
Max. Pipe Length (Pre-Charge)	m	50 (30)	50 (30)	50 (30)	50 (30)	50 (30)	50 (30)	50 (30)
Max. Height Difference		30	30	30	30	30	30	30
Operating Range	Cooling Heating	°CDB	-15 to 46 -15 to 24	-15 to 46 -15 to 24	-15 to 46 -15 to 24	-15 to 46 -15 to 24	-15 to 46 -15 to 24	-15 to 46 -15 to 24
Refrigerant	Type (Global Warming Potential) Charge	kg (CO ₂ eq-T)	R32 (675) 1.90 (1.283)	R32 (675) 2.70 (1.823)	R32 (675) 2.70 (1.823)	R32 (675) 1.90 (1.283)	R32 (675) 2.70 (1.823)	R32 (675) 2.70 (1.823)
Separation tube			UTP-SX236A (Twin) UTP-SX236A (Twin)	UTP-SX236A (Twin) UTP-SX236A (Twin)	UTP-SX236A (Twin) UTP-SX354A (Triple)	UTP-SX236A (Twin) UTP-SX354A (Triple)	UTP-SX236A (Twin) UTP-SX354A (Triple)	UTP-SX236A (Twin) UTP-SX354A (Triple)



* Indoor units of different types and capacity cannot be connected.

* The above specifications apply when used with a cassette type indoor unit.



Dimensions

(Unit: mm)

AOYG36KBTB / AOYG36KRTA

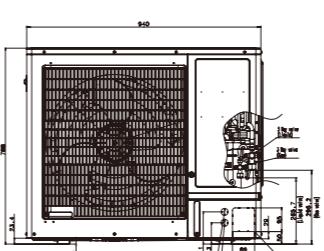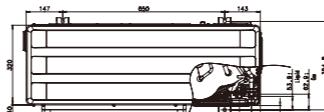

AOYG45KBTB / AOYG54KBTB AOYG45KRTA / AOYG54KRTA

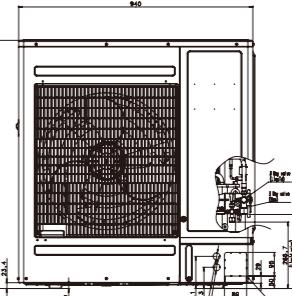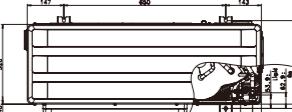


Simultaneous Multi-split Type

Twin/Triple/Double Twin

REFRIGERANT
R410AALL
DC


Meets a variety of installation needs from an open-plan office to a retail store, with up to 4 indoor units connected to an outdoor unit.

Select indoor units according to floor layout and heat load estimated by the number of people working in the room and the direction and intensity of sunlight entering the room. Perfect airflow distribution can be achieved for optimum comfort.

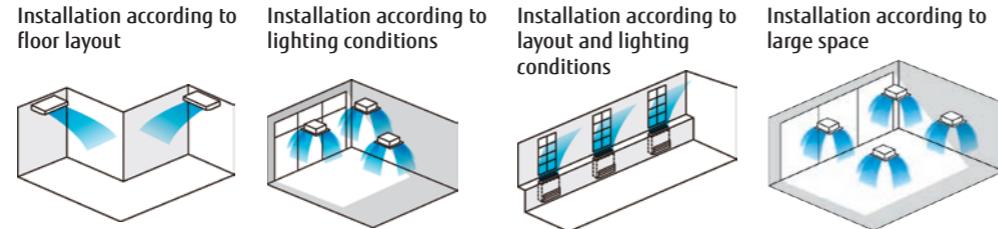

Simultaneous control

Up to 16 indoor units can be controlled simultaneously with a wired remote controller.

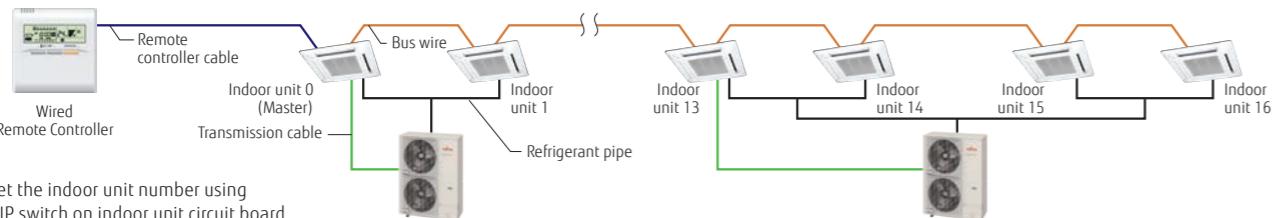

Set the indoor unit number using DIP switch on indoor unit circuit board.

*The following functions are not provided by a wireless remote controller: Timer operation, Sleep Timer operation, 10°C Heat operation

Indoor unit lineup

The indoor units, available in 18 models of 6 types, can be selected according to room size and conditions.



Model: AOYG72LRLA [3-phase] / AOYG90LRLA [3-phase]



Specifications (Indoor units/Outdoor units)

Indoor Units Model name	Compact Cassette, Cassette					
	AUYG18LVLB	AUYG22LVL	AUYG24LVL	AUYG30LRLE	AUYG36LRLE	AUYG45LRLA
Power Source	Single phase, ~230 V, 50 Hz					
Airflow Rate	Cooling H/M/L/Q Heating H/M/L/Q	m³/h	750/610/520/410 800/710/600/450	930/830/600/450 930/860/700/530	930/830/600/450 1,800/1,400/1,270/1,150	1,800/1,400/1,270/1,150 1,900/1,640/1,460/1,250
Net Dimensions H × W × D	mm	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	288 × 840 × 840	288 × 840 × 840
Weight	kg	15	16	16	26	26
Cassette Grille		UTG-UFYD-W				UTG-UGYA-W

Indoor Units Model name	Duct				
	ARYG18LLTB	ARYG24LMLA	ARYG30LMLE	ARYG36LMLE	ARYG45LMLA
Power Source	Single phase, ~230 V, 50 Hz				
Airflow Rate	Cooling H/M/L/Q Heating H/M/L/Q	m³/h	940/880/820/750 940/880/820/750	1,100/910/750/580 1,100/910/750/580	1,900/1,620/1,270/980 2,100/1,620/1,270/980
Net Dimensions H × W × D	mm	198 × 900 × 620	270 × 1135 × 700	270 × 1135 × 700	270 × 1135 × 700
Weight	kg	23	38	40	40

Indoor Units Model name	Floor/Ceiling, Ceiling				
	ABYG18LVTB	ABYG22LVTA	ABYG24LVTA	ABYG30LRTE	ABYG45LRTE
Power Source	Single phase, ~230 V, 50 Hz				
Airflow Rate	Cooling H/M/L/Q Heating H/M/L/Q	m³/h	780/700/560/500 780/700/560/500	980/820/680/540 980/820/680/540	1,660/1,500/1,200/1,000 1,660/1,500/1,200/1,000
Net Dimensions H × W × D	mm	199 × 990 × 655	199 × 990 × 655	240 × 1660 × 700	240 × 1660 × 700
Weight	kg	27	27	46	46

Outdoor Units Model name	AOYG72LRLA			AOYG90LRLA	
	Cooling	Heating	kW		
Capacity			19.0		22.0
Power Source			22.4		27.0
Sound Pressure Level (High)	Cooling/Heating	dB(A)	55/55	55/57	55/57
Airflow Rate	Cooling/Heating	m³/h	8,400/8,400	8,400/9,000	8,400/9,000
Net Dimensions H × W × D	mm		1,428 × 1,080 × 480	1,428 × 1,080 × 480	1,428 × 1,080 × 480
Weight	kg		163	172	172
Connection Pipe Diameter (Liquid/Gas)	mm		12.7/25.4	12.7/25.4	12.7/25.4
Max. Pipe Length (Pre-Charge)	m		100 (30)	100 (30)	100 (30)
Max. Height Difference			30	30	30
Operating Range	Cooling Heating	°CDB	-15 to 46 -20 to 24	-15 to 46 -20 to 24	-15 to 46 -20 to 24
Refrigerant	Type (Global Warming Potential)		R410A (2,088)	R410A (2,088)	R410A (2,088)
Charge	kg (CO ₂ eq-T)		5.6 (11.693)	7.1 (14.825)	7.1 (14.825)
Separation tube			UTP-SX272A × 1 (Twin)	UTP-SX372A × 1 (Triple)	UTP-SX272A × 1 (Twin)
			UTP-SX236A × 2 (Double Twin)	UTP-SX272A × 1 (Twin)	UTP-SX372A × 1 (Triple)
			UTP-SX254A × 2 (Double Twin)	UTP-SX272A × 1 (Twin)	UTP-SX372A × 1 (Triple)


*: That specification is not fixed yet.

• Indoor units of different types and capacity cannot be connected.

• The above specifications apply when used with a cassette type indoor unit.

Dimensions

(Unit: mm)

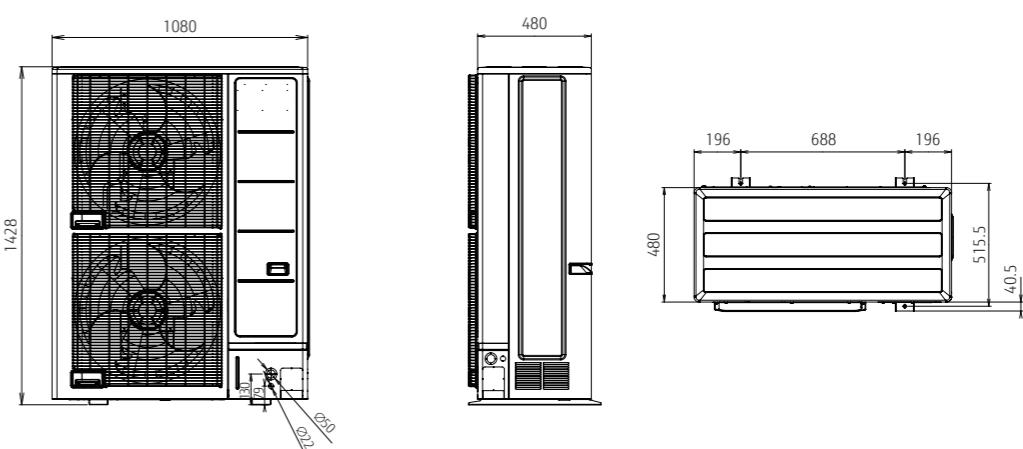

2-unit to 5-unit Multi-split Indoor Units Specifications

Wall-mounted type

NEW

Model name	Indoor unit	ASYG07KGT ASYG07KGTE	ASYG09KGT ASYG09KGTE	ASYG12KGT ASYG12KGTE	ASYG14KGT ASYG14KGTE
kW Class		2.0	2.5	3.5	4.0
Power Source			Single phase, ~230 V, 50 Hz		
Sound Pressure Level	Cooling H/M/L/Q	dB(A)	38/33/29/21	40/34/29/21	40/35/30/21
	Heating		41/35/31/22	42/36/31/22	42/38/33/22
Sound Power Level	Cooling H	dB(A)	54	55	56
	Heating		56	57	58
Airflow Rate	Cooling H/M/L/Q	m³/h	650/540/430/270	700/560/430/270	700/560/430/270
	Heating		720/580/460/330	750/610/470/330	770/640/520/330
Net Dimensions		mm	270 × 834 × 215	270 × 834 × 215	270 × 834 × 215
Weight		kg	10	10	10
Connection Pipe Diameter	Liquid/Gas	mm	6.35/9.52	6.35/9.52	6.35/9.52



Wall-mounted type

NEW

Model name	Indoor unit	ASYG07KETF ASYG07KETF-B ASYG09KETE ASYG07KETE-B	ASYG09KETF ASYG09KETF-B ASYG12KETE ASYG09KETE-B	ASYG12KETF ASYG12KETF-B ASYG14KETE ASYG12KETE-B	ASYG14KETF ASYG14KETF-B ASYG14KETE ASYG14KETE-B
kW Class		2.0	2.5	3.5	4.0
Power Source			Single phase, ~230 V, 50 Hz		
Sound Pressure Level	Cooling H/M/L/Q	dB(A)	38/33/29/21	40/34/29/21	40/35/30/21
	Heating		41/35/31/22	42/36/31/22	42/38/33/22
Sound Power Level	Cooling H	dB(A)	54	55	55
	Heating		56	57	58
Airflow Rate	Cooling H/M/L/Q	m³/h	650/540/430/270	700/560/430/270	700/560/430/270
	Heating		720/580/460/330	750/610/470/330	770/640/520/330
Net Dimensions		mm	295 × 950 (wall side: 840) × 230	295 × 950 (wall side: 840) × 230	295 × 950 (wall side: 840) × 230
Weight		kg	11	11	11
Connection Pipe Diameter	Liquid/Gas	mm	6.35/9.52	6.35/9.52	6.35/9.52



Wall-mounted type

NEW

Model name	Indoor unit	ASYG07KMCF ASYG07KMCE	ASYG09KMCF ASYG09KMCE	ASYG12KMCF ASYG12KMCE	ASYG14KMCF ASYG14KMCE
kW Class		2.0	2.5	3.5	4.0
Power Source			Single phase, ~230 V, 50 Hz		
Sound Pressure Level	Cooling H/M/L/Q	dB(A)	38/33/29/21	40/34/29/21	40/35/30/21
	Heating		41/35/31/22	42/36/31/22	42/38/33/22
Sound Power Level	Cooling H	dB(A)	54	55	55
	Heating		56	57	58
Airflow Rate	Cooling H/M/L/Q	m³/h	650/540/430/320	700/560/430/320	700/560/430/320
	Heating		720/580/460/330	750/610/470/330	780/640/520/330
Net Dimensions		mm	270 × 834 × 222	270 × 834 × 222	270 × 834 × 222
Weight		kg	10	10	10
Connection Pipe Diameter	Liquid/Gas	mm	6.35/9.52	6.35/9.52	6.35/9.52



Wall-mounted type

NEW

Model name	Indoor unit	ASYG18KMTE	ASYG22KMTE	ASYG24KMTE	
kW Class		5.0	6.0	7.0	
Power Source			Single phase, ~230 V, 50 Hz		
Sound Pressure Level	Cooling H/M/L/Q	dB(A)	45/40/35/29	48/40/35/29	49/40/35/29
	Heating		46/40/35/29	48/40/35/29	49/40/35/29
Sound Power Level	Cooling H	dB(A)	60	62	65
	Heating		61	62	65
Airflow Rate	Cooling H/M/L/Q	m³/h	980/810/640/510	1,060/810/640/510	1,170/850/640/510
	Heating		1,020/850/640/510	1,060/850/640/510	1,170/850/640/510
Net Dimensions		mm	280 × 980 × 240	280 × 980 × 240	280 × 980 × 240
Weight		kg	12.5	12.5	12.5
Connection Pipe Diameter	Liquid/Gas	mm	6.35/12.70	6.35/12.70	6.35/12.70



Floor

NEW

Model name	Indoor unit	AGYG09KVCA	AGYG12KVCA	AGYG14KVCA	
kW Class		2.5	3.5	4.0	
Power Source			Single phase, ~230 V, 50 Hz		
Sound Pressure Level	Cooling H/M/L/Q	dB(A)	39/34/28/22	42/36/30/22	44/38/31/22
	Heating		39/35/30/22	42/38/32/22	44/39/33/22
Sound Power Level	Cooling H	dB(A)	52	55	56
	Heating		52	55	56
Airflow Rate	Cooling H/M/L/Q	m³/h	530/440/360/270	600/490/380/270	650/520/400/270
	Heating		530/460/380/270	600/510/410/270	650/540/430/270
Net Dimensions		mm	600 × 740 × 200	600 × 740 × 200	600 × 740 × 200
Weight		kg	14	14	14
Connection Pipe Diameter	Liquid/Gas	mm	6.35/9.52	6.35/9.52	6.35/9.52



Ceiling



Model name	Indoor unit		ABY18KR	ABY22KR
kW Class			5.0	6.0
Power Source			Single phase, ~230 V, 50 Hz	
Sound Pressure Level	Cooling H/M/L/Q	dB(A)	38/36/33/31	42/37/34/31
	Heating		38/36/33/31	42/37/34/31
Sound Power Level	H	dB(A)	53	57
	Heating		53	57
Airflow Rate	Cooling H/M/L/Q	m³/h	840/790/710/650	900/790/710/650
	Heating		840/790/710/650	900/790/710/650
Net Dimensions		mm	235 × 1,080 × 705	235 × 1,080 × 705
Weight		kg	24	24
Connection Pipe Diameter	Liquid/Gas	mm	6.35/12.70	6.35/12.70

Compact Cassette Grid Type



Model name	Indoor unit	AUXG07KVLA	AUXG09KVLA	AUXG12KVLA	AUXG14KVLA	AUXG18KVLA	AUXG22KVLA
kW Class		2.0	2.5	3.5	4.0	5.0	6.0

<tbl_r cells="8" ix="5" maxcspan="1"

6-unit Multi-split Indoor Units Specifications

Compact wall-mounted



Model name	Indoor unit		ASYG07LUCA		ASYG09LUCA		ASYG12LUCA		ASYG14LUCA			
kW Class			kW		2.0		2.5		3.5		4.0	
Power Source	Single phase, ~230 V, 50 Hz											
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	35/30/28/21		36/32/28/21		37/34/31/21		41/36/33/25		
	Heating			35/30/28/21		36/32/28/21		37/34/31/21		41/36/34/27		
Sound Power Level	Cooling	H	dB(A)	53		54		55		59		
	Heating			53		54		55		59		
Airflow Rate	Cooling	H/M/L/Q	m³/h	570/520/470/330		600/550/470/330		660/600/530/330		710/640/570/390		
	Heating			570/520/470/330		600/550/470/330		660/600/530/330		710/640/590/430		
Net Dimensions			mm	282 × 870 × 185		282 × 870 × 185		282 × 870 × 185		282 × 870 × 185		
Weight			kg	9.5		9.5		9.5		9.5		
Connection Pipe Diameter		Liquid/Gas	mm	6.35/9.52		6.35/9.52		6.35/9.52		6.35/12.70		

Wall-mounted type



Model name	Indoor unit			ASYG18LFCA	ASYG24LFCC
KW Class				5.0	7.0
Power Source				Single phase, ~230 V, 50 Hz	
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	43/37/33/26	49/42/37/33
	Heating			42/37/33/25	48/42/37/33
Sound Power Level	Cooling	H	dB(A)	58	64
	Heating			58	64
Airflow Rate	Cooling	H/M/L/Q	m³/h	900/740/620/550	1,120/900/740/620
	Heating			900/740/620/550	1,100/900/740/620
Net Dimensions	mm			320 × 998 × 238	320 × 998 × 238
Weight	kg			14	14
Connection Pipe Diameter	Liquid/Gas	mm		6.35/12.70	6.35/15.88

Compact wall-mounted



Model name	Indoor unit		ASYG07LMCE	ASYG09LMCE	ASYG12LMCE	ASYG14LMCE		
kW Class			kW	2.0	2.5	3.5	4.0	
Power Source				Single phase, ~230 V, 50 Hz				
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	36/32/29/21	37/33/29/21	40/36/30/21	42/38/33/25	
	Heating			36/32/29/22	37/33/29/22	40/36/31/22	42/38/35/27	
Sound Power Level	Cooling	H	dB(A)	51	52	54	56	
	Heating			51	52	55	57	
Airflow Rate	Cooling	H/M/L/Q	m³/h	560/500/430/310	600/520/430/310	660/560/450/310	730/600/530/360	
	Heating			560/500/430/330	600/520/430/330	660/560/470/330	730/615/560/375	
Net Dimensions		mm		270 × 870 × 204	270 × 870 × 204	270 × 870 × 204	270 × 870 × 204	
Weight		kg		8.5	8.5	8.5	8.5	
Connection Pipe Diameter		Liquid/Gas	mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/12.70	

Floor



Model name	Indoor unit		AGYG09LVCA		AGYG12LVCA		AGYG14LVCA		
kW Class			kW	2.5	3.5		4.0		
Power Source	Single phase, ~230 V, 50 Hz								
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	39/34/28/22	42/36/30/22		44/38/31/22		
	Heating			39/35/30/22	42/38/32/22		44/39/33/22		
Sound Power Level	Cooling	H	dB(A)	52	55		56		
	Heating			52	55		56		
Airflow Rate	Cooling	H/M/L/Q	m³/h	530/440/360/270	600/490/380/270		650/520/400/270		
	Heating			530/460/380/270	600/510/410/270		650/540/430/270		
Net Dimensions		mm		600 × 740 × 200	600 × 740 × 200		600 × 740 × 200		
Weight		kg		14	14		14		
Connection Pipe Diameter		Liquid/Gas	mm	6.25/0.52	6.25/0.52		6.25/12.70		

Floor ceiling




Model name	Indoor unit		ABYG14LVTA		ABYG18LVTB
kW Class			4.0		5.0
Power Source			Single phase, ~230 V, 50 Hz		
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	36/34/33/29 (Under ceiling) 39/37/36/32 (Floor console)	41/38/34/32 (Under ceiling) 44/41/37/35 (Floor console)
	Heating			36/34/33/29 (Under ceiling) 39/37/36/32 (Floor console)	41/38/34/32 (Under ceiling) 44/41/37/35 (Floor console)
Sound Power Level	Cooling	H	dB(A)	51	55
	Heating			51	55
Airflow Rate	Cooling	H/M/L/Q	m³/h	640/590/540/480	780/700/560/500
	Heating			640/590/540/480	780/700/560/500
Net Dimensions		mm	199 x 990 x 655		199 x 990 x 655
Weight		kg	27		27
Connection Pipe Diameter		Liquid/Gas	mm	6.35/12.70	6.35/12.70

Compact cassette



Model name	Indoor unit		AUYG07LVLA	AUYG09LVLA	AUYG12LVLB	AUYG14LVLB	AUYG18LVLB	
kW Class			kW	2.0	2.5	3.5	4.0	5.0
Power Source				Single phase, ~230 V, 50 Hz				
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	33/31/29/27	33/31/29/27	37/33/31/28	40/35/32/29	42/37/33/29
	Heating			34/32/29/27	34/32/29/27	37/33/31/28	40/37/34/29	44/40/37/30
Sound Power Level	Cooling	H	dB(A)	46	46	49	52	54
	Heating			47	47	49	52	56
Airflow Rate	Cooling	H/M/L/Q	m³/h	540/490/440/390	540/490/440/390	610/530/470/410	680/580/490/410	750/610/520/410
	Heating			540/490/440/390	540/490/440/390	610/530/470/410	700/620/550/430	800/710/600/450
Net Dimensions		mm	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570
Weight		kg	15	15	15	15	15	15
Panel				UTG-UFYD-W				
Connection Pipe Diameter	Liquid/Gas	mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/12.70	6.35/12.70	6.35/12.70

Mini duct



Model name	Indoor unit		ARYG07LSAP	ARYG09LSAP	ARYG12LSAP	ARYG14LSAP	ARYG18LSAP
kW Class			kW	2.0	2.5	3.5	4.0
Power Source				Single phase, ~230 V, 50 Hz			
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	29/26/24/23	29/26/24/23	31/27/25/23	35/30/27/23
	Heating			29/26/24/23	29/26/24/23	31/27/25/23	35/30/27/23
Sound Power Level	Cooling	H	dB(A)	52	54	55	60
	Heating			53	56	57	62
Airflow Rate	Cooling	H/M/L/Q	m³/h	550/440/390/360	600/450/400/360	650/490/430/360	800/640/530/360
	Heating			550/440/390/360	600/450/400/360	650/490/430/360	800/640/530/360
Net Dimensions		mm	198 × 700 × 450	198 × 700 × 450	198 × 700 × 450	198 × 700 × 450	198 × 900 × 450
Weight		kg	15.5			18.5	
Connection Pipe Diameter		Liquid/Gas	mm	6.35/9.52		6.35/12.70	
External static pressure		Pa		0 to 30		0 to 50	
Drain pump				Standard			

Slim duct



Model name	Indoor unit		ARYG07LLTA	ARYG09LLTA	ARYG12LLTB	ARYG14LLTB	ARYG18LLTB	
kW Class			kW	2.0	2.5	3.5	4.0	5.0
Power Source	Single phase, ~230 V, 50 Hz							
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	28/26/25/24	28/27/26/25	29/28/27/26	32/30/28/26	32/31/30/29
	Heating			28/26/25/24	28/26/25/24	29/28/27/24	33/30/28/25	33/32/31/29
Sound Power Level	Cooling	H	dB(A)	57	57	58	60	58
	Heating			57	57	58	61	59
Airflow Rate	Cooling	H/M/L/Q	m³/h	550/490/470/440	600/550/500/450	650/600/550/480	800/700/600/480	940/880/820/750
	Heating			550/490/470/440	600/550/500/450	650/600/550/480	800/700/600/480	940/880/820/750
Net Dimensions		mm	198 × 700 × 620	198 × 700 × 620	198 × 700 × 620	198 × 700 × 620	198 × 900 × 620	
Weight		kg	17	19	19	19	23	
Connection Pipe Diameter	Liquid/Gas	mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/12.7	6.35/12.70	
External static pressure		Pa	0 to 90					
Drain pump			Standard					

2-unit Multi-split Combination Table-Cooling/Heating

2-unit Multi-split cooling

AOYG14KBTA2	Combination of Indoor Units	Cooling Operation							
		Cooling Capacity			Input Power (Min. - Max.)	EER	Seasonal Data		
		Unit 1 kW	Unit 2 kW	Total Capacity (Min. - Max.) kW			Pdesign kW	SEER	Energy efficiency class
2-unit connection	7 7	2.00	2.00	4.00 (1.4-4.6)	0.97 (0.25-1.20)	4.12	4.0	8.7	A+++
	7 9	1.75	2.25	4.00 (1.4-4.6)	0.97 (0.25-1.20)	4.12	4.0	8.7	A+++
	7 12	1.47	2.53	4.00 (1.4-4.6)	0.97 (0.25-1.20)	4.12	4.0	8.7	A+++
	9 9	2.00	2.00	4.00 (1.4-4.6)	0.97 (0.25-1.20)	4.12	4.0	8.7	A+++
	9 12	1.71	2.29	4.00 (1.4-4.6)	0.97 (0.25-1.20)	4.12	4.0	8.7	A+++

Notes: •7: 7000 Btu/h/9: 9000 Btu/h/12: 12000 Btu/h models

•The above specifications apply when connected with a wall-mounted [KG] unit.

•2 or more indoor units should be connected.

•Cooling capacity is determined based on 27°CDB/19°CWB (indoor temperature) and 35°CDB (outdoor temperature).

•Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)

•Total capacity of indoor units connected must be between 4.0 kW and 6.0 kW.

AOYG18KBTA2	Combination of Indoor Units	Cooling Operation							
		Cooling Capacity			Input Power (Min. - Max.)	EER	Seasonal Data		
		Unit 1 kW	Unit 2 kW	Total Capacity (Min. - Max.) kW			Pdesign kW	SEER	Energy efficiency class
2-unit connection	7 7	2.00	2.00	4.00 (1.7-5.0)	0.92 (0.25-1.23)	4.35	4.0	8.8	A+++
	7 9	2.00	2.50	4.50 (1.7-5.7)	1.07 (0.25-1.45)	4.22	4.5	8.7	A+++
	7 12	1.84	3.16	5.00 (1.7-5.8)	1.24 (0.25-1.55)	4.03	5.0	8.6	A+++
	7 14	1.67	3.33	5.00 (1.7-5.8)	1.24 (0.25-1.55)	4.03	5.0	8.6	A+++
	9 9	2.50	2.50	5.00 (1.7-5.8)	1.24 (0.25-1.55)	4.03	5.0	8.6	A+++
	9 12	2.14	2.86	5.00 (1.7-5.8)	1.24 (0.25-1.55)	4.03	5.0	8.6	A+++
	9 14	1.96	3.04	5.00 (1.7-5.8)	1.24 (0.25-1.55)	4.03	5.0	8.6	A+++
	12 12	2.50	2.50	5.00 (1.7-5.8)	1.24 (0.25-1.55)	4.03	5.0	8.6	A+++
	12 14	2.31	2.69	5.00 (1.7-5.8)	1.24 (0.25-1.55)	4.03	5.0	8.6	A+++

Notes: •7: 7000 Btu/h/9: 9000 Btu/h/12: 12000 Btu/h/14: 14000 Btu/h models

•The above specifications apply when connected with a wall-mounted [KG] unit.

•2 or more indoor units should be connected.

•Cooling capacity is determined based on 27°CDB/19°CWB (indoor temperature) and 35°CDB (outdoor temperature).

•Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)

•Total capacity of indoor units connected must be between 4.0 kW and 7.5 kW.

2-unit Multi-split heating

AOYG14KBTA2	Combination of Indoor Units	Heating Operation							
		Heating Capacity			Input Power (Min. - Max.)	COP	Seasonal Data		
		Unit 1 kW	Unit 2 kW	Total Capacity (Min. - Max.) kW			Pdesign kW	SCOP	Energy efficiency class
2-unit connection	7 7	2.20	2.20	4.40 (1.1-5.5)	0.95 (0.25-1.65)	4.63	3.5	4.7	A++
	7 9	1.92	2.48	4.40 (1.1-5.5)	0.95 (0.25-1.65)	4.63	3.5	4.7	A++
	7 12	1.62	2.78	4.40 (1.1-5.5)	0.95 (0.25-1.65)	4.63	3.5	4.7	A++
	9 9	2.20	2.20	4.40 (1.1-5.5)	0.95 (0.25-1.65)	4.63	3.5	4.7	A++
	9 12	1.89	2.51	4.40 (1.1-5.5)	0.95 (0.25-1.65)	4.63	3.5	4.7	A++

Notes: •7: 7000 Btu/h/9: 9000 Btu/h/12: 12000 Btu/h models

•The above specifications apply when connected with a wall-mounted [KG] unit.

•2 or more indoor units should be connected.

•Heating capacity is determined based on 20°CDB (indoor temperature) and 7°CDB/6°CWB (outdoor temperature).

•Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)

•Total capacity of indoor units connected must be between 4.0 kW and 6.0 kW.

AOYG18KBTA2	Combination of Indoor Units	Heating Operation							
		Heating Capacity			Input Power (Min. - Max.)	COP	Seasonal Data		
		Unit 1 kW	Unit 2 kW	Total Capacity (Min. - Max.) kW			Pdesign kW	SCOP	Energy efficiency class
2-unit connection	7 7	2.40	2.40	4.80 (1.7-5.6)	0.99 (0.25-1.35)	4.85	3.8	4.7	A++
	7 9	2.40	3.00	5.40 (1.7-6.4)	1.15 (0.25-1.60)	4.70	4.0	4.7	A++
	7 12	2.06	3.54	5.60 (1.7-7.0)	1.22 (0.25-1.80)	4.59	4.2	4.7	A++
	7 14	1.87	3.73	5.60 (1.7-7.0)	1.22 (0.25-1.80)	4.59	4.2	4.7	A++
	9 9	2.80	2.80	5.60 (1.7-7.0)	1.22 (0.25-1.80)	4.59	4.2	4.7	A++
	9 12	2.40	3.20	5.60 (1.7-7.0)	1.22 (0.25-1.80)	4.59	4.2	4.7	A++
	9 14	2.19	3.41	5.60 (1.7-7.0)	1.22 (0.25-1.80)	4.59	4.2	4.7	A++
	12 12	2.80	2.80	5.60 (1.7-7.0)	1.22 (0.25-1.80)	4.59	4.2	4.7	A++
	12 14	2.58	3.02	5.60 (1.7-7.0)	1.22 (0.25-1.80)	4.59	4.2	4.7	A++

Notes: •7: 7000 Btu/h/9: 9000 Btu/h/12: 12000 Btu/h/14: 14000 Btu/h models

•The above specifications apply when connected with a wall-mounted [KG] unit.

•2 or more indoor units should be connected.

•Heating capacity is determined based on 20°CDB (indoor temperature) and 7°CDB/6°CWB (outdoor temperature).

•Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)

•Total capacity of indoor units connected must be between 4.0 kW and 7.5 kW.

3-unit Multi-split Combination Table-Cooling/Heating

3-unit Multi-split cooling

AOYG18KBTa3	Combination of Indoor Units	Cooling Operation								
		Cooling Capacity				Input Power (Min. - Max.)	EER	Seasonal Data		
		Unit 1 kW	Unit 2 kW	Unit 3 kW	Total Capacity (Min. - Max.) kW			Pdesign kW	SEER	Energy efficiency
2-unit connection	7 7 -	2.00	2.00	-	4.00 (1.8-5.0)	0.86 (0.35-1.35)	4.65	4.0	8.3	A++
	7 9 -	2.00	2.50	-	4.50 (1.8-5.7)	1.03 (0.35-1.54)	4.36	4.5	8.2	A++
	7 12 -	1.99	3.41	-	5.40 (1.8-6.8)	1.41 (0.35-1.85)	3.83	5.4	8.0	A++
	7 14 -	1.80	3.60	-	5.40 (1.8-7.0)	1.41 (0.35-1.90)	3.83	5.4	8.0	A++
	9 9 -	2.50	2.50	-	5.00 (1.8-6.4)	1.23 (0.35-1.74)	4.06	5.0	8.1	A++
	9 12 -	2.31	3.09	-	5.40 (1.8-7.0)	1.41 (0.35-1.90)	3.83	5.4	8.0	A++
	9 14 -	2.11	3.29	-	5.40 (1.8-7.0)	1.41 (0.35-1.90)	3.83	5.4	8.0	A++
	12 12 -	2.70	2.70	-	5.40 (1.8-7.0)	1.41 (0.35-1.90)	3.83	5.4	8.0	A++
	12 14 -	2.49	2.91	-	5.40 (1.8-7.0)	1.41 (0.35-1.90)	3.83	5.4	8.0	A++
	14 14 -	2.70	2.70	-	5.40 (1.8-7.0)	1.41 (0.35-1.90)	3.83	5.4	8.0	A++
	7 7 7	1.80	1.80	5.40 (1.8-7.0)	1.13 (0.35-1.90)	4.78	5.4	8.6	A+++	
	7 7 9	1.64	1.64	5.40 (1.8-7.0)	1.13 (0.35-1.90)	4.78	5.4	8.6	A+++	
	7 7 12	1.45	1.45	5.40 (1.8-7.0)	1.13 (0.35-1.90)	4.78	5.4	8.6	A+++	
	7 7 14	1.35	1.35	5.40 (1.8-7.0)	1.13 (0.35-1.90)	4.78	5.4	8.6	A+++	
3-unit connection	7 9 9	1.52	1.94	5.40 (1.8-7.0)	1.13 (0.35-1.90)	4.78	5.4	8.6	A+++	
	7 9 12	1.35	1.74	5.40 (1.8-7.0)	1.13 (0.35-1.90)	4.78	5.4	8.6	A+++	
	7 9 14	1.26	1.62	5.40 (1.8-7.0)	1.13 (0.35-1.90)	4.78	5.4	8.6	A+++	
	9 9 9	1.80	1.80	5.40 (1.8-7.0)	1.13 (0.35-1.90)	4.78	5.4	8.6	A+++	
	9 9 12	1.62	2.16	5.40 (1.8-7.0)	1.13 (0.35-1.90)	4.78	5.4	8.6	A+++	

AOYG24KBTa3	Combination of Indoor Units	Cooling Operation								
		Cooling Capacity				Input Power (Min. - Max.)	EER	Seasonal Data		
		Unit 1 kW	Unit 2 kW	Unit 3 kW	Total Capacity (Min. - Max.) kW			Pdesign kW	SEER	Energy efficiency
2-unit connection	7 7 -	2.00	2.00	-	4.00 (1.8-5.0)	0.86 (0.35-1.35)	4.65	4.0	8.3	A++
	7 9 -	2.00	2.50	-	4.50 (1.8-5.7)	1.03 (0.35-1.54)	4.36	4.5	8.2	A++
	7 12 -	2.00	3.50	-	5.50 (1.8-6.8)	1.46 (0.35-1.85)	3.77	5.5	8.0	A++
	7 14 -	2.00	4.00	-	6.00 (1.8-7.5)	1.73 (0.35-2.20)	3.48	6.0	7.6	A++
	7 18 -	1.90	4.90	-	6.80 (1.8-8.5)	2.26 (0.35-2.65)	3.01	6.8	6.9	A++
	9 9 -	2.50	2.50	-	5.00 (1.8-6.4)	1.23 (0.35-1.74)	4.06	5.0	8.1	A++
	9 12 -	2.50	3.50	-	6.00 (1.8-7.5)	1.73 (0.35-2.20)	3.48	6.0	7.6	A++
	9 14 -	2.50	4.00	-	6.50 (1.8-8.2)	2.04 (0.35-2.46)	3.19	6.5	7.2	A++
	9 18 -	2.27	4.53	-	6.80 (1.8-8.5)	2.26 (0.35-2.65)	3.01	6.8	6.9	A++
	12 12 -	3.40	3.40	-	6.80 (1.8-8.5)	2.26 (0.35-2.65)	3.01	6.8	6.9	A++
	12 14 -	3.14	3.66	-	6.80 (1.8-8.5)	2.26 (0.35-2.65)	3.01	6.8	6.9	A++
	12 18 -	2.72	4.08	-	6.80 (1.8-8.5)	2.26 (0.35-2.65)	3.01	6.8	6.9	A++
	14 14 -	3.40	3.40	-	6.80 (1.8-8.5)	2.26 (0.35-2.65)	3.01	6.8	6.9	A++
	14 18 -	2.98	3.82	-	6.80 (1.8-8.5)	2.26 (0.35-2.65)	3.01	6.8	6.9	A++
3-unit connection	7 7 7	2.00	2.00	6.00 (1.8-7.5)	1.37 (0.35-2.20)	4.37	6.0	8.6	A+++	
	7 7 9	2.00	2.50	6.50 (1.8-8.2)	1.59 (0.35-2.46)	4.08	6.5	8.5	A+++	
	7 7 12	1.83	3.14	6.80 (1.8-8.5)	1.74 (0.35-2.65)	3.90	6.8	8.5	A+++	
	7 7 14	1.70	3.40	6.80 (1.8-8.5)	1.74 (0.35-2.65)	3.90	6.8	8.5	A+++	
	7 7 18	1.49	3.82	6.80 (1.8-8.5)	1.74 (0.35-2.65)	3.90	6.8	8.5	A+++	
	7 9 9	1.90	2.45	6.80 (1.8-8.5)	1.74 (0.35-2.65)	3.90	6.8	8.5	A+++	
	7 9 12	1.70	2.19	6.80 (1.8-8.5)	1.74 (0.35-2.65)	3.90	6.8	8.5	A+++	
	7 9 14	1.59	2.04	3.17	6.80 (1.8-8.5)	1.74 (0.35-2.65)	3.90	6.8	8.5	A+++
	7 9 18	1.40	3.60	6.80 (1.8-8.5)	1.74 (0.35-2.65)	3.90	6.8	8.5	A+++	
	7 12 12	1.54	2.63	6.80 (1.8-8.5)	1.74 (0.35-2.65)	3.90	6.8	8.5	A+++	
	7 12 14	1.44	2.89	6.80 (1.8-8.5)	1.74 (0.35-2.65)	3.90	6.8	8.5	A+++	
	7 14 14	1.36	2.72	6.80 (1.8-8.5)	1.74 (0.35-2.65)	3.90	6.8	8.5	A+++	
	9 9 9	2.27	2.27	6.80 (1.8-8.5)	1.74 (0.35-2.65)	3.90	6.8	8.5	A+++	
	9 9 12	2.04	2.72	6.80 (1.8-8.5)	1.74 (0.35-2.65)	3.90	6.8	8.5	A+++	
	9 9 14	1.91	2.98	6.80 (1.8-8.5)	1.74 (0.35-2.65)	3.90	6.8	8.5	A+++	
	9 9 18	1.70	3.40	6.80 (1.8-8.5)	1.74 (0.35-2.65)	3.90	6.8	8.5	A+++	
	9 12 12	1.86	2.47	2.47	6.80 (1.8-8.5)	1.74 (0.35-2.65)	3.90	6.8	8.5	A+++
	9 12 14	1.75	2.33	2.72	6.80 (1.8-8.5)	1.74 (0.35-2.65)	3.90	6.8	8.5	A+++
	12 12 12	2.27	2.27	6.80 (1.8-8.5)	1.74 (0.35-2.65)	3.90	6.8	8.5	A+++	

Notes: •7: 7000 Btu/h/9: 9000 Btu/h/12: 12000 Btu/h/14: 14000 Btu/h/18: 18000 Btu/h models

•The above specifications apply when connected with a wall-mounted unit.

•2 or more indoor units should be connected.

•Cooling capacity is determined based on 27°CDB/19°CWB (indoor temperature) and 35°CDB (outdoor temperature).

4-unit Multi-split Combination Table-Cooling/Heating

4-unit Multi-split cooling

AOYG30KBTA4	Combination of Indoor Units	Cooling Operation								
		Cooling Capacity				Input Power (Min. - Max.)	EER	Seasonal Data		
		Unit 1 kW	Unit 2 kW	Unit 3 kW	Unit 4 kW			Pdesign kW	SEER	Energy efficiency
2-unit connection	7 22 - -	2.00	6.00	-	-	8.00 (2.4-10.1)	2.67 (0.45-3.25)	3.00	8.0	A++
	7 24 - -	1.81	6.19	-	-	8.00 (2.4-10.1)	2.67 (0.45-3.25)	3.00	8.0	A++
	9 22 - -	2.32	5.68	-	-	8.00 (2.4-10.1)	2.67 (0.45-3.25)	3.00	8.0	A++
	9 24 - -	2.18	5.82	-	-	8.00 (2.4-10.1)	2.67 (0.45-3.25)	3.00	8.0	A++
	12 18 - -	3.20	4.80	-	-	8.00 (2.4-10.1)	2.67 (0.45-3.25)	3.00	8.0	A++
	12 22 - -	2.82	5.18	-	-	8.00 (2.4-10.1)	2.67 (0.45-3.25)	3.00	8.0	A++
	12 24 - -	2.67	5.33	-	-	8.00 (2.4-10.1)	2.67 (0.45-3.25)	3.00	8.0	A++
	14 18 - -	3.50	4.50	-	-	8.00 (2.4-10.1)	2.67 (0.45-3.25)	3.00	8.0	A++
	14 22 - -	3.11	4.89	-	-	8.00 (2.4-10.1)	2.67 (0.45-3.25)	3.00	8.0	A++
	14 24 - -	2.95	5.05	-	-	8.00 (2.4-10.1)	2.67 (0.45-3.25)	3.00	8.0	A++
	18 18 - -	4.00	4.00	-	-	8.00 (2.4-10.1)	2.67 (0.45-3.25)	3.00	8.0	A++
	18 22 - -	3.60	4.40	-	-	8.00 (2.4-10.1)	2.67 (0.45-3.25)	3.00	8.0	A++
	18 24 - -	3.43	4.57	-	-	8.00 (2.4-10.1)	2.67 (0.45-3.25)	3.00	8.0	A++
	22 22 - -	4.00	4.00	-	-	8.00 (2.4-10.1)	2.67 (0.45-3.25)	3.00	8.0	A++
3-unit connection	22 24 - -	3.83	4.17	-	-	8.00 (2.4-10.1)	2.67 (0.45-3.25)	3.00	8.0	A++
	24 24 - -	4.00	4.00	-	-	8.00 (2.4-10.1)	2.67 (0.45-3.25)	3.00	8.0	A++
	7 7 12 -	2.00	2.00	3.50	-	7.50 (2.4-9.3)	2.10 (0.45-2.84)	3.57	7.5	A++
	7 7 14 -	2.00	2.00	4.00	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
	7 7 18 -	1.75	1.75	4.50	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
	7 7 22 -	1.56	1.56	4.88	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
	7 7 24 -	1.47	1.47	5.06	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
	7 9 9 -	2.00	2.50	2.50	-	7.00 (2.4-8.9)	1.90 (0.45-2.65)	3.69	7.0	A++
	7 9 12 -	2.00	2.50	3.50	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
	7 9 14 -	1.87	2.40	3.73	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
	7 9 18 -	1.64	2.12	4.24	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
	7 9 22 -	1.47	1.89	4.64	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
	7 9 24 -	1.40	1.80	4.80	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
	7 12 12 -	1.80	3.10	3.10	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
	7 12 14 -	1.70	2.91	3.39	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
3-unit connection	7 12 18 -	1.51	2.59	3.90	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
	7 12 22 -	1.37	2.34	4.29	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
	7 12 24 -	1.30	2.23	4.47	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
	7 14 14 -	1.60	3.20	3.20	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
	7 14 18 -	1.44	2.87	3.69	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
	7 14 22 -	1.30	2.60	4.10	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
	7 14 24 -	1.24	2.49	4.27	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
	7 18 18 -	1.30	3.35	3.35	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
	7 18 22 -	1.19	3.06	3.75	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
	7 18 24 -	1.14	2.94	3.92	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
	9 9 9 -	2.50	2.50	2.50	-	7.50 (2.4-9.6)	2.10 (0.45-3.01)	3.57	7.5	A++
	9 9 12 -	2.40	2.40	3.20	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
	9 9 14 -	2.25	2.25	3.50	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
	9 9 18 -	2.00	2.00	4.00	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
4-unit connection	9 9 22 -	1.80	1.80	4.40	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
	9 9 24 -	1.71	1.71	4.58	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
	9 12 12 -	2.18	2.91	-	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
	9 12 14 -	2.06	2.74	3.20	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
	9 12 18 -	1.85	2.46	3.69	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
	9 12 22 -	1.67	2.23	4.10	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
	9 12 24 -	1.60	2.13	4.27	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
	9 14 14 -	1.94	3.03	3.03	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
	9 14 18 -	1.76	2.73	3.51	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
	9 14 22 -	1.60	2.49	3.91	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
	9 14 24 -	1.53	2.38	4.09	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
	9 18 18 -	1.60	3.20	3.20	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
	12 12 12 -	2.67	2.67	-	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
4-unit connection	12 12 14 -	2.53	2.53	2.94	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
	12 12 18 -	2.29	2.29	3.42	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++
	12 12 22 -	2.09	2.09	3.82	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	A++

5-unit Multi-split Combination Table-Cooling

5-unit Multi-split cooling

AOYG36KBTAS	Combination of Indoor Units	Cooling Operation					Input Power (Min. - Max.)	EER	Seasonal Data		
		Cooling Capacity							Pdesign kW	SEER	Energy efficiency
		Unit 1 kW	Unit 2 kW	Unit 3 kW	Unit 4 kW	Unit 5 kW	Total Capacity (Min. - Max.)	kW	kW		
2-unit connection	7 24 - - - - - 2.00 7.00 - - - - 9.00 (3.0-11.0) 2.91 (0.30-3.45) 3.09 9.0 7.9 A++										
	9 22 - - - - - 2.50 6.00 - - - - 8.50 (3.0-11.0) 2.67 (0.30-3.45) 3.18 8.5 7.9 A++										
	9 24 - - - - - 2.50 7.00 - - - - 9.50 (3.0-11.0) 3.17 (0.30-3.45) 3.00 9.5 7.8 A++										
	12 22 - - - - - 3.50 6.00 - - - - 9.50 (3.0-11.0) 3.17 (0.30-3.45) 3.00 9.5 7.8 A++										
	12 24 - - - - - 3.17 6.33 - - - - 9.50 (3.0-11.0) 3.17 (0.30-3.45) 3.00 9.5 7.8 A++										
	14 22 - - - - - 3.69 5.81 - - - - 9.50 (3.0-11.0) 3.17 (0.30-3.45) 3.00 9.5 7.8 A++										
	14 24 - - - - - 3.50 6.00 - - - - 9.50 (3.0-11.0) 3.17 (0.30-3.45) 3.00 9.5 7.8 A++										
	18 18 - - - - - 4.75 4.75 - - - - 9.50 (3.0-11.0) 3.17 (0.30-3.45) 3.00 9.5 7.8 A++										
	18 22 - - - - - 4.27 5.23 - - - - 9.50 (3.0-11.0) 3.17 (0.30-3.45) 3.00 9.5 7.8 A++										
	18 24 - - - - - 4.07 5.43 - - - - 9.50 (3.0-11.0) 3.17 (0.30-3.45) 3.00 9.5 7.8 A++										
3-unit connection	22 22 - - - - - 4.75 4.75 - - - - 9.50 (3.0-11.0) 3.17 (0.30-3.45) 3.00 9.5 7.8 A++										
	22 24 - - - - - 4.54 4.96 - - - - 9.50 (3.0-11.0) 3.17 (0.30-3.45) 3.00 9.5 7.8 A++										
	24 24 - - - - - 4.75 4.75 - - - - 9.50 (3.0-11.0) 3.17 (0.30-3.45) 3.00 9.5 7.8 A++										
	7 7 14 - - - - 2.00 2.00 4.00 - - - 8.00 (3.0-10.0) 2.26 (0.30-2.88) 3.54 8.0 8.2 A++										
	7 7 18 - - - - 2.00 2.00 5.00 - - - 9.00 (3.0-11.0) 2.68 (0.30-3.45) 3.36 9.0 8.1 A++										
	7 7 22 - - - - 1.85 5.80 - - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
	7 7 24 - - - - 1.75 6.00 - - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
	7 9 12 - - - - 2.00 2.50 3.50 - - - 8.00 (3.0-10.0) 2.26 (0.30-2.88) 3.54 8.0 8.2 A++										
	7 9 14 - - - - 2.00 2.50 4.00 - - - 8.50 (3.0-10.7) 2.46 (0.30-3.27) 3.45 8.5 8.1 A++										
	7 9 18 - - - - 2.00 2.50 5.00 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
4-unit connection	7 9 22 - - - - 1.75 2.25 5.50 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
	7 9 24 - - - - 1.66 2.14 5.70 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
	7 12 12 - - - - 2.00 3.50 3.50 - - - 9.00 (3.0-11.0) 2.68 (0.30-3.45) 3.36 9.0 8.1 A++										
	7 12 14 - - - - 2.00 3.50 4.00 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
	7 12 18 - - - - 1.80 3.08 4.62 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
	7 12 22 - - - - 1.62 2.78 5.10 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
	7 12 24 - - - - 1.55 2.65 5.30 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
	7 14 14 - - - - 1.90 3.80 3.80 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
	7 14 18 - - - - 1.71 3.41 4.38 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
	7 14 22 - - - - 1.55 3.09 4.86 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
5-unit connection	7 14 24 - - - - 1.47 2.96 5.07 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
	7 18 18 - - - - 1.54 3.98 3.98 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
	7 18 22 - - - - 1.41 3.64 4.45 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
	7 18 24 - - - - 1.36 3.49 4.65 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
	9 9 9 - - - - 2.50 2.50 2.50 - - - 7.50 (3.0-9.6) 2.07 (0.30-2.70) 3.63 7.5 8.2 A++										
	9 9 12 - - - - 2.50 2.50 3.50 - - - 9.50 (3.0-10.7) 2.46 (0.30-3.27) 3.45 8.5 8.1 A++										
	9 9 14 - - - - 2.50 2.50 4.00 - - - 9.00 (3.0-11.0) 2.68 (0.30-3.45) 3.36 9.0 8.1 A++										
	9 9 18 - - - - 2.38 2.38 4.74 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
	9 9 22 - - - - 2.14 2.14 5.22 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
	9 9 24 - - - - 2.04 2.04 5.42 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
6-unit connection	9 12 12 - - - - 2.50 3.50 3.50 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
	9 12 14 - - - - 2.44 3.26 3.80 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
	9 12 18 - - - - 2.19 2.92 4.39 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
	9 12 22 - - - - 1.99 2.65 4.86 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
	9 12 24 - - - - 1.90 2.53 5.07 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
	9 14 14 - - - - 2.32 3.59 3.59 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
	9 14 18 - - - - 2.09 3.24 4.17 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
	9 14 22 - - - - 1.90 2.96 4.64 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
	9 14 24 - - - - 1.82 2.83 4.85 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
	9 18 18 - - - - 1.90 3.80 3.80 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
7-unit connection	9 18 22 - - - - 1.74 3.49 4.27 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
	9 18 24 - - - - 1.68 3.35 4.47 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
	9 12 24 - - - - 3.17 3.17 3.17 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
	9 12 28 - - - - 3.00 3.00 3.50 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
	9 12 32 - - - - 2.71 2.71 4.08 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
	9 12 36 - - - - 2.48 2.48 4.54 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
	9 12 40 - - - - 2.38 2.38 4.74 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
	9 12 44 - - - - 2.84 3.33 3.33 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
	9 12 48 - - - - 2.59 3.02 3.89 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
	9 12 52 - - - - 2.38 2.77 4.35 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
8-unit connection	9 12 56 - - - - 2.28 2.66 4.56 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0 A++										
	9 12 60 - - - - 2.38 3.56 3.56 - - - 9.50 (3.0-11.0) 2.91 (0.30-3.45) 3.27 9.5 8.0										

5-unit Multi-split Combination Table-Heating

5-unit Multi-split heating

AOYG36KBTAS	Combination of Indoor Units	Heating Operation					COP	Seasonal Data			
		Heating Capacity						Pdesign kW	SCOP	Energy efficiency	
		Unit 1 kW	Unit 2 kW	Unit 3 kW	Unit 4 kW	Unit 5 kW					
2-unit connection	7 24 -	2.39	8.21	-	-	-	10.60 (3.5-12.0)	2.65 (0.25-3.25)	4.00	7.0 A+	
	9 22 -	-	3.00	7.20	-	-	10.20 (3.5-12.0)	2.52 (0.25-3.25)	4.04	6.8 A+	
	9 24 -	-	2.89	7.71	-	-	10.60 (3.5-12.0)	2.65 (0.25-3.25)	4.00	7.0 A+	
	12 22 -	-	3.74	6.86	-	-	10.60 (3.5-12.0)	2.65 (0.25-3.25)	4.00	7.0 A+	
	12 24 -	-	3.53	7.07	-	-	10.60 (3.5-12.0)	2.65 (0.25-3.25)	4.00	7.0 A+	
	14 22 -	-	4.12	6.48	-	-	10.60 (3.5-12.0)	2.65 (0.25-3.25)	4.00	7.0 A+	
	14 24 -	-	3.91	6.69	-	-	10.60 (3.5-12.0)	2.65 (0.25-3.25)	4.00	7.0 A+	
	18 18 -	-	5.30	5.30	-	-	10.60 (3.5-12.0)	2.65 (0.25-3.25)	4.00	7.0 A+	
	18 22 -	-	4.77	5.83	-	-	10.60 (3.5-12.0)	2.65 (0.25-3.25)	4.00	7.0 A+	
	18 24 -	-	4.54	6.06	-	-	10.60 (3.5-12.0)	2.65 (0.25-3.25)	4.00	7.0 A+	
3-unit connection	22 22 -	-	5.30	5.30	-	-	10.60 (3.5-12.0)	2.65 (0.25-3.25)	4.00	7.0 A+	
	22 24 -	-	5.07	5.53	-	-	10.60 (3.5-12.0)	2.65 (0.25-3.25)	4.00	7.0 A+	
	24 24 -	-	5.30	5.30	-	-	10.60 (3.5-12.0)	2.65 (0.25-3.25)	4.00	7.0 A+	
	7 7 14 -	-	2.40	2.40	4.80	-	9.60 (3.5-11.2)	2.25 (0.25-2.87)	4.26	6.5 A+	
	7 7 18 -	-	2.32	2.32	5.96	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
	7 7 22 -	-	2.06	2.06	6.48	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
	7 7 24 -	-	1.95	1.95	6.70	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
	7 9 12 -	-	2.40	3.00	4.20	-	9.60 (3.5-11.2)	2.25 (0.25-2.87)	4.26	6.5 A+	
	7 9 14 -	-	2.40	3.00	4.80	-	10.20 (3.5-12.0)	2.42 (0.25-3.25)	4.21	6.8 4.4 A+	
	7 9 18 -	-	2.18	2.81	5.61	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
4-unit connection	7 9 22 -	-	1.95	2.51	6.14	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
	7 9 24 -	-	1.85	2.39	6.36	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
	7 12 12 -	-	2.40	4.10	6.10	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
	7 12 14 -	-	2.25	3.85	4.50	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
	7 12 18 -	-	2.00	3.44	5.16	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
	7 12 22 -	-	1.81	3.10	5.69	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
	7 12 24 -	-	1.72	2.96	5.92	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
	7 14 14 -	-	2.12	4.24	6.24	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
	7 14 18 -	-	1.90	3.81	4.89	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
	7 14 22 -	-	1.73	3.45	5.43	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
5-unit connection	7 14 24 -	-	1.65	3.30	5.65	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
	7 18 18 -	-	1.72	4.44	4.44	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
	7 18 22 -	-	1.58	4.06	4.96	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
	7 18 24 -	-	1.51	3.89	5.20	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
	9 9 9 -	-	3.00	3.00	3.00	-	9.00 (3.5-10.8)	2.09 (0.25-2.70)	4.31	6.0 4.5 A+	
	9 9 12 -	-	3.00	3.00	4.20	-	10.20 (3.5-12.0)	2.42 (0.25-3.25)	4.21	6.8 4.4 A+	
	9 9 14 -	-	2.98	3.26	4.84	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
	9 9 18 -	-	2.65	3.65	5.30	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
	9 9 22 -	-	2.39	3.59	5.82	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
	9 9 24 -	-	2.27	2.27	6.06	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
6-unit connection	9 9 26 -	-	2.90	3.85	3.85	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
	9 12 12 -	-	2.73	3.63	4.24	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
	9 12 18 -	-	2.45	3.26	4.89	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
	9 12 22 -	-	2.22	2.96	5.42	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
	9 12 24 -	-	2.12	2.83	5.65	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
	9 14 14 -	-	2.58	4.01	4.01	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
	9 14 18 -	-	2.33	3.62	4.65	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
	9 14 22 -	-	2.12	3.30	5.18	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
	9 14 24 -	-	2.03	3.16	5.41	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
	9 18 18 -	-	2.12	4.24	4.24	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
7-unit connection	9 18 22 -	-	1.95	3.89	4.76	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
	9 18 24 -	-	1.87	3.74	4.99	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
	12 12 -	-	3.53	3.53	3.53	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
	12 14 -	-	3.35	3.35	3.90	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
	12 18 -	-	3.03	3.03	4.54	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
	12 22 -	-	2.77	2.77	5.06	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A+	
	12 24 -	-	2.65	2.65	5.30	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0 4.4 A	

6-unit Multi-split Combination Table-Cooling

6-unit Multi-split cooling

AOYG45LBLA6	Combination of Indoor Units						Cooling Operation						Input Power (Min. - Max.)	EER	
							Cooling Capacity			Unit 1					
	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW		
2-unit connection	12	24	-	-	-	-	3.50	7.00	-	-	-	-	10.5 (3.5-11.5)	3.06 (0.8-3.32)	3.43
	14	24	-	-	-	-	4.00	7.00	-	-	-	-	11.0 (3.5-12.1)	3.28 (0.8-3.70)	3.35
	18	18	-	-	-	-	5.00	5.00	-	-	-	-	10.0 (3.5-11.5)	2.92 (0.8-3.32)	3.42
	18	24	-	-	-	-	5.00	7.00	-	-	-	-	12.0 (3.5-13.4)	3.75 (0.8-4.46)	3.20
	24	24	-	-	-	-	6.25	6.25	-	-	-	-	12.5 (3.5-14.0)	4.01 (0.8-4.84)	3.12
	7	7	24	-	-	-	2.00	2.00	7.00	-	-	-	11.0 (3.5-12.1)	3.19 (0.8-3.70)	3.45
	7	9	18	-	-	-	2.00	2.50	5.00	-	-	-	9.5 (3.5-10.8)	2.55 (0.8-2.93)	3.73
	7	9	24	-	-	-	2.00	2.50	7.00	-	-	-	11.5 (3.5-12.7)	3.41 (0.8-4.08)	3.37
	7	12	18	-	-	-	2.00	3.50	5.00	-	-	-	10.5 (3.5-11.8)	3.02 (0.8-3.51)	3.48
	7	12	24	-	-	-	2.00	3.50	6.90	-	-	-	12.4 (3.5-13.7)	3.82 (0.8-4.65)	3.25
3-unit connection	7	14	14	-	-	-	2.00	4.00	4.00	-	-	-	10.0 (3.5-11.1)	2.81 (0.8-3.13)	3.56
	7	14	18	-	-	-	2.00	4.00	5.00	-	-	-	11.0 (3.5-12.4)	3.23 (0.8-3.89)	3.41
	7	14	24	-	-	-	1.94	3.89	6.67	-	-	-	12.5 (3.5-14.0)	3.89 (0.8-4.84)	3.21
	7	18	18	-	-	-	2.00	5.00	5.00	-	-	-	12.0 (3.5-13.7)	3.69 (0.8-4.65)	3.25
	7	18	24	-	-	-	1.79	4.59	6.12	-	-	-	12.5 (3.5-14.0)	3.87 (0.8-4.84)	3.23
	7	24	24	-	-	-	1.60	5.45	5.45	-	-	-	12.5 (3.5-14.0)	3.83 (0.8-4.84)	3.26
	9	9	18	-	-	-	2.50	2.50	5.00	-	-	-	10.0 (3.5-11.5)	2.84 (0.8-3.32)	3.52
	9	9	24	-	-	-	2.50	2.50	7.00	-	-	-	12.0 (3.5-13.4)	3.65 (0.8-4.46)	3.29
	9	12	14	-	-	-	2.50	3.50	4.00	-	-	-	10.0 (3.5-11.1)	2.81 (0.8-3.13)	3.56
	9	12	18	-	-	-	2.50	3.50	5.00	-	-	-	11.0 (3.5-12.4)	3.23 (0.8-3.89)	3.41
4-unit connection	9	12	24	-	-	-	2.50	3.33	6.67	-	-	-	12.5 (3.5-14.0)	3.89 (0.8-4.84)	3.21
	9	14	14	-	-	-	2.50	4.00	4.00	-	-	-	10.5 (3.5-11.8)	3.02 (0.8-3.51)	3.48
	9	14	18	-	-	-	2.40	3.72	6.38	-	-	-	12.5 (3.5-14.0)	3.88 (0.8-4.84)	3.22
	9	18	18	-	-	-	2.50	5.00	5.00	-	-	-	12.5 (3.5-14.0)	3.89 (0.8-4.84)	3.21
	9	18	24	-	-	-	2.21	4.41	5.88	-	-	-	12.5 (3.5-14.0)	3.86 (0.8-4.84)	3.24
	9	24	24	-	-	-	1.98	5.26	5.26	-	-	-	12.5 (3.5-14.0)	3.82 (0.8-4.84)	3.27
	12	12	12	-	-	-	3.50	3.50	2.50	-	-	-	10.5 (3.5-11.5)	2.98 (0.8-3.32)	3.52
	12	12	14	-	-	-	3.50	3.50	4.00	-	-	-	11.0 (3.5-12.1)	3.19 (0.8-3.70)	3.45
	12	12	18	-	-	-	3.50	3.50	5.00	-	-	-	12.0 (3.5-13.4)	3.65 (0.8-4.46)	3.29
	12	12	24	-	-	-	3.13	6.24	-	-	-	-	12.5 (3.5-14.0)	3.87 (0.8-4.84)	3.23
5-unit connection	12	14	14	-	-	-	3.50	4.00	4.00	-	-	-	11.5 (3.5-12.7)	3.41 (0.8-4.08)	3.37
	12	14	18	-	-	-	3.50	4.00	5.00	-	-	-	12.5 (3.5-14.0)	3.89 (0.8-4.84)	3.21
	12	14	24	-	-	-	3.00	3.50	6.00	-	-	-	12.5 (3.5-14.0)	3.86 (0.8-4.84)	3.24
	12	18	18	-	-	-	3.12	4.69	4.69	-	-	-	12.5 (3.5-14.0)	3.87 (0.8-4.84)	3.23
	12	18	24	-	-	-	2.78	4.17	5.55	-	-	-	12.5 (3.5-14.0)	3.85 (0.8-4.84)	3.25
	12	24	24	-	-	-	2.50	5.00	5.00	-	-	-	12.5 (3.5-14.0)	3.81 (0.8-4.84)	3.28
	14	14	14	-	-	-	4.00	4.00	4.00	-	-	-	12.0 (3.5-13.4)	3.29 (0.8-4.46)	3.29
	14	14	18	-	-	-	3.80	4.90	4.90	-	-	-	12.5 (3.5-14.0)	3.88 (0.8-4.84)	3.22
	14	14	24	-	-	-	3.37	5.76	-	-	-	-	12.5 (3.5-14.0)	3.85 (0.8-4.84)	3.25
	14	18	18	-	-	-	3.50	4.50	4.50	-	-	-	12.5 (3.5-14.0)	3.86 (0.8-4.84)	3.24
4-unit connection	14	18	24	-	-	-	3.13	4.02	5.35	-	-	-	12.5 (3.5-14.0)	3.83 (0.8-4.84)	3.26
	14	24	24	-	-	-	2.82	4.84	4.84	-	-	-	12.5 (3.5-14.0)	3.80 (0.8-4.84)	3.29
	18	18	18	-	-	-	4.17	4.17	4.17	-	-	-	12.5 (3.5-14.0)	3.85 (0.8-4.84)	3.25
	18	18	24	-	-	-	3.75	5.00	-	-	-	-	12.5 (3.5-14.0)	3.81 (0.8-4.84)	3.28
	18	24	24	-	-	-	2.00	2.00	4.00	-	-	-	10.0 (3.5-11.1)	2.50 (0.8-3.13)	4.00
	18	24	24	14	-	-	2.00	2.00	5.00	-	-	-	11.0 (3.5-12.4)	3.06 (0.8-3.89)	3.59
	18	24	24	18	-	-	1.94	1.94	6.68	-	-	-	12.5 (3.5-14.0)	3.77 (0.8-4.84)	3.32
	18	24	24	24	-	-	2.00	2.00	2.50	-	-	-	10.0 (3.5-11.1)	2.50 (0.8-3.13)	4.00
	18	24	24	24	14	-	2.00	2.00	2.50	4.00	-	-	10.5 (3.5-11.8)	2.79 (0.8-3.51)	3.76
	18	24	24	24	18	-	2.00	2.00	2.50	5.00	-	-	11.5 (3.5-13.0)	3.33 (0.8-4.27)	3.45

6-unit Multi-split Multi Combination Table-Cooling/Heating

6-unit Multi-split cooling

AOYG45LBLA6	Combination of Indoor Units	Cooling Operation						Input Power (Min. - Max.)	EER
		Unit 1 kW	Unit 2 kW	Unit 3 kW	Unit 4 kW	Unit 5 kW	Unit 6 kW		
7	7	7	7	7	7	7	2.00	2.00	3.32 (0.8-4.46)
7	7	7	7	7	7	7	2.00	2.00	3.50
7	7	7	7	7	12	1.86	1.86	1.86	3.52
7	7	7	7	7	14	1.79	1.79	1.79	3.53
7	7	7	7	7	18	1.65	1.65	1.65	3.56
7	7	7	7	7	24	1.48	1.48	1.48	3.59
7	7	7	7	9	9	1.90	1.90	2.45	3.51
7	7	7	7	9	12	1.79	1.79	2.29	3.53
7	7	7	7	9	14	1.72	1.72	2.20	3.54
7	7	7	7	9	18	1.59	1.59	2.05	3.57
7	7	7	7	9	24	1.43	1.43	1.85	3.60
7	7	7	7	12	12	1.68	1.68	2.89	3.55
7	7	7	7	12	14	1.62	1.62	2.78	3.56
7	7	7	7	12	18	1.51	1.51	2.59	3.59
7	7	7	7	14	14	1.56	1.56	3.13	3.57
7	7	7	7	14	18	1.46	1.46	2.92	3.60
7	7	7	9	9	9	1.82	1.82	2.34	3.52
7	7	7	9	9	12	1.72	1.72	2.21	3.54
7	7	7	9	9	14	1.65	1.65	2.12	3.56
7	7	7	9	9	18	1.54	1.54	1.97	3.58
7	7	7	9	9	24	1.62	1.62	2.08	3.56
7	7	7	9	12	12	1.56	1.56	2.68	3.57
7	7	7	9	12	18	1.51	1.51	2.01	3.59
7	7	7	9	14	14	1.46	1.46	2.50	3.60
7	7	7	9	14	18	1.46	1.46	2.92	3.59
7	7	7	9	9	12	1.54	1.54	2.63	3.58
7	7	7	9	12	14	1.48	1.48	2.54	3.59
7	7	7	9	12	18	1.48	1.48	2.98	3.59
7	7	7	9	12	24	1.43	1.43	2.87	3.60
7	7	7	9	14	14	1.46	1.46	2.47	3.57
7	7	7	9	14	18	1.46	1.46	2.91	3.59
7	7	7	9	9	12	1.75	1.75	2.25	3.54
7	7	7	9	9	12	1.65	1.65	2.12	3.56
7	7	7	9	9	16	1.59	1.59	2.05	3.57
7	7	7	9	9	18	1.48	1.48	1.91	3.59
7	7	7	9	9	24	1.51	1.51	2.01	3.57
7	7	7	9	12	12	1.56	1.56	2.50	3.60
7	7	7	9	12	18	1.51	1.51	3.02	3.59
7	7	7	9	12	24	1.54	1.54	2.63	3.58
7	7	7	9	12	14	1.48	1.48	2.54	3.59
7	7	7	9	12	18	1.48	1.48	2.98	3.59
7	7	7	9	12	24	1.43	1.43	2.87	3.60
7	7	7	9	9	12	1.75	1.75	2.25	3.53
7	7	7	9	9	12	1.65	1.65	2.12	3.51
7	7	7	9	9	16	1.59	1.59	2.05	3.50
7	7	7	9	9	18	1.48	1.48	1.91	3.48
7	7	7	9	9	24	1.51	1.51	2.01	3.47
7	7	7	9	12	12	1.56	1.56	2.50	3.47
7	7	7	9	12	18	1.51	1.51	3.02	3.49
7	7	7	9	12	24	1.54	1.54	2.63	3.47
7	7	7	9	12	14	1.48	1.48	2.54	3.47
7	7	7	9	12	18	1.48	1.48	2.98	3.47
7	7	7	9	12	24	1.43	1.43	2.87	3.47
7	7	7	9	9	12	1.75	1.75	2.25	3.41
7	7	7	9	9	12	1.65	1.65	2.12	3.39
7	7	7	9	9	16	1.59	1.59	2.05	3.37
7	7	7	9	9	18	1.48	1.48	1.91	3.36
7	7	7	9	9	24	1.51	1.51	2.01	3.36
7	7	7	9	12	12	1.56	1.56	2.50	3.35
7	7	7	9	12	18	1.51	1.51	3.02	3.35
7	7	7	9	12	24	1.54	1.54	2.63	3.35
7	7	7	9	12	14	1.48	1.48	2.54	3.35
7	7	7	9	12	18	1.48	1.48	2.98	3.35
7	7	7	9	12	24	1.43	1.43	2.87	3.35
7	7	7	9	9	12	1.75	1.75	2.25	3.31
7	7	7	9	9	12	1.65	1.65	2.12	3.29
7	7	7	9	9	16	1.59	1.59	2.05	3.27
7	7	7	9	9	18	1.48	1.48	1.91	3.26
7	7	7	9	9	24	1.51	1.51	2.01	3.26
7	7	7	9	12	12	1.56	1.56	2.50	3.25
7	7	7	9	12	18	1.51	1.51	3.02	3.25
7	7	7	9	12	24	1.54	1.54	2.63	3.25
7	7	7	9	12	14	1.48	1.48	2.54	3.25
7	7	7	9	12	18	1.48	1.48	2.98	3.25
7	7	7	9	12	24	1.43	1.43	2.87	3.25
7	7	7	9	9	12	1.75	1.75	2.25	3.21
7	7	7	9	9	12	1.65	1.65	2.12	3.19
7	7	7	9	9	16	1.59	1.59	2.05	3.17
7	7	7	9	9	18	1.48	1.48	1.91	3.16
7	7	7	9	9	24	1.51	1.51	2.01	3.16
7	7	7	9	12	12	1.56	1.56	2.50	3.15
7	7	7	9	12	18	1.51	1.51	3.02	3.15
7	7	7	9	12	24	1.54	1.54	2.63	3.15
7	7	7	9	12	14	1.48	1.48	2.54	3.15
7	7	7	9	12	18	1.48	1.48	2.98	3.15
7	7	7	9	12	24	1.43	1.43	2.87	3.15
7	7	7	9	9	12	1.75	1.75	2.25	3.11
7	7	7	9	9	12	1.65	1.65	2.12	3.09
7	7	7	9	9	16	1.59	1.59	2.05	3.07
7	7	7	9	9	18	1.48	1.48	1.91	3.06
7	7								

6-unit Multi-split Combination Table-Heating

6-unit Multi-split heating

AOYG45LBLA6	Combination of Indoor Units						Heating Operation						Input Power (Min. - Max.)	COP
							Heating Capacity			Unit 1 kW				
	Unit 1	Unit 2	Unit 3	Unit 4	Unit 5	Unit 6	Total Capacity (Min. - Max.)	Unit 1	Unit 2	Unit 3	Unit 4	Unit 5	Unit 6	
4-unit connection	12	12	12	12	-	-	3.38	3.38	3.38	-	-	13.5 (3.5-16.0)	3.60 (0.7-4.41)	3.75
	12	12	12	14	-	-	3.24	3.24	3.24	3.78	-	13.5 (3.5-16.0)	3.60 (0.7-4.41)	3.75
	12	12	12	18	-	-	3.00	3.00	3.00	4.50	-	13.5 (3.5-16.0)	3.58 (0.7-4.41)	3.77
	12	12	12	24	-	-	2.70	2.70	2.70	5.40	-	13.5 (3.5-16.0)	3.57 (0.7-4.41)	3.78
	12	12	14	14	-	-	3.12	3.12	3.63	-	-	13.5 (3.5-16.0)	3.59 (0.7-4.41)	3.76
	12	12	14	18	-	-	2.89	2.89	3.38	4.34	-	13.5 (3.5-16.0)	3.58 (0.7-4.41)	3.77
	12	12	14	24	-	-	2.61	2.61	3.05	5.23	-	13.5 (3.5-16.0)	3.56 (0.7-4.41)	3.79
	12	12	18	18	-	-	2.70	2.70	4.05	-	-	13.5 (3.5-16.0)	3.57 (0.7-4.41)	3.78
	12	14	14	14	-	-	3.00	3.50	3.50	-	-	13.5 (3.5-16.0)	3.58 (0.7-4.41)	3.77
	12	14	14	18	-	-	2.79	3.26	4.19	-	-	13.5 (3.5-16.0)	3.57 (0.7-4.41)	3.78
	12	14	18	18	-	-	2.61	3.05	3.92	3.92	-	13.5 (3.5-16.0)	3.56 (0.7-4.41)	3.79
	7	7	7	7	7	-	2.40	2.40	2.40	2.40	-	12.0 (3.5-12.7)	2.82 (0.7-3.44)	4.26
	7	7	7	7	9	-	2.33	2.33	2.33	2.98	-	12.3 (3.5-13.5)	3.03 (0.7-3.65)	4.06
	7	7	7	7	12	-	2.24	2.24	2.24	3.84	-	12.8 (3.5-14.5)	3.29 (0.7-3.98)	3.89
	7	7	7	7	14	-	2.20	2.20	2.20	4.40	-	13.2 (3.5-15.3)	3.40 (0.7-4.20)	3.88
	7	7	7	7	18	-	2.05	2.05	2.05	5.30	-	13.5 (3.5-16.0)	3.49 (0.7-4.41)	3.87
	7	7	7	7	24	-	1.82	1.82	1.82	6.22	-	13.5 (3.5-16.0)	3.47 (0.7-4.41)	3.89
	7	7	9	9	-	-	2.28	2.28	2.93	-	-	12.7 (3.5-14.2)	3.23 (0.7-3.87)	3.93
	7	7	9	9	12	-	2.20	2.20	2.83	3.77	-	13.2 (3.5-15.3)	3.40 (0.7-4.20)	3.88
	7	7	9	9	14	-	2.15	2.15	2.76	4.29	-	13.5 (3.5-16.0)	3.49 (0.7-4.41)	3.87
	7	7	9	9	18	-	1.97	1.97	2.53	5.06	-	13.5 (3.5-16.0)	3.48 (0.7-4.41)	3.88
	7	7	9	9	24	-	1.75	1.75	2.25	6.00	-	13.5 (3.5-16.0)	3.46 (0.7-4.41)	3.90
	7	7	9	12	12	-	2.10	2.10	3.60	3.60	-	13.5 (3.5-16.0)	3.49 (0.7-4.41)	3.87
	7	7	9	12	14	-	2.01	2.01	3.45	4.02	-	13.5 (3.5-16.0)	3.48 (0.7-4.41)	3.88
	7	7	9	12	18	-	1.85	1.85	3.18	4.77	-	13.5 (3.5-16.0)	3.47 (0.7-4.41)	3.89
	7	7	9	12	24	-	1.66	1.66	2.84	5.68	-	13.5 (3.5-16.0)	3.45 (0.7-4.41)	3.91
	7	7	9	14	14	-	1.93	1.93	3.86	3.86	-	13.5 (3.5-16.0)	3.48 (0.7-4.41)	3.88
	7	7	9	14	18	-	1.78	1.78	3.57	4.59	-	13.5 (3.5-16.0)	3.47 (0.7-4.41)	3.89
	7	7	9	14	24	-	1.60	1.60	3.20	5.50	-	13.5 (3.5-16.0)	3.45 (0.7-4.41)	3.91
	7	7	9	18	18	-	1.66	1.66	4.26	4.26	-	13.5 (3.5-16.0)	3.45 (0.7-4.41)	3.91
	7	7	9	9	9	-	2.22	2.22	2.85	3.85	-	13.0 (3.5-14.9)	3.34 (0.7-4.09)	3.89
	7	7	9	9	12	-	2.15	2.15	2.76	3.68	-	13.5 (3.5-16.0)	3.49 (0.7-4.41)	3.87
	7	7	9	9	14	-	2.05	2.05	2.64	4.12	-	13.5 (3.5-16.0)	3.49 (0.7-4.41)	3.87
	7	7	9	9	18	-	1.89	1.89	2.43	4.86	-	13.5 (3.5-16.0)	3.48 (0.7-4.41)	3.88
	7	7	9	9	24	-	1.69	1.69	2.17	5.78	-	13.5 (3.5-16.0)	3.46 (0.7-4.41)	3.90
	7	7	9	12	12	-	2.01	2.01	3.45	3.45	-	13.5 (3.5-16.0)	3.48 (0.7-4.41)	3.88
	7	7	9	12	14	-	1.93	1.93	3.28	3.85	-	13.5 (3.5-16.0)	3.47 (0.7-4.41)	3.89
	7	7	9	12	18	-	1.78	1.78	2.29	3.06	-	13.5 (3.5-16.0)	3.45 (0.7-4.41)	3.91
	7	7	9	12	24	-	1.66	1.66	2.26	3.26	-	13.5 (3.5-16.0)	3.45 (0.7-4.41)	3.91
	7	7	9	9	9	-	2.22	2.22	2.85	3.85	-	13.0 (3.5-14.9)	3.34 (0.7-4.09)	3.89
	7	7	9	9	12	-	2.15	2.15	2.76	3.68	-	13.5 (3.5-16.0)	3.49 (0.7-4.41)	3.87
	7	7	9	9	14	-	2.05	2.05	2.64	4.12	-	13.5 (3.5-16.0)	3.49 (0.7-4.41)	3.87
	7	7	9	9	18	-	1.89	1.89	2.43	4.86	-	13.5 (3.5-16.0)	3.48 (0.7-4.41)	3.88
	7	7	9	9	24	-	1.69	1.69	2.17	5.78	-	13.5 (3.5-16.0)	3.46 (0.7-4.41)	3.90
	7	7	9	12	12	-	2.01	2.01	3.45	3.45	-	13.5 (3.5-16.0)	3.48 (0.7-4.41)	3.88
	7	7	9	12	14	-	1.93	1.93	3.28	3.85	-	13.5 (3.5-16.0)	3.47 (0.7-4.41)	3.89
	7	7	9	12	18	-	1.78	1.78	2.29	3.06	-	13.5 (3.5-16.0)	3.45 (0.7-4.41)	3.91
	7	7	9	12	24	-	1.66	1.66	2.26	3.26	-	13.5 (3.5-16.0)	3.45 (0.7-4.41)	3.91
	7	7	9	14	14	-	1.75	3.00	3.50	3.50	-	13.5 (3.5-16.0)	3.46 (0.7-4.41)	3.90
	7	7	12	14	18	-	1.63	1.63	2.79	3.26	-	13.5 (3.5-16.0)</td		

Type	Wall-mounted type								Cassette						Duct						Floor		Floor/Ceiling		Ceiling	
Series	Designer Series		Standard Series		Designer Series	Standard Series		Compact 4-way Flow Grid type Series	Compact 4-way Flow Series	4-way Flow Series	Mini (With drain pump)		Slim (With drain pump)		Medium Static Pressure											
Model name																										
Refrigerant																										
Energy-saving Features																										
Features for Comfort																										
Convenience Features																										
Clean Features																										
Installation / Support																										

O : Optional function

Light Commercial & Commercial, Residential VRF

VRF systems provide air conditioning solutions that meet the requirements of a diverse range of buildings.

VRF systems provide air conditioning solutions for large residences as well as large commercial buildings.

- V-002 VRF J Series Overview
- V-004 VRF V Series Overview
- V-006 VRF Outdoor Units Lineup
- V-008 Features

VRF Outdoor Units



VRF J Series Heat Pump for Small-Capacity Type

- V-022 VRF J-IVL
- V-028 VRF J-IV
- V-032 VRF J-IVS




VRF V Series Heat Recovery Modular Type

- V-036 VRF VR-IV
- Heat Pump Modular Type**
- V-046 VRF V-IV

VRF INDOOR UNITS

- V-054 VRF Indoor Units Lineup
- V-056 VRF Indoor Units

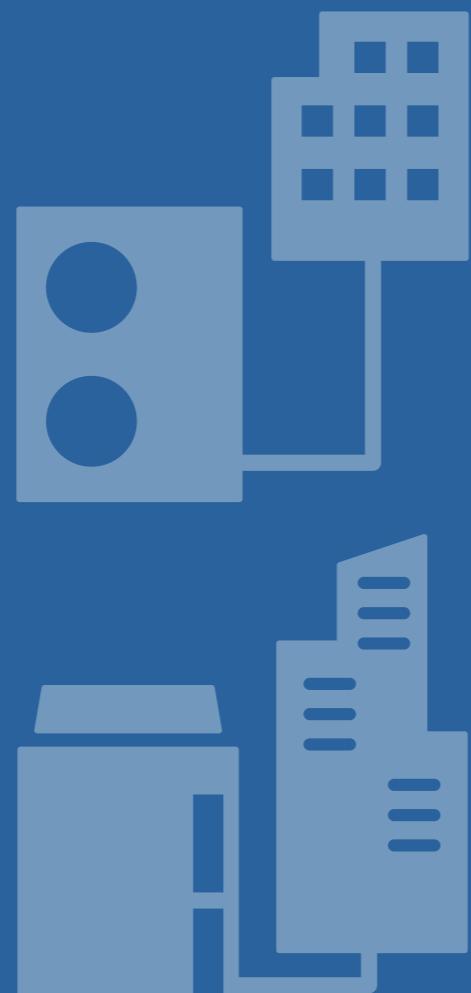

FUJITSU GENERAL (Euro) GmbH participates in the ECP program for VRF.
Check ongoing validity of certificate:
www.eurovent-certification.com

FUJITSU GENERAL LIMITED

VRF J Series Overview

Fujitsu General provides air conditioning systems for a wide range of applications, from residences, small offices, hotels, to large retailers.



Maximum 18 HP Heat Pump

VRF J-IVL

J-IVL is an outdoor unit with a slim design. Its flexibility in installation makes it ideal for midsize office buildings and hotels. With the newly added 14/16/18 HP models, up to 42 indoor units* are connectable, making them ideal for hospitals and educational facilities with many rooms.

*: 18 HP model

Slim Outdoor Unit

Although the new 14/16/18 HP models support slightly higher capacities, they have a slim depth of just 480 mm. This means they can be installed even in tight spaces.

Small room application

The optimum heat exchanger structure allows up to 20-42 indoor units to be connected to an outdoor unit, easily accommodating a number of small rooms

Class-leading Low Operating Sound

The top-class low operating noise makes it ideal for use in densely populated areas.



*Actual product's design may be different from the images.

Maximum 6 HP Heat Pump

VRF J-IV

J-IV is connectable with up to 14 indoor units, making it suitable for commercial facilities housing a number of small stores.

High energy efficiency

Heat pump inverter control achieves efficient cooling and heating operation for any combination of indoor units.

Flexible system configuration for small and midsize buildings

The space saving design and long pipe connection enable flexible installation on the roof or balcony of a small or midsize building. Multiple indoor units of various capacities and types can be connected.



Maximum 6 HP Heat Pump, Compact Design

VRF J-IVS

The 998 mm compact design does not obstruct the view even when installed underneath a waist-high window, ideal for large houses and retail stores.

Spaces saving and low sound level design

Economical individual air conditioning is achieved by ALL-DC technology, large-capacity DC twin-rotary compressor, and 3-row heat exchanger, despite the compact size.

Flexible system configuration for homes, stores, and small buildings

The compact size and flexible pipe design make the J-IVS Series an ideal choice for installation in tight spaces in residences, stores, and small offices. Multiple indoor units of various capacities and types can be connected.



VRF V Series Overview

VRF V provides air conditioning solutions for large residences as well as large commercial buildings.



Maximum 48 HP Heat Recovery VRF VR-IV

Smart, cutting-edge design
Extensive lineup from 8 HP to 48 HP
with the capacity ratio of indoor units connectable up to 150%.

Simultaneous cooling and heating operation using a single refrigerant system


Cooling and heating operations can be selected individually for each indoor unit to provide a comfortable room environment in each room by accommodating widely varying temperatures requirements.

Annual cooling operation

Choose the annual cooling option for rooms and other spaces that require constant temperature control throughout the year.

Accommodating changes in temperature difference

When there are large temperature differences during the day, such as with the change of seasons, the operation mode can be readily changed between heating and cooling.

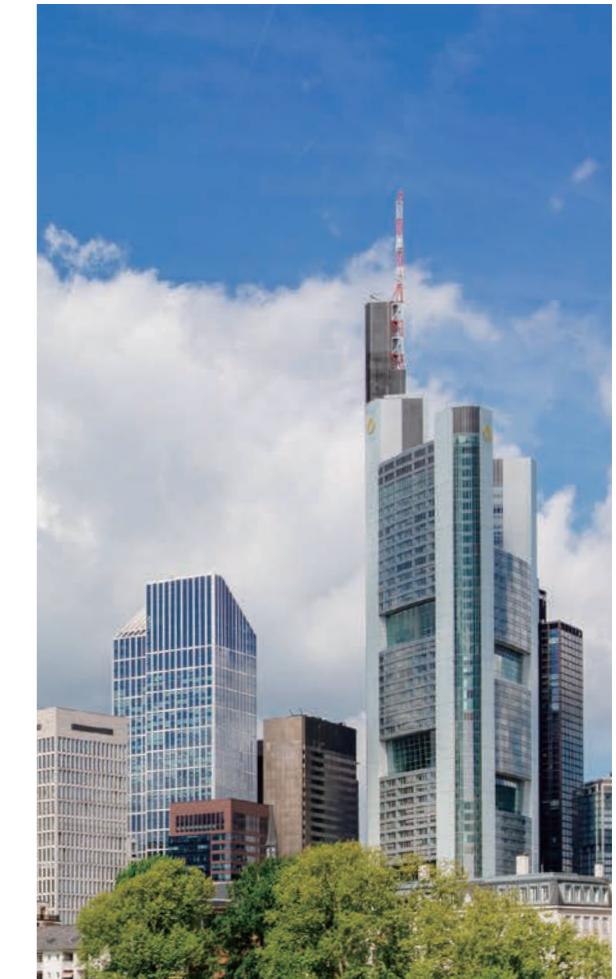

Maximum 48 HP Heat Pump VRF V-IV

Smart, cutting-edge design
Available in a wide range of models from 8 to 48 HP in 2 HP increments with the capacity ratio of indoor units connectable up to 150%.

Excellent energy saving

The inverter heat pump model achieves high energy savings for individual cooling or heating operation by making full use of inverter technology to achieve seasonal efficiency.

High design flexibility for placement in any building

Superb design flexibility meets the diverse installation needs of high-rise buildings for air conditioners, such as a concentrated rooftop installation of outdoor units combined with individual floor installation of indoor units. This flexibility is achieved by large-capacity combination, ample connection capacity, and high static pressure design.

Easy installation and maintenance

The flexible communication method and pipe connections make installation and maintenance easy—even for large systems.

VRF Outdoor Units Lineup

Capacity (kW)	12.1	14.0	15.1-15.5	22.4	28.0	33.5	40.0	45.0	50.0-50.4	55.9	61.5	67.0	73.5	78.5	85.0	90.0	95.0	100.5	107.0	112.0	118.5	123.5	130.0	135.0		
HP	4	5	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48		
J-IVL Series					AJY072 LELDH	AJY090 LELDH	AJY108 LELDH	AJY126 LELDH	AJY144 LELDH	AJY162 LELDH																
J-IV Series		AJY040 LBLDH, AJY040 LELDH	AJY045 LBLDH, AJY045 LELDH	AJY054 LBLDH, AJY054 LELDH																						
J-IVS Series		AJY040 LCLDH	AJY045 LCLDH	AJY054 LCLDH																						
VR-IV Series Heat Recovery	Space Saving					AJY072 GALDH	AJY090 GALDH	AJY108 GALDH	AJY126 GALDH	AJY144 GALDH	AJY162 GALDH	AJY180 GALDH	AJY198 GALDH	AJY216 GALDH	AJY234 GALDH	AJY252 GALDH	AJY270 GALDH	AJY288 GALDH	AJY306 GALDH	AJY324 GALDH	AJY342 GALDH	AJY360 GALDH	AJY378 GALDH	AJY396 GALDH	AJY414 GALDH	AJY432 GALDH
	Set Model																									
V-IV Series Heat Pump	Space Saving					AJY072 LALDH	AJY090 LALDH	AJY108 LALDH	AJY126 LALDH	AJY144 LALDH	AJY162 LALDH	AJY180 LALDH	AJY198 LALDH	AJY216 LALDH	AJY234 LALDH	AJY252 LALDH	AJY270 LALDH	AJY288 LALDH	AJY306 LALDH	AJY324 LALDH	AJY342 LALDH	AJY360 LALDH	AJY378 LALDH	AJY396 LALDH	AJY414 LALDH	AJY432 LALDH
	Set Model																									




High-efficiency

High-efficiency is achieved significantly by the use of a DC twin-rotary compressor, inverter technology, and a large heat exchanger.




DC twin-rotary compressor

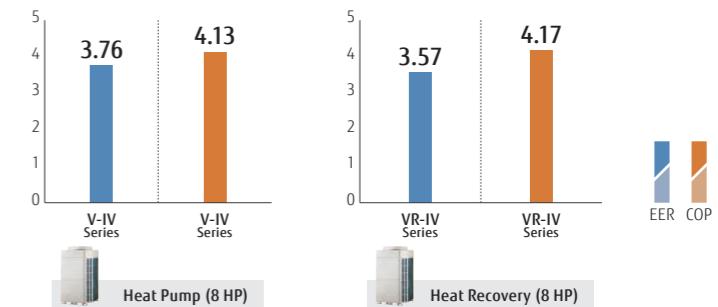

* These specifications are determined by ducted combination.

ALL DC High-efficiency design with top-class SEER/SCOP


All the VRF Series, including the J-IVL Series, have DC technology to achieve high-efficiency operation. This enhances the durability and reliability of the VRF Series.

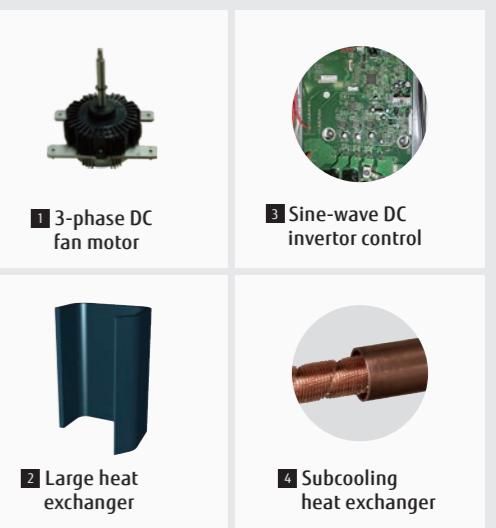

Efficient control of operation


Setting temperature range limitation

Sets the minimum and maximum limits on room temperature to establish an optimum balance between energy-saving performance and a comfortable environment.

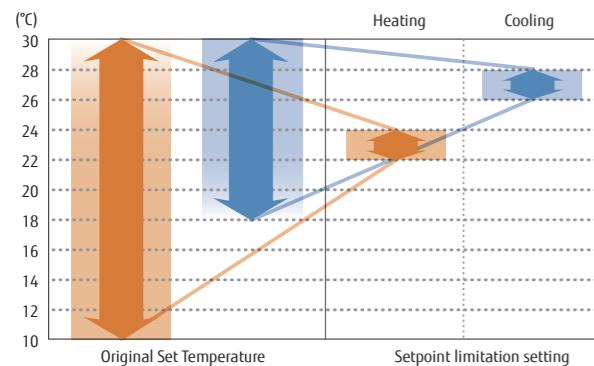


Auto-off timer

The wired remote controller is equipped with an auto-off timer function that automatically stops operation after a fixed period of time has elapsed from the start of operation to avoid wasting energy. The function also allows you to set the interval for stopping operations.

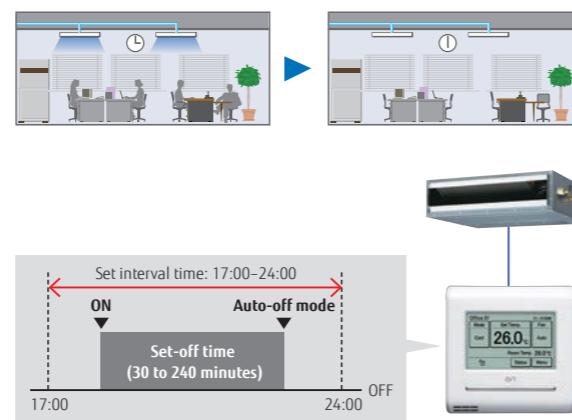


Energy-saving management

A variety of energy-saving operations can be set and managed depending on the season, climate, and time period.
Excellent energy-saving operation using the system controller.

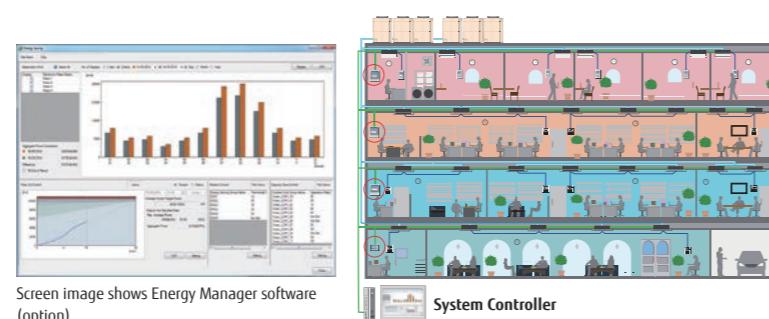


Capacity-saving mode

Operation capacity can be reduced in 5 steps from the rated capacity. This mode cuts down on peak power consumption and eases the maximum load on the unit.

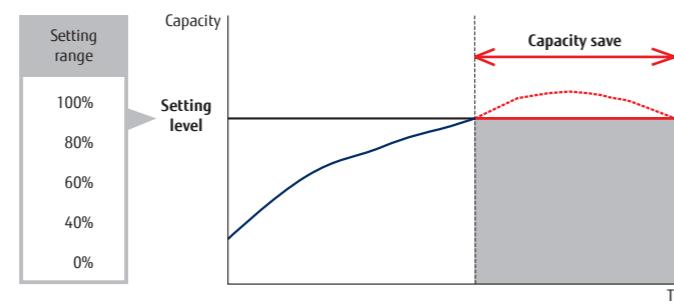

Intelligent refrigerant control

Fujitsu General is proposing outdoor units equipped with refrigerant control function. The refrigerant control operates with subtle control corresponding to the heat load of the room and offers a more comfortable environment. The refrigerant control can also provide increased energy savings.

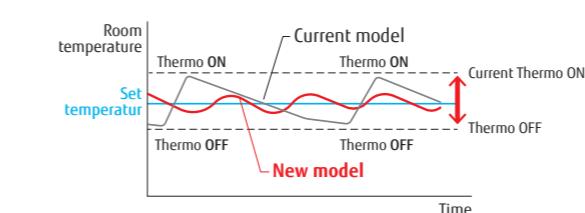


Current refrigerant control

Thermostat-ON/OFF occurs frequently.
→ Frequent changes in room temperature interfere with comfort. The compressor starts and stops repeatedly, wasting energy.

New refrigerant control

The thermostat is turned on and off less frequently than under current control to maintain the room temperature at the target temperature. Compared to current control, the compressor will run longer, thus saving energy.

Current model

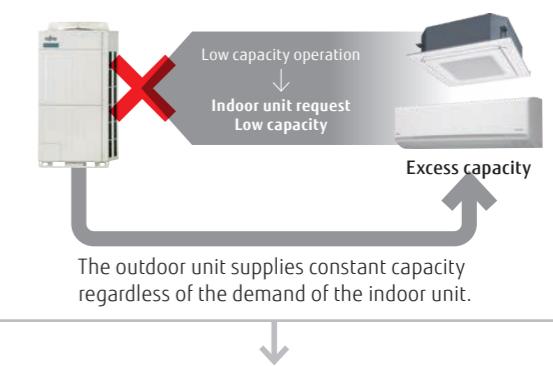


New model




* The improvements due to the control and the actual sine wave vary depending on the combination of the indoor unit and system operating conditions.

More Comfort

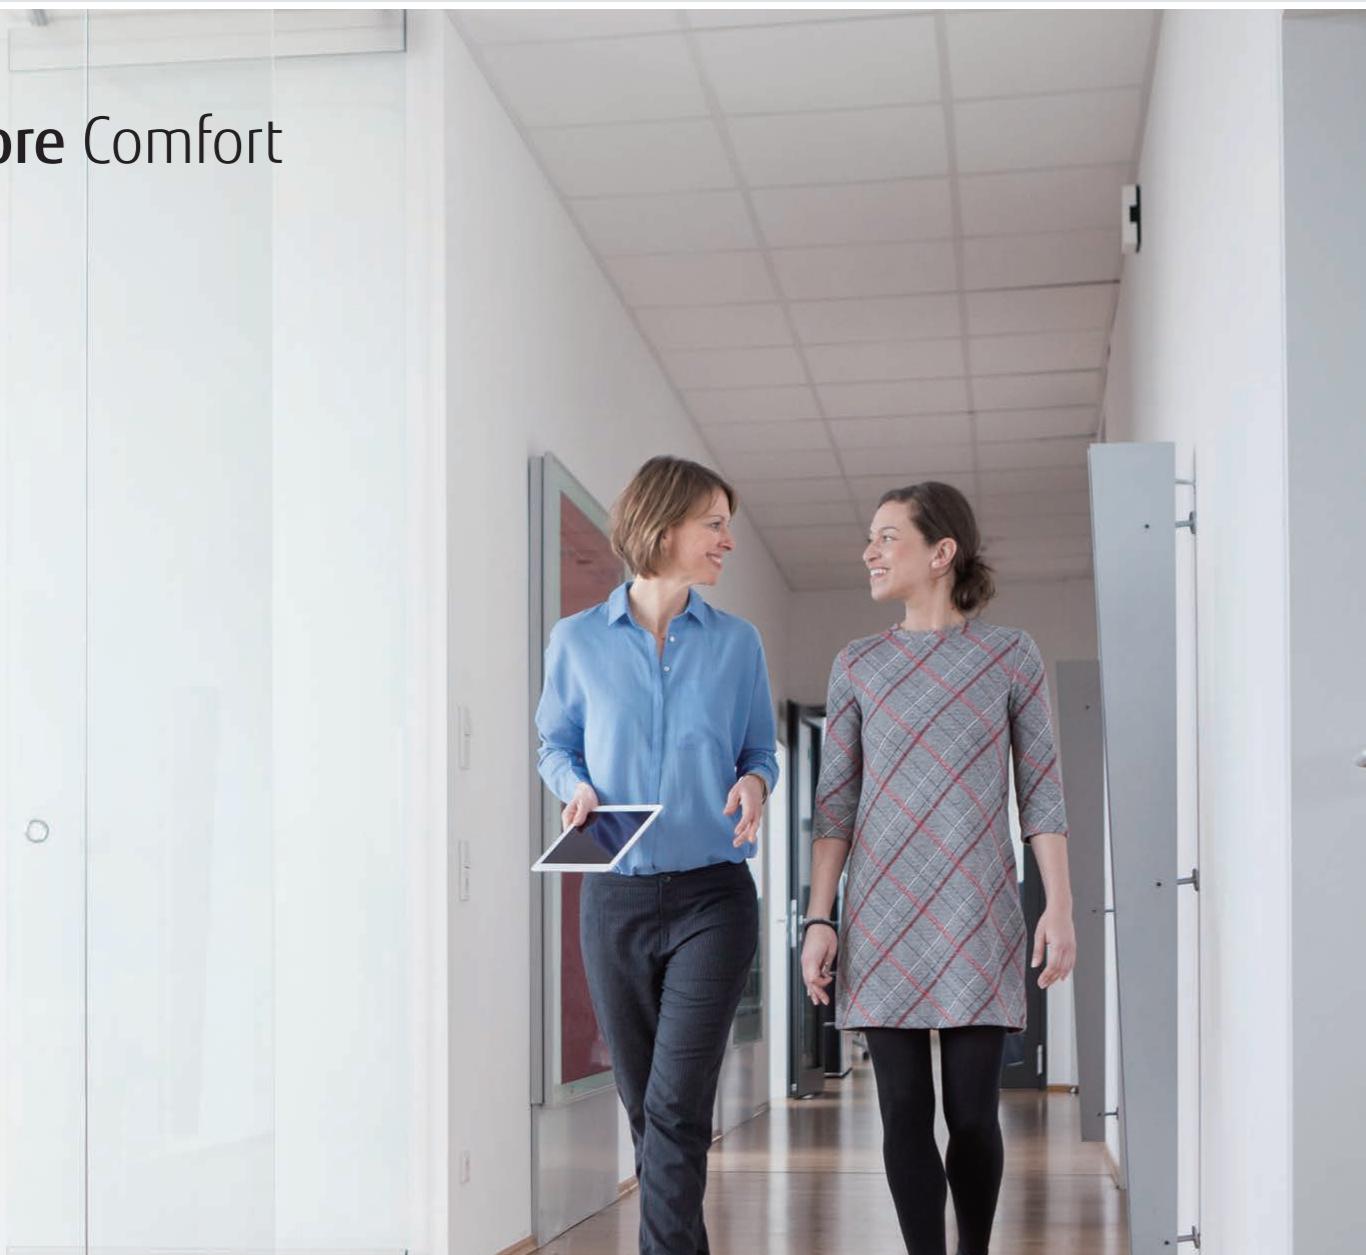


Auto changeover

In Auto setting, the air conditioner switches between cooling and heating modes automatically according to the set temperature and the room temperature.

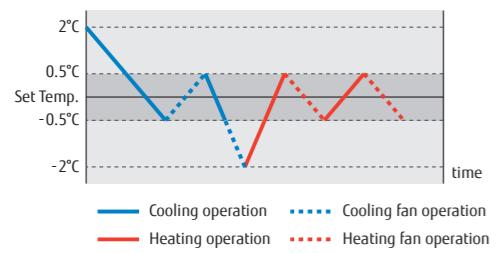


Auto changeover settings enable the indoor unit to easily switch between cooling and heating regardless of the operating mode of other indoor units. These settings can be made using a wired remote controller for a specific indoor unit. Provides a comfortable environment all year round.

Automatic cooling/heating operation for each room is possible

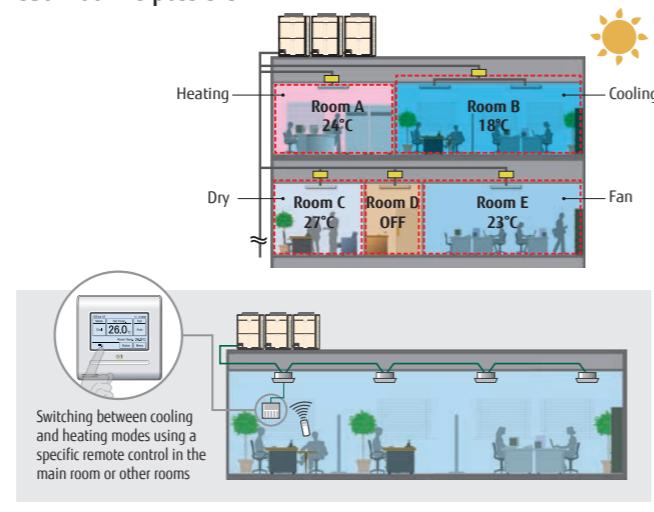

Precise control of refrigerant flow



The combination of DC inverter control and individual control of electronic expansion valves of an indoor unit enables precise and smooth control of the refrigerant flow. This means the room temperature can be set in increments of 0.5°C .

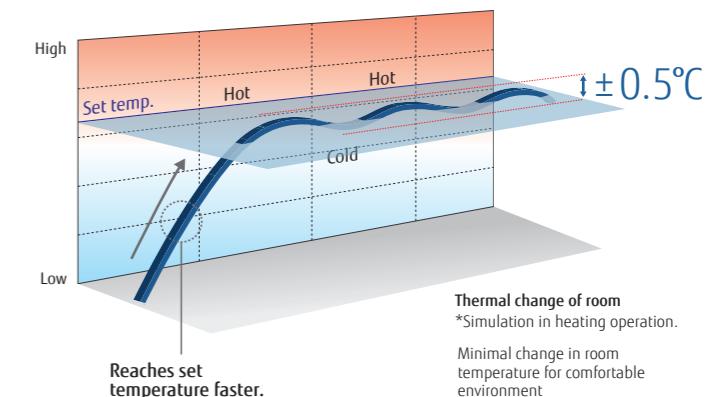

Quiet operation



Quiet operation

Two low noise modes can be switched over automatically between one in which low noise is prioritized over performance, and the other in which performance is prioritized over low noise, depending on the room temperature and outdoor temperature. This feature can be controlled by external input from the outdoor unit or a system controller.

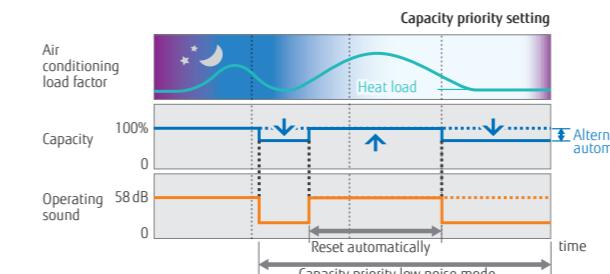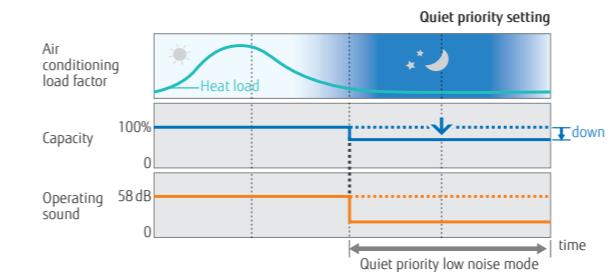

Non-stop oil recovery operation

A comfortable room condition is maintained during oil recovery mode because the product continues to operate without stopping the cooling or heating operation.

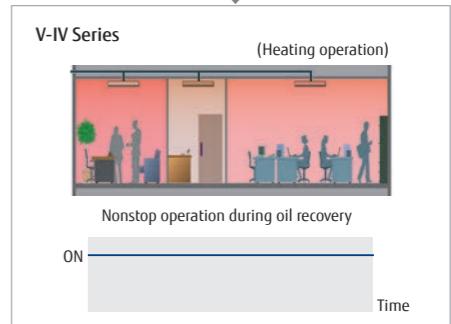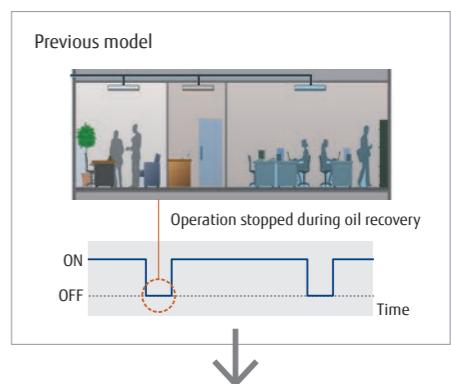

Low noise design


Small-capacity indoor units meet a variety of applications. Super low noise operations offer greater audibility comfort. In particular, the low static pressure duct (04 model) has a noise level of only 20 dB(A) during quiet mode.



High Reliability

Outdoor unit rotation


The compressor starting order is rotated to equalize the cumulative running time of each unit.

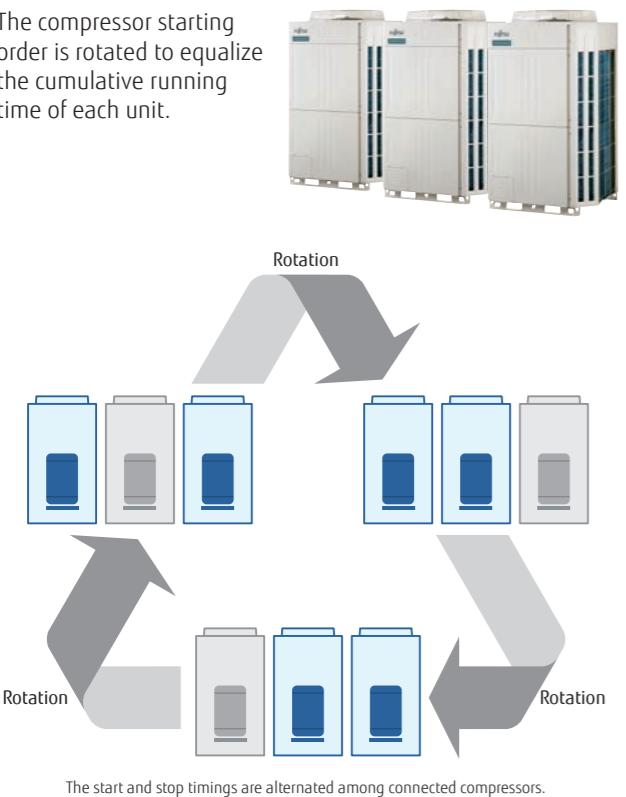

Backup operation


If one compressor fails, the other compressors will initiate backup operation*.

Note: Backup operation may not be possible depending on the cause of failure.

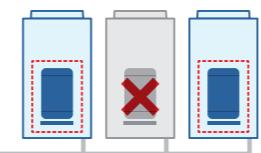


Advanced refrigerant control

Compressor control logic controls the inverter speed to balance the mass airflow rate of refrigerant in each outdoor unit.

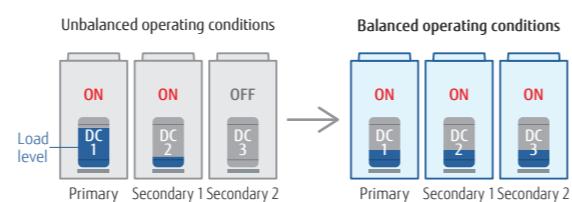



Protection against liquid flowback

The use of a large accumulator means that refrigerant that has not been completely vaporized stays inside the accumulator to ensure no liquid refrigerant is fed into the compressor.

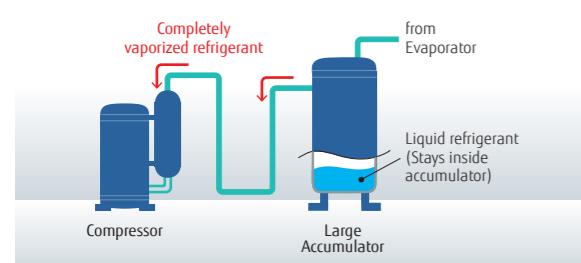

Blue fin heat exchanger

The anti-corrosion blue fin treatment is applied to the heat exchanger of the outdoor unit.

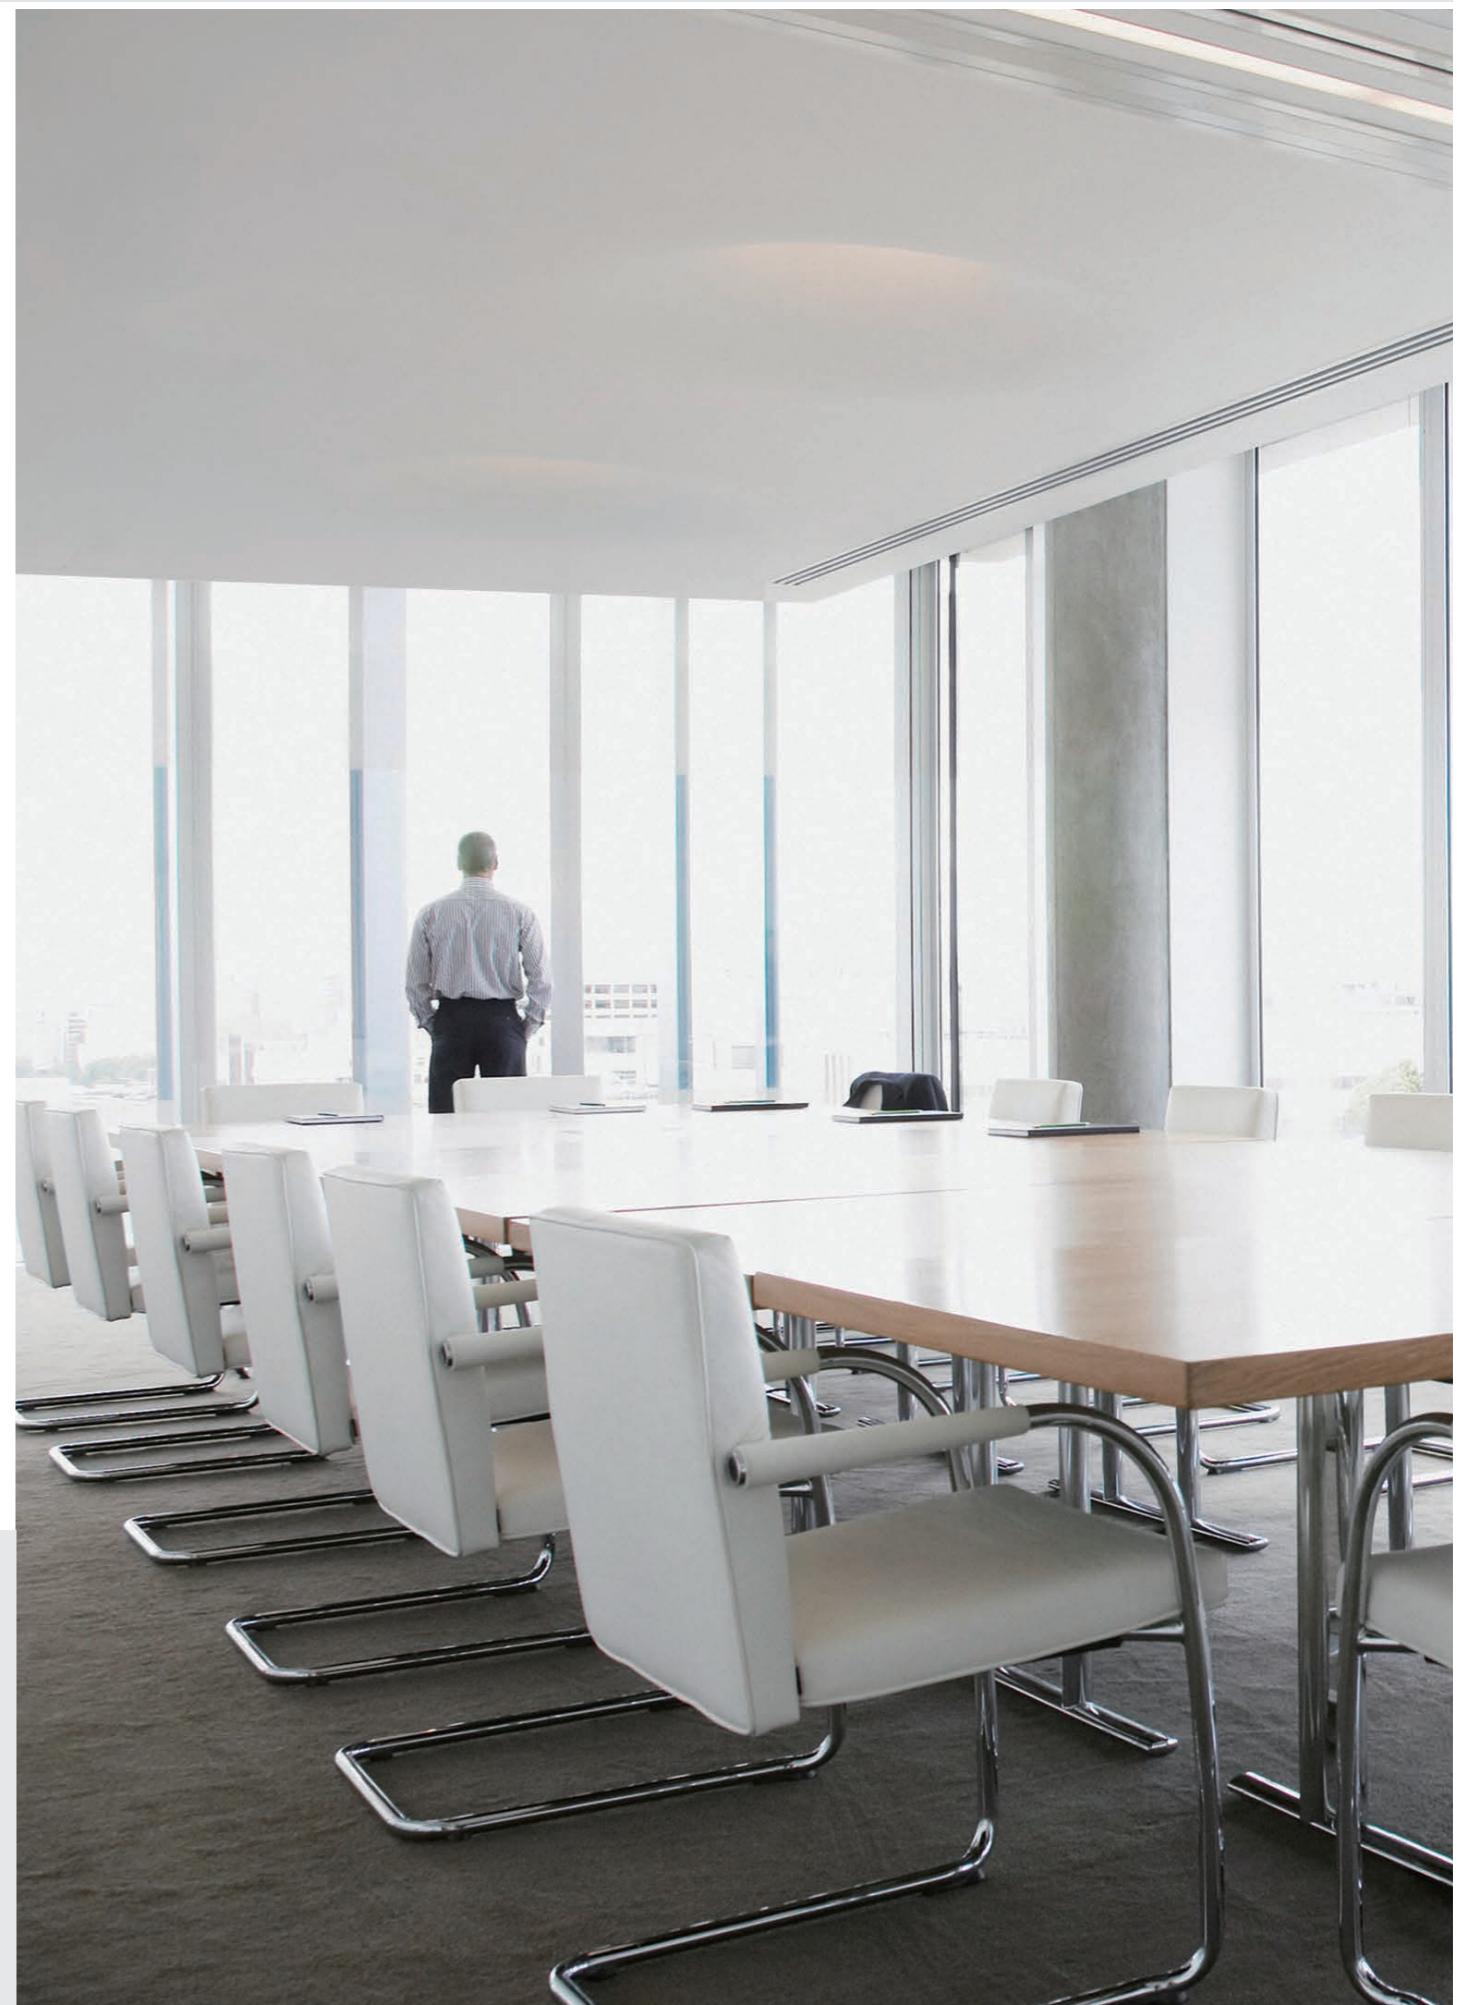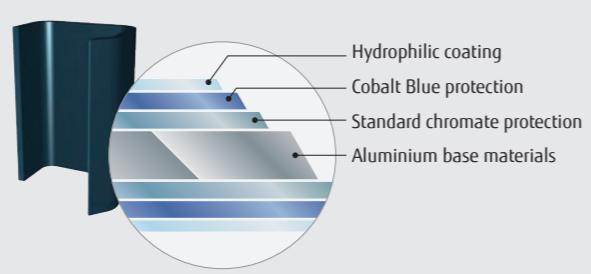

Design flexibility


Class-leading compact design

An industry-leading compact outdoor unit with optimal airflow pattern design. (Up to 18 HP)




Long pipe design

Pipe design suitable for long and narrow office buildings with elevation differences and low-rise stores with long distances
(VRF J-IVL Series)

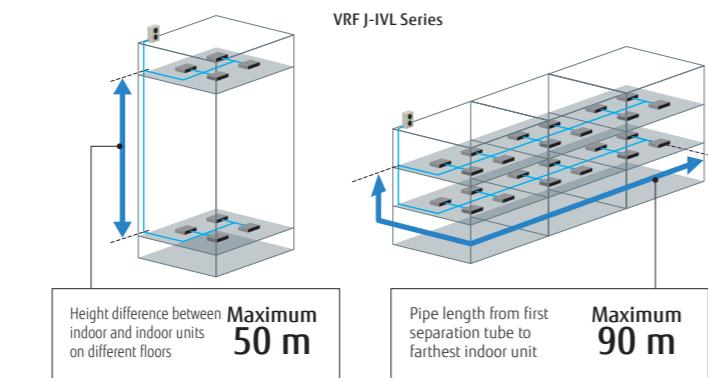

Max. allowable overall pipe length: 1,000 m

The class-leading pipe length of 1,000 m increases flexibility of installation in a wide variety of buildings.

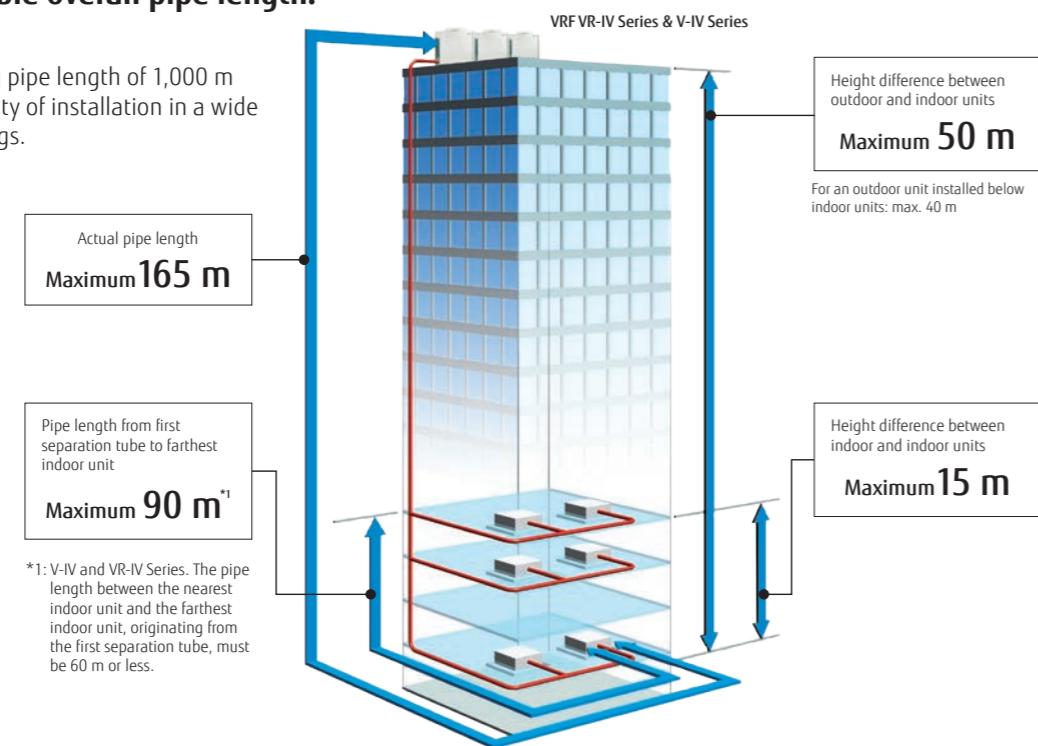

High-capacity connection

Series	Connectable indoor unit capacity range	Connectable indoor units
VRF J-IVL Series 14/16/18 HP Heat pump type	50% to 150% ²	up to 42 ⁴
VRF J-IVL Series 8/10/12 HP Heat pump type	50% to 150% ²	up to 30 ⁵
VRF J-IV Series Heat pump type	50% to 150% ²	up to 14 ⁶
VRF J-IVS Series Heat pump type	50% to 130% ²	up to 13 ⁷
VRF VR-IV Series Heat Recovery Modular type	25% ⁸ to 150% ²	up to 64
VRF V-IV Series Heat Pump Modular type	50% to 150% ³	up to 64

*2: Conditions for the maximum capacity ratio of connectable indoor units are shown in the chart above.

*3: The maximum capacity of the combination that includes the 18-HP outdoor unit is below 150%.

*4: J-IVL Series 18-HP model only.

*5: J-IVL Series 12-HP model only.

*6: J-IV Series 6-HP model only.

*7: J-IVS Series 6-HP model only.

Designed for low refrigerant charge

The optimal design of the indoor and outdoor units reduces the amount of refrigerant required and can be easily installed in a room as small as 15 m².

Various optional parts

- Fresh air intake kit to bring in fresh air
- Comfortable temperature control with a remote sensor
- DX kit links ventilation equipment and air handling units.



Low ambient operation

Our refrigeration cycle technology enables cooling operation even at -15°C.




Wide operating temperature range

All outdoor units have a wide operating temperature range and can operate in extreme temperature conditions.


*8: When multiple outdoor units are connected, their operating temperature range is from -5°C to 46°C in cooling.

*9: The operating range is -15°C to 46°C only for systems with all indoor units rated at 5.6 kW or more.

VRF VR-IV Series Heat Recovery Modular type

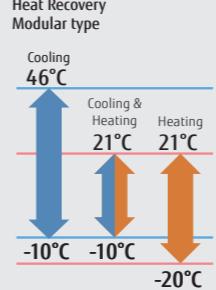


VRF V-IV Series Heat Pump Modular type

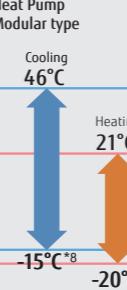

VRF J-IVL Series Heat pump type



VRF J-IV & J-IVS Series Heat pump type

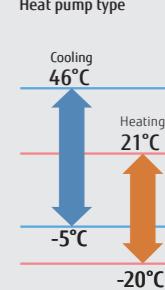

Easy Installation



Easily transported



A lifting strap can be hooked onto an outdoor unit
Design of outdoor unit allows for lifting straps to be used




Transportable by forklift
The outdoor unit can be lifted and transported by forklift.



Fits into a small elevator.

Easy access

The removable L-shaped front panel provides more room for installation and service work. Multiple installations can be performed easily and efficiently even in tight spaces.

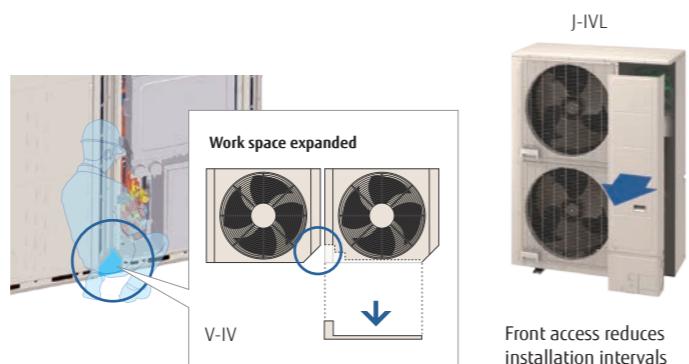


Flexible pipe connection

Piping and wiring can be accessed from the front, left, right, and bottom.



Simplified wiring work

The communication wiring can be installed seamlessly among indoor, outdoor, and RB units, which makes the installation of the wiring system easier.

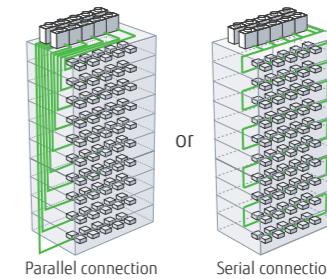


Maximum wiring length:
3,600 m

Note: The automatic address setting is not available on a serially connected multiple refrigerant system.


Vacuum mode function for easy evacuation

The vacuum mode function enables all expansion valves of an indoor unit to be opened fully, allowing for easier evacuation of air inside pipe lines and indoor units.

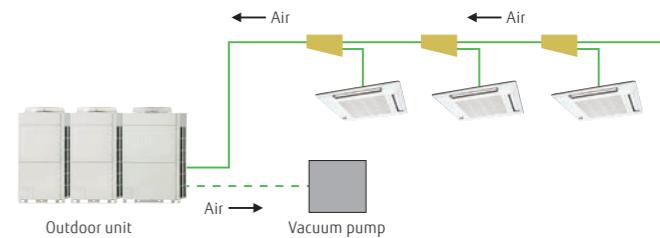

Automatic address setting

Addresses of connected indoor units, RB units, and Signal amplifier can all be set automatically from the PCB in the outdoor unit.

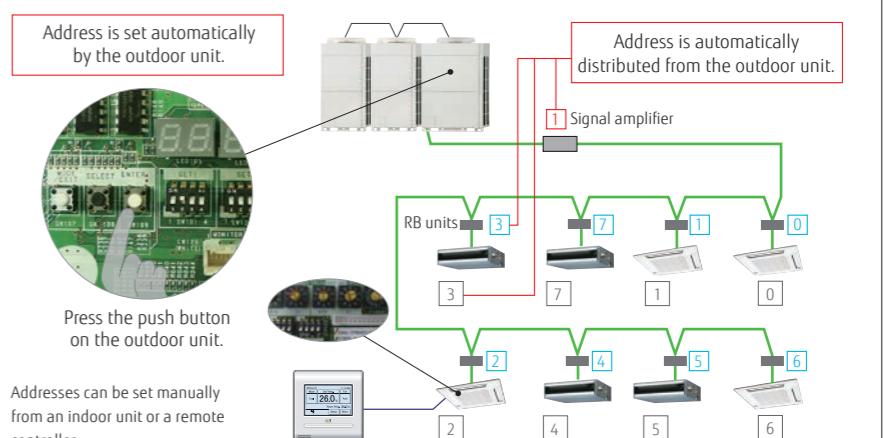

Easy commissioning with Service Tool


The Service Tool checks the refrigerant temperature and pressure, and the operating status of the electronic expansion valves, making it easy to determine if the units are connected properly.



Easy service and maintenance

Designed for easy maintenance

A 7-segment indicator lamp panel provides detailed information on the function setting status, refrigerant temperature and pressure, compressor operation time, and other factors, facilitating self-diagnosis for each unit.

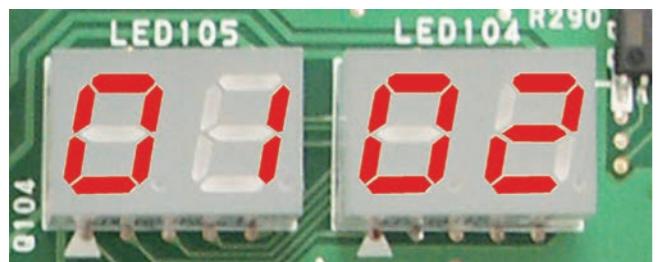


Easy-to-read 7-segment indicator lamp

Shows the following detailed operation and error status without need of any special tools.

Error status can be checked on an outdoor unit's display

- System operation mode
- Discharge temperature and pressure
- Compressor operation status
- Address, type, and number of outdoor unit

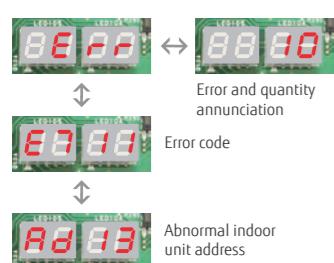


- Error status can easily be checked on an outdoor unit's display.

Movable PCB panel

Enables easier access behind the PCB for maintenance work.




Error codes are displayed on an LCD screen.

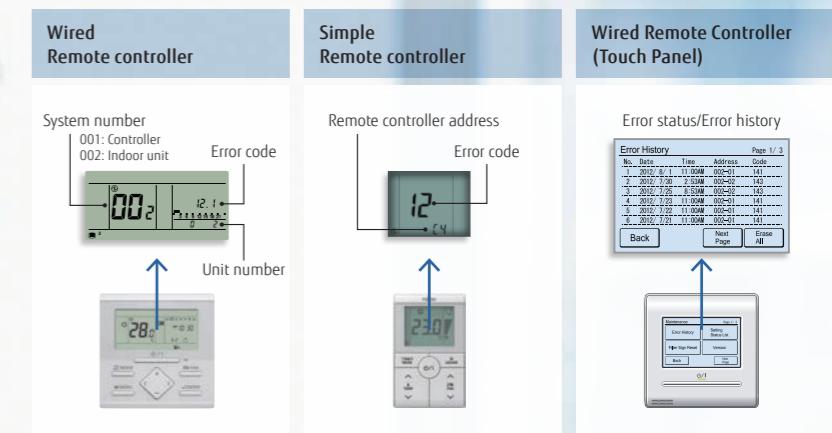

Error diagnosis by Service tool


Connection to Service tool

- A detailed operation status and recent error history can be checked and analyzed using Service tool.
- The last 5 minutes of operation status can be recorded continuously.

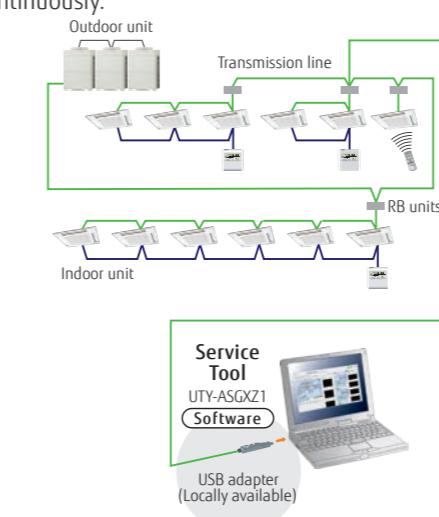

Remote monitoring

The Web Monitoring system enables the monitoring of the system's operation status at any time via the internet to ensure trouble-free operation. The operating VRF network system in the building can be monitored real time over the internet.

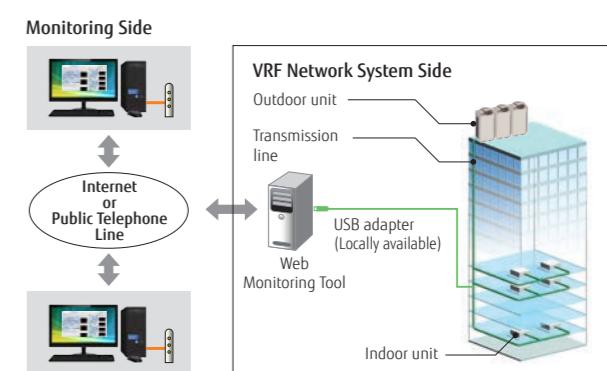


Heat Pump for Small-capacity type

VRF J-IVL


System configuration example

- Suitable for air conditioning small and medium-size buildings. One refrigerant system is used for each outdoor unit.
- Multiple indoor units are connected with separation tubes and headers.

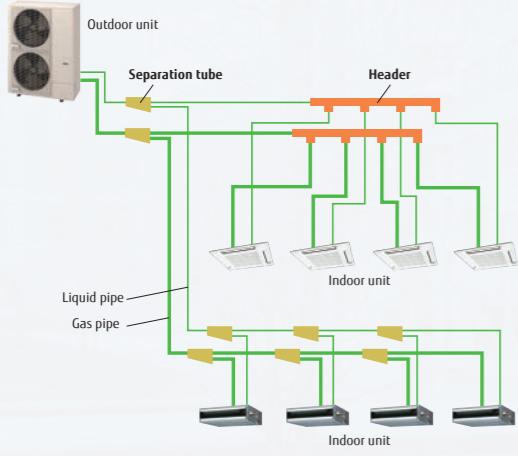

New intelligent refrigerant control

Fujitsu General is proposing outdoor units equipped with refrigerant control function. The refrigerant control operates with suitable control corresponding to the heat load of the room and offers a more comfortable environment. The refrigerant control can also provide increased energy savings.

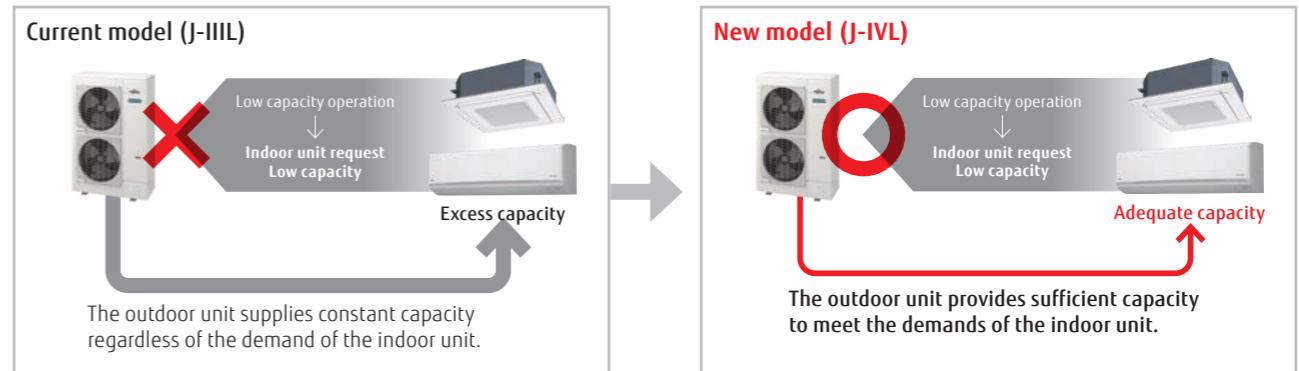

* The improvements due to the control and the actual sine wave vary depending on the combination of the indoor unit and system operating conditions.


External static pressure

External static pressure is available up to 60 Pa for 14/16/18 HP.
(30 Pa for 8/10 HP, 40 Pa for 12 HP)

Capacities are slightly decreased relative to the rated values during high static pressure operations.



Advanced high-efficiency technology

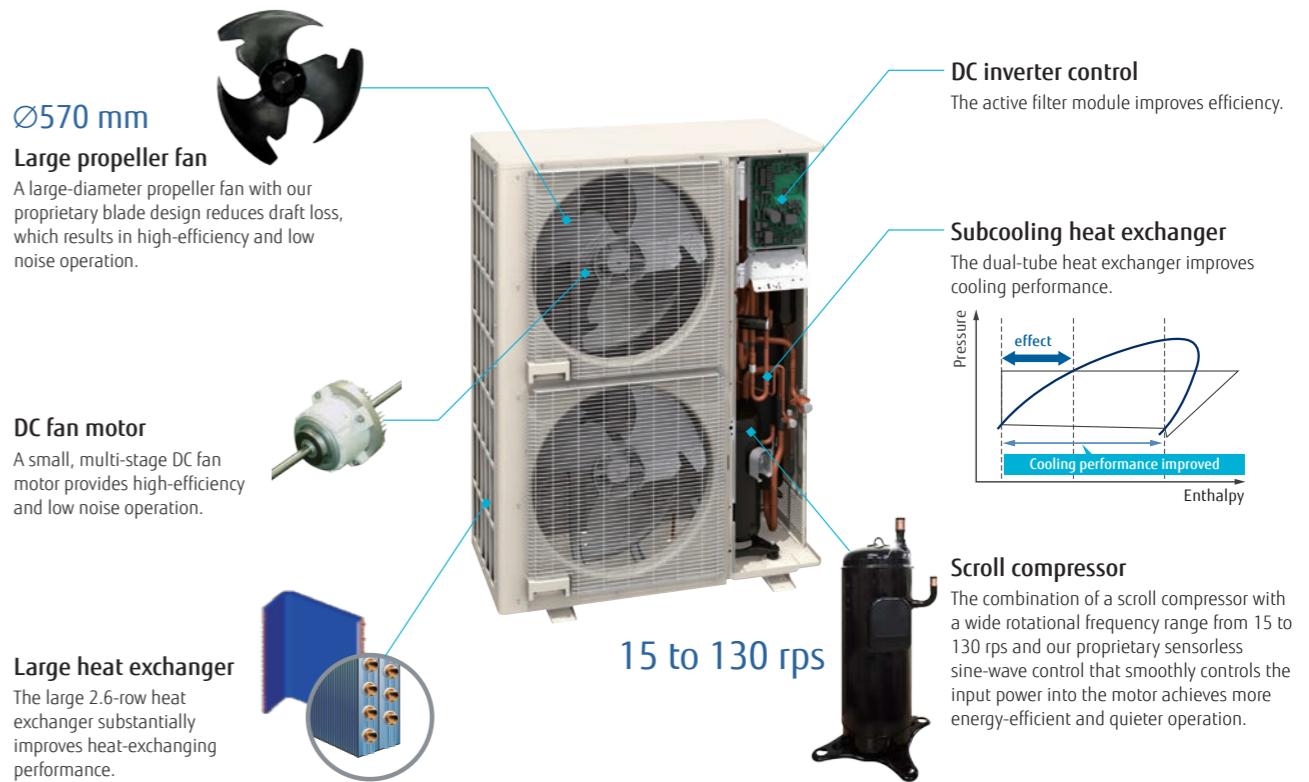



Slim & Compact design



Various installation methods



Installation

Low noise level in consideration of nearby residents

Front air discharge type with a width of about 1,000 mm, allowing for flexible installation even in narrow spaces.



Narrow space behind building Space saving

Small and thin, allowing for direct ground or wall mounting installations even in narrow alleys.




Installation on the back street of a building Flexible installation

Slim, low-body front air discharge meets the requirements for installation even in tight spaces. Installation flexibility without blocking the windows of buildings contributes to substantial space savings, even when multiple units are installed.


Efficiency in actual operating conditions

The use of a large heat exchanger and a high-efficiency Scroll compressor achieves class-leading EER/COP (Max. Heating) in all models.

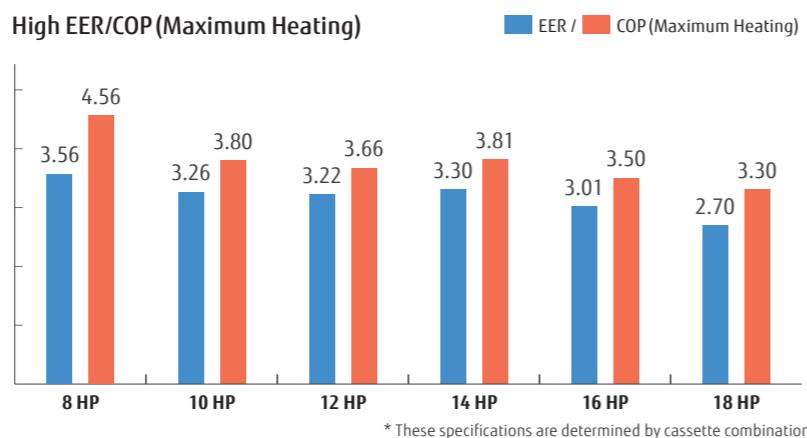


Long pipe length

Our advanced refrigerant control technology extends the maximum allowable length of refrigerant piping to 400 m. This provides high flexibility in system design.

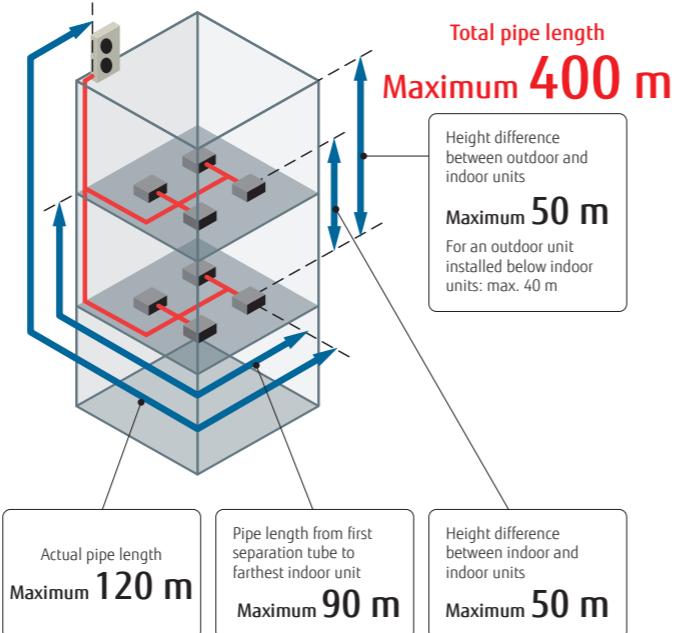


Up to 42 indoor units* can be connected.

The combination of smaller but sufficiently powerful indoor units and a new outdoor unit with an optimized heat exchanging structure makes it possible to connect up to 42 indoor units, which is the best in its class. *: 18 HP model

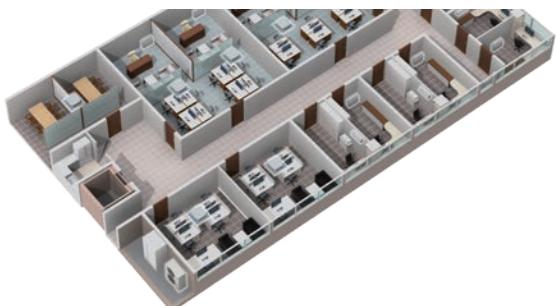

Class-leading low operating sound

The top-class low operating noise makes it ideal for use in densely populated areas. These low operating sound models are ideal for installation in densely populated areas.

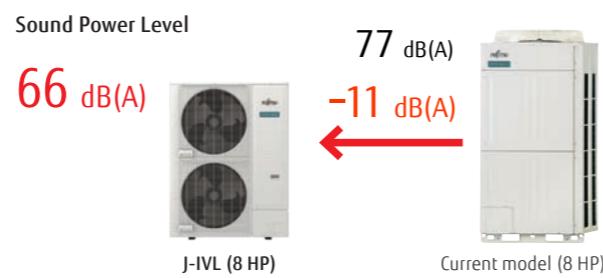

8,10,12 HP: AJY072LELDH / AJY090LELDH / AJY108LELDH
14,16,18 HP: AJY126LELDH / AJY144LELDH / AJY162LELDH



*Actual product's design may be different from the images.

Specifications

Rated capacity range	HP	8	10	12	14	16	18
Model name		AJY072LELDH	AJY090LELDH	AJY108LELDH	AJY126LELDH	AJY144LELDH	AJY162LELDH
Maximum connectable indoor units		1-20	1-25	1-30	1-36	1-40	1-42
Power source							
Capacity	Cooling	kW	22.4	28.0	33.5	40.0	45.0
	Nominal Heating		22.4	28.0	33.5	40.0	45.0
	Max. Heating		25.0	31.5	37.5	45.0	50.0
Input power	Cooling	kW	6.30	8.59	10.42	12.12	14.96
	Nominal Heating		4.65	6.61	8.18	9.71	11.81
	Max. Heating		5.45	8.29	10.25	11.81	14.29
EER	Cooling		3.56	3.26	3.22	3.30	3.01
	Nominal Heating		4.82	4.24	4.10	4.12	3.81
	Max. Heating		4.56	3.80	3.66	3.81	3.50
COP	Cooling		7.62	7.50	7.27	7.27	6.29
	Heating		3.89	3.61	3.63	3.53	3.54
SEER			301.8	297.0	287.8	287.8	248.6
SCOP			301.8	297.0	287.8	287.8	248.6
η_c	Cooling	%	152.6	141.4	142.2	138.2	137.4
η_h	Heating		480	480	480	480	480
Airflow rate		m³/h	8,400	9,000	11,000/12,100	13,000	14,000
Sound pressure level/ Power level	Cooling	dB(A)	52/66	54/69	59/73	62/75	64/77
	Heating		54/66	57/70	62/75	63/76	65/78
Net Dimensions	Height	mm	1,428	1,428	1,428	1,638	1,638
	Width		1,080	1,080	1,080	1,080	1,080
	Depth		480	480	480	213	213
Weight		kg	170	177	178	213	217
Refrigerant	Type (Global Warming Potential)		R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)
	Charge kg (CO ₂ eq-T)		7.0 (14.6)	7.5 (15.7)	7.5 (15.7)	11.0 (23.0)	11.8 (24.6)
Connection pipe diameter	Liquid	mm	9.52	9.52	12.70	12.70	12.70
	Gas		19.05	22.20	28.58	28.58	28.58
Total pipe length		m	400	400	400	400	400
Max. height difference			50/40 (Outdoor unit: Upper/Lower)				
Operating Range	Cooling	°C	-15 to 46	-15 to 46	-15 to 46	-5 to 46*	-5 to 46*
	Heating		-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21

Note: Specifications are based on the following conditions.

Cooling: Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.


Heating: Indoor temperature of 20°CDB / 15°CWB, and outdoor temperature of 7°CDB / 6°CWB.

Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m.

* The cooling operation range of -15 to 46°C is allowed only when all of the indoor units connected to the system are higher than capacity of 5.6kW.

Dimensions

(Unit: mm)

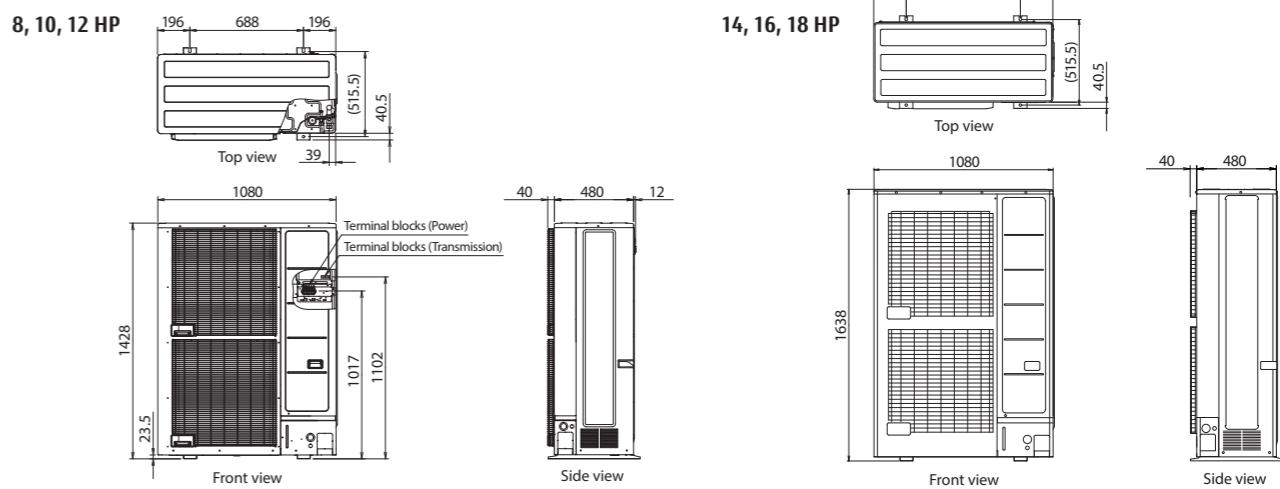


Heat Pump for Small-capacity type

VRF J-IV


System configuration example

- Suitable for air conditioning small and medium-size buildings. One refrigerant system is used for each outdoor unit.
- Multiple indoor units are connected with separation tubes and headers.

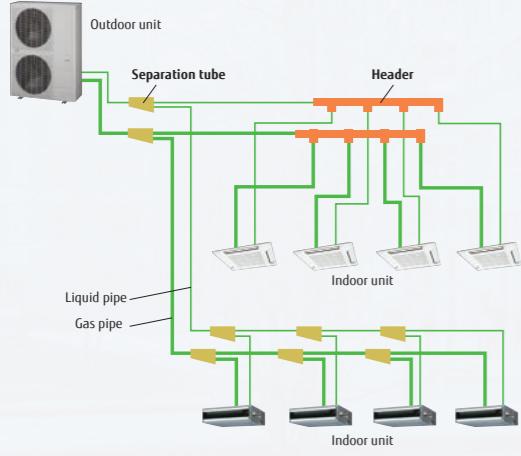

New intelligent refrigerant control

Fujitsu General is proposing outdoor units equipped with refrigerant control function. The refrigerant control operates with suitable control corresponding to the heat load of the room and offers a more comfortable environment. The refrigerant control can also provide increased energy savings.

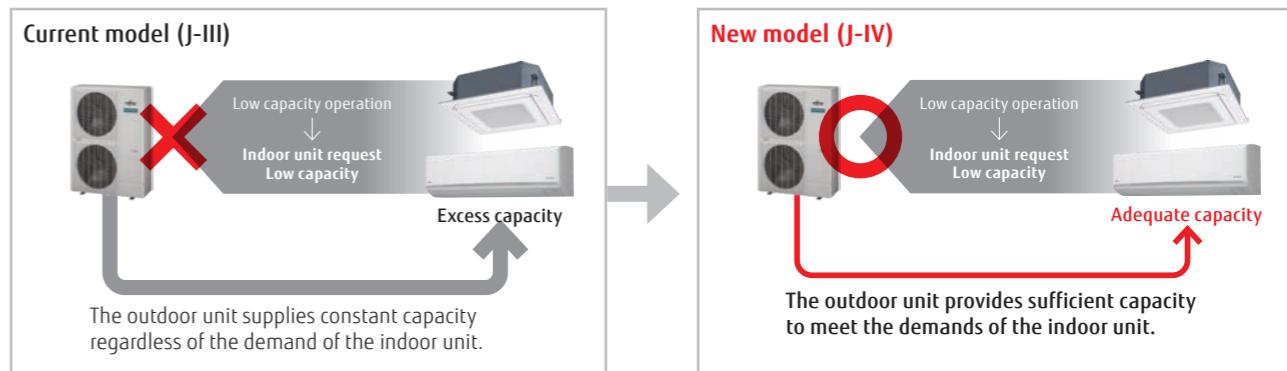


* The improvements due to the control and the actual sine wave vary depending on the combination of the indoor unit and system operating conditions.

External static pressure

External static pressure measures up to 30 Pa for 4/5/6 HP.




Advanced high-efficiency technology

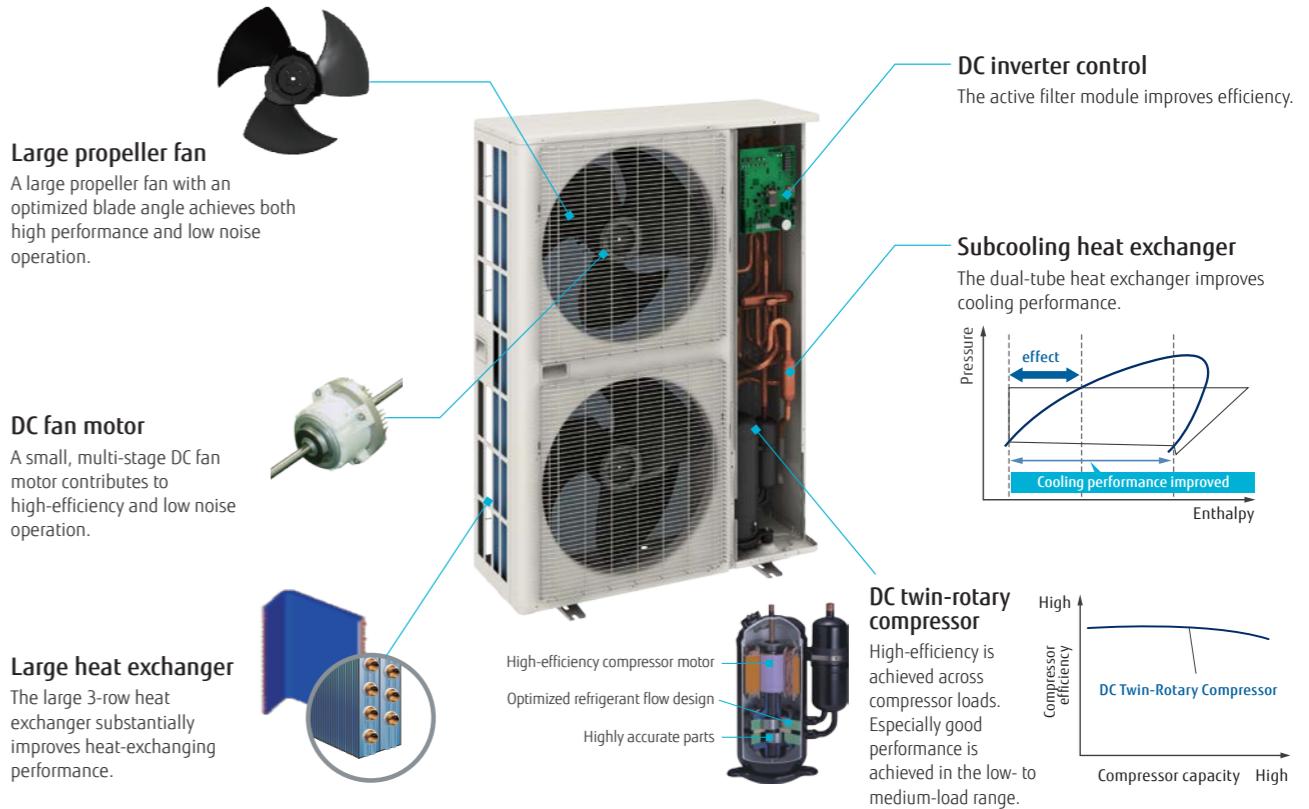


Efficiency in actual operating conditions

The use of a large heat exchanger and a high-efficiency Scroll compressor achieves class-leading EER/COP (Max. Heating) in all models.

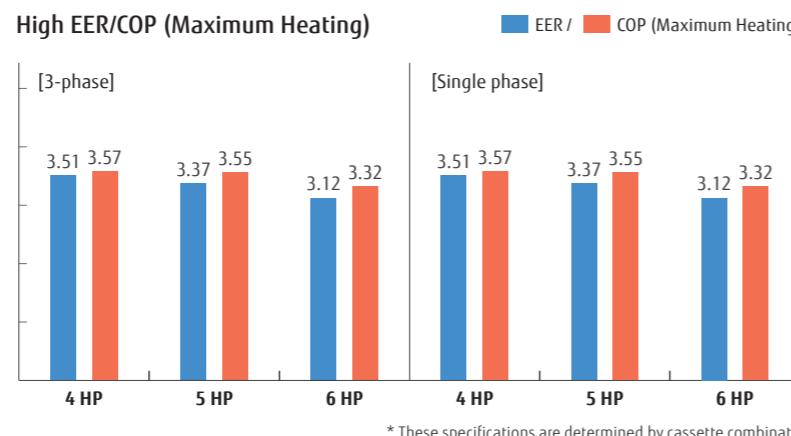

Long pipe length

Our advanced refrigerant control technology allows us to achieve a total refrigerant pipe length of 180 m. This provides high flexibility in system design.

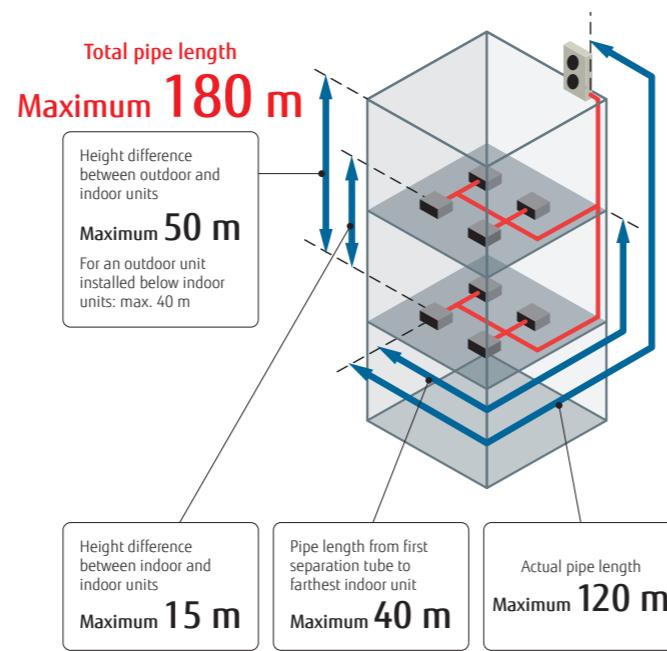

Up to 14 indoor units* can be connected


The combination of smaller but sufficiently powerful indoor units and outdoor units with an optimized heat exchanging structure makes it possible to connect up to 14 indoor units, which is the best in its class.

*: 6 HP model

Model	Current model (J-III)			New model (J-IV)		
	4	5	6	4	5	6
Rating Capacity range (HP)	4	5	6	4	5	6
Max. Connectable indoor unit	1-9	1-10	1-13	1-11	1-12	1-14

Non-stop oil recovery operation

A comfortable room condition is maintained during oil recovery mode because the product continues to operate without stopping the cooling or heating operation.

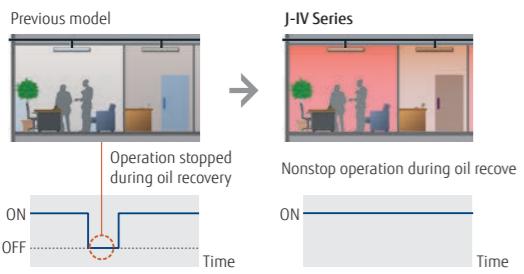

- Displays the number of each connected indoor unit
- Displays the duplicate address number assigned to an indoor unit.

4,5,6HP: AJY040LBLDH / AJY045LBLDH / AJY054LBLDH
AJY040LELDH [3-phase] / AJY045LELDH [3-phase] / AJY054LELDH [3-phase]



*Actual product's design may be different from the images.


Specifications

Rated capacity range	HP	4	5	6	
Model name		AJY040LBLDH	AJY045LBLDH	AJY054LBLDH	
Maximum connectable indoor units		1-11	1-12	1-14	
Power source					
Capacity	Cooling	kW	12.1	14.0	15.5
Nominal Heating			12.1	14.0	15.5
Max. Heating			13.6	16.0	18.0
Input power	Cooling	kW	3.44	4.15	4.96
Nominal Heating			3.14	3.60	4.17
Max. Heating			3.80	4.50	5.41
EER	Cooling	W/W	3.51	3.37	3.12
Nominal Heating			3.85	3.88	3.71
Max. Heating			3.57	3.55	3.32
COP	Cooling		6.50	6.30	6.08
Nominal Heating			3.83	3.93	3.94
Max. Heating			257.0	249.0	240.0
SEER	Heating		150.0	154.0	155.0
SCOP			6,200	6,600	7,000
η_c	Cooling	%	50 / 65	52 / 66	53 / 67
η_h	Heating		52 / 67	55 / 69	56 / 69
Airflow rate			Blue fin	Blue fin	Blue fin
Sound pressure level/Power level	Cooling	dB(A)	1,334	1,334	1,334
Heating			970	970	970
Heat exchanger fin	Height	mm	370	370	370
Net Dimensions	Width		117	117	119
Depth			118	119	119
Weight		kg	R410A (2,088)	R410A (2,088)	R410A (2,088)
Refrigerant	Type (Global Warming Potential)		4.8 (10.0)	5.3 (11.1)	5.3 (11.1)
Charge	kg (CO ₂ eq-T)		9.52	9.52	9.52
Connection pipe diameter	Liquid	mm	15.88	15.88	19.05
	Gas		180	180	180
Total pipe length			50/40 (Outdoor unit: Upper/Lower)	50/40 (Outdoor unit: Upper/Lower)	50/40 (Outdoor unit: Upper/Lower)
Max. height difference			-5 to 46	-5 to 46	-5 to 46
Operating Range	Cooling	°C	-20 to 21	-20 to 21	-20 to 21
Heating			-20 to 21	-20 to 21	-20 to 21

Note: Specifications are based on the following conditions.
Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.
Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.
Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m.
The protective function may work when using it outside the operation range.


Dimensions

(Unit: mm)

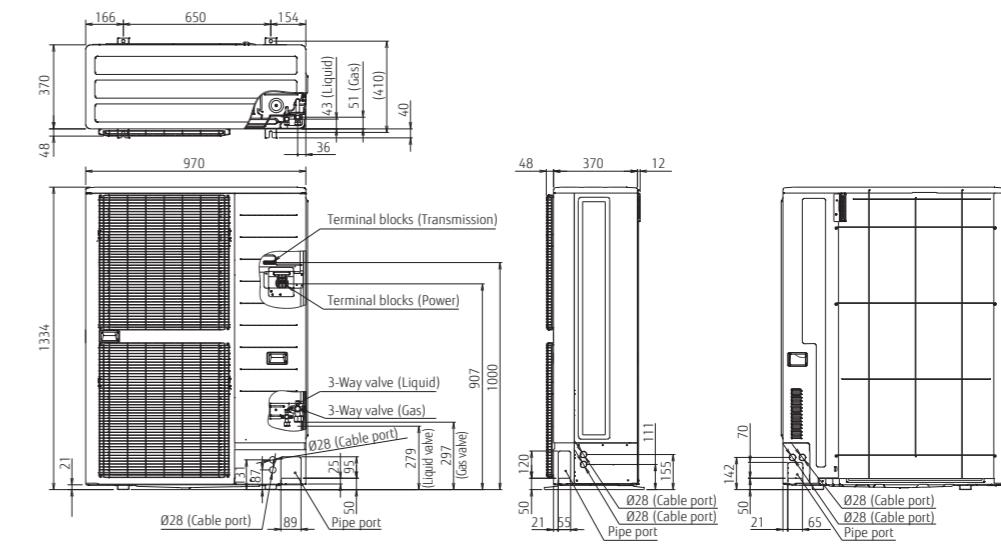

Easier installation

Connection check function: Wiring connections and address settings can be checked thanks to the quick check run function.

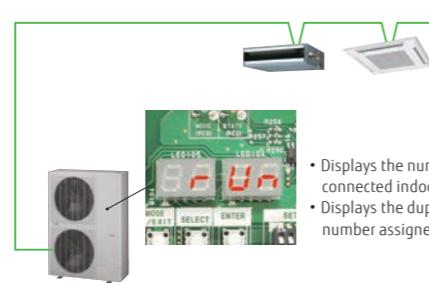


- Displays the number of each connected indoor unit
- Displays the duplicate address number assigned to an indoor unit.

Heat Pump for Small-capacity type

VRF J-IVS


System configuration example

- Suitable for air conditioning small and medium-size buildings. One refrigerant system is used for each outdoor unit.
- Multiple indoor units are connected with separation tubes and headers.

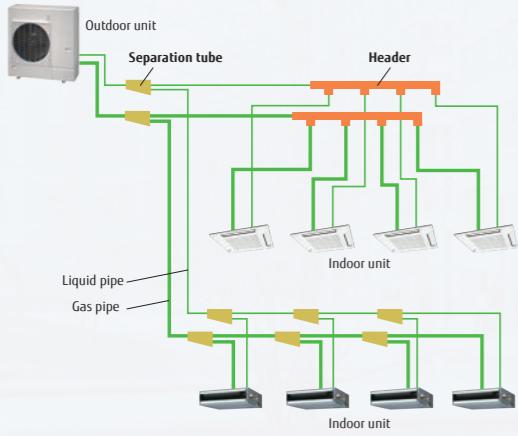

New intelligent refrigerant control

Fujitsu General is proposing outdoor units equipped with refrigerant control function. The refrigerant control operates with suitable control corresponding to the heat load of the room and offers a more comfortable environment. The refrigerant control can also provide increased energy savings.

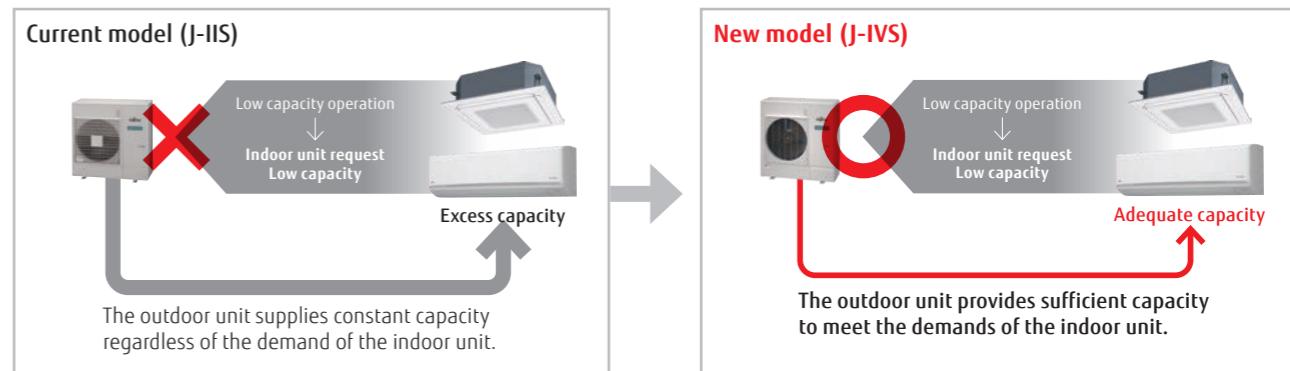


* The improvements due to the control and the actual sine wave vary depending on the combination of the indoor unit and system operating conditions.

External static pressure


External static pressure measures up to 25 Pa for 4/5/6 HP models.



Advanced high-efficiency technology

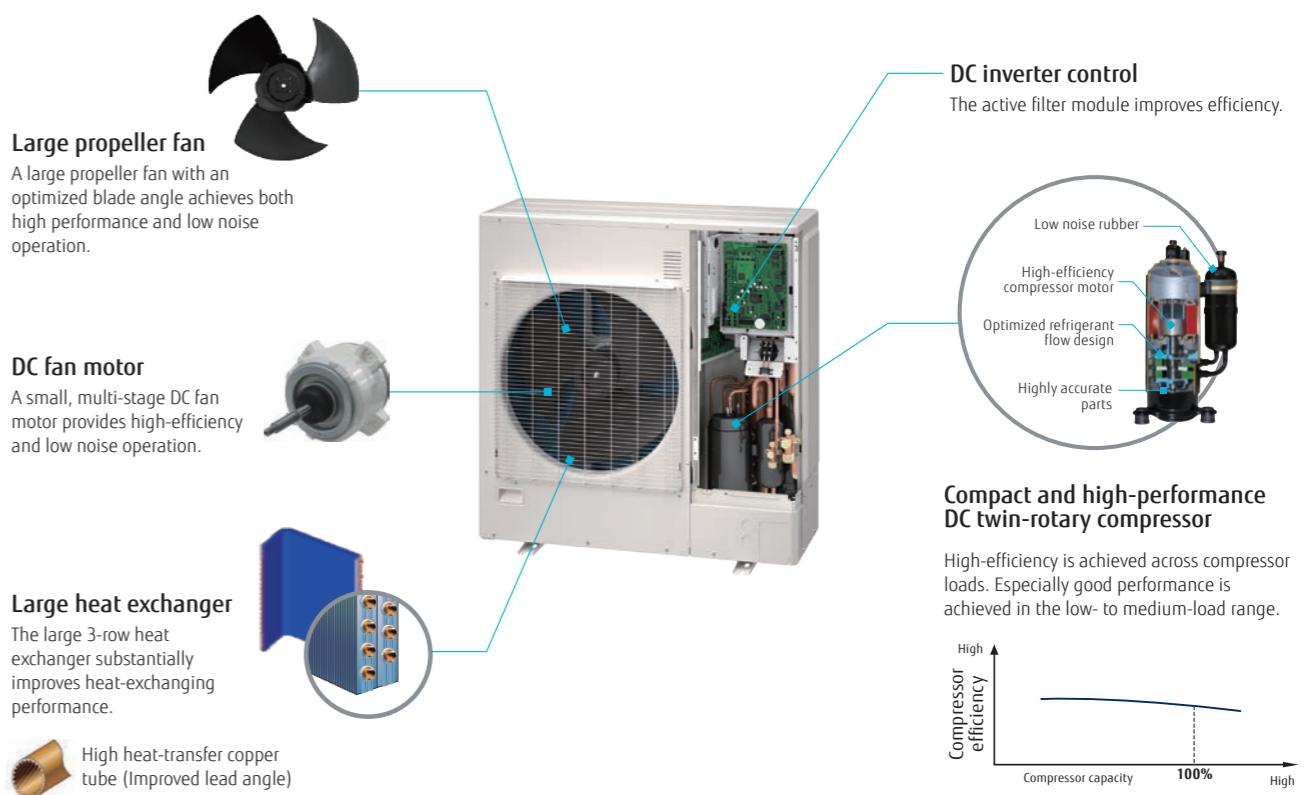

Easy to carry, easy to install

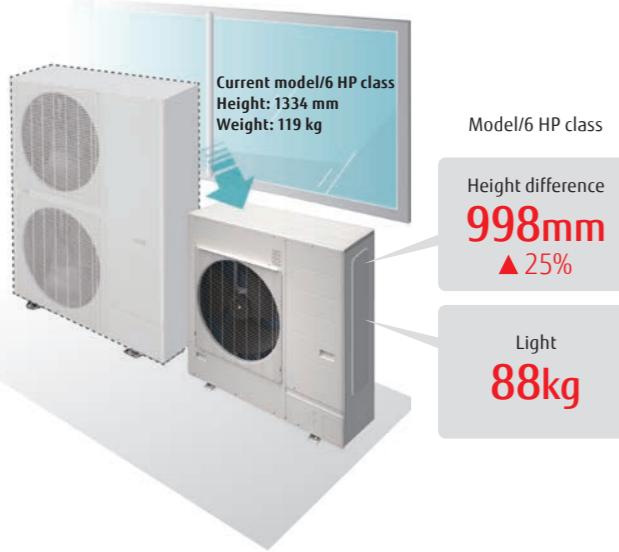

Small, lightweight outdoor unit

The outdoor units in this series are much more compact than conventional outdoor units of comparable capacity. They can be installed on a balcony, fitting below the height of the railing. With a height of less than 1 m, they can be installed in tight spaces such as under windows.



4, 5, 6 HP: AJY040LCDH / AJY045LCDH / AJY054LCDH



Long pipe length


Our advanced refrigerant control technology extends the maximum allowable length of refrigerant piping to 80 m. This provides high flexibility in system design.

Up to 13 indoor units* can be connected

The combination of smaller but sufficiently powerful indoor units and a new outdoor unit with an optimized heat exchanging structure makes it possible to connect up to 13 indoor units, which is the best in its class.


*: 6 HP model

Model	Current model (J-IIS)			New model (J-IVS)		
Rating Capacity range (HP)	4	5	6	4	5	6
Max. Connectable indoor unit	1-7	1-8	1-8	1-11	1-12	1-13

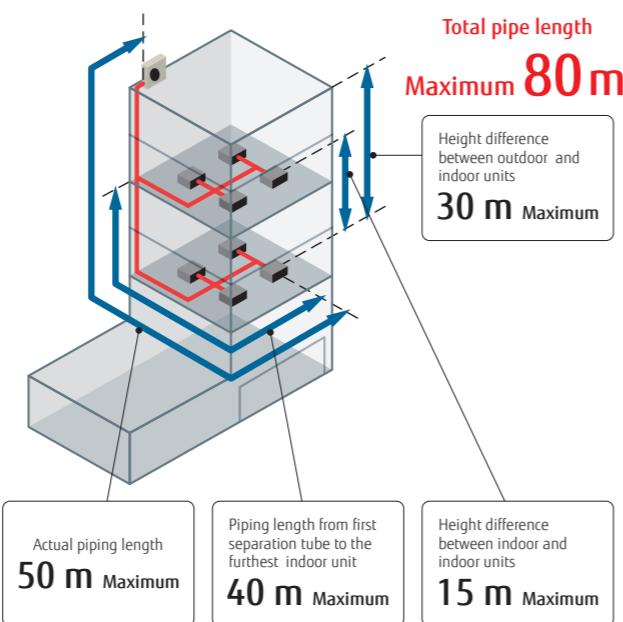


Non-stop oil recovery operation

A comfortable room condition is maintained during oil recovery mode because the product continues to operate without stopping the cooling or heating operation.

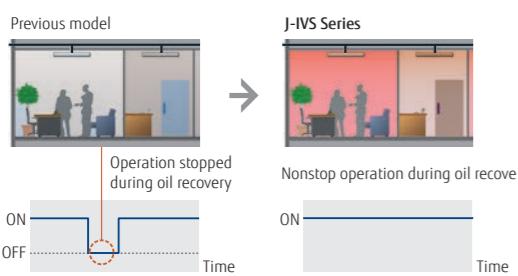

Easier installation

Connection check function: Wiring connections and address settings can be checked thanks to the quick check run function.

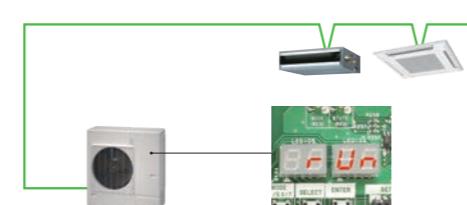

- Displays the number of each connected indoor unit.
- Displays the duplicate address number assigned to an indoor unit.

*Actual product's design may be different from the images.

Specifications


Rated capacity range	HP	4	5	6
Model name		AJY040LCDH	AJY045LCDH	AJY054LCDH
Maximum connectable indoor units		1-11	1-12	1-13
Power source		Single phase, ~230 V, 50 Hz		
Capacity	Cooling Nominal Heating Max. Heating	kW	12.1 12.1 13.6	14.0 14.0 16.0
Input power	Cooling Nominal Heating Max. Heating	kW	3.75 3.22 3.99	4.71 3.77 5.04
EER	Cooling	W/W	3.22	2.97
COP	Nominal Heating Max. Heating		3.75 3.40	3.71 3.17
SEER	Cooling		5.83	5.58
SCOP	Heating		3.82	3.96
η_c	Cooling	%	230.2	220.2
η_h	Heating		149.8	155.4
Airflow rate		m³/h	4,240	4,400
Sound pressure level/ Power level	Cooling Heating	dB(A)	53 / 67 54 / 68	53 / 69 56 / 69
Heat exchanger fin			Blue fin	Blue fin
Net Dimensions	Height Width Depth	mm	998 970 370	998 970 370
Weight		kg	88	88
Refrigerant	Type (Global Warming Potential)		R410A (2,088)	R410A (2,088)
	Charge kg (CO ₂ eq-T)		4.0 (8.4)	4.0 (8.4)
Connection pipe diameter	Liquid Gas	mm	9.52 15.88	9.52 15.88
Total pipe length		m	80	80
Max. height difference		m	30	30
Operating Range	Cooling Heating	°C	-5 to 46 -20 to 21	-5 to 46 -20 to 21

Note: Specifications are based on the following conditions.

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.
Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.
Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m.
The protective function may work when using it outside the operation range.

Dimensions

(Unit: mm)

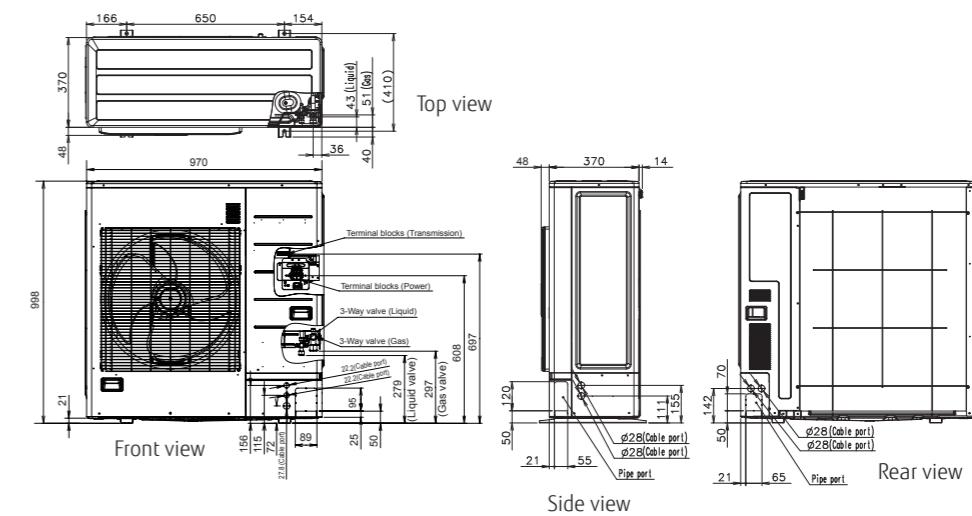


Heat Recovery

Modular Type


VRF VR-IV

Highly energy-efficient operation

Our heat recovery systems achieve high operating energy efficiency by drawing heat from the room to be cooled and transferring it as energy for rooms that are to be heated.

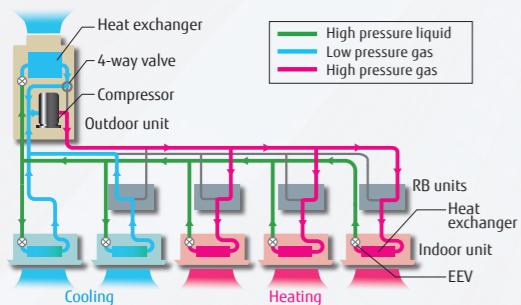


Our heat recovery systems achieve high operating energy efficiency by drawing heat from the room to be cooled and transferring it as energy for rooms that are to be heated.

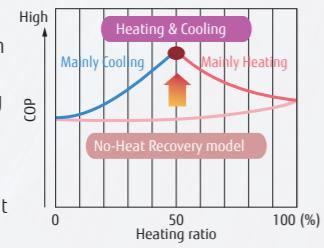

New intelligent refrigerant control

Fujitsu General is proposing outdoor units equipped with refrigerant control function.

The refrigerant control operates with suitable control corresponding to the heat load of the room and offers a more comfortable environment. The refrigerant control can also provide increased energy savings.

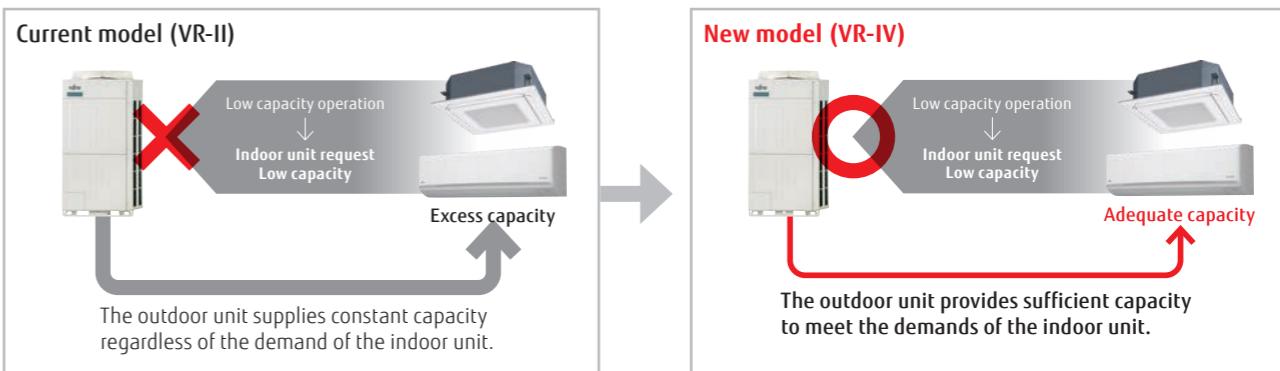

* The improvements due to the control and the actual sine wave vary depending on the combination of the indoor unit and system operating conditions.

Increase in the number of connectable indoor units

Capacity range of connectable indoor units


New model (VR-IV)	25%* to 150%
Current model (VR-II)	50% to 150%

*: For modular type, 25% to 49.9% operation in the entire system is available.
(by one unit operation)

Increased number of connectable indoor units and space saving combinations
(Unit)

HP	10	12	14	16	...	28	30	32	...	48	
New model (VR-IV)	21	26	30	34	...	60	64	64	...	64	
Current model (VR-II)	15	16	17	21	24	...	42	45	48	...	64


The energy-saving technology that boosted operation efficiency



Powerful large propeller fan


The fan uses CFD* technology to achieve both high performance and low noise operation.

*CFD: Computational Fluid Dynamics



3-phase DC fan motor

The use of a DC fan motor with sophisticated driver control improves energy efficiency substantially. In addition, this motor operates quietly.




Subcooling heat exchanger

High heat exchange efficiency is achieved by using an internal projection-shape double-pipe construction.



High-efficient, large-capacity DC twin-rotary compressor

Large-capacity high-efficient DC twin-rotary compressor with excellent intermediate capability.

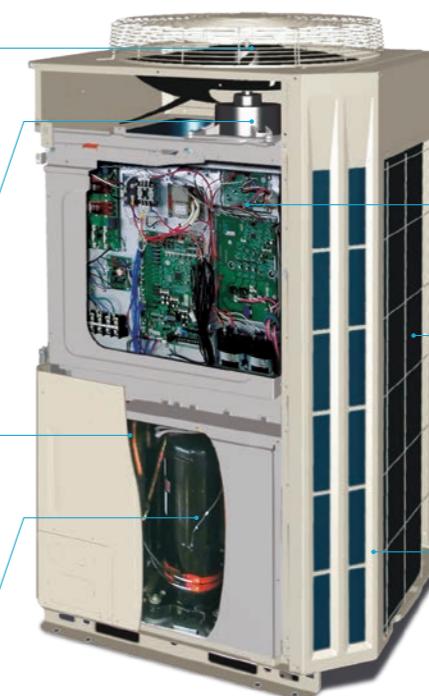


Sine-wave DC inverter control

High-efficiency is realized by the adoption of reduced switching loss IPM.



4-face heat exchanger

The 4-face heat exchanger increases the effective surface area and significantly improves heat-exchanging efficiency.



Front intake port (Corner cut air inlet structure)

In multiple outdoor unit installations, the unique front intake design improves airflow into the heat exchanger.

Extended connection ratio (applicable to multiple tenants)


Especially useful when starting partial air conditioning in a building under construction
Installation can be added flexibly for each tenant.



Stand-alone

Current model (VR-II)


Example) 50% of 12HP minimum connected indoor unit capacity is required

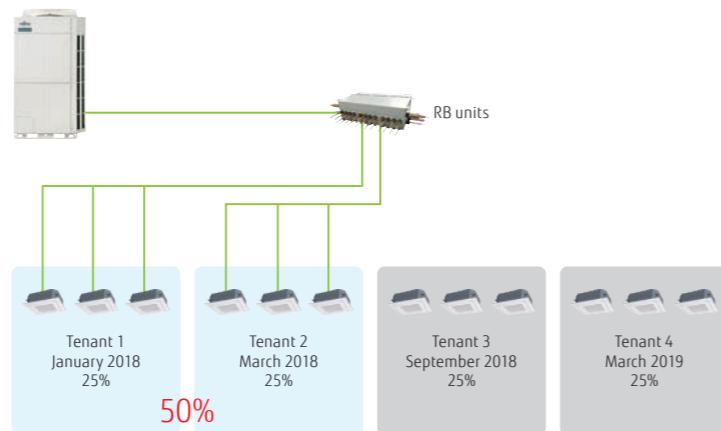

Installation is possible even for tenants who have not yet started operations.

New model (VR-IV)

Example) 25% of 12HP minimum connected indoor unit capacity is required

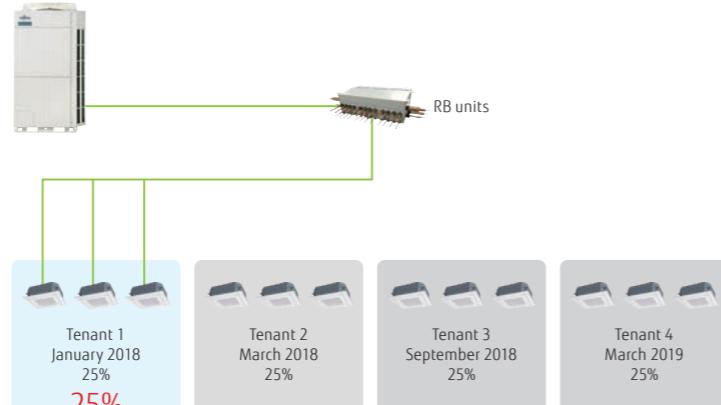


Installation and commissioning can be added flexibly to meet the opening dates of other tenants.

Modular type

One outdoor unit operates effectively for the capacities of connectable indoor units in the entire system. (Each of the multiple outdoor units does not dare to operate at 25% capacity: any one of the outdoor units will operate at 50% and the remaining units will each output 0%, i.e., stop operating.)


Example: One 10HP outdoor unit performs 25% of the total 20HP outdoor units system.

One 10HP outdoor unit performs 50% of its capacity
→ Two outdoor units do not perform 25% of the operation.

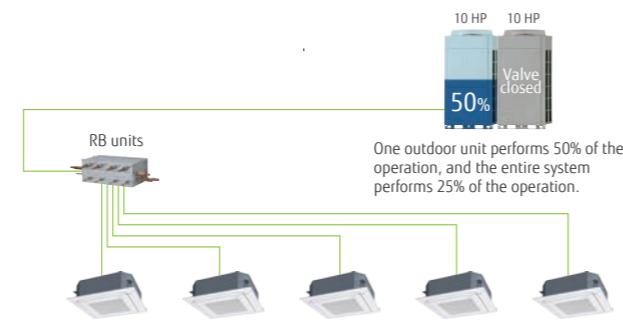

Additional installation is possible without changing the main pipe.

A main pipe of a diameter that can be used for the final system is installed at the beginning of the installation.
Duplication of the work will be avoided as there is no need to change the main pipe as in the previous model.

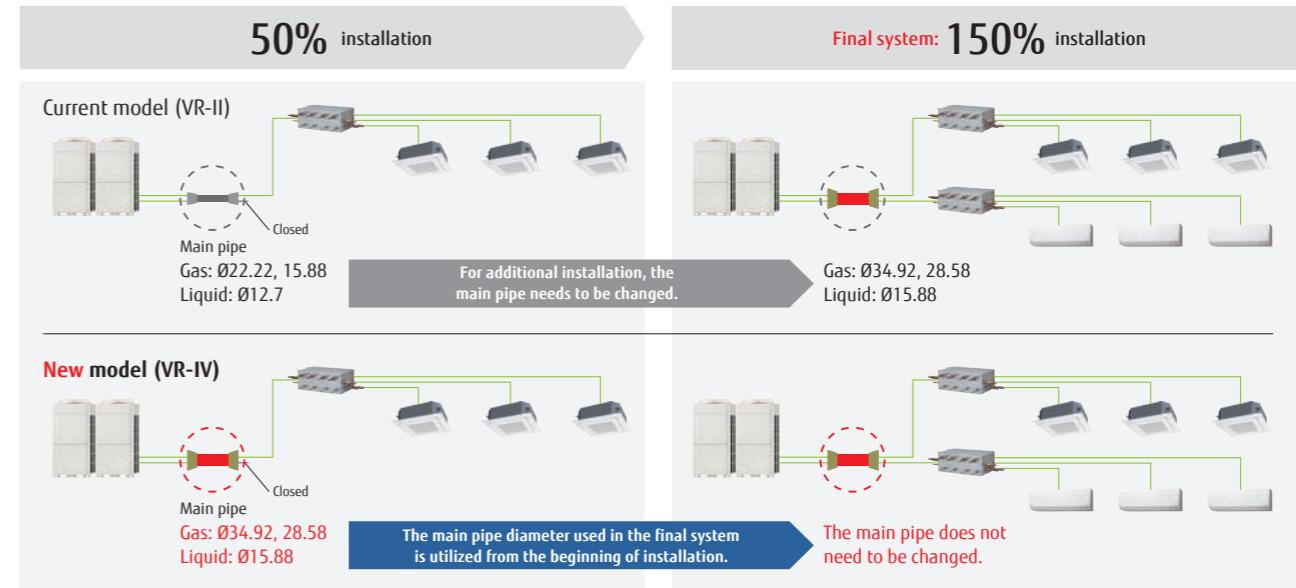

All-inverter compressor


Large-capacity DC inverter compressor

Large-capacity high-efficient DC twin-rotary compressor with excellent intermediate capability.





High-efficiency compressor speed control

The compressor speed control in 0.1 Hz increments ensures a comfortable space with less change in room temperature and less energy loss.

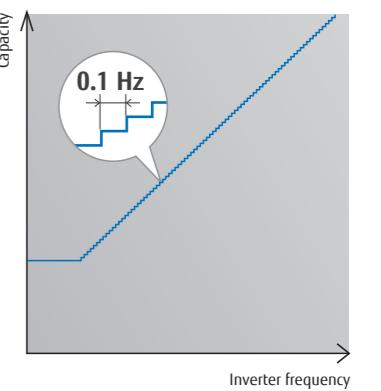

Efficiency in actual operating conditions


Class-leading high COP (Maximum) The use of our proprietary heat exchanger structure and high-efficiency DC twin-rotary compressors achieves the class-leading coefficient of performance (COP) in every combination.

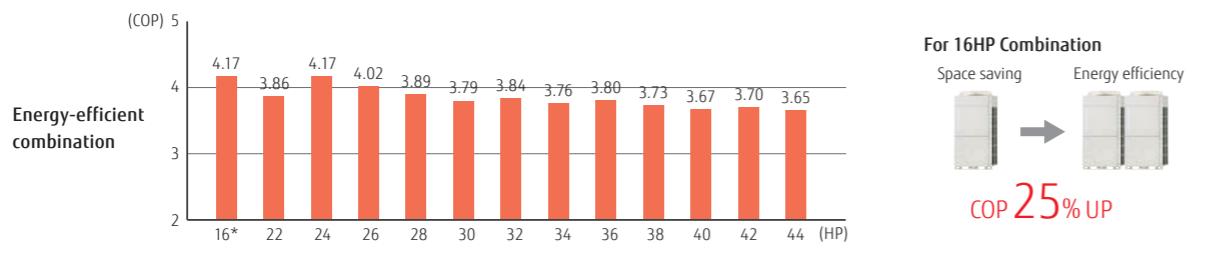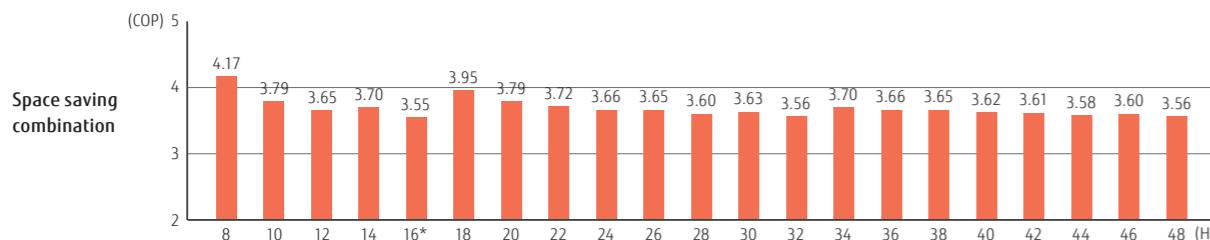

* These specifications are determined by Cassette combination.
*Multiple outdoor units are not certified by Eurovent.


Multiple outdoor operation control

When multiple outdoor units are connected, each compressor carries out sophisticated operation. Instead of operating one compressor at full load to distribute the refrigerant to one heat exchanger, all compressors operate at partial load to distribute the refrigerant to all heat exchangers, thereby improving the efficiency of the entire system.

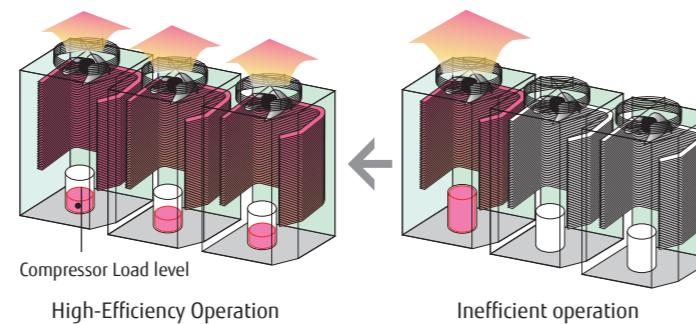


Heat exchanger refrigerant control

The heat exchanger in the outdoor unit is divided into two parts, upper and lower. The efficiency of the heat exchanger has been improved by adopting an optimum refrigerant path control where the refrigerant is distributed more into the top heat exchanger as this is where there is a greater air flow intake.

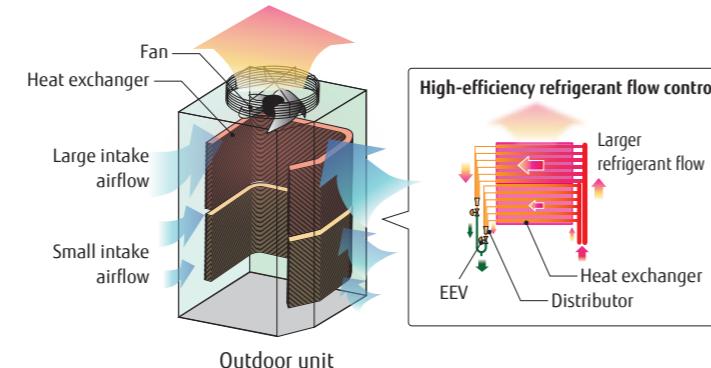

Flexible pipe connection

More flexible refrigerant pipe work is possible due to the use of various piping and RB unit connections, for adjustments to the floor layout and building structure.

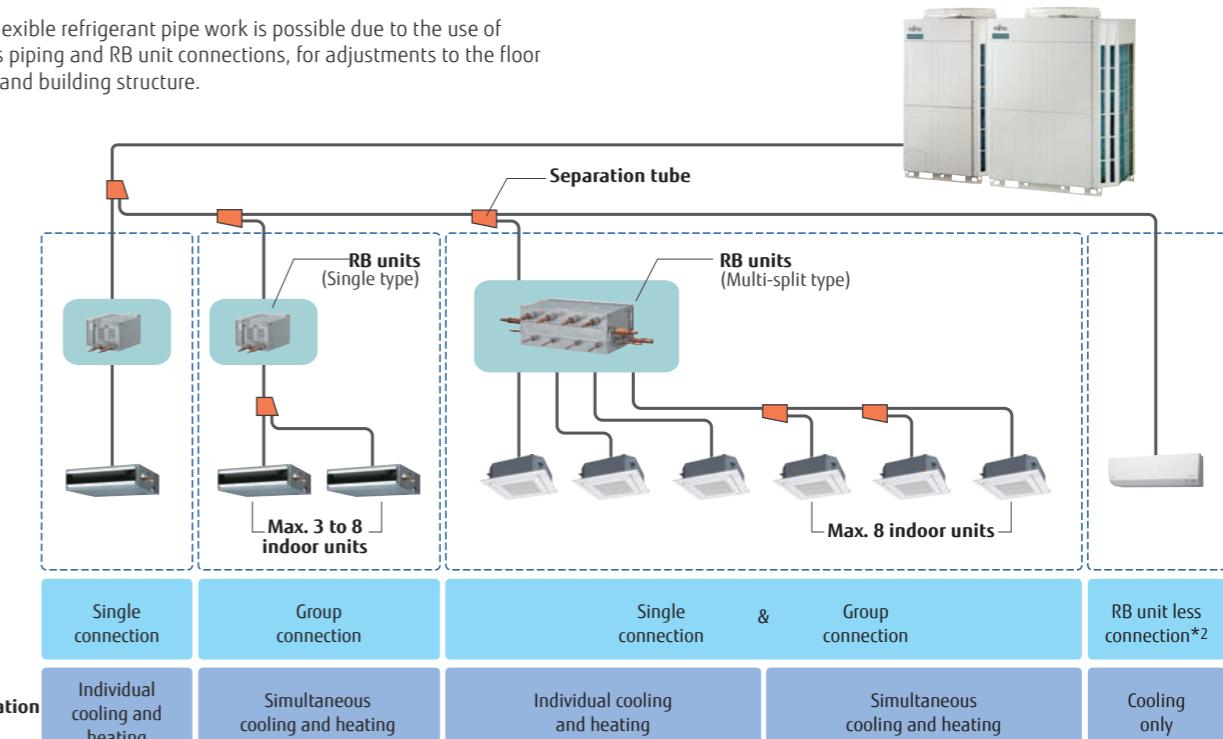

Flexible installation of RB unit

Small and slim design with a height of 198 mm makes it easy to install in tight spaces with height constraints.



- A drain pipe is not required.
- Different positions of a control box can be chosen to accommodate installation conditions.
- Series connection for simplified installation



• 2-way connection

- Two RB units can be connected in series*.

*: RB unit (Single type/4-branch)

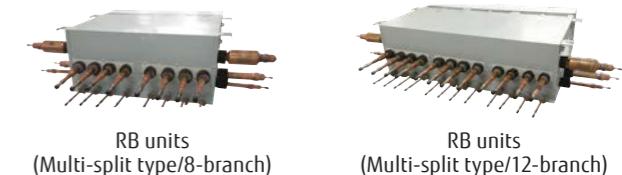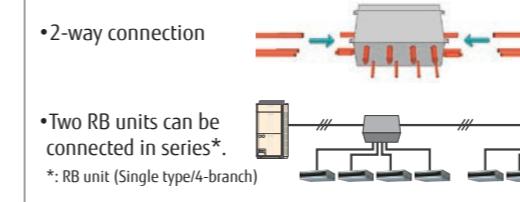


Easy maintenance in tight spaces

Maintenance can be performed from the side.



Parts can be accessed and replaced easily even in tight spaces inside the ceiling.

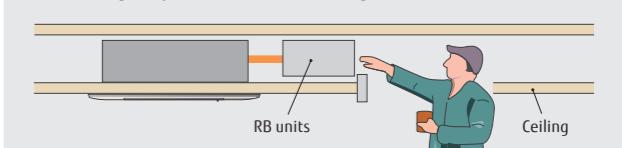

Outdoor units lineup • Combinations other than those listed below are not recommended.

Space saving combination

22.4kW (8HP)  AJY072GALDH UNIT : AJY072GALDH	28.0kW (10HP)  AJY090GALDH UNIT : AJY090GALDH	33.5kW (12HP)  AJY108GALDH UNIT : AJY108GALDH	40.0kW (14HP)  AJY126GALDH UNIT : AJY126GALDH	45.0kW (16HP)  AJY144GALDH UNIT : AJY144GALDH
50.4kW (18HP)  AJY162GALDH UNIT : AJY090/072GALDH	56.0kW (20HP)  AJY180GALDH UNIT : AJY090/090GALDH	61.5kW (22HP)  AJY198GALDH UNIT : AJY108/090GALDH	67.0kW (24HP)  AJY216GALDH UNIT : AJY108/108GALDH	73.0kW (26HP)  AJY234GALDH UNIT : AJY144/090GALDH
78.5kW (28HP)  AJY252GALDH UNIT : AJY144/108GALDH	85.0kW (30HP)  AJY270GALDH UNIT : AJY144/126GALDH	90.0kW (32HP)  AJY288GALDH UNIT : AJY144/144GALDH	95.0kW (34HP)  AJY306GALDH UNIT : AJY108/108/090GALDH	100.5kW (36HP)  AJY324GALDH UNIT : AJY108/108/108GALDH
106.5kW (38HP)  AJY342GALDH UNIT : AJY144/108/090GALDH	112.0kW (40HP)  AJY360GALDH UNIT : AJY144/108/108GALDH	118.0kW (42HP)  AJY378GALDH UNIT : AJY144/144/090GALDH	123.5kW (44HP)  AJY396GALDH UNIT : AJY144/144/108GALDH	130.0kW (46HP)  AJY414GALDH UNIT : AJY144/144/126GALDH
135.0kW (48HP)  AJY432GALDH UNIT : AJY144/144/144GALDH				

Energy efficiency combination

44.8kW (16HP)  AJY144GALDHH UNIT : AJY072/072GALDH	62.4kW (22HP)  AJY198GALDHH UNIT : AJY126/072GALDH	67.2kW (24HP)  AJY216GALDHH UNIT : AJY072/072/072GALDH	72.8kW (26HP)  AJY234GALDHH UNIT : AJY090/072/072GALDH	78.4kW (28HP)  AJY252GALDHH UNIT : AJY090/090/072GALDH
84.0kW (30HP)  AJY270GALDHH UNIT : AJY090/090/090GALDH	90.4kW (32HP)  AJY288GALDHH UNIT : AJY126/090/090GALDH	96.0kW (34HP)  AJY306GALDHH UNIT : AJY126/090/090GALDH	102.4kW (36HP)  AJY324GALDHH UNIT : AJY126/126/072GALDH	108.0kW (38HP)  AJY342GALDHH UNIT : AJY126/126/090GALDH
113.0kW (40HP)  AJY360GALDHH UNIT : AJY144/126/090GALDH	120.0kW (42HP)  AJY378GALDHH UNIT : AJY126/126/126GALDH	125.0kW (44HP)  AJY396GALDHH UNIT : AJY144/126/126GALDH		

8,10,12HP : AJY072GALDH / AJY090GALDH / AJY108GALDH
14,16HP : AJY126GALDH / AJY144GALDH






*Actual product's design may be different from the images.





Dimensions

(Unit: mm)

8, 10, 12 HP

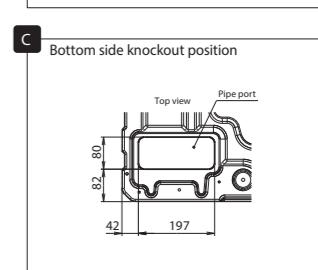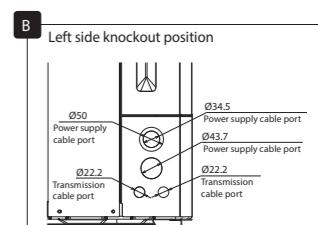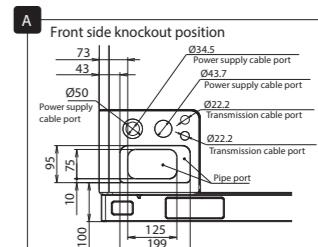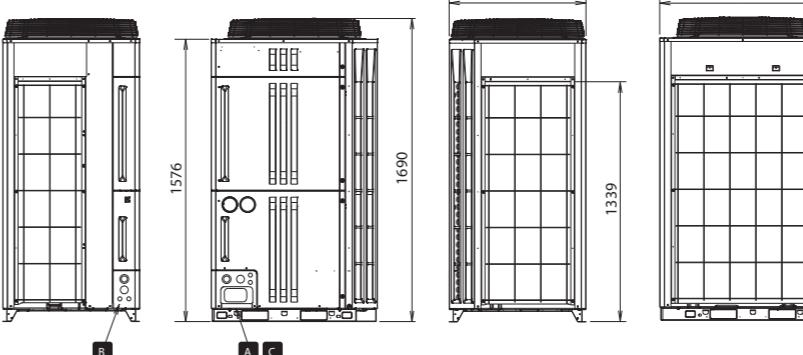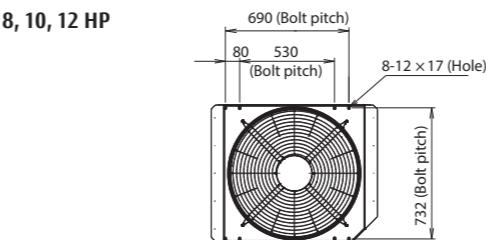

14, 16 HP

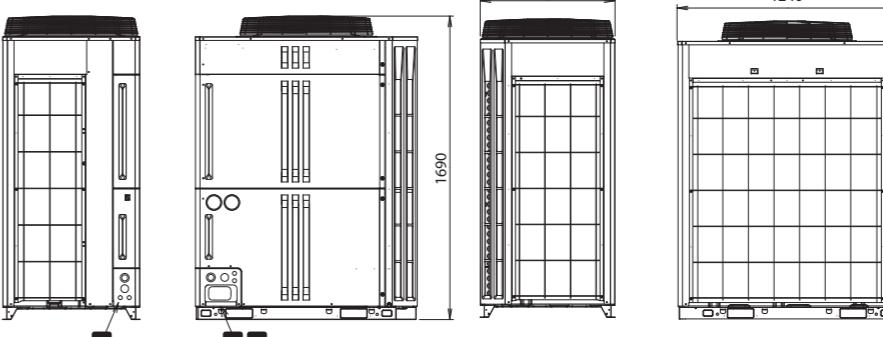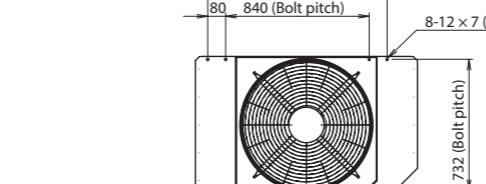

Outdoor unit specifications

Energy Efficiency Combination

Note: Specifications are based on the following conditions.

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.
Heating: Indoor temperature of 20°CDB/(15°CWB), and outdoor temperature of 7°CDB/6°CWB.
Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m.

When cooling operation is conducted at an outdoor air temperature below -5°C,
the outdoor unit must be installed in a position that is higher than or equal to that of the indoor units.
* These specifications are determined by a standard combination.

* Multiple outdoor units are not certified by Emerson.

* Multiple outdoor units are not certified by Eurovent.

*1: Minimum connectable indoor unit number is 2.

*2: The noise level is the value measured in an anechoic room. When measured in an actual installation, the measured value is typically larger than the indicated value due to ambient noise and reflections.

*3: If the capacity range of the connectable indoor units is between 25% and 49.9%, do not open the three-way valve except for the unit to be operated. In addition, do not connect the power line.


Heat Pump

Modular Type

VRF V-IV


System configuration example

- Suitable for air conditioning midsize and large buildings. Connecting each outdoor unit makes it possible to create a high-capacity system.
- Multiple indoor units are connected with separation tubes and headers.

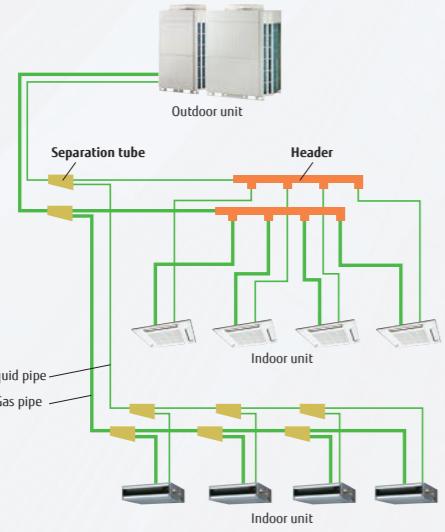

New intelligent refrigerant control

Fujitsu General is proposing outdoor units equipped with refrigerant control function. The refrigerant control operates with subtle control corresponding to the heat load of the room and offers a more comfortable environment. The refrigerant control can also provide increased energy savings.

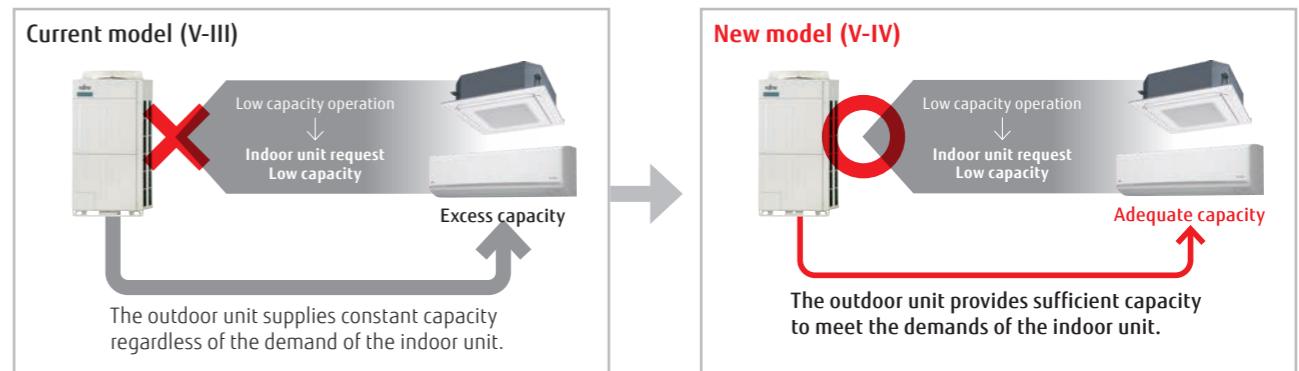


* The improvements due to the control and the actual sine wave vary depending on the combination of the indoor unit and system operating conditions.

Efficiency in actual operating conditions


The use of our proprietary heat exchanger structure and high-efficiency DC twin-rotary compressors achieves the class-leading coefficient of performance (COP) in every combination.

Space saving combination

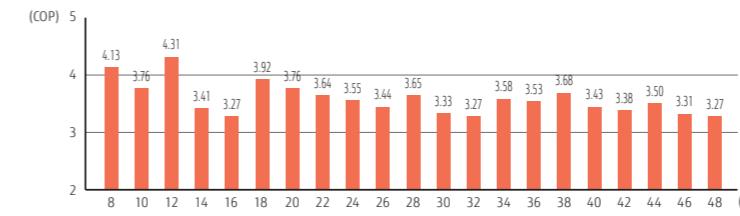

* These specifications are determined by Cassette combination.

Energy efficiency combination

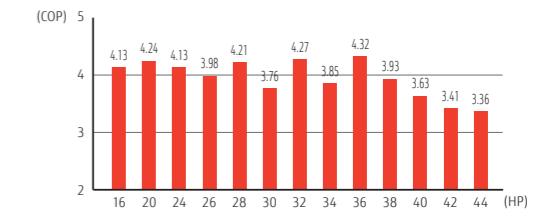

* Multiple outdoor units are not certified by Eurovent.

The energy-saving technology that boosted operation efficiency



Powerful large propeller fan

The fan uses CFD* technology to achieve both high performance and low noise operation. *CFD: Computational Fluid Dynamics

3-phase DC fan motor

The use of a DC fan motor with sophisticated driver control improves energy efficiency substantially. In addition, low noise is realized by the DC fan motor.

Sine-wave DC inverter control

High-efficiency is realized by the adoption of reduced switching loss IPM.

4-face heat exchanger

The 4-face heat exchanger increases the effective surface area and significantly improves heat-exchanging efficiency.

Subcooling heat exchanger

High heat exchange efficiency is achieved by using an internal projection-shape double-pipe construction.

High-efficient, large-capacity DC twin-rotary compressor

Large-capacity high-efficient DC twin-rotary compressor with excellent intermediate capability.

Front intake port (Corner cut air inlet structure)

In multiple outdoor unit installations, the unique front intake design improves airflow into the heat exchanger.

Outdoor units lineup • Combinations other than those listed below are not recommended.

Space saving combination

22.4 kW (8 HP)  AJY072LALDH UNIT: AJY072LALDH	28.0 kW (10 HP)  AJY090LALDH UNIT: AJY090LALDH	33.5 kW (12 HP)  AJY108LALDH UNIT: AJY108LALDH	40.0 kW (14 HP)  AJY126LALDH UNIT: AJY126LALDH	45.0 kW (16 HP)  AJY144LALDH UNIT: AJY144LALDH
50.4 kW (18 HP)  AJY162LALDH UNIT: AJY090/072LALDH	56.0 kW (20 HP)  AJY180LALDH UNIT: AJY090/090LALDH	62.4 kW (22 HP)  AJY198LALDH UNIT: AJY126/072LALDH	68.0 kW (24 HP)  AJY216LALDH UNIT: AJY126/090LALDH	73.0 kW (26 HP)  AJY234LALDH UNIT: AJY144/090LALDH
78.5 kW (28 HP)  AJY252LALDH UNIT: AJY144/108LALDH	85.0 kW (30 HP)  AJY270LALDH UNIT: AJY144/126LALDH	90.0 kW (32 HP)  AJY288LALDH UNIT: AJY144/144LALDH	95.4 kW (34 HP)  AJY306LALDH UNIT: AJY144/090/072LALDH	101.0 kW (36 HP)  AJY324LALDH UNIT: AJY144/090/090LALDH
106.5 kW (38 HP)  AJY342LALDH UNIT: AJY144/108/090LALDH	113.0 kW (40 HP)  AJY360LALDH UNIT: AJY144/126/090LALDH	118.0 kW (42 HP)  AJY378LALDH UNIT: AJY144/144/090LALDH	123.5 kW (44 HP)  AJY396LALDH UNIT: AJY144/144/108LALDH	130.0 kW (46 HP)  AJY414LALDH UNIT: AJY144/144/126LALDH
135.0 kW (48 HP)  AJY432LALDH UNIT: AJY144/144/144LALDH				

Energy efficiency combination

44.8 kW (16 HP)  AJY144LALDHH UNIT: AJY072/072LALDH	55.9 kW (20 HP)  AJY180LALDHH UNIT: AJY108/072LALDH	67.2 kW (24 HP)  AJY216LALDHH UNIT: AJY072/072/072LALDH	72.8 kW (26 HP)  AJY234LALDHH UNIT: AJY090/072/072LALDH	78.3 kW (28 HP)  AJY252LALDHH UNIT: AJY108/072/072LALDH
84.8 kW (30 HP)  AJY270LALDHH UNIT: AJY126/072/072LALDH	89.4 kW (32 HP)  AJY288LALDHH UNIT: AJY108/108/072LALDH	95.9 kW (34 HP)  AJY306LALDHH UNIT: AJY126/108/072LALDH	100.5 kW (36 HP)  AJY324LALDHH UNIT: AJY108/108/108LALDH	107.0 kW (38 HP)  AJY342LALDHH UNIT: AJY126/108/108LALDH
113.5 kW (40 HP)  AJY360LALDHH UNIT: AJY126/126/108LALDH	120.0 kW (42 HP)  AJY378LALDHH UNIT: AJY126/126/126LALDH	125.0 kW (44 HP)  AJY396LALDHH UNIT: AJY126/126/126LALDH		

8, 10 HP: AJY072LALDH / AJY090LALDH
12, 14, 16 HP: AJY108LALDH / AJY126LALDH / AJY144LALDH






*Actual product's design may be different from the images.





Dimensions

(Unit: mm)

8, 10 HP

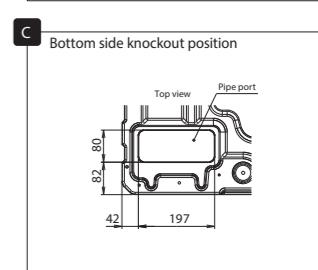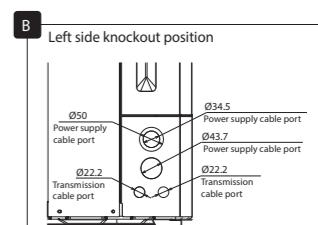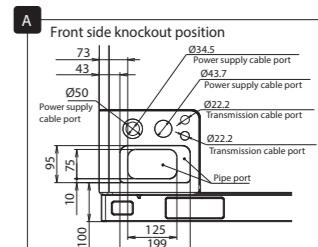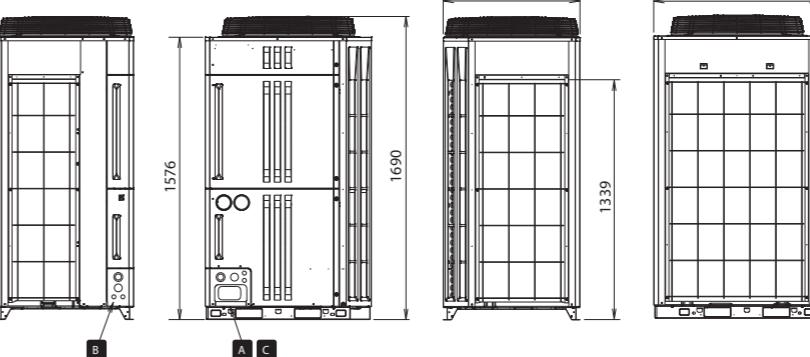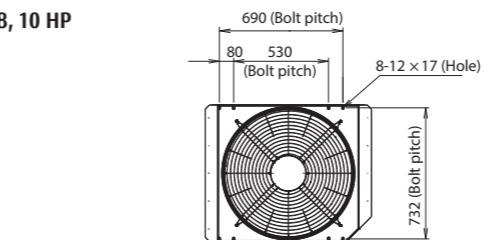

12, 14, 16 HP

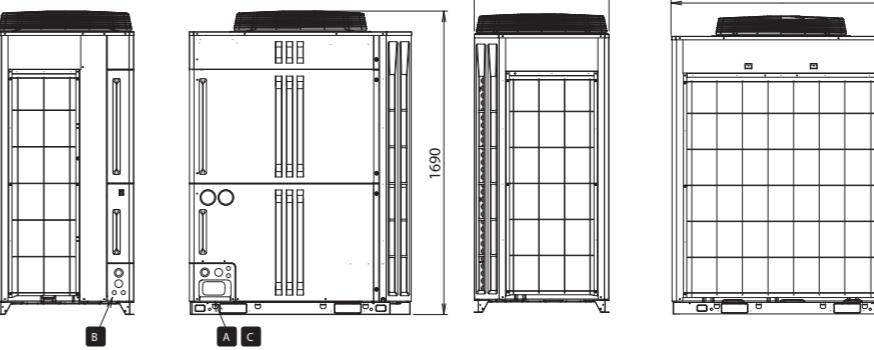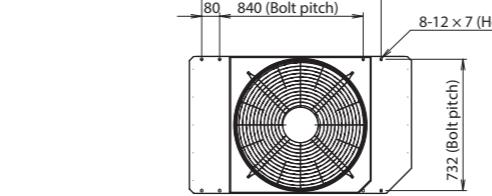

Outdoor unit specifications

Space saving combination

Energy Efficiency Combination

Note: Specifications are subject to the following conditions:

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.

Heating: Indoor temperature of 20°CDB/(15°CWB), and outdoor temperature of 7°CDB/6°CWB.

Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m.

When cooling operation is conducted at an outdoor air temperature below -5°C, the outdoor unit must be installed in a position that is higher than or equal to that of the indoor units.

* These specifications are determined by ducted combination.

*Multiple outdoor units are not certified by Eurovent.

*1 Minimum connectable indoor unit number is 2.
However, the ARXC72 and ARXC90 can be used with a signal connection.

*2 The noise level is the value measured in an anechoic room.

In measured in an actual installation, the measured value is typically lower than the indicated value due to ambient noise and reflections.

These specifications are determined by ducted combination.

VRF INDOOR UNITS

17 types and 95 models available to meet the requirements of any building design.

Indoor units for the VRF Systems are compact, highly efficient, quiet, and user-friendly. Fujitsu General offers a variety of types and capacities for its indoor units that are easy to install and maintain. In addition, a variety of optional parts are available to provide an even more desirable air conditioning experience to users.

- V-054 INDOOR UNITS LINEUP
- V-056 Compact Cassette (Grid type)
- V-058 Cassette Slim type (Circular Flow)
- V-060 Cassette Large type (Circular Flow)
- V-062 Cassette (One-way Flow type)
- V-064 3D Flow Cassette
- V-066 Low Static Pressure Duct/Mini Duct
- V-068 Low Static Pressure Duct/Slim Duct/Slim Concealed Floor
- V-070 Low Static Pressure Duct
- V-072 Medium Static Pressure Duct
- V-074 High Static Pressure Duct
- V-076 Compact Floor
- V-078 Floor/Ceiling
- V-080 Ceiling
- V-082 Wall-mounted (EEV Internal/external)



VRF Indoor Unit Lineup

Capacity range (kW)			1.1	2.2	2.8	3.6	4.0	4.5	5.6	7.1	9.0	10.0	11.2	12.5	14.0	18.0	22.4	25.0	28.0
Class			4	7	9	12	14	14	18	24	30	34	36	45	54	60	72	90	96
Cassette	Compact type	Compact Grid type/Standard type		AUXB 004 GLEH	AUXB 007 GLEH	AUXB 009 GLEH	AUXB 012 GLEH			AUXB 014 GLEH	AUXB 018 GLEH	AUXB 024 GLEH							
	Slim type	Circular Flow								AUXM 018 GLEH	AUXM 024 GLEH	AUXM 030 GLEH							
	Large type	Circular Flow								AUXK 018 GLEH	AUXK 024 GLEH	AUXK 030 GLEH	AUXK 034 GLEH	AUXK 036 GLEH	AUXK 045 GLEH	AUXK 054 GLEH			
	One-way Flow type	One-way Flow	004 - 012 014 - 024	AUXV 004 GLEH	AUXV 007 GLEH	AUXV 009 GLEH	AUXV 012 GLEH			AUXV 014 GLEH	AUXV 018 GLEH	AUXV 024 GLEH							
	3D Flow type	3D Flow								AUXS 018 GLEH	AUXS 024 GLEH								
Duct	Low Static Pressure Duct	Mini Duct (With drain pump)	004 - 014 018 024	ARXK 004 GLGH	ARXK 007 GLGH	ARXK 009 GLGH	ARXK 012 GLGH			ARXK 014 GLGH	ARXK 018 GLGH	ARXK 024 GLGH							
		Slim Duct (With drain pump)	04/007 - 014 018 024	ARXD 04 GALH* ²	ARXD 007 GLEH	ARXD 009 GLEH	ARXD 012 GLEH			ARXD 014 GLEH	ARXD 018 GLEH	ARXD 024 GLEH							
		High Efficiency* ³									ARXP 018 GLFH		ARXP 030 GLFH						
	Medium static pressure duct	Normal										ARXA 024 GLEH	ARXA 030 GLEH		ARXA 036 GLEH	ARXA 045 GLEH			
	High Static Pressure Duct	Normal	036/45 - 60 072 - 090 096											ARXC 036 GTEH	ARXC 045 GTEH		ARXC 060 GTEH* ¹	ARXC 072 GTEH* ¹	ARXC 090 GTEH* ¹
Floor	Floor (*Same as Ceiling models)						ABYA 012 GTEH			ABYA 014 GTEH	ABYA 018 GTEH	ABYA 024 GTEH							
	Slim Concealed Floor (*Same as Slim Duct models)	04/007 - 014 018 024	ARXD 04 GALH* ²	ARXD 007 GLEH	ARXD 009 GLEH	ARXD 012 GLEH			ARXD 014 GLEH	ARXD 018 GLEH	ARXD 024 GLEH								
	Compact Floor			AGYA 004 GCGH	AGYA 007 GCGH	AGYA 009 GCGH	AGYA 012 GCGH	AGYA 014 GCGH											
	Compact Floor (EEV external)			AGYE 004 GCEH	AGYE 007 GCEH	AGYE 009 GCEH	AGYE 012 GCEH	AGYE 014 GCEH											
Ceiling		012 - 024 030 - 054					ABYA 012 GTEH			ABYA 014 GTEH	ABYA 018 GTEH	ABYA 024 GTEH	ABYA 030 GTEH		ABYA 036 GTEH	ABYA 045 GTEH	ABYA 054 GTEH		
Wall-mounted type	Wall-mounted type	004 - 014 18 - 24 030 - 034	ASYA 004 GCGH	ASYA 007 GCGH	ASYA 009 GCGH	ASYA 012 GCGH		ASYA 014 GCGH		ASYA 18 GBCH	ASYA 24 GBCH	ASYA 30 GTEH	ASYA 34 GTEH						
	Wall-mounted type (EEV external)	004 - 014	ASYE 004 GCEH	ASYE 007 GCEH	ASYE 009 GCEH	ASYE 012 GCEH	ASYE 014 GCEH												

*1: ARXC060/072/090/096G cannot be connected to J-IVS/J-IV Series.
*2: ARXD04GALH cannot be connected to J-IVS/J-IV/LVL/VR-IV Series.

*3: Production by order
Specifications and design are subject to change without notice.


Compact Cassette

Grid type

DC
FAN

Compact and stylish panel

The compact and stylish panel fits nicely into a grid type ceiling. The linear design is a perfect fit into a grid of 620 mm × 620 mm in the ceiling.

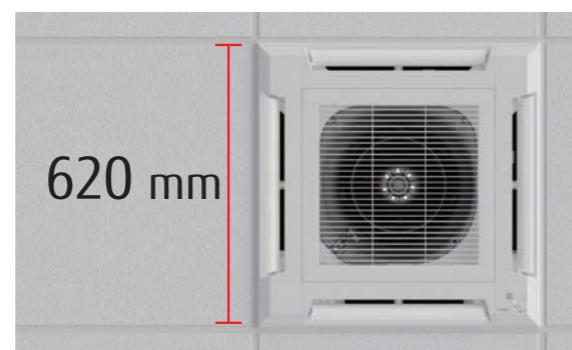

Easy maintenance

You can access the unit for maintenance just by removing a ceiling panel right next to the grille. As no inspection hole needs to be cut through the ceiling, no additional construction cost is incurred.




The air inlet grille can be installed to open in any direction for easy maintenance.



Flexible installation

The unit fits nicely into the decor of a grid type ceiling and can be installed near a lighting or a ventilation opening.

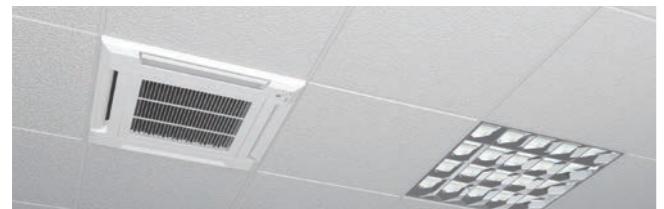

High ceiling mode

The cassette can be installed up to a height of 3.0 m.
(012/014/018/024).

Model code	Maximum height from floor to ceiling (m)	
	Standard mode	High ceiling mode
004	2.7	-
007	2.7	-
009	2.7	-
012	2.7	3.0
014	2.7	3.0
018	2.7	3.0
024	2.7	3.0

Model: AUXB004GLEH / AUXB007GLEH / AUXB009GLEH
AUXB012GLEH / AUXB014GLEH / AUXB018GLEH
AUXB024GLEH

*Actual product's design may be different from the images.



Specifications

Model name	AUXB004GLEH	AUXB007GLEH	AUXB009GLEH	AUXB012GLEH	AUXB014GLEH	AUXB018GLEH	AUXB024GLEH
Power source	Single phase, ~230 V, 50 Hz						
Capacity	Cooling kW	1.1 1.3	2.2 2.8	2.8 3.2	3.6 4.1	4.5 5.0	5.6 6.3
Input power	W	23	25	25	29	35	36
Airflow rate	High m³/h	530/530 490/480 450/430 420/380 390/340 350/300	540 500 460 420 390 350	550 520 480 440 400 350	600 560 520 480 430 390	680 620 560 500 440 390	710 660 590 520 460 400
Sound pressure level	dB(A) High Med-High Med Med-Low Low Quiet	34/34 32/31 30/29 28/26 27/24 25/21	34 32 30 28 27 25	35 33 31 29 27 25	37 34 33 31 29 27	38 37 34 32 30 27	41 39 36 33 30 30
Net Dimensions (H × W × D)	mm	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570
Weight	kg	14.5	15	15	15	15	17
Connection pipe diameter	Liquid (Flare) mm	6.35	6.35	6.35	6.35	6.35	9.52
Drain Hose Diameter (I.D./O.D.)	Gas (Flare) mm	9.52	9.52	9.52	12.70	12.70	15.88
Cassette	Model name	UTG-UFYE-W/UTG-UFYC-W					
Grille	Net Dimensions (H × W × D)	50 × 620 × 60/50 × 700 × 700					
	Weight	2.3/2.6					

Note: Specifications are subject to the following conditions:

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.
Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.


Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V]

*1: This value is under cooling operation.

Optional parts


*For more details, please refer to the chapter "Optional parts".

Air Outlet Shutter Plate:	UTR-YDZB	Cassette Grille:	UTG-UFYC-W, UTG-UFYE-W
Flesh Air Intake Kit:	UTZ-VXAA	External power supply unit:	UTZ-GXXA, UTZ-GXXC*
Insulation kit for high humidity:	UTZ-KXGC	WLAN adapter:	UTY-TFSXZ1, UTY-TFSXJ3, FG-AC-WIF1Z1
Silver Ion Filter:	UTD-HFAA		

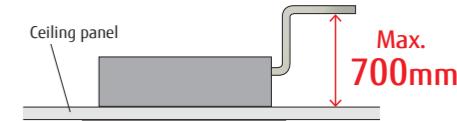

Dimensions

(Unit: mm)

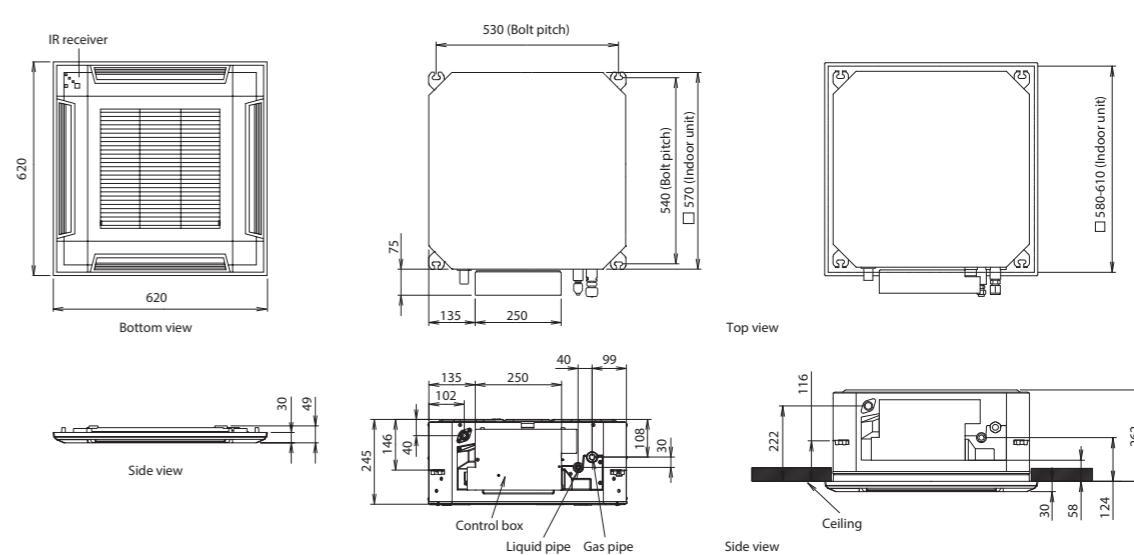


Cassette Slim type Circular Flow

DC
FAN

Unique circular flow design

This Cassette type air conditioner is equipped with a high performance DC fan motor, a turbo fan, and a louver to propel powerful airflows in all directions.

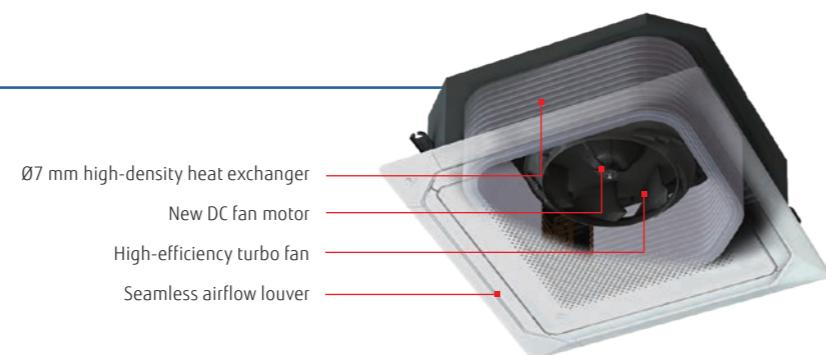

Uniform temperature air conditioning

Achieve a comfortable air conditioning spread to every corner of the room thanks to the circular flow and wide vertical airflow.



Individual louver control

Each louver can be set individually by the Touch panel wired remote controller so the user can enjoy the comfort of different directional airflows according to the room layout.


* UTY-RNRYZ5 Wired remote controller with touch panel and UTY-DCGYZ2 Central remote controller only



The Occupancy sensor contributes to further energy savings.

Energy saving operation starts automatically by detecting the motion of a person. Two modes of save operation mode and stop mode can be selected.

* UTY-RNRYZ5 Wired remote controller with touch panel and UTY-DCGYZ2 Central remote controller only



2 modes are available to choose from:

Auto economy mode

Occupancy sensor (Optional)

The air conditioner switches to operate on reduced power when it detects that the room is unoccupied.

Auto-off mode

The air conditioner stops operating when it detects that the room is unoccupied.

Model: AUXM018GLEH / AUXM024GLEH / AUXM030GLEH



Specifications

Model name	AUXM018GLEH		AUXM024GLEH		AUXM030GLEH
Power source	Single phase, ~230 V, 50 Hz				
Capacity	Cooling	kW	5.6	7.1	9.0
	Heating		6.3	8.0	10.0
Input power		W	20	25	49
	High		1,050	1,120	1,470
	Med-High		930	1,050	1,160
	Med		900	930	1,070
	Med-Low		870	900	930
	Low		810	870	900
	Quiet		780	780	780
	High		33	35	40
	Med-High		32	33	36
	Med		31	32	34
	Med-Low		30	31	32
	Low		29	30	31
	Quiet		28	28	28
Dimensions (H × W × D)	mm		246 × 840 × 840		
Weight	kg		24.0	24.5	24.5
Connection pipe diameter	Liquid (Flare)		6.35	9.52	9.52
	Gas (Flare)		12.70	15.88	15.88
Drain Hose Diameter (I.D./O.D.)	mm		25/32		
Cassette Grille	Model name	UTG-UKYC-W/UTG-UKYA-B			
	Dimensions (H × W × D)	mm		53 × 950 × 950	
	Weight	kg		6.0	

Note: Specifications are subject to the following conditions:

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.

Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.

Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V].

When AUX*018GLEH is connected to an outdoor unit other than one of the J-IVL Series, the pipe diameter should be Ø9.52/Ø15.88 mm (Liquid/Gas).

When connecting AUXK036GLEH, AUXK045GLEH, and AUXK054GLEH to an outdoor unit other than the outdoor unit of the J-IVL Series, the gas pipe diameter should be Ø19.05 mm.

*For more details, please refer to the chapter "Optional parts".

Optional parts


Occupancy sensor Kit: UTG-SHZXC
Wide Panel: UTG-AKXA-W
Panel Spacer: UTG-BKXA-W
Fresh air intake kit: UTZ-VXRA

Air Outlet Shutter Plate: UTR-YDZK
Insulation kit for high humidity: UTZ-KXRA
Cassette Grille: UTG-UKYC-W, UTG-UKYA-B
External power supply unit: UTZ-GXXA, UTZ-GXXC*

IR Receiver Unit: UTY-LBHXD
WLAN adapter: UTY-TFSXZ1, UTY-TFSXJ3, FG-AC-WIF1Z1
Silver Ion Filter: UTD-HFRA

Dimensions

(Unit: mm)

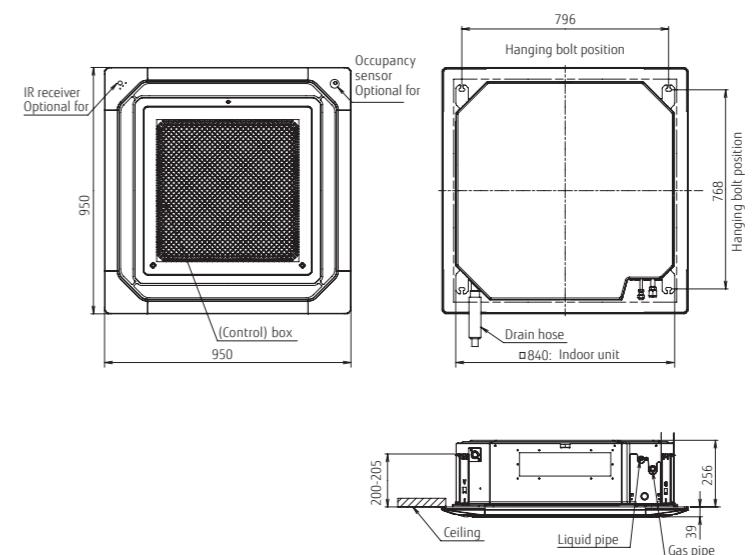


Cassette Large type Circular Flow

DC
FAN

Unique circular flow design

This Cassette type air conditioner is equipped with a high performance DC fan motor, a turbo fan, and a louver to propel powerful airflows in all directions.

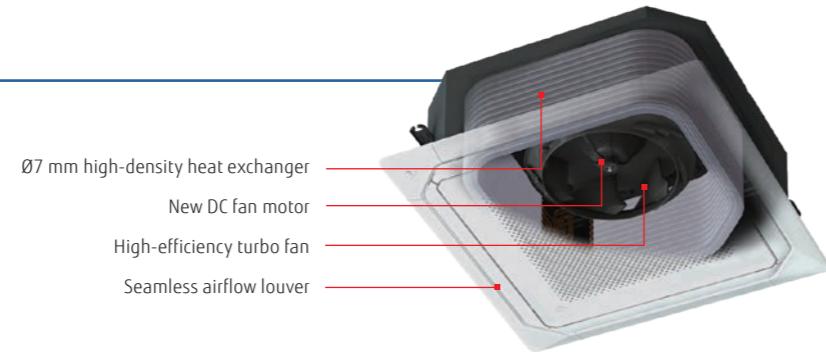

Uniform temperature air conditioning


Achieve a comfortable air conditioning spread to every corner of the room by circular flow and wide vertical airflow.



Individual louver control

Each louver can be set individually by the Touch panel wired remote controller so the user can enjoy the comfort of different directional airflows according to the room layout.

* UTY-RNRYZ5 Wired remote controller with touch panel and UTY-DCGYZ2 Central remote controller only

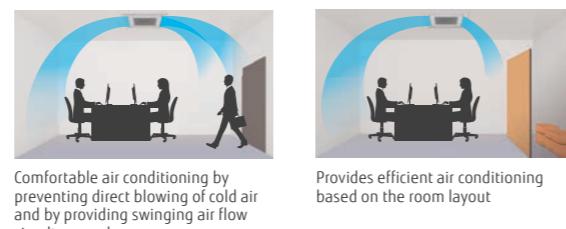

The Occupancy sensor contributes to further energy savings.

Energy saving operation starts automatically by detecting the motion of a person. Two modes of save operation mode and stop mode can be selected.

* UTY-RNRYZ5 Wired remote controller with touch panel and UTY-DCGYZ2 Central remote controller only



2 modes are available to choose from:

Auto economy mode

Occupancy sensor (Optional)

The air conditioner switches to operate on reduced power when it detects that the room is unoccupied.

Auto-off mode

The air conditioner stops operating when it detects that the room is unoccupied.

**Model: AUXK018GLEH / AUXK024GLEH / AUXK030GLEH
AUXK034GLEH / AUXK036GLEH / AUXK045GLEH
AUXK054GLEH**



Specifications

Model name	AUXK018GLEH	AUXK024GLEH	AUXK030GLEH	AUXK034GLEH	AUXK036GLEH	AUXK045GLEH	AUXK054GLEH	
Power source	Single phase, ~230 V, 50 Hz							
Capacity	Cooling kW	5.6 6.3	7.1 8.0	9.0 10.0	10.0 11.2	11.2 12.5	12.5 14.0	
Input power	Heating W	40	40	47	47	61	89	
Airflow rate	High m³/h	1,420	1,420	1,440	1,440	1,620	1,820	
	Med-High	1,360	1,360	1,400	1,400	1,500	1,590	
	Med	1,300	1,300	1,340	1,340	1,400	1,500	
	Med-Low	1,270	1,270	1,300	1,300	1,340	1,400	
	Low	1,200	1,200	1,280	1,280	1,280	1,300	
	Quiet	1,150	1,150	1,150	1,150	1,150	1,150	
Sound pressure level	High dB(A)	38	38	39	39	41	44	
	Med-High	37	37	38	38	40	42	
	Med	36	36	37	37	38	40	
	Med-Low	35	35	36	36	37	39	
	Low	34	34	35	35	36	36	
	Quiet	33	33	33	33	33	33	
Dimensions (H × W × D)	mm	288 × 840 × 840						
Weight	kg	26.5	26.5	29.5	29.5	29.5	29.5	
Connection pipe diameter	Liquid (Flare) mm	6.35	9.52	9.52	9.52	9.52	9.52	
	Gas (Flare)	12.70	15.88	15.88	15.88	15.88	15.88	
Drain Hose Diameter (I.D./O.D.)	mm	25/32						
Cassette Grille	Model name	UTG-UKYC-W/UTG-UKYA-B						
Dimensions (H × W × D)	mm	53 × 950 × 950						
Weight	kg	6.0						

Note: Specifications are subject to the following conditions:

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.
Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.

Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V].

When AUX*018GLEH is connected to an outdoor unit other than one of the J-IVL Series, the pipe diameter should be Ø9.52/Ø15.88 mm (Liquid/Gas).

When connecting AUXK036GLEH, AUXK045GLEH, and AUXK054GLEH to an outdoor unit other than the outdoor unit of the J-IVL Series, the gas pipe diameter should be Ø19.05 mm.


*For more details, please refer to the chapter "Optional parts".

Optional parts

Occupancy sensor Kit: UTY-SHZXC	Air Outlet Shutter Plate: UTR-YDZK	IR Receiver Unit: UTY-LBHXD
Wide Panel: UTG-AKXA-W	Insulation kit for high humidity: UTZ-KXRA	WLAN adapter: UTY-TFSXZ1, UTY-TFSXJ3, FG-AC-WIF1Z1
Panel Spacer: UTG-BKXA-W	Cassette Grille: UTG-UKYC-W, UTG-UKYA-B	Silver Ion Filter: UTD-HFRA
Fresh air intake kit: UTZ-VXRA	External power supply unit: UTZ-GXXA, UTZ-GXXC*	

Dimensions

(Unit: mm)

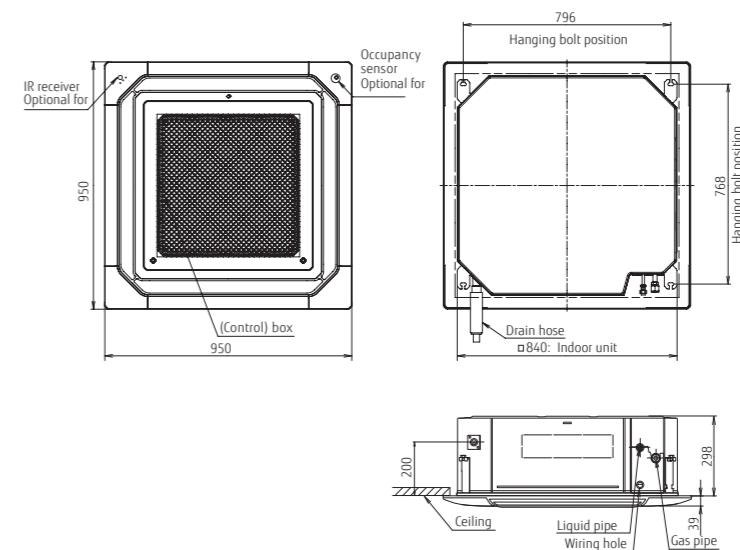

Cassette One-way Flow type

DC
FAN

Compact chassis size

The compact size allows easy installation in a variety of commercial facilities and environments.

- The height of the chassis is less than 200 mm for all models.
- All 4 to 12 kBtu models are less than 1,000 mm wide.
- The depth of the chassis is 570 mm, which fits nicely into a grid type ceiling.

Dimensions (Panel size) (Unit: mm)							
	4	7	9	12	14	18	24
H			198 (43)			198 (43)	
W		785 (950)			1,190 (1,360)		
D		570 (620)			570 (620)		



Wide airflow range

A large flap with a wide range of movements, equipped with louvers arranged triangularly, sends air into every corner of the room.



In cooling mode, the left/right airflow reaches every corner of the room without directly touching the human body to provide comfortable air conditioning.



In heating mode, warm air is directed downward toward the floor to warm the feet and lower body, while the head is kept relatively cool.



Note: This is a conceptual drawing. The performance of an air conditioner may vary depending on where it is installed, the size of the room, and its distance from the wall.

Quiet mode

The low operating noise makes the model ideal for use in hotel rooms.



Model: AUXV004GLEH / AUXV007GLEH / AUXV009GLEH
AUXV012GLEH / AUXV014GLEH / AUXV018GLEH
AUXV024GLEH



AUXV004/007/009/012GLEH



AUXV014/018/024GLEH

*Actual product's design may be different from the images.

Specifications

Model name	AUXV004GLEH	AUXV007GLEH	AUXV009GLEH	AUXV012GLEH	AUXV014GLEH	AUXV018GLEH	AUXV024GLEH
Power source	Single phase, ~230 V, 50 Hz						
Capacity	Cooling	kW	1.1	2.2	2.8	3.6	4.5
	Heating		1.3	2.8	3.2	4.0	5.0
Input power		W	30/30	42/42	42/42	60/60	38/38
	High		460	550	550	670	720
	Med-High		440	440	440	520	660
	Med		420	420	420	480	630
	Med-Low		400	400	400	450	600
	Low		380	380	380	410	580
	Quiet		360	360	360	360	580
	High		38	42	42	45	44
	Med-High		37	37	37	41	43
	Med		36	36	36	39	40
	Med-Low		35	35	35	38	42
	Low		33	33	33	36	39
	Quiet		32	32	32	32	36
Net Dimensions (H × W × D)	mm	198 × 785 × 570	198 × 785 × 570	198 × 785 × 570	198 × 785 × 570	198 × 1,190 × 570	198 × 1,190 × 570
Weight	kg	18	19	19	19	26	26
Connection pipe diameter	Liquid (Flare)	6.35	6.35	6.35	6.35	6.35	9.52
	Gas (Flare)	9.52	9.52	9.52	12.70	12.70	15.88
Drain Hose Diameter (I.D./O.D.)		25/32					
Cassette	Model name	UTG-UNYA-W					
Grille	Net Dimensions (H × W × D)	43 × 950 × 620					UTG-UNYB-W
	Weight	kg	6.5				43 × 1,360 × 620
							8.5

Note: Specifications are subject to the following conditions:
Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.
Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.
Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V]


Optional parts

*For more details, please refer to the chapter "Optional parts".

WLAN adapter:	UTY-TFSXZ1, UTY-TFSXJ3, FG-AC-WIF1Z1
IR Receiver Unit:	UTY-TRHX
Cassette Grille:	UTG-UNYA-W/UTG-UNYB-W
External power supply unit:	UTZ-GXXA, UTZ-GXXC*

Dimensions


(Unit: mm)

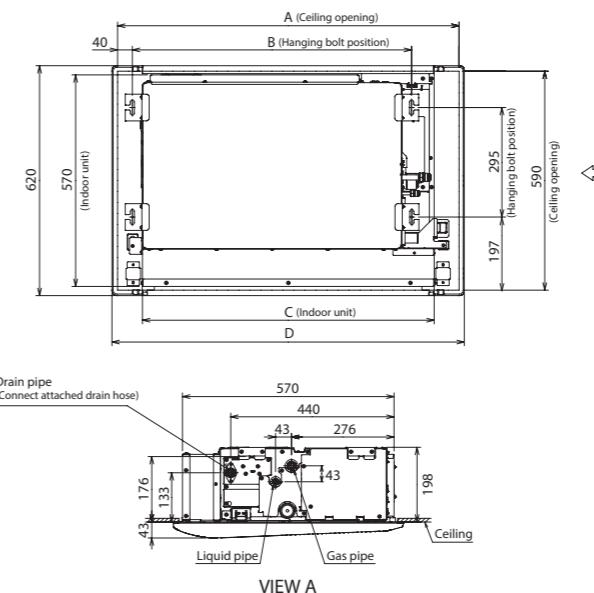

Flexible Installation

The L-shaped pipe kit allows for more flexible installation.

Equipped with a built-in drain pump as standard, which enables a maximum pipe height difference of 700 m from the ceiling.

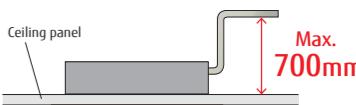

	AUXV004-012	AUXV014-024
A	920	1,330
B	752	1,152
C	785	1,190
D	950	1,360

3D Flow Cassette

DC FAN




3 individually controlled air outlet ports

The Comfortable airflow setting enables the left and right air outlet ports as well as the wide center port to work together to provide a comfortable room environment.


Temperature distribution during cooling and heating (when set to Comfortable airflow)



Testing conditions: Model AUXS024GLEH running cooling operation with the air volume set to "Hi" to maintain the room temperature at 18°C with the outdoor temperature at 35°C, tested in our 40m² environmental test room




Testing conditions: Model AUXS024GLEH running heating operation with the air volume set to "Hi" to maintain the room temperature at 30°C with the outdoor temperature at 7°C, tested in our 40m² environmental test room

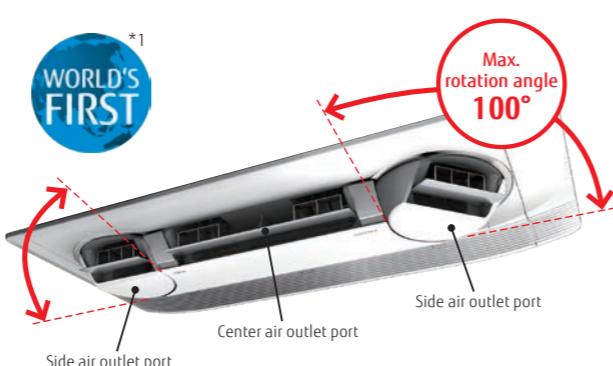

*1: Announced 2018. In the category of room air conditioners for the home (source: Fujitsu General Limited).

Individual airflow setting

The individual airflow setting function optimizes the airflow direction to match the room layout.

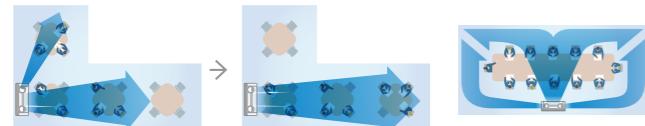

Adjusts airflows from the side air outlet ports to match the layout and usage of the room to minimize the amount of wasted airflow.

Individual control of air outlet ports

Individual airflow can be set using a Wired remote controller with touch panel and Central remote controller*. The airflow from each air outlet port can be set individually.



Wired remote controller with Touch Panel
UTY-RNRYZ5




Central remote controller
UTY-DCGYZ2

* Feature available only on UTY-RNRYZ5 Wired remote controller with touch panel and UTY-DCGYZ2 Central remote controller

High energy saving

The structural design to take in a larger volume of air and blow air out more smoothly reduces air blowing loss and achieves class-leading energy-saving performance.

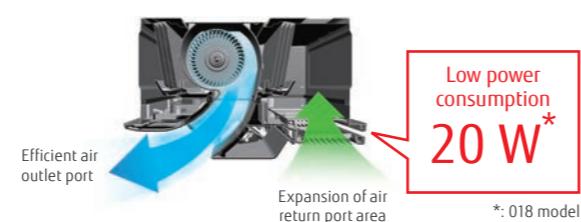

Model: AUXS018GLEH / AUXS024GLEH



*Actual product's design may be different from the images.

Specifications

Model name	AUXS018GLEH		AUXS024GLEH
Power source	Single phase, ~230 V, 50 Hz		
Capacity	5.60 6.30		7.10 8.00
Input power	W	20/28	34/43
		750/870	950/1,040
		710/830	890/990
		690/780	860/930
		660/740	810/880
		630/700	770/840
Airflow rate*	m ³ /h	540/540	540/540
		38/41	43/46
		36/40	42/45
		35/39	41/43
		35/37	40/42
		33/36	38/40
Sound pressure level*	dB(A)	29/29	29/29
		200 × 1,240 × 500	200 × 1,240 × 500
		25	25
		6.35	9.52
		12.70	15.88
		25/32	
Net Dimensions (H × W × D)	mm	200 × 1,240 × 500	200 × 1,240 × 500
Weight	kg	25	25
Connection pipe diameter	Liquid (Flare) Gas (Flare)	6.35	9.52
Drain Hose Diameter (I.D./O.D.)	mm	12.70	15.88
Cassette Grille	Model name	UTG-USYA-W	
	Net Dimensions (H × W × D)	85 × 1,350 × 580	
	Weight	11.5	

Note: Specifications are subject to the following conditions:
Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.
Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.
Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V]

*: Applicable to cooling and heating operation


Optional parts

*For more details, please refer to the chapter "Optional parts".

WLAN adapter: UTY-TFSXZ1, UTY-TFSXJ3, FG-AC-WIF1Z1
IR Receiver Unit: UTY-TRHX
Cassette Grille: UTY-USYA-W
External power supply unit: UTZ-GXXA, UTZ-GXXC*

Dimensions

(Unit: mm)

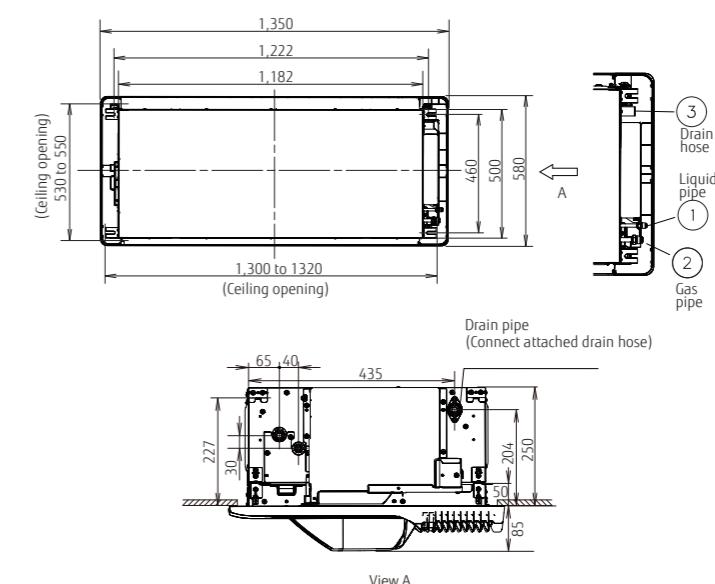


Low Static Pressure Duct Mini Duct (With drain pump)

DC FAN


Space saving design

- Fits into a space 198 mm high and 450 mm deep
- 30% smaller than previous-generation models
- Weighs 16 kg, 10% lighter

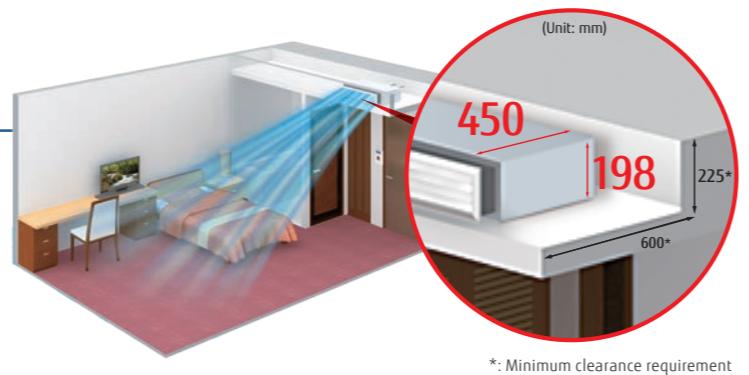


Optimum airflow path and low noise operation

The stabilized airflow reduces the noise level significantly.

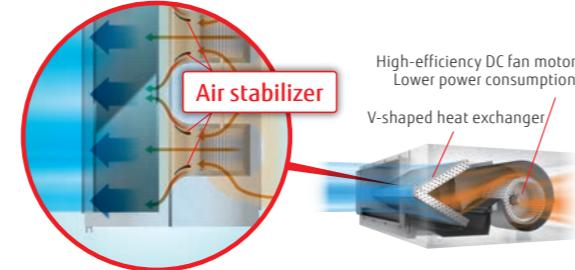

6-speed control*


Multistep airflow adjustment allows installation in a quiet location.



* Remote controller is compatible with the following:
UTY-RNRYZ5/UTY-RLRY/UTY-RSRY/UTY-RHRY/UTY-DCGYZ2/UTY-ALGXZ1/UTY-APGXZ1

Easy to design and maintain for drain

Indoor unit design for easy maintenance. Parts can be replaced from the side of the unit where maintenance is easier.

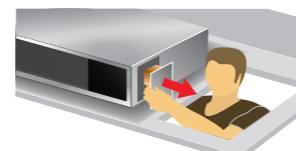

A drain pump is built into the unit as standard:
Parts can be accessed and replaced through the side of the unit for easy maintenance.

Model: ARXK004GLGH / ARXK007GLGH / ARXK009GLGH
ARXK012GLGH / ARXK014GLGH / ARXK018GLGH
ARXK024GLGH



ARXK004/007/009/012/014GLGH



ARXK018GLGH



ARXK024GLGH

Specifications

Model name	ARXK004GLGH	ARXK007GLGH	ARXK009GLGH	ARXK012GLGH	ARXK014GLGH	ARXK018GLGH	ARXK024GLGH
Power source	Single phase, ~230 V, 50 Hz						
Capacity	Cooling	kW	1.1	2.2	2.8	3.6	4.5
	Heating		1.3	2.8	3.2	4.0	5.0
Input power		W	26	28	28	35	66
	High		460	460	460	550	760
	Med-High		440	440	440	520	660
	Med		420	420	420	480	560
	Med-Low		400	400	400	450	490
	Low		370	370	370	410	410
	Quiet		340	340	340	340	340
Airflow rate		m ³ /h	0 to 30	0 to 30	0 to 30	0 to 30	0 to 50
	High		10	10	10	10	15
	Med-High		25	26	26	29	34
	Med		24	25	25	27	31
	Med-Low		23	24	24	26	28
	Low		22	23	23	25	26
	Quiet		21	22	22	24	24
Static pressure range		Pa	0 to 30	0 to 30	0 to 30	0 to 50	0 to 50
Standard static pressure			10	10	10	10	15
	High		25	26	26	29	34
	Med-High		24	25	25	27	31
	Med		23	24	24	26	28
	Med-Low		22	23	23	25	27
	Low		21	22	22	24	25
	Quiet		20	21	21	22	22
Sound pressure level		dB(A)	0 to 30	0 to 30	0 to 30	0 to 50	0 to 50
Net Dimensions (H × W × D)	mm	198 × 700 × 450	198 × 700 × 450	198 × 700 × 450	198 × 700 × 450	198 × 700 × 450	198 × 900 × 450
Weight	kg	14.5	15.5	15.5	16	16	19
Connection pipe diameter	Liquid (Flare)	6.35	6.35	6.35	6.35	6.35	9.52
	Gas (Flare)	9.52	9.52	9.52	12.70	12.70	15.88
Drain Hose Diameter (I.D./O.D.)	mm	25/32					

Note: Specifications are subject to the following conditions:

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.
Heating: Indoor temperature of 20°CDB/(15°CWB), and outdoor temperature of 7°CDB/6°CWB.
Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V].

Optional parts

*For more details, please refer to the chapter "Optional parts".

Remote sensor unit: UTY-XSZX1	External power supply unit: UTZ-GXXA, UTZ-GXXC*
IR receiver unit: UTY-TRHX	Auto Louver Grille Kit: UTD-GXTA-W (004-014)
Silver Ion Filter: UTD-HFTA (004-014) UTD-HFTB (018) UTD-HFTC (024)	UTD-GXTB-W (018) UTD-GXTC-W (024)
WLAN adapter: FG-AC-WIF1Z1	FG-AC-WIF1Z1
	UTY-TFSXJ3, UTY-TFSXZ1 (007-024)


Auto Louver Grille Kit (Optional)

The slim design of the unit provides comfortable cooling and heating air conditioning over a wide area.
The optional automatic louver grille, which fits nicely into any interior decor, provides comfortable air conditioning (Optional)



Dimensions

(Unit: mm)

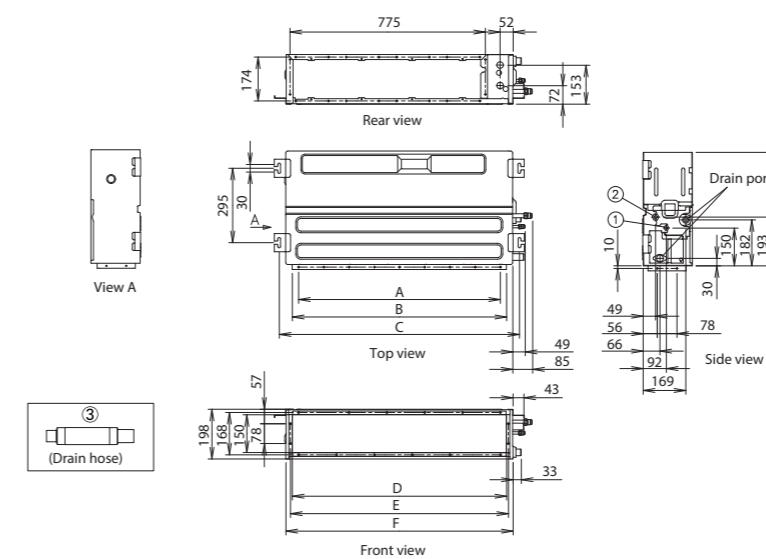

- ① Refrigerant pipe flare connection (Liquid)
② Refrigerant pipe flare connection (Gas)
③ Drain hose connection

	ARXK004-014	ARXK018	ARXK024
A	P100×6=600	P100×8=800	P100×10=1000
B	650	850	1050
C	752	952	1152
D	650	850	1050
E	665	864	1064
F	700	900	1100


Low Static Pressure Duct Slim Duct/Slim Concealed Floor

DC FAN




Slim design

Slim design allows for installation in a tight ceiling space.

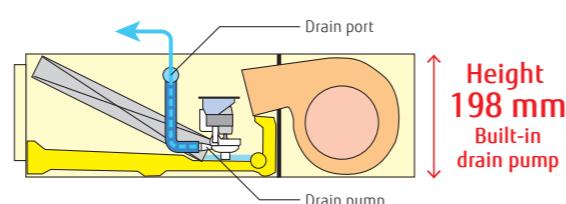


Air intake

Air intake direction can be selected to match the installation site.

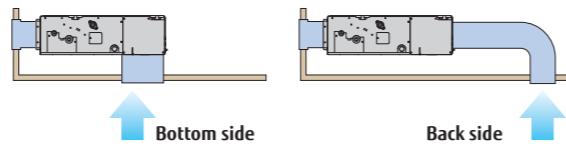


Flexible installation

Ceiling concealed

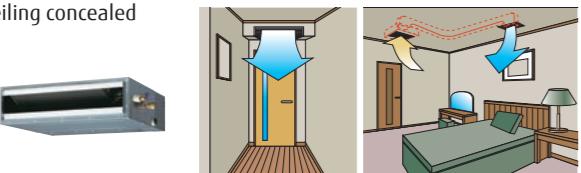

Floor concealed

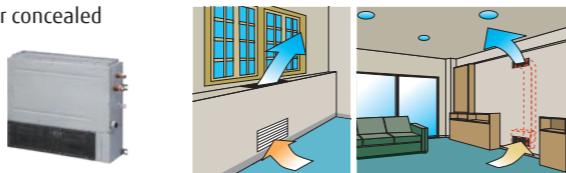

Wide range of static pressures

The use of a DC fan motor makes it possible to adjust the static pressure between 0 and 90 Pa.

The static pressure range can be changed by a remote controller.




Static pressure range
0 to 90 Pa

*024 model static pressure range is 0 to 50 Pa.

Filter (Accessory)

ARXD04/007/009/012/014/018 ARXD024

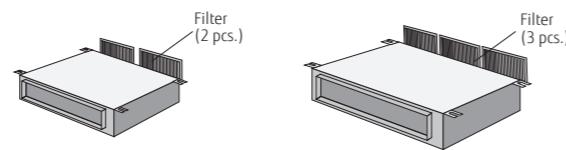

Model: ARXD04GALH / ARXD007GLEH / ARXD009GLEH
ARXD012GLEH / ARXD014GLEH / ARXD018GLEH
ARXD024GLEH



ARXD04GALH
ARXD007/009/012/014GLEH



ARXD018GLEH



ARXD024GLEH

Slim
Concealed
Floor



Specifications

Model name	ARXD04GALH*	ARXD007GLEH	ARXD009GLEH	ARXD012GLEH	ARXD014GLEH	ARXD018GLEH	ARXD024GLEH
Power source	Single phase, ~230 V, 50 Hz						
Capacity	Cooling kW	1.1 1.3	2.2 2.8	2.8 3.2	3.6 4.0	4.5 5.0	5.6 6.3
Input power	Heating W	40	44	50	54	92	83
Airflow rate	High m³/h	510	550	600	600	800	940
	Med-High	-	480	510	530	680	820
	Med	400/470*1	440	460	490	600	730
	Med-Low	-	410	420	450	520	630
	Low	320/440*1	370	370	410	440	540
	Quiet	-	320	320	340	340	470
Static pressure range	Pa	0 to 90	0 to 50				
Standard static pressure	Pa	25	25	25	25	25	25
	High	26	28	29	30	34	35
	Med-High	-	26	27	28	32	31
	Med	21/25*1	25	25	27	30	29
	Med-Low	-	24	24	26	28	27
	Low	20/22*1	22	22	24	25	24
	Quiet	-	21	21	22	22	21
Net Dimensions (H × W × D)	mm	198 × 700 × 620	198 × 700 × 620	198 × 700 × 620	198 × 700 × 620	198 × 700 × 620	198 × 900 × 620
Weight	kg	17	17	17	18	18	22
Connection pipe diameter	Liquid (Flare) Gas (Flare)	6.35 12.70	6.35 9.52	6.35 9.52	6.35 12.70	6.35 12.70	9.52 15.88
Drain Hose Diameter (I.D./O.D.)	mm	25/32					

Note: Specifications are subject to the following conditions:

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.
Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.

Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V].


*1: This value is under cooling operation.

*: ARXD04GALH cannot be connected to J-IVS/J-IVL/J-VR-IV Series.

Optional parts

*For more details, please refer to the chapter "Optional parts".


Remote sensor unit: UTY-XSZXZ1	External power supply unit: UTZ-GXXA, UTZ-GXXC*
IR receiver unit: UTY-YWC (04)	Auto Louver Grille Kit: UTD-GXTA-W (04, 007-014)
UTY-TRHX (007-024)	UTD-GXTB-W (018)
WLAN adapter: UTY-TFSXJ3 (007-024)	UTD-GXTC-W (024)
UTY-TFSXZ1 (007-024)	Silver Ion Filter: UTD-HFTA (04, 007-014)
FG-RC-WIF1Z2 (04)	UTD-HFTB (018)
FG-AC-WIF1Z1 (007-024)	UTD-HFTC (024)

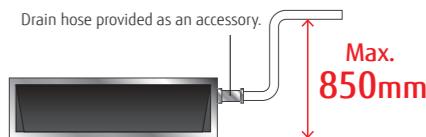

Dimensions

(Unit: mm)

*Maintenance accessibility should be considered when installing the product.
Refer to the installation manual for the required maintenance access size.

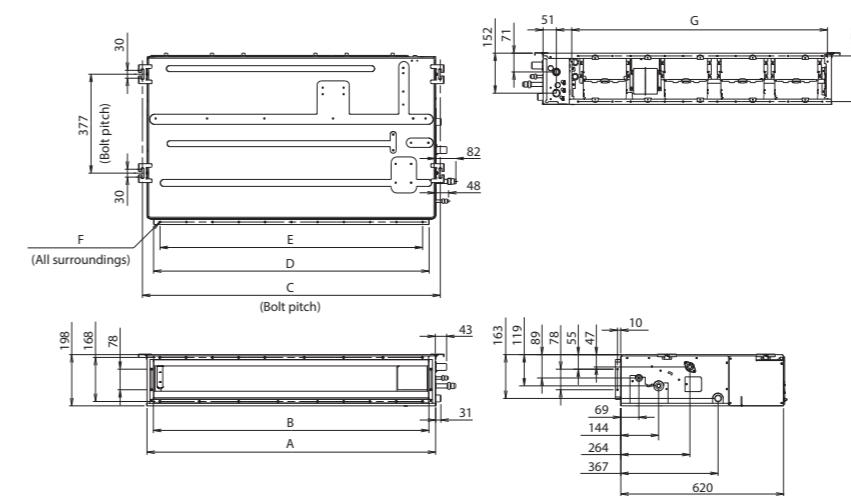

	ARXD04-014	ARXD018	ARXD024
A	700	900	1100
B	650	850	1050
C	734	934	1134
D	650	850	1050
E	P100 × 6 = 600	P100 × 8 = 800	P100 × 10 = 1000
F	18 × Ø5	22 × Ø5	26 × Ø5
G	574	774	974


Low static pressure duct High Efficiency

DC FAN



Slim & Compact design


The slim and compact design of the indoor unit, with the control box mounted on the side, allows installation in narrow spaces.

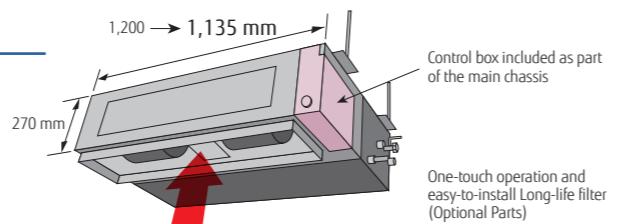

Easy maintenance


Structural improvement has been developed by making the bottom panel in two pieces, front and rear. The internal fan casing is also manufactured in two pieces—upper and lower. The motor and fan can be easily accessed and maintained by removing the rear panel and the lower casing with the main chassis remaining in place.

See below for rear-suction type

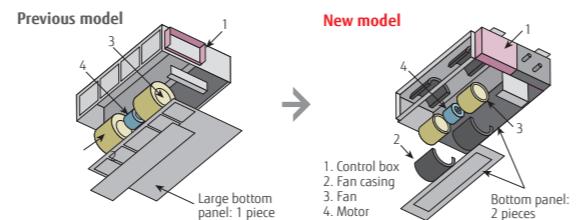


Installation styles


Embedded in Ceiling

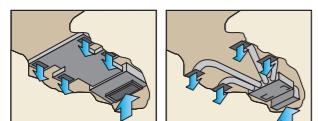

Hanging from Ceiling

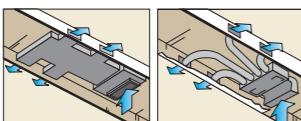

A drain pipe can be installed on either the left or right side of the unit

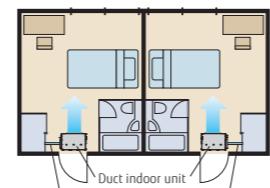

High-efficiency DC fan motor achieves low-energy consumption.

Improved motor efficiency from previous model.



Wide range of static pressures

Static pressures can be changed in the range of 0 to 150 Pa.

Static pressure range
0 to 80 Pa

Model: ARXP018GLFH / ARXP030GLFH * Production by order



Specifications

Model name	ARXP018GLFH		ARXP030GLFH
Power source	Single-phase, ~220V, 50Hz		
Capacity	Cooling	kW	5.6
	Heating		6.3
Input power		W	128
	High		1,540 / 1,440
Airflow rate	Med-High		1,460 / 1,380
	Med	m³/h	1,380 / 1,320
	Med-Low		1,300 / 1,260
	Low		1,220 / 1,200
	Quiet		1,150 / 1,150
Static pressure range		Pa	0 to 80
Standard static pressure			40
	High		35 / 34
Sound pressure level	Med-High	dB(A)	34 / 32
	Med		32 / 31
	Med-Low		31 / 30
	Low		29 / 29
	Quiet		28 / 28
Net Dimensions (H × W × D)		mm	270 × 1,135 × 700
Weight		kg	40
Connection pipe diameter	Liquid (Flare)	mm	6.35
	Gas (Flare)		9.52
Drain Hose Diameter (I.D./O.D.)		mm	12.70
			25/32

Note: Specifications are subject to the following conditions:

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.
Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.
Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V].

Optional parts


*For more details, please refer to the chapter "Optional parts".

Long-life filter:	UTD-LF25NA	IR receiver unit:	UTY-TRHX
Flange (square):	UTD-SF045T	Drain pump unit:	UTZ-PX1NBA
Flange (round):	UTD-RF204	WLAN adapter:	UTY-TFSX21, UTY-TFSXJ3, FG-AC-WIF1Z1
External power supply unit:	UTZ-GXXA, UTZ-GXXC*	Silver Ion Filter:	UTD-HFND
Remote sensor unit:	UTY-XS2X21		

Dimensions

(Unit: mm)

*Maintenance accessibility should be considered when installing the product.
Refer to the installation manual for the required maintenance access size.

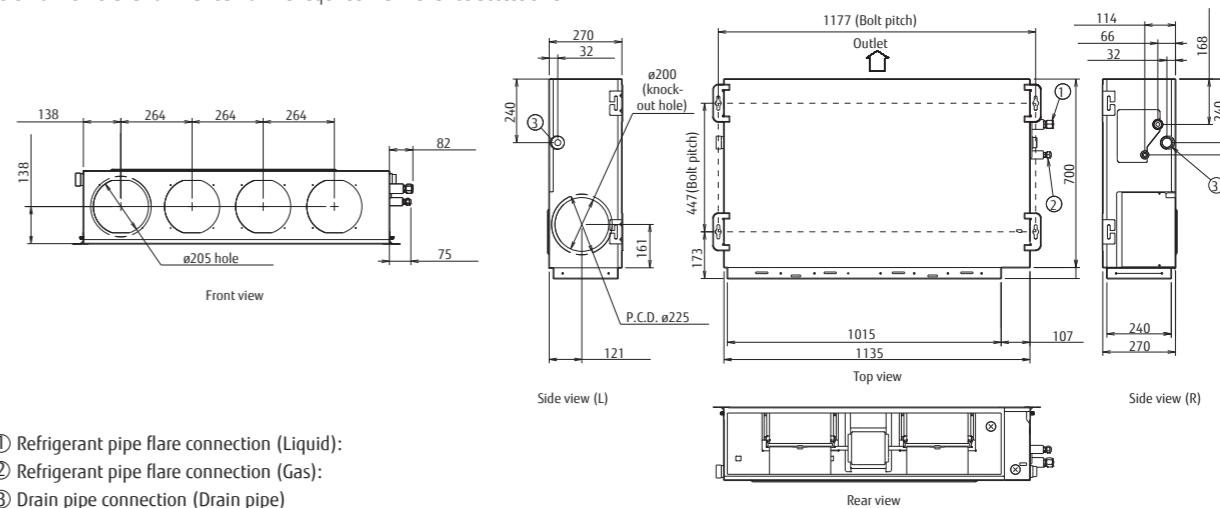


- ① Refrigerant pipe flare connection (Liquid):
- ② Refrigerant pipe flare connection (Gas):
- ③ Drain pipe connection (Drain pipe)

Medium static pressure duct Normal

DC
FAN

Slim & Compact design


The slim and compact design of the indoor unit, with the control box mounted on the side, allows installation in narrow spaces.

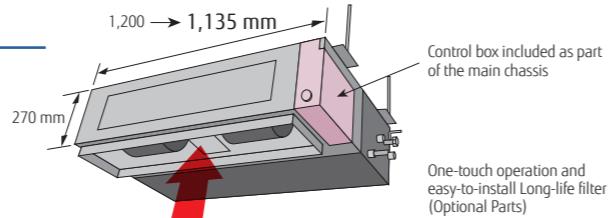

Easy maintenance


Structural improvement has been developed by making the bottom panel in two pieces, front and rear. The internal fan casing is also manufactured in two pieces—upper and lower. The motor and fan can be easily accessed and maintained by removing the rear panel and the lower casing with the main chassis remaining in place.

See below for rear-suction type

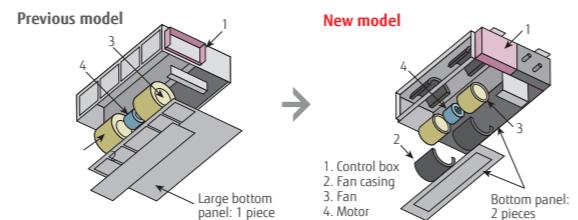


Installation styles


Embedded in Ceiling

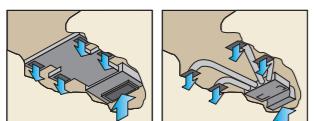

Hanging from Ceiling

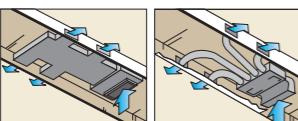

A drain pipe can be installed on either the left or right side of the unit

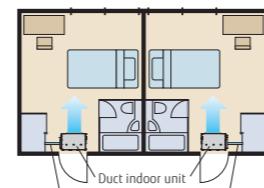

High-efficiency DC fan motor achieves low-energy consumption.

Improved motor efficiency from previous model.




Wide range of static pressures

Static pressures can be changed in the range of 0 to 150 Pa.

Static pressure range
0 to 150 Pa

Model: ARXA024GLEH / ARXA030GLEH / ARXA036GLEH / ARXA045GLEH

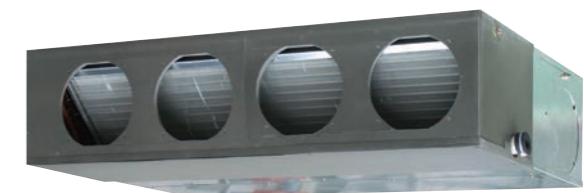

Specifications

Model name	ARXA024GLEH	ARXA030GLEH	ARXA036GLEH	ARXA045GLEH		
Power source	Single phase, ~230 V, 50 Hz					
Capacity	Cooling Heating	kW	7.1 8.0	9.0 10.0	11.2 12.5	12.5 14.0
Input power		W	94	108	194	240
Airflow rate	High Med-High Med Med-Low Low Quiet	m³/h	1,280 1,180 1,090 1,000 920 840	1,410 1,350 1,280 1,240 1,190 1,150	1,840 1,750 1,660 1,600 1,530 1,470	1,970 1,910 1,860 1,780 1,710 1,640
Static pressure range		Pa	0 to 150	0 to 150	0 to 150	0 to 150
Standard static pressure	High Med-High Med Med-Low Low Quiet	Pa	40 29 27 26 24 23	50 33 32 31 30 29	50 37 35 35 34 33	60 41 40 38 37 36
Sound pressure level		dB(A)				
Net Dimensions (H × W × D)		mm	270 × 1,135 × 700	270 × 1,135 × 700	270 × 1,135 × 700	270 × 1,135 × 700
Weight	kg		36	40	40	40
Connection pipe diameter	Liquid (Flare) Gas (Flare)	mm	9.52 15.88	9.52 15.88	9.52 15.88	9.52 15.88
Drain Hose Diameter (I.D./O.D.)						25/32

Note: Specifications are subject to the following conditions:

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.
Heating: Indoor temperature of 20°CDB/(15°CWB), and outdoor temperature of 7°CDB/6°CWB.
Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V].

Optional parts


*For more details, please refer to the chapter "Optional parts".

Long-life filter:	UTD-LF25NA	IR receiver unit:	UTY-TRHX
Flange (square):	UTD-SF045T	Drain pump unit:	UTZ-PX1NBA
Flange (round):	UTD-RF204	WLAN adapter:	UTY-TFSX21, UTY-TFSXJ3, FG-AC-WIF1Z1
External power supply unit:	UTZ-GXXA, UTZ-GXXC*	Silver Ion Filter:	UTD-HFND
Remote sensor unit:	UTY-XS2XZ1		

Dimensions

(Unit: mm)

*Maintenance accessibility should be considered when installing the product.
Refer to the installation manual for the required maintenance access size.

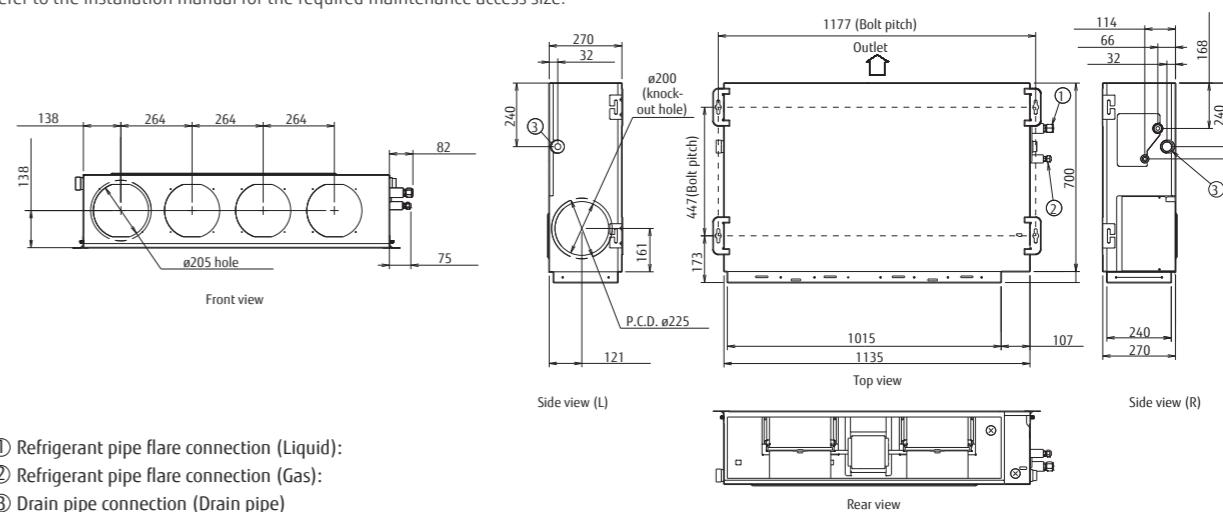

- ① Refrigerant pipe flare connection (Liquid):
- ② Refrigerant pipe flare connection (Gas):
- ③ Drain pipe connection (Drain pipe)

High Static Pressure Duct Normal



Static pressure mode selection

The use of a DC fan motor makes it possible to adjust the static pressure between 0 to 200 Pa (ARXC036) / 250Pa (ARXC045/060) / 300 Pa (ARXC072/090/096)

MAX.
200 Pa
(036 type)

MAX.
250 Pa
(045/060 type)

MAX.
300 Pa

MAX.
300 Pa



(ARXC036/045/060 type)



(ARXC072/090 type)



(ARXC096 type)

Easy installation (Compact & Lightweight)

The indoor unit is designed to be compact and light by reducing the basic chassis size and the overall material weight.



(ARXC036/045/060 type)



(ARXC072/090 type)




(Unit: mm)

Low noise


Models: ARXC036/ARXC045/ARXC060

The corners of the front panel and fan casing of the indoor unit are shaved to reduce air turbulence. The use of a plastic case and fan reduces the noise level generated by the unit.

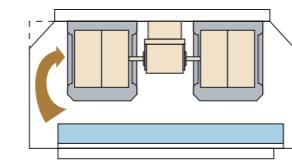

ARXC036GTEH:
Plastic fan [42 dB(A)]

* Model: Material
(Actual noise measurement value measured at 100 Pa)

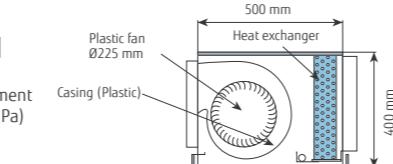

High-efficiency DC fan motor achieves low energy consumption.

Improved motor efficiency compared to the previous model



(ARXC036/045/060 type)



(ARXC072/090/096 type)

Model: ARXC036GTEH / ARXC045GTEH / ARXC060GTEH
ARXC072GTEH / ARXC090GTEH / ARXC096GTEH



ARXC036/045/060GTEH



ARXC072/090GTEH



ARXC096GTEH

Specifications

Model name	ARXC036GTEH	ARXC045GTEH	ARXC060GTEH*	ARXC072GTEH*	ARXC090GTEH*	ARXC096GTEH*
Power source	Single phase, ~230 V, 50 Hz					
Capacity	Cooling kW	11.2	12.5	18.0	22.4	25.0
	Heating	12.5	14.0	20.0	25.0	28.0
Input power	W	207	715	730	681	819
Airflow rate	High m³/h	1,990	3,500	3,500	3,900	4,300
	Med	1,680	3,000	3,000	3,300	4,000
	Low	1,330	2,460	2,460	3,000	3,600
Static pressure range	Pa	0 to 200	100 to 250	100 to 250	0 to 300	0 to 300
Standard static pressure	High	100	100	100	150	150
	Med	42	49	49	47	48
	Low	36	45	45	43	46
Sound pressure level	dB(A)	32	42	42	40	42
Net Dimensions (H × W × D)	mm	400 × 1,050 × 500	400 × 1,050 × 500	400 × 1,050 × 500	450 × 1,587 × 700	450 × 1,587 × 700
Weight	kg	40	46	46	84	84
Connection pipe diameter	Liquid mm	9.52 (Flare)	9.52 (Flare)	9.52 (Flare)	9.52 (Flare)	9.52 (Brazing)
	Gas	15.88 (Flare)	15.88 (Flare)	15.88 (Flare)	19.05 (Flare)	22.22 (Brazing)
Drain Hose Diameter (I.D./O.D.)						25/32

Note: Specifications are based on the following conditions:

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.
Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.
Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V]

*: ARXC060/072/090/096G cannot be connected to J-IV/J-IVS Series.

Optional parts

*For more details, please refer to the chapter "Optional parts".

Long-life filter:	UTD-LF60KA (036/045/060)
IR receiver unit:	UTY-TRHX
External power supply unit:	UTZ-GXXA, UTZ-GXXC*
WLAN adapter:	UTY-TFSXZ1, UTY-TFSXJ3, FG-AC-WIF1Z1
Silver Ion Filter:	UTD-HFKB (036/045/060)
Remote sensor unit:	UTY-XSZXZ1


Dimensions

(Unit: mm)

Models: ARXC036/ARXC045/ARXC060

Models: ARXC072/ARXC090

Models: ARXC096

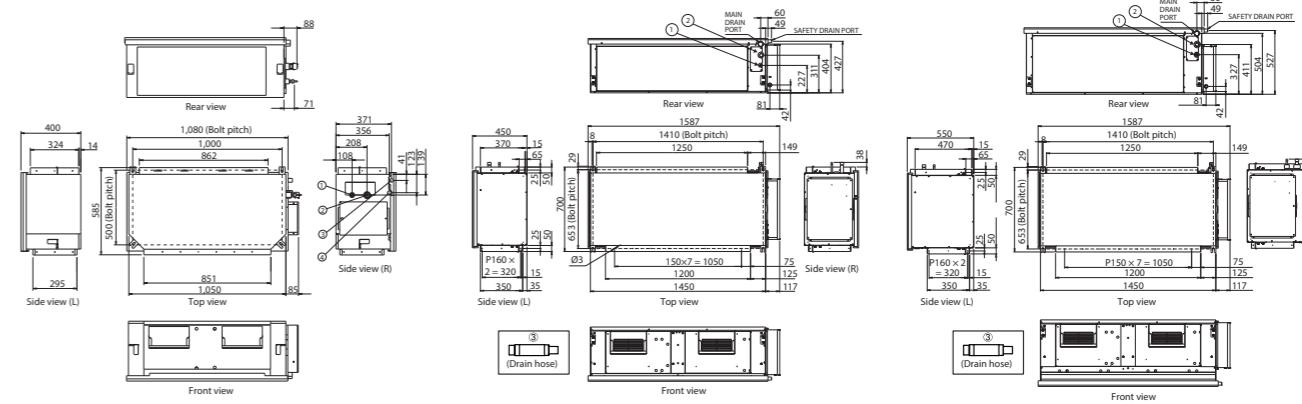

- ① Refrigerant pipe flare connection (Liquid)
- ② Refrigerant pipe flare connection (Gas)
- ③ Drain pipe connection (Safety drain pan)
- ④ Drain pipe connection (Main drain pan)

- ① Refrigerant pipe flare connection (Liquid)
- ② Refrigerant pipe flare connection (Gas)
- ③ Drain hose


- ① Refrigerant pipe flare connection (Liquid)
- ② Refrigerant pipe flare connection (Gas)
- ③ Drain hose

Compact floor

DC
FAN


2-fan and wide airflow

A 2-fan individual vertical airflow cools or warms the entire room comfortably.

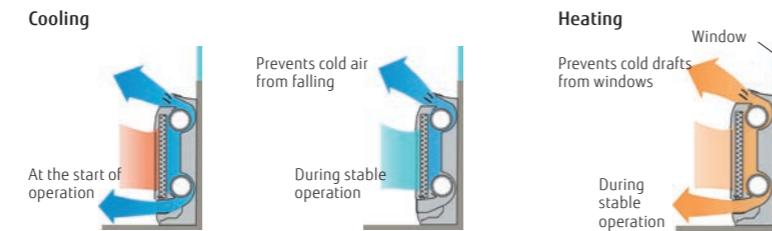

Flexible and easy installation


The compact and whole-surface suction design provides flexible installation options, including floor-standing, embedded, partially embedded, and wall-mounted installation to match the room layout.

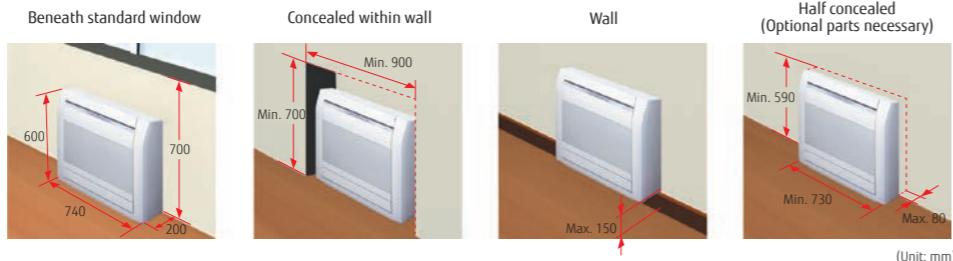

Quiet operation


6-fan speed control for quiet operation (via 2-wire controller)

Low noise
22 dB(A)
004/007/009 models

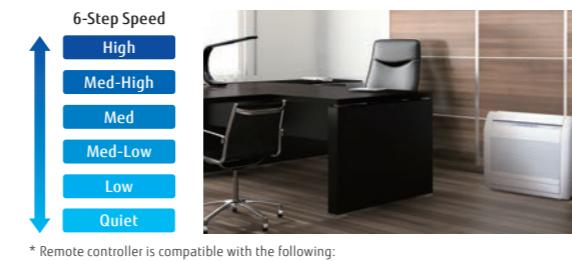

Flexible pipe connection enables draining and piping in 6 directions

The drain hose and pipe can be connected to the unit in the right, left, straight in depth, or downward direction.

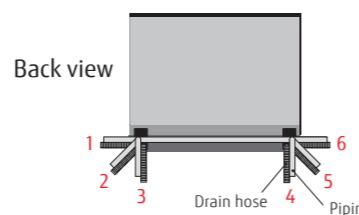

Model: AGYA004GCGH / AGYA007GCGH / AGYA009GCGH
AGYA012GCGH / AGYA014GCGH

[external EEV]
AGYE004GCEH / AGYE007GCEH / AGYE009GCEH
AGYE012GCEH / AGYE014GCEH

*Actual product's design may be different from the images.



Specifications

Model name	AGYA004GCGH	AGYA007GCGH	AGYA009GCGH	AGYA012GCGH	AGYA014GCGH	AGYE004GCEH	AGYE007GCEH	AGYE009GCEH	AGYE012GCEH	AGYE014GCEH		
Power source	Single phase, ~230 V, 50 Hz					Single phase, ~230 V, 50 Hz						
Capacity	Cooling	kW	1.1	2.2	2.8	3.6	4.0	1.1	2.2	2.8	3.6	4.0
	Heating		1.3	2.8	3.2	4.0	4.5	1.3	2.8	3.2	4.0	4.5
Input power		W	12/14	16	17	22	29	14	16	17	22	29
	High		380/430	470	500	590	670	380/430	470	500	590	670
	Med-High		350	420	450	520	590	350	420	450	520	590
	Med		320	390	400	470	520	320	390	400	470	520
	Med-Low		310	360	360	420	450	310	360	420	450	450
	Low		280	330	330	390	390	280	330	330	390	390
	Quiet		210	270	270	340	340	210	270	270	340	340
	High		35/36	37	38	42	46	35/36	37	38	42	46
	Med-High		33	35	36	39	42	33	35	36	39	42
	Med		31	33	34	37	39	31	33	34	37	39
	Med-Low		30	31	31	35	36	30	31	31	35	36
	Low		28	29	29	33	33	28	29	29	33	33
	Quiet		22	22	22	30	30	22	22	22	30	30
Net Dimensions (H × W × D)	mm	600 × 740 × 200					600 × 740 × 200					
Weight	kg	15.0	15.0	15.0	15.0	15.0	14.5	14.5	14.5	14.5	14.5	
Connection pipe diameter	Liquid (Flare) Gas (Flare)	6.35 9.52	6.35 9.52	6.35 9.52	6.35 12.70	6.35 12.70	6.35 9.52	6.35 9.52	6.35 12.70	6.35 12.70	6.35 12.70	
Drain Hose Diameter (I.D./O.D.)	mm	13.8/15.8 to 16.7					13.8/15.8 to 16.7					
EV kit (optional)		-					UTR-EV09XB					
		UTR-EV14XB					UTR-EV14XB					

Note: Specifications are subject to the following conditions:

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.

Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.

Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V].

When connecting AGYA004/007/009GCGH, AGYE004/007/009GCEH to an outdoor unit other than an outdoor unit of the J-IVL Series, the gas pipe diameter should be Ø12.70 mm.


Optional parts

*For more details, please refer to the chapter "Optional parts".

Partially concealing kit: UTR-STA
External power supply unit: UTZ-GXXA, UTZ-GXXC*
WLAN adapter: UTY-TFSXZ1, UTY-TFSXJ3, FG-AC-WIF1Z
Silver Ion Filter: UTR-FA03-5

Dimensions

(Unit: mm)

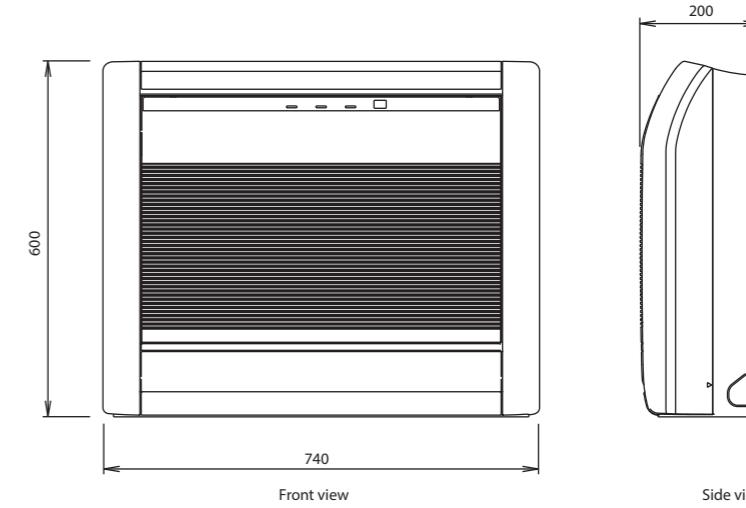

Floor/Ceiling

DC
FAN

Flexible installation

Example of floor standing installation

Floor standing console with the back against the wall




Example of ceiling installation

Under ceiling



Double auto swing

The combination of horizontal and vertical swings enables 3-dimensional control of the airflow direction.

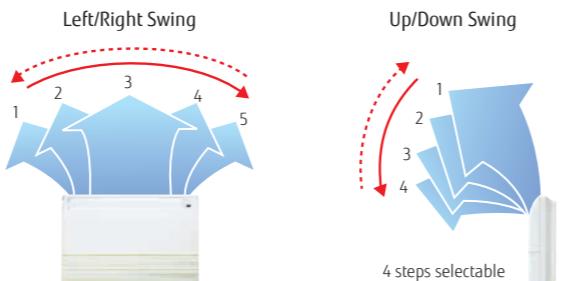


High-power DC fan motor

- High power
- Wide rotation range
- High-efficiency



Compact design

Symmetrical, slim and compact design.

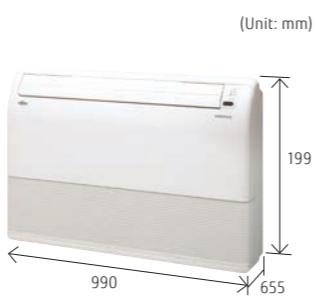

Model: ABYA012GTEH / ABYA014GTEH / ABYA018GTEH / ABYA024GTEH



*Actual product's design may be different from the images.

Specifications

Model name	ABYA012GTEH		ABYA014GTEH		ABYA018GTEH		ABYA024GTEH	
Power source	Single phase, ~230 V, 50 Hz							
Capacity	Cooling	kW	3.6	4.5	5.6	7.1		
	Heating		4.0	5.0	6.3	8.0		
Input power		W	30	42	74	99		
	High		660	780	1,000	1,000		
	Med-High		620	740	910	930		
	Med		580	690	830	870		
Airflow rate	Med-Low		550	640	750	800		
	Low		520	600	660	740		
	Quiet		490	550	580	680		
	High		36	40	46	47		
	Med-High		34	39	44	45		
	Med		33	38	42	43		
Sound pressure level	Med-Low		31	36	40	41		
	Low		29	35	37	39		
	Quiet		28	34	35	37		
Net Dimensions (H × W × D)	mm	199 × 990 × 655	199 × 990 × 655	199 × 990 × 655	199 × 990 × 655			
Weight	kg	25	26	26	27			
Connection pipe diameter	Liquid (Flare) Gas (Flare)	mm	6.35	6.35	6.35	9.52		
Drain Hose Diameter (I.D./O.D.)		mm	12.70	12.70	12.70	15.88		

25/32

Note: Specifications are subject to the following conditions:

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.
Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.
Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V]


Optional parts

*For more details, please refer to the chapter "Optional parts".

External power supply unit: UTZ-GXXA, UTZ-GXXC*
WLAN adapter: UTY-TFSXZ1, UTY-TFSXJ3, FG-AC-WIF1Z1

Dimensions

(Unit: mm)

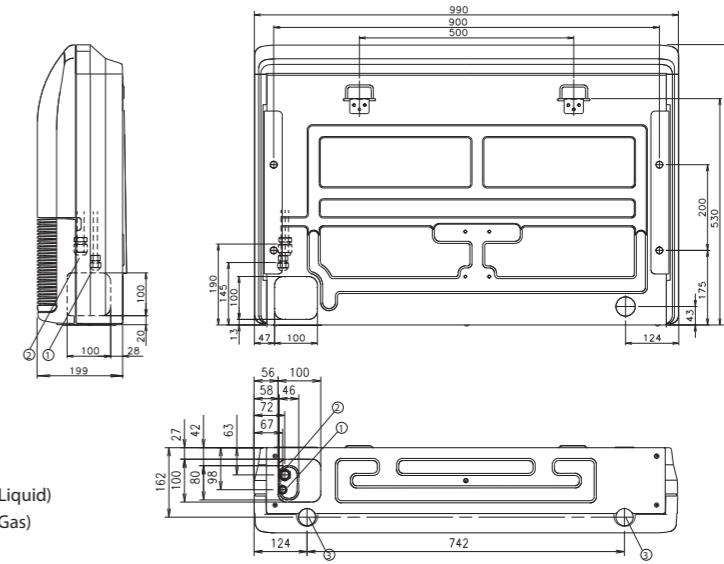


Ceiling


DC FAN




Installation

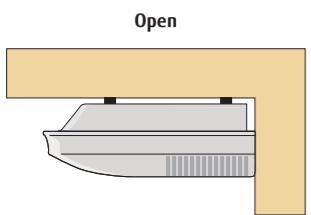

General installation with indoor unit installed on the ceiling

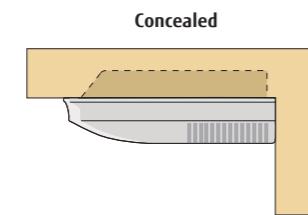


Installation with indoor unit embedded into the ceiling

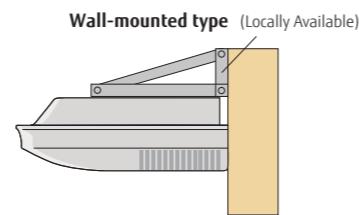

Wall-mounting brackets are used to mount the indoor unit on the wall. (Locally available)
This type of installation is used when the ceiling space is insufficient.

Double auto swing and wide airflow

Auto airflow direction and auto swing

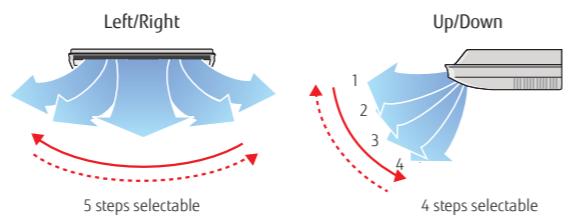


High-power DC fan motor

- High power
- Wide rotation range
- High-efficiency




Long airflow


Long airflow provides comfort in every corner of a large room.

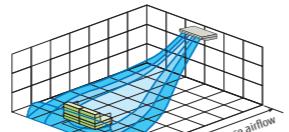

Fresh air intake

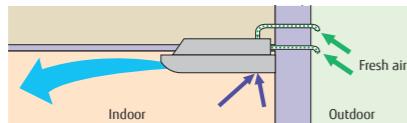

Slim & Compact design

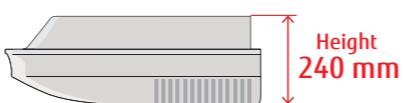

Model: ABYA030GTEH / ABYA036GTEH / ABYA045GTEH / ABYA054GTEH



*Actual product's design may be different from the images.

Specifications

Model name	ABYA030GTEH		ABYA036GTEH		ABYA045GTEH		ABYA054GTEH	
Power source	Single phase, ~230 V, 50 Hz							
Capacity	Cooling	kW	9.0	11.2	12.5	14.0		
	Heating		10.0	12.5	14.0	16.0		
Input power		W	66	85	131	180		
Airflow rate	High		1,630	1,690	2,010	2,270		
	Med-High		1,520	1,560	1,840	2,070		
	Med		1,420	1,450	1,690	1,860		
	Med-Low		1,320	1,360	1,530	1,660		
	Low		1,220	1,270	1,380	1,470		
	Quiet		1,140	1,170	1,230	1,280		
Sound pressure level	High		42	45	48	51		
	Med-High		40	41	46	49		
	Med		39	39	45	46		
	Med-Low		37	38	41	43		
	Low		35	36	38	40		
	Quiet		33	34	35	36		
Net Dimensions (H × W × D)		mm	240 × 1,660 × 700	240 × 1,660 × 700	240 × 1,660 × 700	240 × 1,660 × 700		
Weight		kg	46	48	48	48		
Connection pipe diameter			Liquid (Flare)	9.52	9.52	9.52		
Drain Hose Diameter (I.D./O.D.)		mm	Gas (Flare)	15.88	15.88	15.88		
25/32								


Note: Specifications are subject to the following conditions:

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.
Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.
Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V]

Optional parts



*For more details, please refer to the chapter "Optional parts".

- Drain pump unit: UTR-DPB24T
Flange: UTD-RF204
External power supply unit: UTZ-GXXA, UTZ-GXXC*
WLAN adapter: UTY-TFSXZ1, UTY-TFSXJ3, FG-AC-WIF1Z1

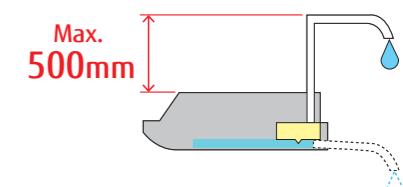

Dimensions

(Unit: mm)

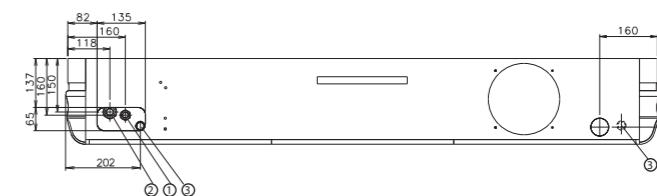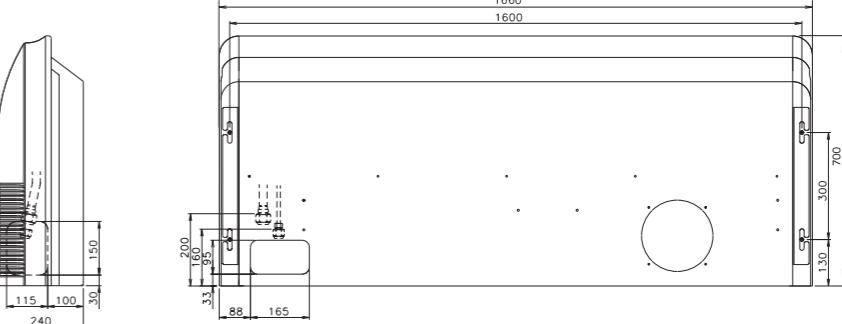

- ① Refrigerant pipe flare connection (Liquid)
② Refrigerant pipe flare connection (Gas)
③ Drain pipe connection

Wall-mounted type

DC
FAN

Highly-efficiency, compact design

The 004-014 models share the same design. The high-density and large heat exchanger achieves a highly-efficiency and compact design. The compact body blends in well with conference rooms and offices, providing comfortable air conditioning.




More comfortable airflow

The unique power diffuser provides comfortable air conditioning.

Heating

The vertical airflow provides powerful floor-level heating.

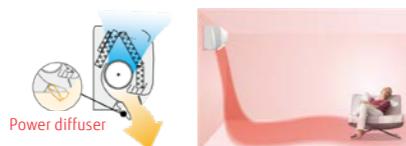



Cooling

The left/right airflow avoids blowing cool air directly at the occupants in a room.



Quiet operation & 6-Step fan speed control

The airflow pattern achieves significant noise reduction. Multistep airflow adjustment to suit the environment

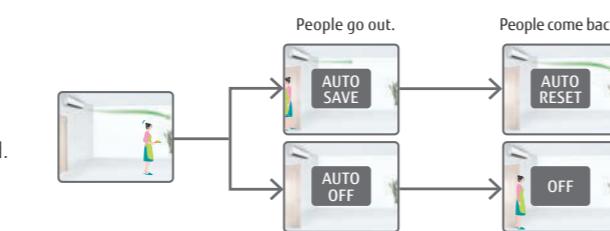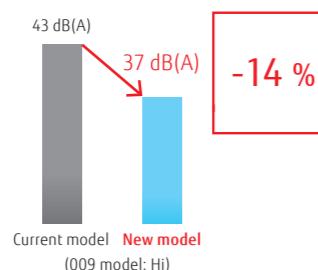

The Occupancy sensor contributes to further energy savings.

Energy saving operation starts automatically by detecting the motion of a person. Two modes of save operation mode and stop mode can be selected.

*If you want to use the Occupancy sensor control' function, you need an setting device that can set the Occupancy sensor control' function. For example: Wired RC (Touch panel).

Model: ASYA004GCGH / ASYA007GCGH / ASYA009GCGH
ASYA012GCGH / ASYA014GCGH

[external EEV]
ASYE004GCEH / ASYE007GCEH / ASYE009GCEH
ASYE012GCEH / ASYE014GCEH



*Actual product's design may be different from the images.

Specifications

Model name	Single phase, ~230 V, 50 Hz								Single phase, ~230 V, 50 Hz								Single phase, ~230 V, 50 Hz								
	Power source		Capacity		Input power		Airflow rate		Sound pressure level		Net Dimensions (H × W × D)		Weight		Connection pipe diameter		Drain Hose Diameter (I.D./O.D.)		EV kit (optional)		Single phase, ~230 V, 50 Hz		Single phase, ~230 V, 50 Hz		
	Cooling	Heating	kW	1.1	2.2	2.8	3.6	4.0	1.1	2.2	2.8	3.6	4.0	W	1.3	2.8	4.0	4.5	1.3	2.8	3.2	4.0	4.5		
Airflow rate	High		W	450	550	610	690	800	450	550	610	690	800	m³/h	430	510	560	610	740	430	510	560	610	740	
	Med-High		400	470	510	560	680	400	470	510	560	680	380		410	440	530	380	410	440	530	610	680		
	Med		360	360	360	470	550	360	360	360	360	360	310		310	330	310	310	310	310	330	330	330		
	Med-Low		310	310	310	330	330	310	310	310	310	310	31		34	37	40	44	31	35	43	40	44		
	Low		26	26	26	30	34	26	26	26	30	34	27		28	29	33	27	27	29	33	37	42		
	Quiet		22	22	22	24	24	22	22	22	24	24	22		22	22	22	22	22	22	24	24	24		
Sound pressure level	High		dB(A)	31	34	37	40	44	31	35	43	40	44		30	32	35	37	42	30	32	38	37	42	
	Med-High			28	30	32	35	40	28	30	34	35	40		27	28	29	33	37	27	27	29	33	37	
	Med			26	26	26	30	34	26	26	26	30	34		26	26	26	30	34	26	26	24	30	34	
	Med-Low			22	22	22	24	24	22	22	22	24	24		22	22	22	22	22	22	22	24	24	24	
	Low			22	22	22	24	24	22	22	22	24	24		13.8/15.8 to 16.7	13.8/15.8 to 16.7	13.8/15.8 to 16.7	13.8/15.8 to 16.7	13.8/15.8 to 16.7	UTR-EV09XB	UTR-EV14XB	UTR-EV09XB	UTR-EV14XB		
	Quiet			22	22	22	24	24	22	22	22	24	24		—	—	—	—	—	—	—	—	—	—	
Net Dimensions (H × W × D)								268 × 840 × 203								268 × 840 × 203									
Weight								kg								kg									
Connection pipe diameter								Liquid (Flare)								mm									
Drain Hose Diameter (I.D./O.D.)								Gas (Flare)								mm									
EV kit (optional)								13.8/15.8 to 16.7								13.8/15.8 to 16.7									

Note: Specifications are subject to the following conditions:

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.

Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.

Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V]

When connecting ASY*004G**H, ASY*007G**H, ASY*009G**H to an outdoor unit other than the outdoor unit of the J-IVL Series, the gas pipe diameter should be Ø12.70 mm.

Optional parts

*For more details, please refer to the chapter "Optional parts".



External power supply unit: UTZ-GXXA, UTZ-GXXC*

WLAN adapter: UTY-TFSXZ1, UTY-TFSXJ3, FG-AC-WIF1Z1

Silver Ion Filter : UTR-FA16-5

Dimensions



(Unit: mm)

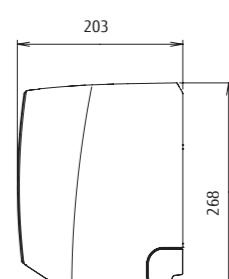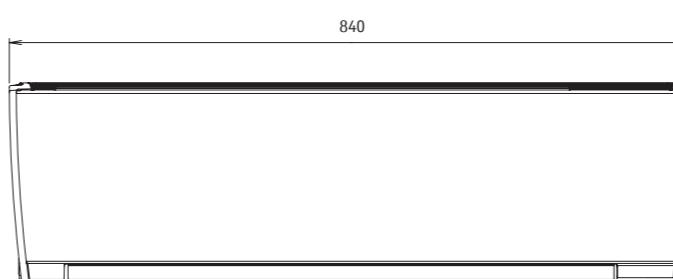

Wall-mounted type

DC
FAN


Powerful & Comfort airflow

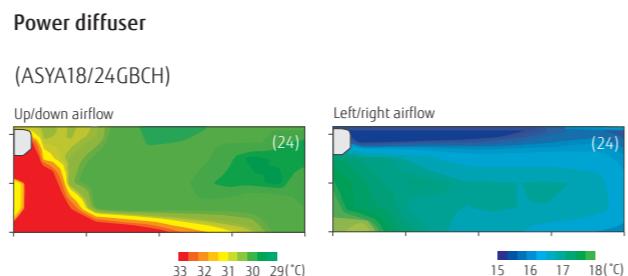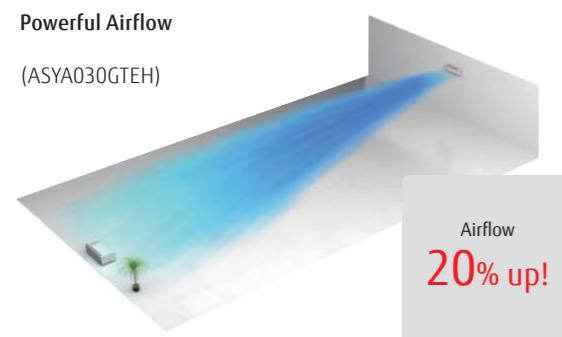

The Occupancy sensor contributes to further energy savings. (ASYA030/034GTEH only)


Energy saving operation starts automatically by detecting the motion of a person. Two modes of save operation mode and stop mode can be selected.

*If you want to use the Occupancy sensor control' function, you need an setting device that can set the Occupancy sensor control' function. For example: Wired RC (Touch panel).

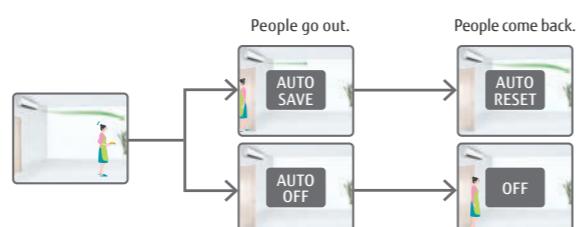

6-step fan speed control for quiet operation

The airflow pattern achieves significant noise reduction. A 6-step sound level setting allows for multiple-step silent operations.

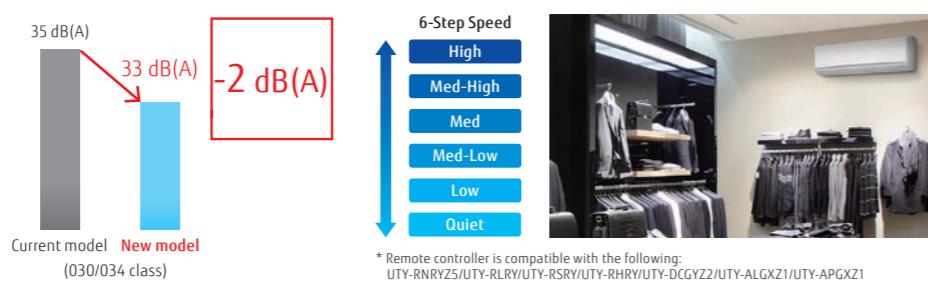

**Model: ASYA18GBCH / ASYA24GBCH
ASYA030GTEH / ASYA034GTEH**



ASYA18/24GBCH



ASYA030/034GTEH

*Actual product's design may be different from the images.

Specifications

Model name	ASYA18GBCH		ASYA24GBCH		ASYA030GTEH		ASYA034GTEH	
Power source	Single phase, ~230 V, 50 Hz		Single phase, ~230 V, 50 Hz		Single phase, ~230 V, 50 Hz		Single phase, ~230 V, 50 Hz	
Capacity	Cooling	kW	5.6	7.1	9.0	10.0	1,620/1,520	1,620/1,520
	Heating		6.3	8.0	10.0	11.2	1,200	1,300
Input power		W	32	60	74	103	1,050	1,120
	High		840	1,100	1,440	1,720	55/54	55/54
	Med-High		-	-	1,200	1,300	49	51
	Med		770	910	1,050	1,120	940	980
	Med-Low		-	-	700	700	890	890
	Low		690	730	890	980	700	700
	Quiet		-	-	700	700	53	53
	High		41	48	49	51	45	47
	Med-High		-	-	49	51	42	43
	Med		39	43	45	47	39	39
	Med-Low		-	-	42	43	33	33
	Low		35	35	39	39	33	33
	Quiet		-	-	33	33	13.8/15.8 to 16.7	13.8/15.8 to 16.7
Net Dimensions (H × W × D)	mm	320 × 998 × 238	320 × 998 × 238	340 × 1,150 × 280	340 × 1,150 × 280			
Weight	kg	15	15	18	18			
Connection pipe diameter	Liquid (Flare)	6.35	9.52	9.52	9.52			
	Gas (Flare)	12.70	15.88	15.88	15.88			
Drain Hose Diameter (I.D./O.D.)	mm	12/16						

Note: Specifications are subject to the following conditions:

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.

Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.

Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V].

When connecting ASYA18GBCH to an outdoor unit other than the outdoor unit of the J-IVL Series, the pipe diameter should be Ø9.52/Ø15.88 mm (Liquid/Gas).

Optional parts

*For more details, please refer to the chapter "Optional parts".

External power supply unit: UTZ-GXXA (030/034), UTZ-GXXC* (030/034)

Silver Ion Filter: UTR-FA13-3

WLAN adapter: UTY-TFSXJ3 (030/034), UTY-TFSXZ1 (030/034)


FG-RC-WIF1Z2 (18/24), FG-AC-WIF1Z1 (030/034)

Dimensions

(Unit: mm)

Models: ASYA18/ASYA24


Models: ASYA030/ASYA034

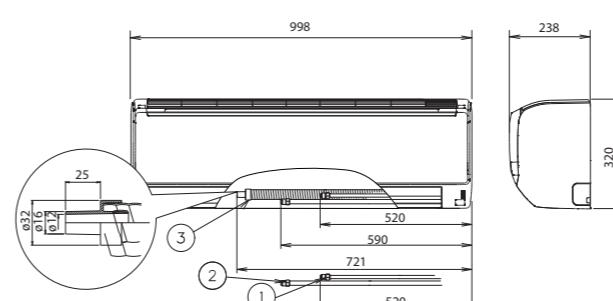

① Refrigerant pipe flare connection (Liquid)

② Refrigerant pipe flare connection (Gas)



③ Drain pipe connection

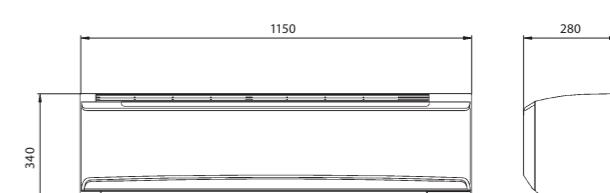

Residential, Commercial & Light Commercial VENTILATION

VENTILATION Lineup

- Vn-002 Energy Recovery Ventilator
- Vn-004 DX kit for Air handling applications
 - for VRF Outdoor unit
- Vn-006 DX kit for Air handling applications
 - for Single Split Outdoor Units
- Vn-008 AIR HANDLING UNIT

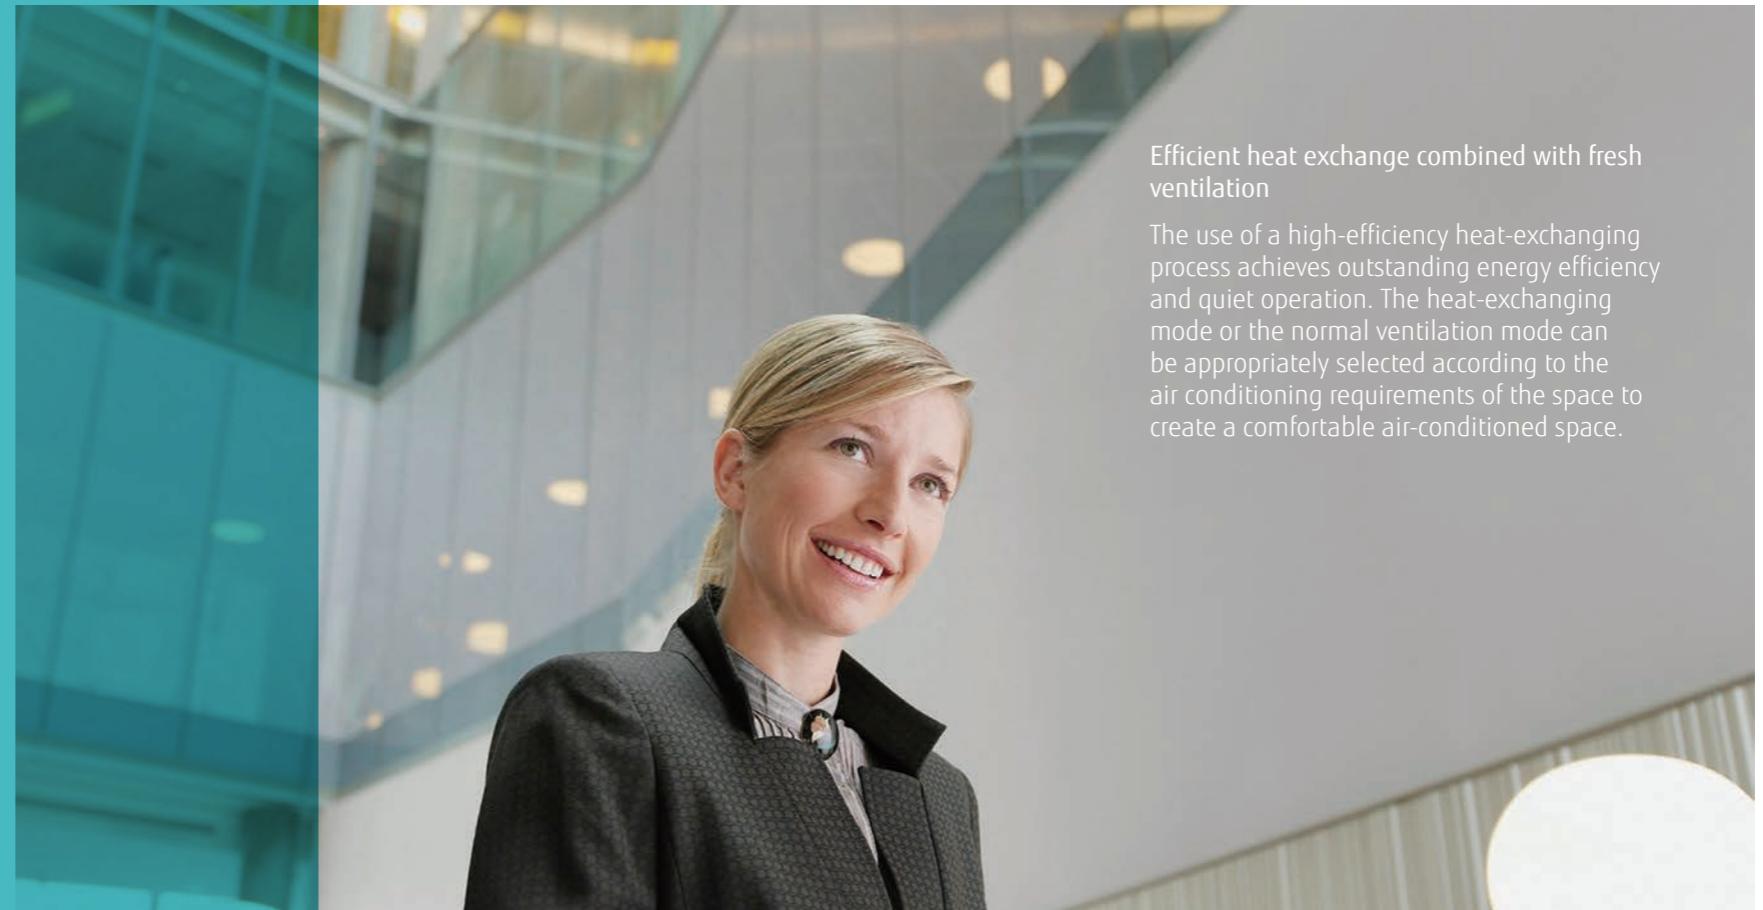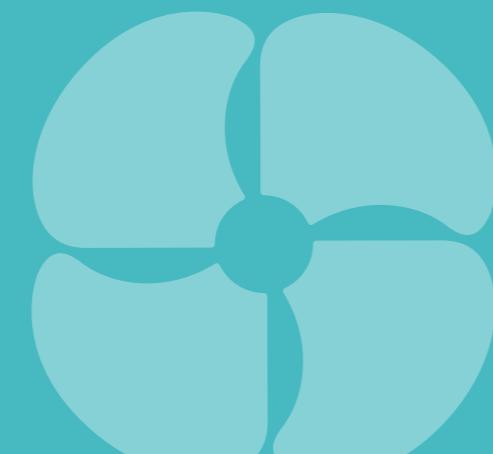

Efficient heat exchange combined with fresh ventilation

The use of a high-efficiency heat-exchanging process achieves outstanding energy efficiency and quiet operation. The heat-exchanging mode or the normal ventilation mode can be appropriately selected according to the air conditioning requirements of the space to create a comfortable air-conditioned space.

Lineup

Airflow rate (m ³ /h)	250	350	500	800	1000					
Energy Recovery Ventilator										
Connectable capacity class (kW)	5.0	6.3	8.0	10.0	12.5	14.0	20.0	25.0	40.0	50.0
DX kit for Air handling applications for VRF Outdoor unit	 									
Connectable capacity class (kW)	3.5 - 22.0									
DX-kit for Air handling applications for Single Split Outdoor Units										
Connectable capacity class (kW)	25 - 96									
Air handling unit										

Energy Recovery Ventilator



The energy recovery ventilator unit provides energy efficiency for comfort and improved savings.

Heat exchange ventilation and normal ventilation

Heat exchange ventilation

When a room is cooled or heated, the exhausted cooling or heating energy is recovered by heat exchange ventilation.


Normal ventilation

Used when the indoor space does not require cooling or heating, i.e., when there is little temperature difference between the indoor and outdoor environments.

Energy efficiency and ecology

The use of a counter-flow heat-exchanging element, designed to recover up to 77% of heat from the outgoing air, significantly reduces energy consumption.


The air conditioning load is reduced by approximately 20%, which results in substantial savings in energy cost.

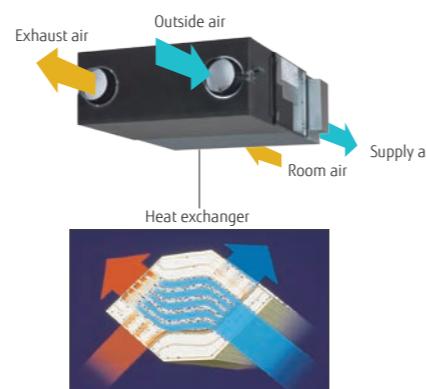

A high-efficiency counter-flow heat-exchanging element is used in the setup.

Comparison of heat-exchanging elements

Air flows in a straight line through a crossflow element. In contrast, air flows for a longer time (a longer distance) through a counter-flow element to achieve more consistent heat-exchanging performance.

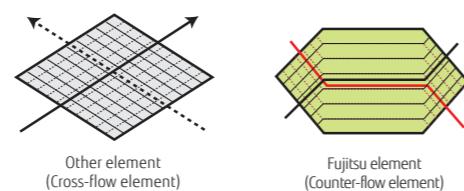

Quiet operation

Significantly lower noise levels are achieved by reducing pressure loss.

25.5dB
(UTZ-BD035C)


Slim design for easier installation

The use of a counter-flow heat-exchanging element made it possible to design a quieter, slimmer unit.



Reverse-mountable direct air supply and exhaust system

Simplifies the duct design, due to its straight ducts for air supply and exhaust. Since each unit can be mounted facing opposite directions, only one inspection hole is needed for two units. This makes duct work easier and more flexible.

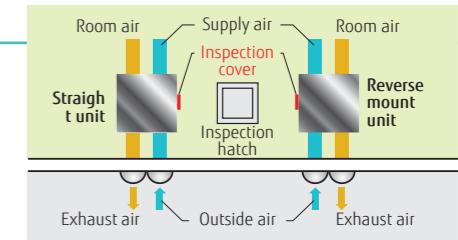

Simple remote operation

Easy operation with connected liquid crystal switch

- Power On/Off
- On/Off Timer
- Air volume High/Low
- Clean filter display
- Heat exchange ventilation and normal ventilation



Model: UTZ-BD025C/UTZ-BD035C/UTZ-BD050C/UTZ-BD080C/UTZ-BD100C




Specifications

	250 m ³ /h	350 m ³ /h	500 m ³ /h	800 m ³ /h	1000 m ³ /h
Model name	UTZ-BD025C	UTZ-BD035C	UTZ-BD050C	UTZ-BD080C	UTZ-BD100C
Power source	Single phase, 220 to 240 V, 50 Hz				
Heat Exchange Ventilation					
Input power	(Extra high)/High/Low W	128/123/96	190/185/168	289/225/185	418/378/295
Airflow rate	(Extra high)/High/Low m ³ /h	250/25/190	350/350/240	500/500/440	800/800/630
External static pressure	(Extra high)/High/Low Pa	105/95/45	140/60/45	120/60/35	140/110/55
Temperature exchange efficiency	(Extra high)/High/Low %	75/75/77	75/75/78	75/75/76	75/75/79
Energy exchange efficiency cooling	(Extra high)/High/Low %	63/63/65	66/66/71	62/62/64	65/65/68
Energy exchange efficiency heat pump	(Extra high)/High/Low %	70/70/72	69/69/73	67/67/69	71/71/74
Sound pressure level	(Extra high)/High/Low dB*	31.5/30.5/26.5	33.0/31.0/25.5	37.5/35.5/32.5	37.5/37.0/34.5
Normal Ventilation					
Input power	(Extra high)/High/Low W	128/123/96	190/185/168	289/225/185	418/378/295
Airflow rate	(Extra high)/High/Low m ³ /h	250/25/190	350/350/240	500/500/440	800/800/630
External static pressure	(Extra high)/High/Low Pa	105/95/45	140/60/45	120/60/35	140/110/55
Sound pressure level	(Extra high)/High/Low dB*	31.5/30.5/26.5	33.0/31.0/25.5	38.5/38.0/32.5	37.5/37.0/34.5
Dimensions	W × D × H mm	882 × 599 × 270	1,050 × 804 × 317	1,090 × 904 × 317	1,322 × 884 × 388
Weight	kg	29	49	57	71
Outlet duct diameter	mm	150	150	200	250
Operating range	°C	-10 to 40	-10 to 40	-10 to 40	-10 to 40
Maximum humidity	%	85	85	85	85

* Noise level measured 1.5 m below the center of the unit

Dimensions

(Unit: mm)

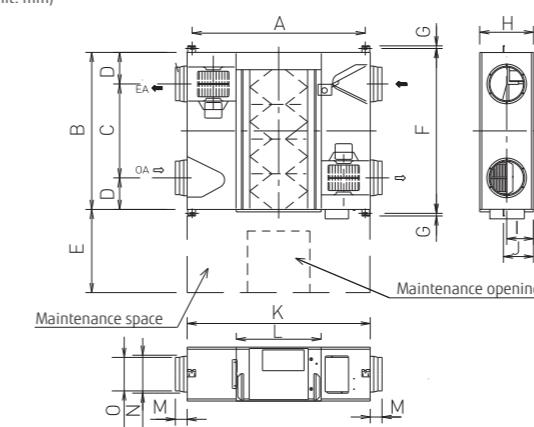


	UTZ-BD025C	UTZ-BD035C	UTZ-BD050C	UTZ-BD080C	UTZ-BD100C
A	810	978	1,018	1,250	1,250
B	599	804	904	884	1,134
C	315	580	640	428	678
D	142	112	132	228	228
E	600	600	600	600	600
F	655	860	960	940	1,190
G	19	19	19	19	19
H	270	317	317	388	388
I	135	159	159	194	194
J	159	182	182	218	218
K	882	1,050	1,090	1,322	1,322
L	414	470	470	612	612
M	95	70	70	85	85
N	Ø164	Ø164	Ø210	Ø258	Ø258
O	Ø144	Ø144	Ø194	Ø242	Ø242

DX kit for Air handling applications for VRF Outdoor unit



With these kits, air handling units (AHUs) and fan coil units (FCUs) from other manufacturers can be incorporated into Fujitsu General VRF systems, or one AHU can be connected to one Fujitsu General VRF dedicated outdoor unit to control outdoor ventilation and room temperatures.


Multiple temperature sensors optimally control an Air handling unit and a fan coil unit.

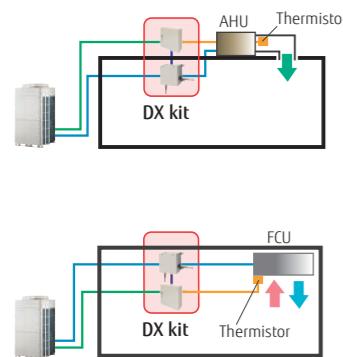

When connected to an Air handling unit, the temperature of supply air is controlled by a discharge air sensor.


When connected to a fan coil unit, the room temperature is controlled by the discharge air sensor.

Application as part of a VRF system

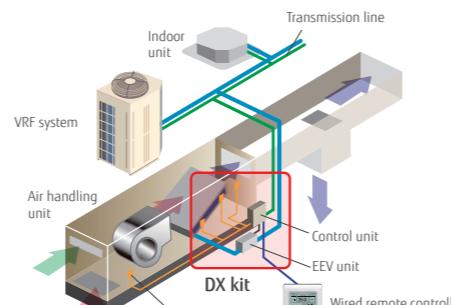


Supports a wide range of capacity classes

- Two EEV units can be connected in parallel to large-capacity units of up to 20 HP (50 kW). (UTP-LX180A separation tube required)
- Connectable capacity range: 5 kW to 50 kW

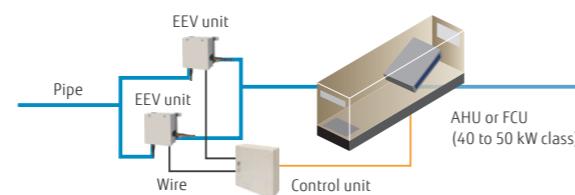


A variety of control options that meet application requirements

Central control enabled by our VRF controllers or central management controllers

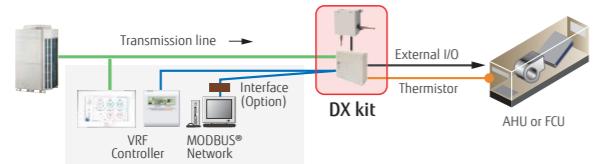

Central control from external controllers

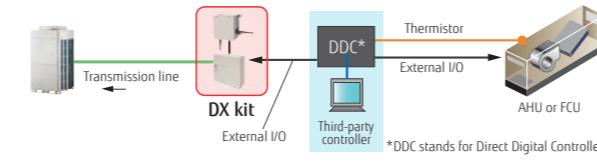

Summary of functions

Inputs

- On/Off
- Setting temperature
- Capacity demand
- Heating/Cooling operation modes
- Fault indication

Outputs

- On/Off indication
- Fan On/Off indication
- Thermostat On/Off indication
- Defrost indication
- Fault indication


MODBUS® Control

Can be controlled via a MODBUS®-enabled BMS using an optional interface.


Installation requirements

- Connectable VRF Series: All VRF Series
- Capacity range of connectable DX kit systems with outdoor units: 50 to 100% of capacity
- Capacity range of connectable DX kit systems with indoor units: 30% or less of capacity
- Max. wire length from a control unit: 10 m
- Max. pipe length between EEV unit and indoor unit: 5 m
- A control unit (IP54 class) and an EEV unit can be installed outdoors.

Connectable capacity

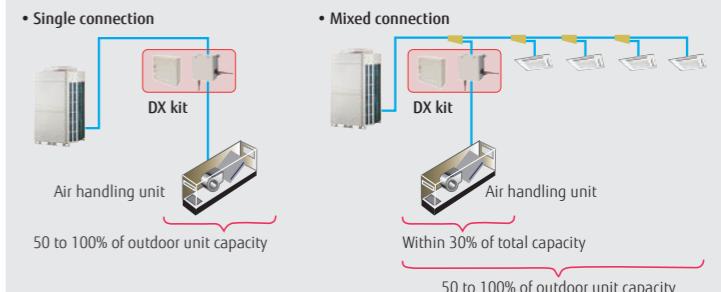

Pipe and wire length

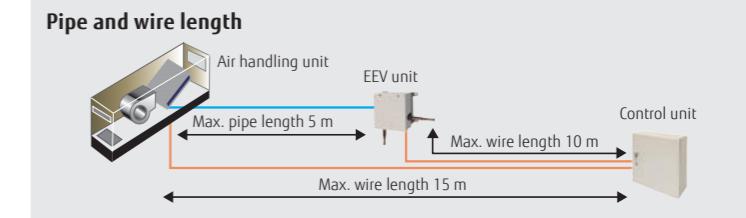

Control unit: UTY-VDGX

EEV unit: UTP-VX30A/UTP-VX60A/UTP-VX90A



Specifications

Connectable capacity class	5.0 kW	6.3 kW	8.0 kW	10.0 kW	12.5 kW	14.0 kW	20.0 kW	25.0 kW	40.0 kW	50.0 kW	
Capacity	Cooling kW	5.6	6.3	8.0	10.0	12.5	14.0	22.4	25.0	40.0	50.4
	Heating kW	6.3	7.1	9.0	11.2	14.0	16.0	25.0	28.0	45.0	56.5

Control unit	UTY-VDGX
Power source	V/IØ/Hz
Dimensions (H × W × D)	230/I/50 400 × 400 × 120

EEV unit	UTP-VX30A	UTP-VX60A	UTP-VX90A	UTP-VX90A × 2
Connection pipe diameter (Liquid) Dimensions (H × W × D)	Ø9.53 160 × 220 × 90	Ø12.70 160 × 220 × 90	Ø12.70 160 × 220 × 90	Ø12.70 160 × 220 × 90

Note: Specifications are based on the following conditions.
Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.
Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.
Pipe length: 7.5 m Voltage: 230 [V].

DX kit


for Air handling applications
for Single Split Outdoor Units



With this kit, other manufacturers' Air handling units (AHUs) and fan coil units (FCUs) can be incorporated into Fujitsu General Split outdoor units.

Flexible connectivity

This kit allows connections to third-party equipment. This control unit can also be used in conjunction with Fujitsu General single-split outdoor units, providing a perfect solution when a stand-alone Air handling unit is needed.

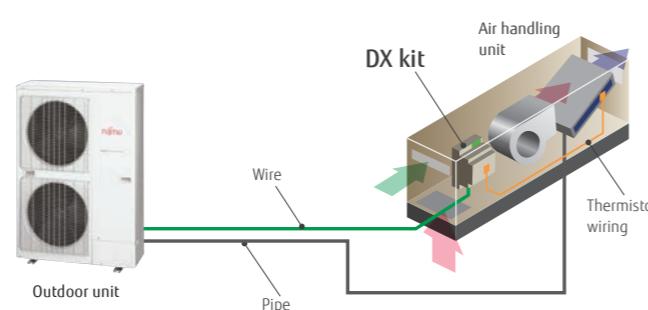


Supports a wide range of capacity classes

Capable of connecting large capacities in the range of 3.5 kW to 22.0 kW (Nominal)



Mobile devices allow for operation from anywhere

Can be operated and managed remotely using your smartphone or tablet.

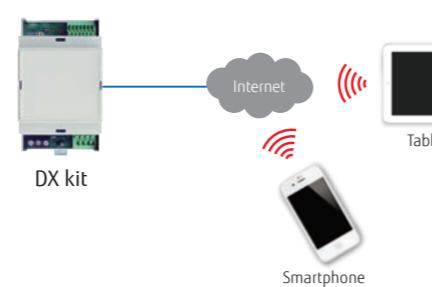

Summary of functions

Inputs

- On/Off
- Heating/Cooling operation modes
- Capacity demand (analogue 0 to 10 V)
- Heat exchanger temperature

Outputs


- Status of Compressor, Defrost, and Errors (Potential free relays)
- Status indicator with LED

Wireless LAN Control

Wireless LAN control through cloud connectivity enables secure remote monitoring and control from anywhere.

Easy installation

- Compact DIN rail mountable enclosure for easy installation
- No expansion devise required
- No separate external power supply required

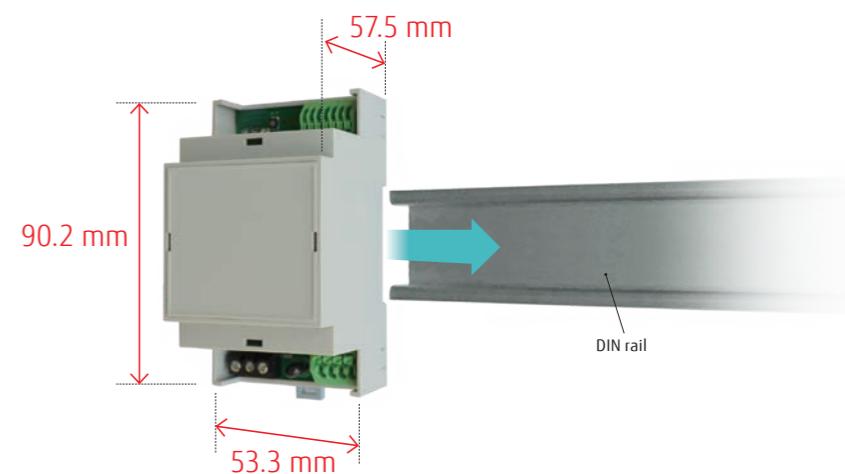

Model: UTY-XDZX



Specifications

BTU		12	14	18	24	30	36	45	54	60	72	90	
Capacity (Nominal)	Cooling	kW	3.5	4.3	5.2	6.8	8.5	9.4	12.1	13.3	15.0	19.0	22.0
	Heating		4.1	5.0	6.0	7.8	10.0	10.8	13.3	15.8	18.0	22.4	27.0

Model name	UTY-XDZX
Power source	V/Ø/Hz
Dimensions (H × W × D)	mm
Weight	g

230/1/50

90.2 × 53.3 × 57.5

110

Note: Specifications are based on the following conditions.
Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.
Heating: Indoor temperature of 20°CDB/(15°CWB), and outdoor temperature of 7°CDB/6°CWB.
Pipe length: 5.0 m Voltage: 230 [V].



Light Commercial & Commercial AIR HANDLING UNIT

- Vn-010 System Overview
- Vn-012 VRF Lineup
- Vn-014 Air Handling Units Overview
- Vn-016 Features
 - Structure
 - Filtration
 - Thermal Exchange Sections
 - Fan Section
 - Humidifier
 - Heat Recovery Section
- Vn-022 Dimensions
- Vn-025 Loose Accessories
- Vn-026 Total Pressure Drop
- Vn-027 Fan Characteristic Curves
- Vn-030 Specifications
- Vn-032 Control System
 - AHU Controller
 - System controller (System controller Lite)



FUJITSU GENERAL (Euro) GmbH participates in the ECP program for AHU.
Check ongoing validity of certificate:
www.eurovent-certification.com




System Overview

Air handling applications available in Fujitsu General VRF system realize high energy efficiency and superior comfort to flexibly adapt to the stringent air conditioning requirements and installation conditions of a wide variety of facilities.

The system consists of VRF outdoor units of 10 to 48 HP and thermal ventilation and air conditioning units for civil and industrial use, covering airflow ranges from 4,300 to 18,100 m³/h with cooling capacities from 25 to 96 kW.



- For AHU control: AHU controller (Only For AHU)
 '- For mixed connection control: System controller, or third-party controller with MODBUS® converter

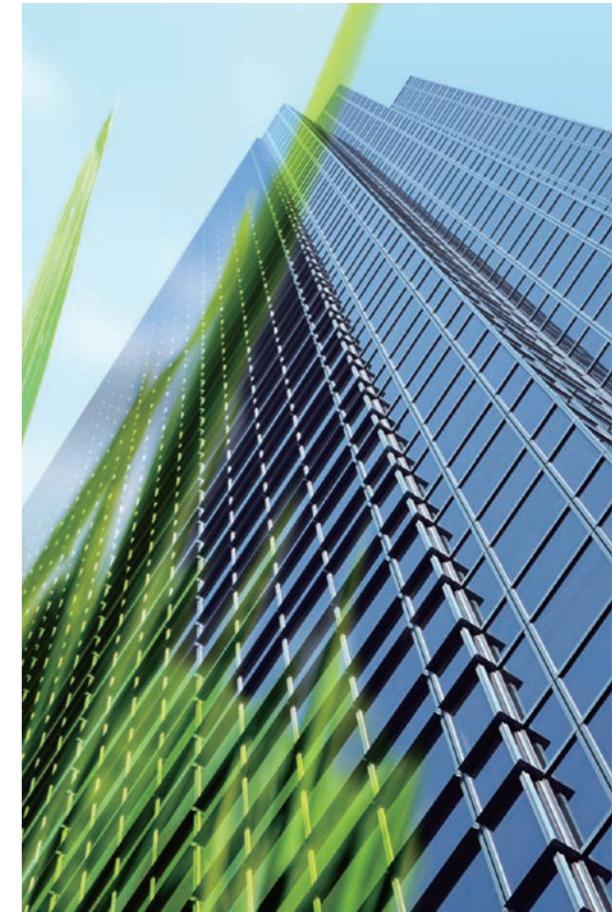

Advantages of the System

Full comfort

This system provides clean, Fresh air with advanced filtration and balanced temperatures to increase comfort and air quality in a building.

Simple design, easy installation

Equipped with a DX kit (Electronic Expansion Valve and PCB), AHU facilitates installation design. The AHU model can be easily configured using the Selection Software.

Total solution concept


Integrating an AHU into the building climate control system simplifies the design and installation processes based on a single, common technology. From project follow-up through to installation, commissioning, and maintenance, all procedures are simplified. The above features allow a single installation company to carry out design, installation, and commissioning.

VRF Lineup

Fujitsu General's VRF series is a multi-type air conditioning system for buildings tailored to the scale and application of the building.

Capacity (kW)	28.0	33.5	40.0	45.0	50.4	55.9	61.5	67.0	73.5	78.5	85.0	90.0	95.0	100.5	107.0	112.0	118.5	123.5	130.0	135.0
HP	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48
J-IVL Series	AJY090 LELDH	AJY108 LELDH	AJY126 LELDH	AJY144 LELDH	AJY162 LELDH															
V-IV Series Heat Pump	Space Saving																			
	Set Model	AJY090 LALDH	AJY108 LALDH	AJY126 LALDH	AJY144 LALDH	AJY162 LALDH	AJY180 LALDH	AJY198 LALDH	AJY216 LALDH	AJY234 LALDH	AJY252 LALDH	AJY270 LALDH	AJY288 LALDH	AJY306 LALDH	AJY324 LALDH	AJY342 LALDH	AJY360 LALDH	AJY378 LALDH	AJY396 LALDH	AJY414 LALDH
Energy Efficiency																				
	Set Model				AJY144 LALDHH		AJY180 LALDHH		AJY216 LALDHH	AJY234 LALDHH	AJY252 LALDHH	AJY270 LALDHH	AJY288 LALDHH	AJY306 LALDHH	AJY324 LALDHH	AJY342 LALDHH	AJY360 LALDHH	AJY378 LALDHH	AJY396 LALDHH	

*Actual product's design may be different from the images.

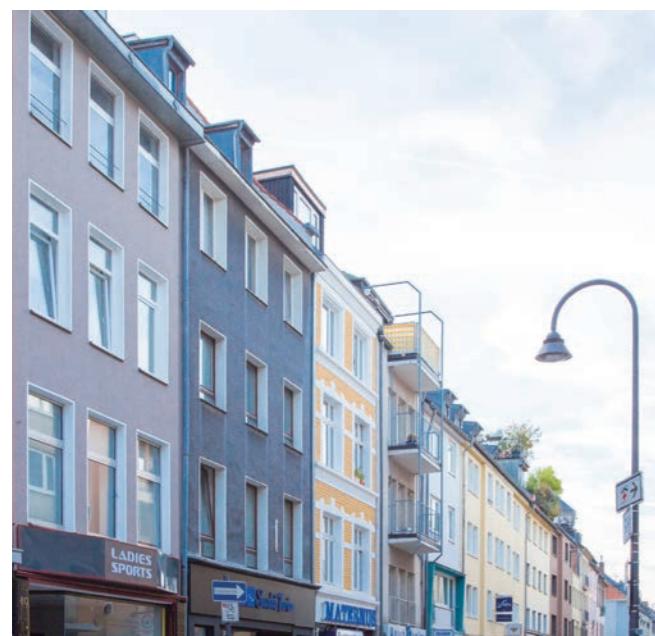

VRF **J-IVL**
for Small Offices

Fujitsu General provides air conditioning systems for a wide range of applications, from residences, small offices, hotels, to large retailers.



VRF **V-IV**
for Large Office

Smart, cutting-edge design Available in a wide range of models from 10 to 48 HP in 2 HP increments, with the capacity ratio of indoor units connectable up to 100%.



Air handling units Overview



The Air handling unit (AHU) is designed to be connected with VRF series outdoor units for thermal ventilation and air conditioning of civil and industrial buildings.

With airflow rates ranging from 4,300 to 18,100 m³/h and cooling capacities from 25 to 96 kW, a variety of models and multiple additional modules are available to meet diverse installation needs.

The AHU is made of extruded aluminum profiles and nylon angle bars. The "sandwich-type" double-skin panels (50 mm thick), made of surface coating pre-painted galvanized sheets and high-density polyurethane foam insulation, are fixed to the unit by an aluminum snap-in locking system.

The AHU fan section in the EC inverter Plug Fans provides constant airflow and constant available static pressure with an automatic control system. An electronic device with a pressure sensor mounted in the system and a control sensor on the EC inverter Plug Fans adjust the airflow rate and the available static pressure to keep the airflow constant.

5 configurations are available

Configuration A

In line with Front damper

For fresh air operation up to 100% external air

Configuration B

In line with Top inlet damper

For fresh air operation up to 100% external air

Configuration C

In line with Inlet mixing box


For fresh air operation up to 20% external air

Configuration D


Double deck with Cross-flow heat exchanger

Configuration E

Double deck with heat wheel

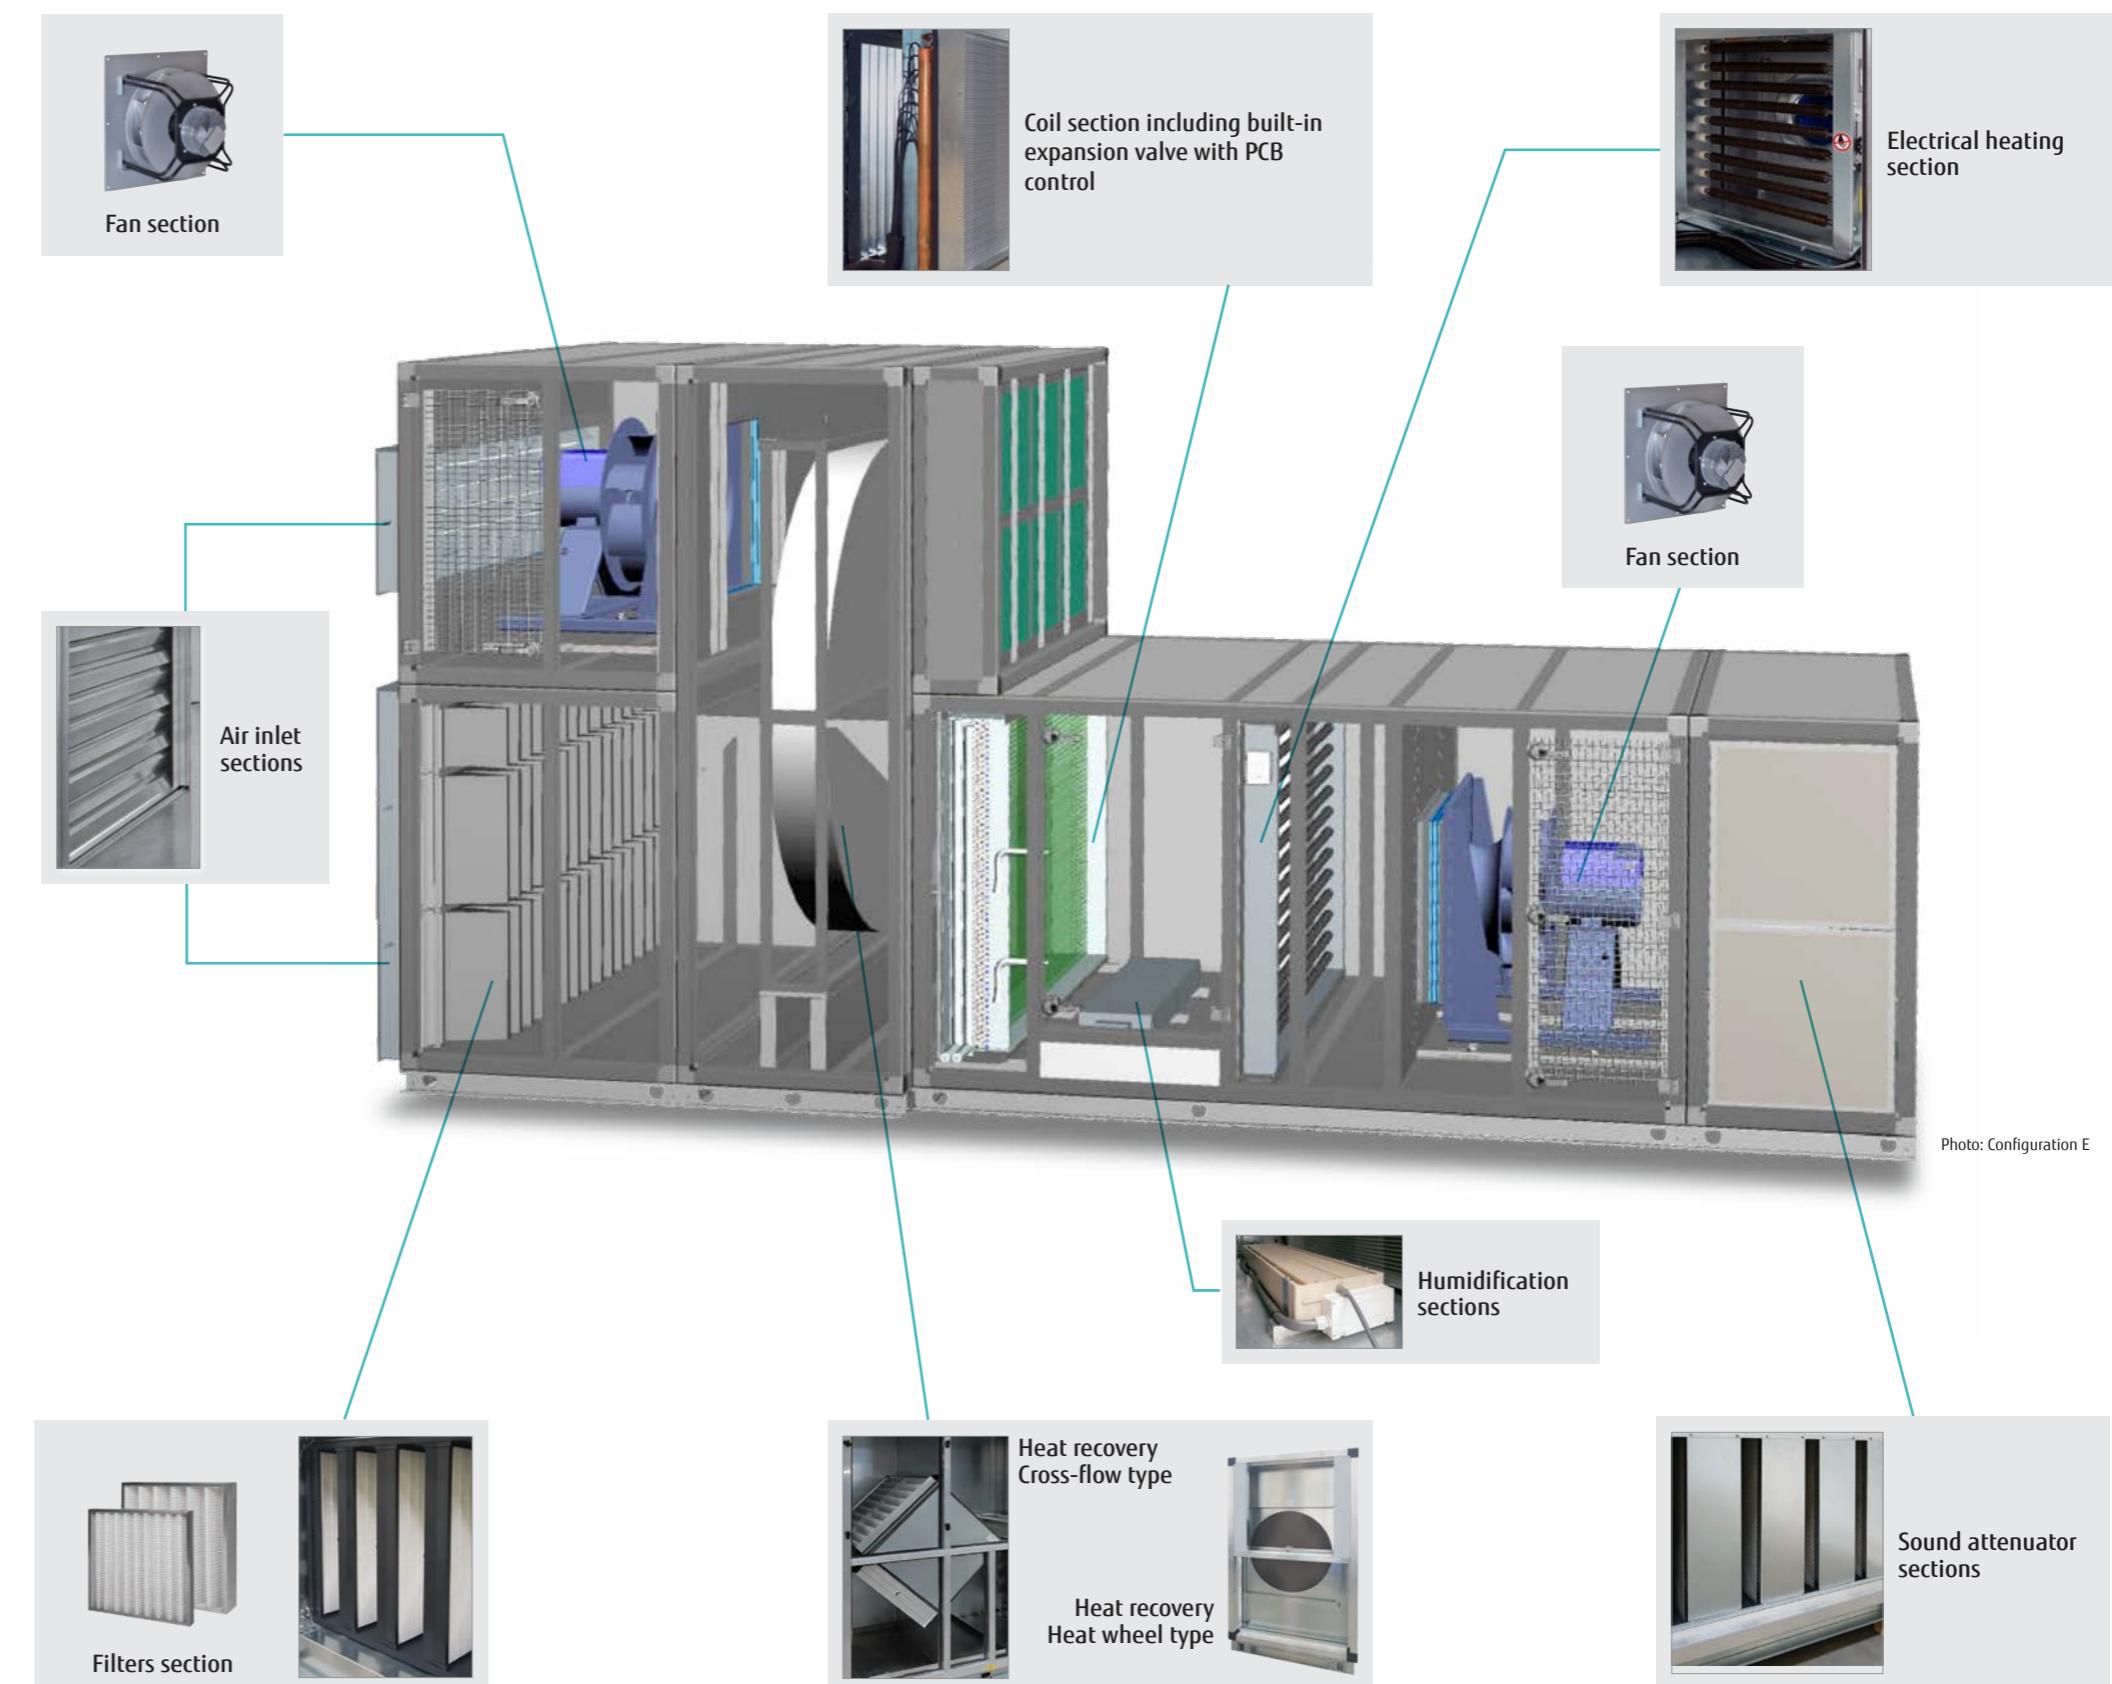

Feature

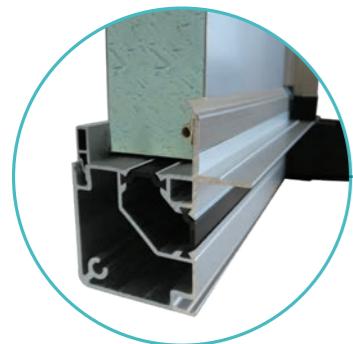

Structure

Section of extruded profile 62 × 62 mm (SNAP-IN system)



Photo: Configuration C

- The Air handling units are manufactured with a bearing framework and sandwich paneling.
- The frame is made of extruded anti-corrosive aluminum alloy profile, AlMgSi 0.5- UNI 9006/1.

Mechanical characteristics of extruded aluminium alloy


Denomination	Specific weight (kg/dm ³)	Unitary load of traction break R (kg/mm ²)	Yielding load S (0,2) (kg/mm ²)	Stretch (%)	Brinell hardness (kg/mm ²)
ANTICORODAL 050 UNI 9006/1 EX UNI 3569 (6060) ISO = Al Mg Si 0.5	2,70	20 ÷ 23	16 ÷ 20	12 ÷ 15	60 ÷ 70

Profile

- Fujitsu General's proprietary bearing has an actual size of 62 × 62 mm and an aluminum locking panel system (SNAP-IN system). This system enables uniform tightness of the panels that has not been achieved with the previous self-drilling screw fasteners, and thus ensures a degree of adhesion in excess of 2,500 Pa (10 in.W.G.). This profile, with no internal or external screws, provides a stronger and more beautiful appearance.
- The actual size of the panel used is 50 mm, due to the dimensions of the profile.
- In addition, the profile has no external sharp edges as prescribed by safety and accident prevention guidelines.
- The AHU is certified as meeting the most stringent performance standards.



- Fujitsu General units and all the internal components comply with ErP EcoDesign Directive 2018 Lot 6.
- Fujitsu General units comply with the European Standards UNE EN 1886 with respect to thermal and mechanical performances.

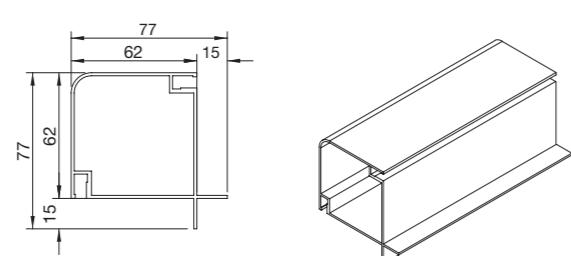

(Unit: mm)

Paneling


The panels are a double-skin sandwich type made of galvanized steel, with polyurethane foam insulation of a minimum density of 45 kg/m³ and an actual thickness of -50 mm.

The composition of the panel is as follows:

Inner skin: hot-dip galvanized sheet (galvanization thickness of not less than 140 g/m²), 5/10 mm thick

Insulation: rigid polyurethane foam (minimum density of 45 kg/m³, thermal conductivity 0.018 ÷ 0.024 w/m²°C)

Outer skin: hot-dip, pre-painted galvanized sheet (galvanizing thickness of not less than 140 g/m²), 6/10 mm thick

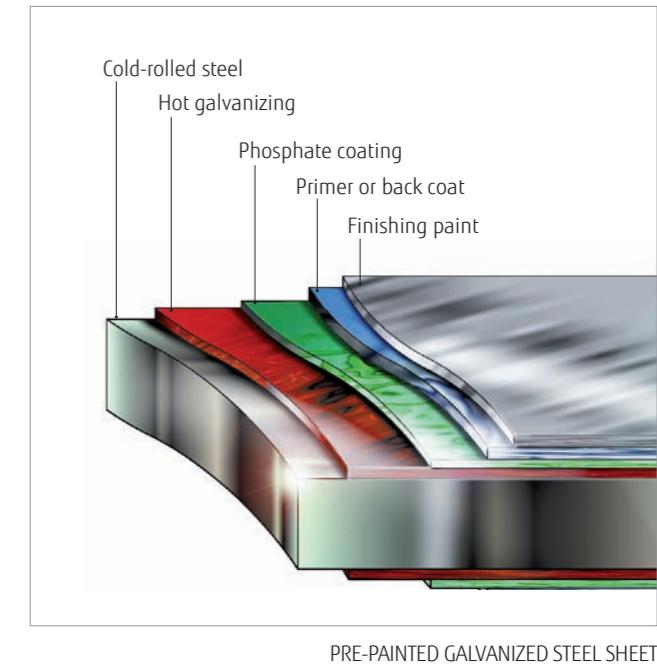

PRE-PAINTED GALVANIZED STEEL SHEET

Features of steel sheets

Hot-dipped galvanized steel sheet Fe P02 GZ 140 UNI EN 10142 with galvanization of not less than 140 g/m², 6/10 mm thick

Pre-painted steel sheet, 6/10 mm thick, with base support made of hot-dip galvanized steel with galvanization of not less than 140 g/m² EURONORM 142-79, a white-grey coating with excellent weather resistance. The protective system consists of a dry film of 25 µm on the exposed skin, and of a dry film of 5 µm on the non-exposed skin.

Film hardness: F on the Koh-i-Noor scale

Other chemical and physical properties:

- Resistance to salt spray exceeding 250 hours
- Resistance exceeding 1,000 hours in 100% relative humidity (ASTM D 714)
- Film resistance to cleaving and adhesion after bending (ECCA T7).

The exposed surface of the steel plate is covered with a self-adhesive PVC film to prevent damage during the manufacturing process and transportation.


Base frame

The bearing base frame is made of galvanized steel, the outline of which is pressure bent, bolted or welded, depending on the configuration of the unit.

Each part can be elevated and lowered, making it suitable for water and drain pipe.

The perimeter base frame is 100 mm high, C-shaped and bolted on all units.

The base frames for all of the above solutions are made of galvanized steel with a thickness of at least 2 mm.

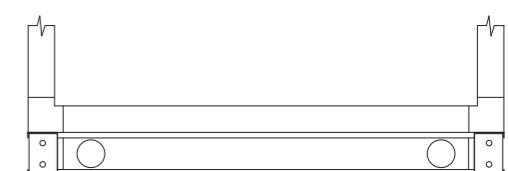


SECTION VIEW
The baseframe is flush with the panel.

Covering Roof (TT - Accessory)

- Units that are installed outdoors or that are frequently exposed to the weather can be fitted with a hot galvanized steel roof (with a galvanization of 140 g/m² or higher) as an accessory element.
- The roof overhang relative to the outer length of the unit is about 100 mm.
- All roof corners are equipped with protectors to prevent accidents.

Filtration

Plate Filters COARSE 55%

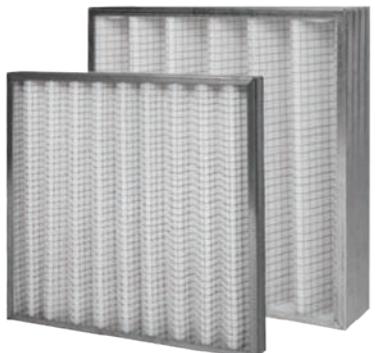

The plate filter filters air at low and medium efficiency.

- Plate filters are generally used as pre-filters to maintain the efficiency of the filters installed downstream for longer.
- Plate filters are installed on guides fixed inside the unit. In this case, the air bypass will be minimal.

Plate filters are widely used due to the following features:

- Easy to remove
- Easy to obtain spare parts
- Highly regenerable, they can be cleaned with warm water and soap or common household detergent.

Features of Plate filters

- Galvanized steel sheet frame 48 mm thick
- Support containing net made of galvanized electrowelded wire
- Filtering material made of synthetic fiber with a filtration efficiency of COARSE 55%

Filtration

Bag Filters ePM1 50%



Bag filters are characterized by a large filtration area due to their bag-like shape, which greatly reduces the airflow velocity as the air passes through the filter.

The bags are installed on a galvanized slide and can be removed from the side. This filtering section includes an access door.

N.B.: ePM1 50% bag filters are mandatory to comply with ECODSIGN ErP 2016.

Features of soft bag filters

- Efficiency of ePM1 50%
- 287 mm deep
- Filter material made of fiberglass
- Galvanized steel sheet frame
- 80% of the material is recyclable
- Can be used even at 100% relative humidity.

Thermal Exchange Sections

DX Coil



Contents

- DX coil with copper tubes and aluminum fins, specifically designed to ensure a high thermal exchange rate and an excellent ratio of sensible and latent heat;
- One distributor and one electronic expansion valve for each circuit are connected to the control PCB, and the control PCB is located in close proximity to avoid interference, immunity, and electromagnetic interference problems;
- The temperature probes installed at the front, rear, and middle of the coil provide data to the control PCB, which in turn determines the opening of the electronic expansion valve according to the work point and the setpoint;

In multi-module units, the cooling circuits are interlaced to ensure full utilization of the exchange surface and the uniformity of the air being processed even under partial loads. The section includes the control PCB.

Thermal Exchange Sections

Electrical heating



Electrical heating section is used for heating and post-heating processing

The thermal exchange sections consist of:

- Galvanized steel sheet flanged containing frame
- Finned steel tubular heaters on base insulators
- Safety fix thermostat with manual reset
- Electric heating is assumed to have a capacity of up to 36 kW at 400 V/3-phase/50 Hz system.

Fan Section

EC Inverter Plug-Fan



The fan section is equipped with an EC Inverter Plug-Fan.

- EC Inverter Plug-Fans are electronically controlled to adjust the fan speed to provide airflow and static pressure according to the system capacity. By varying the airflow according to the required heat load, the system reduces energy consumption and noise, which is effective especially when partial loads are applied.
- The EC Inverter Plug-Fans allow the user to set various working conditions to meet the needs of the unit directly on site from the control panel on the Electrical Board section. If the wind is weaker than expected, for example, the operating conditions can be changed and adjusted with ease.
- Compared to traditional plug fans, the use of EC inverter technology has greatly improved the overall efficiency and acoustic properties of fans. The blade geometry with a diagonal trailing edge has positive effects on the aerodynamic performance and on the smoothness of fan rotation. The same holds true for the contour of the mounted nozzle.
- By integrating the EC motor directly into the impeller with the fan, the overall dimensions of the section can be minimized. There is no need for the commonly used belt drive between the motor and the fan. This reduces the amount of installation required and associated installation work.
- The EC inverter Plug Fans substantially exceed the requirements for energy efficiency class A+ requirements listed in the German Manufacturers Association RLT Directive 01 "General Requirements for Ventilation and Air Conditioning Equipment" and in the ErP2015 standards respectively.
- The EC inverter Plug Fans used in the fan section of the AHU provide constant airflow and constant available static pressure with an automatic control system. An electronic device with a pressure sensor mounted in the system and a control sensor on the EC inverter Plug Fans adjust the airflow rate and the available static pressure to keep the airflow constant.

Humidifier



Electrode humidifiers specifically designed for installation inside Air handling units

- The humidifier consists of two electrically connected parts: a hydraulic part and a control unit based on a microprocessor board. The hydraulic part is completely inserted into the AHU, and sits on top of the drain tank immediately downstream of the cooling coil.
- This control is fully integrated into the microprocessor in the AHU.
- The hydraulic boiler consists of a plastic polypropylene channel with a cross section of 33 cm × 16 cm high and a length proportional to the width of the AHU. Stainless steel electrodes are placed vertically inside the boiler, connected to the power supply, and are easily removable. The plastic lid is inclined so that any condensation will drain into the boiler in order to avoid power losses.
- Narrow longitudinal slots between the plastic sections allow air to fill the entire length of the AHU section by outputting the generated steam.
- This prevents condensate from being generated in the pipes and also prevents the steam pressure in the boiler from rising due to clogging of the steam pipes.

On one side of the kettle, there is a body for hydraulic management of the system, which can be easily accessed after installation.

- Maximum water level sensor
- The drainage block is specially designed to empty the tank of water and limestone debris without blocking the tank or interrupting the flow of water, allowing the work to be done without applying pressure.

An electronic rotation sensor grafted to the pivot motor communicates with the microprocessor to manage correct operation, and any malfunctions are indicated on the display.

Heat Recovery Section

Cross-flow heat recovery



The efficiency of the recovery unit is up to 85%.

- The fixed plate static recovery units are air-to-air with no moving parts, making the system reliable and safe. The air moves in a cross flow, where heat is transferred directly from the hotter stream to the cooler stream. The efficiency of the recovery unit is up to 85%.
- This type of heat exchanger is made of pressed aluminum sheets and is housed at various intervals depending on the type of use.
- The edges are sealed to prevent renewed air from being contaminated from polluting agents contained in exhaust air.

Normal supply is assumed to be as follows:

- Recovery units with aluminum fins
- Cell prefilters COARSE 55% (85% efficiency) installed on the fresh air side
- Galvanized steel sheet drain pan to collect possible condensation

Heat Recovery Section

Heat Wheel Recovery Units



The principle of operation is as follows:


- The exhaust air travels across the semi-circular rotor sector, transferring some of its heat to the metal mass. As the exhaust passes through the half circular rotor sector, it transfers heat to the metal parts, which in turn transfers the heat to the fresh, cool air drawn in from outside through the other side of the half circular rotor sector, thus allowing ventilation without cooling the room. When the rotor is of the hygroscopic type, the humidity contained in the exhaust air will also be partially transferred to the regenerative air.
- The terms "warm air" and "cold air" as used above are valid for the winter operating cycle; in the summer operating cycle, the functions of heat and humidity transfer and absorption are reversed.

Typically, these types of recovery units consist of:


- Aluminum rotor
- Galvanized steel sheet frame
- Constant speed electric gearmotor

Dimensions


Configurations A

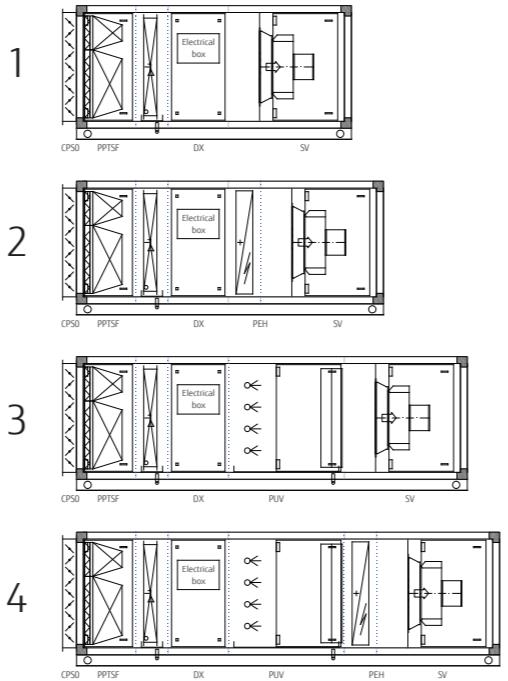

Configurations B

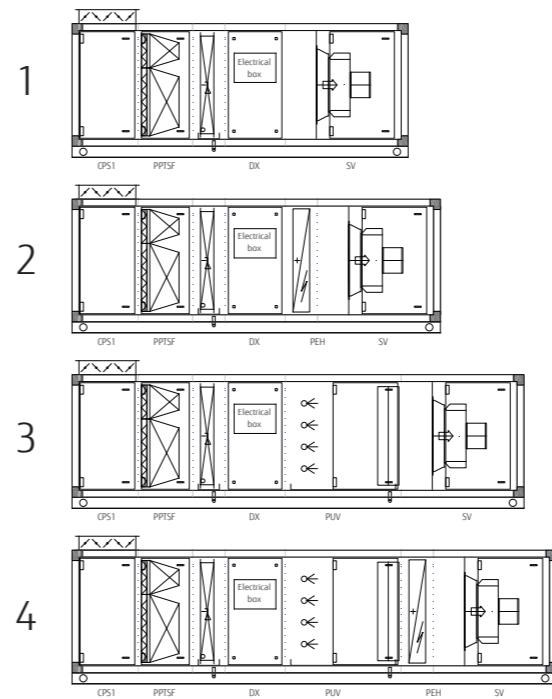

Configurations C

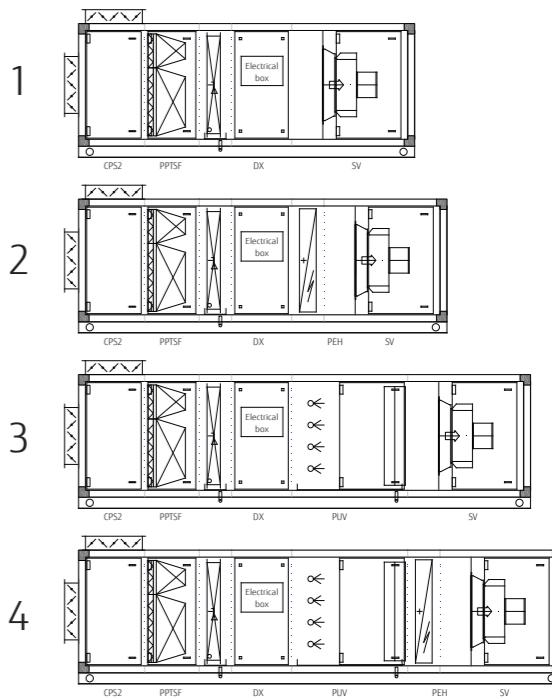


Model name	Config.	H (mm)	W (mm)	L (mm)	kg	L (with silencer) (mm)
AHYA025GWAA	1	1,064	1,154	2,619	611	3,529
AHYA025GWAB	2	1,064	1,154	3,109	679	4,019
AHYA025GWAC	3	1,064	1,154	2,619	629	3,529
AHYA025GWAD	4	1,064	1,154	3,109	697	4,019
AHYA040GWAA	1	1,199	1,354	2,749	844	3,659
AHYA040GWAB	2	1,199	1,354	3,319	931	4,229
AHYA040GWAC	3	1,199	1,354	2,749	865	3,659
AHYA040GWAD	4	1,199	1,354	3,319	952	4,229
AHYA048GWAA	1	1,309	1,574	2,749	921	3,659
AHYA048GWAB	2	1,309	1,574	3,319	1,023	4,229
AHYA048GWAC	3	1,309	1,574	2,749	944	3,659
AHYA048GWAD	4	1,309	1,574	3,319	1,046	4,229
AHYA080GWAA	1	1,544	2,074	3,189	1,542	4,099
AHYA080GWAB	2	1,544	2,074	3,839	1,701	4,749
AHYA080GWAC	3	1,544	2,074	3,189	1,570	4,099
AHYA080GWAD	4	1,544	2,074	3,839	1,729	4,749
AHYA096GWAA	1	1,789	2,250	3,189	1,691	4,099
AHYA096GWAB	2	1,789	2,250	3,839	1,869	4,749
AHYA096GWAC	3	1,789	2,250	3,189	1,724	4,099
AHYA096GWAD	4	1,789	2,250	3,839	1,899	4,749


Model name	Config.	H (mm)	W (mm)	L (mm)	kg	L (with silencer) (mm)
AHYB025GWAA	1	1,179	1,154	2,854	628	3,764
AHYB025GWAB	2	1,179	1,154	3,344	696	4,254
AHYB025GWAC	3	1,179	1,154	2,854	646	3,764
AHYB025GWAD	4	1,179	1,154	3,344	714	4,254
AHYB040GWAA	1	1,314	1,354	3,084	873	3,994
AHYB040GWAB	2	1,314	1,354	3,654	960	4,564
AHYB040GWAC	3	1,314	1,354	3,084	894	3,994
AHYB040GWAD	4	1,314	1,354	3,654	981	4,564
AHYB048GWAA	1	1,424	1,574	3,084	953	3,994
AHYB048GWAB	2	1,424	1,574	3,654	1,055	4,564
AHYB048GWAC	3	1,424	1,574	3,084	976	3,994
AHYB048GWAD	4	1,424	1,574	3,654	1,078	4,564
AHYB080GWAA	1	1,659	2,074	3,624	1,591	4,534
AHYB080GWAB	2	1,659	2,074	4,274	1,749	5,184
AHYB080GWAC	3	1,659	2,074	3,624	1,619	4,534
AHYB080GWAD	4	1,659	2,074	4,274	1,777	5,184
AHYB096GWAA	1	1,904	2,250	3,724	1,760	4,634
AHYB096GWAB	2	1,904	2,250	4,374	1,936	5,284
AHYB096GWAC	3	1,904	2,250	3,724	1,790	4,634
AHYB096GWAD	4	1,904	2,250	4,374	1,966	5,284

Model name	Config.	H (mm)	W (mm)	L (mm)	kg	L (with silencer) (mm)
AHYC025GWAA	1	1,179	1,154	2,969	650	3,879
AHYC025GWAB	2	1,179	1,154	3,459	718	4,369
AHYC025GWAC	3	1,179	1,154	2,969	668	3,879
AHYC025GWAD	4	1,179	1,154	3,459	736	4,369
AHYC040GWAA	1	1,314	1,354	3,199	899	4,109
AHYC040GWAB	2	1,314	1,354	3,769	986	4,679
AHYC040GWAC	3	1,314	1,354	3,199	920	4,109
AHYC040GWAD	4	1,314	1,354	3,769	1,007	4,679
AHYC048GWAA	1	1,424	1,574	3,199	980	4,109
AHYC048GWAB	2	1,424	1,574	3,769	1,082	4,679
AHYC048GWAC	3	1,424	1,574	3,199	1,003	4,109
AHYC048GWAD	4	1,424	1,574	3,769	1,105	4,679
AHYC080GWAA	1	1,659	2,074	3,739	1,624	4,649
AHYC080GWAB	2	1,659	2,074	4,389	1,782	5,299
AHYC080GWAC	3	1,659	2,074	3,739	1,652	4,649
AHYC080GWAD	4	1,659	2,074	4,389	1,810	5,299
AHYC096GWAA	1	1,904	2,250	3,839	1,799	4,749
AHYC096GWAB	2	1,904	2,250	4,489	1,975	5,399
AHYC096GWAC	3	1,904	2,250	3,839	1,829	4,749
AHYC096GWAD	4	1,904	2,250	4,489	2,005	5,399



Configurations D

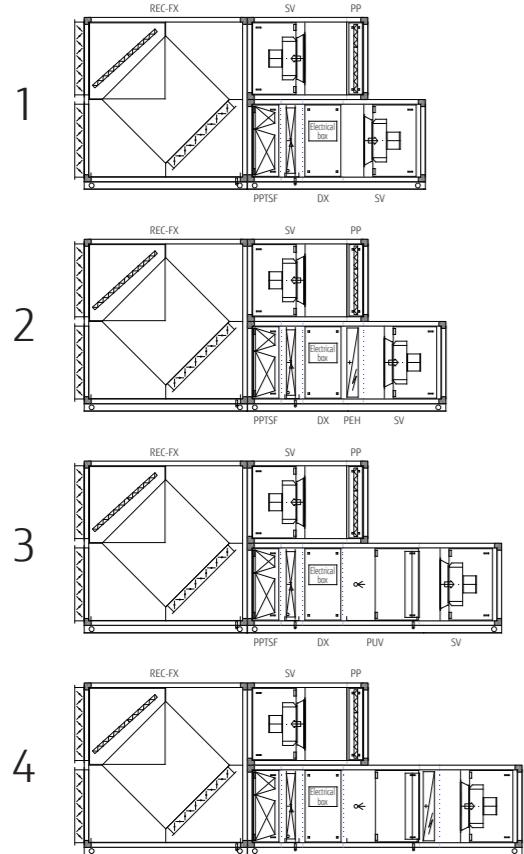

Configurations E

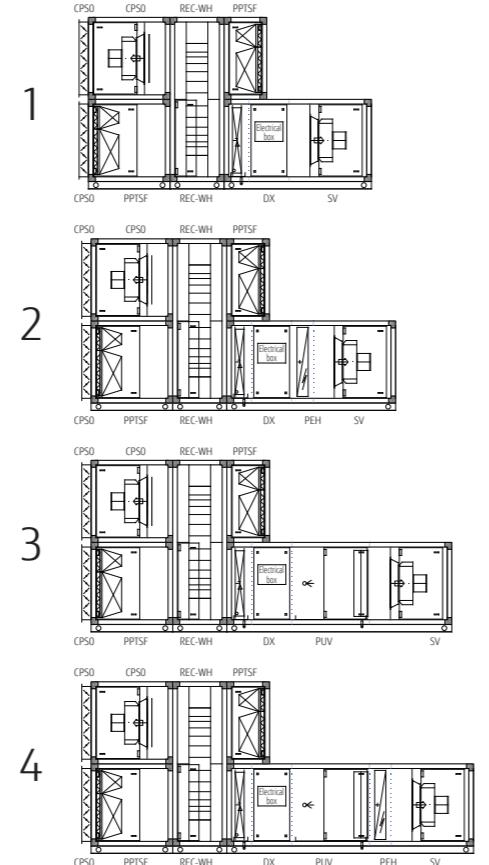

Silencer PI

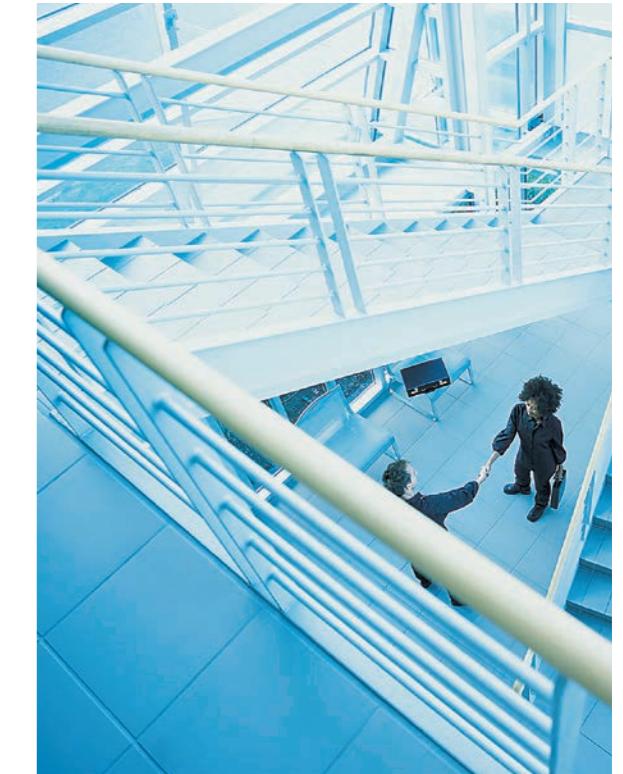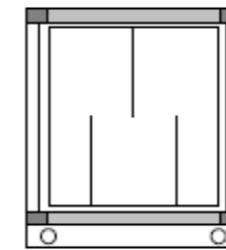

Loose Accessories

Galvanized metal sheet roof


Units that are installed outdoors or that are frequently exposed to the weather can be fitted with a hot galvanized steel roof (with a galvanization of 140 g/m² or higher) as an accessory element.

The roof overhang relative to the outer length of the unit is about 100 mm. All roof corners are equipped with protectors to prevent accidents.

Model name	Config.	H (mm)	W (mm)	L (mm)	kg	L (with silencer) (mm)
AHYD025GWAA	1	2028/1064	1424/1154	4,311	1,259	5,221
AHYD025GWAB	2	2028/1064	1424/1154	4,801	1,327	5,711
AHYD025GWAC	3	2028/1064	1424/1154	4,311	1,277	5,221
AHYD025GWAD	4	2028/1064	1424/1154	4,801	1,345	5,711
AHYD040GWAA	1	2298/1199	1574/1354	4,871	1,750	5,781
AHYD040GWAB	2	2298/1199	1574/1354	5,441	1,837	6,351
AHYD040GWAC	3	2298/1199	1574/1354	4,871	1,771	5,781
AHYD040GWAD	4	2298/1199	1574/1354	5,441	1,858	6,351
AHYD048GWAA	1	2518/1309	1824/1574	4,871	1,978	5,781
AHYD048GWAB	2	2518/1309	1824/1574	5,348	2,080	6,258
AHYD048GWAC	3	2518/1309	1824/1574	4,778	2,001	5,688
AHYD048GWAD	4	2518/1309	1824/1574	5,348	2,103	6,258
AHYD080GWAA	1	2988/1544	2,074	6,161	3,361	7,071
AHYD080GWAB	2	2988/1544	2,074	6,811	3,520	7,721
AHYD080GWAC	3	2988/1544	2,074	6,161	3,389	7,071
AHYD080GWAD	4	2988/1544	2,074	6,811	3,548	7,721
AHYD096GWAA	1	3478/1789	2,250	6,451	3,849	7,361
AHYD096GWAB	2	3478/1789	2,250	7,008	4,025	7,918
AHYD096GWAC	3	3478/1789	2,250	6,451	3,879	7,268
AHYD096GWAD	4	3478/1789	2,250	7,008	4,055	7,918

Model name	Config.	H (mm)	W (mm)	L (mm)	kg	L (with silencer) (mm)
AHYE025GWAA	1	2028/1064	1429/1154	3,813	1,150	4,723
AHYE025GWAB	2	2028/1064	1429/1154	4,303	1,226	5,213
AHYE025GWAC	3	2028/1064	1429/1154	3,813	1,168	4,723
AHYE025GWAD	4	2028/1064	1429/1154	4,303	1,244	5,213
AHYE040GWAA	1	2298/1199	1729/1354	4,073	1,571	4,983
AHYE040GWAB	2	2298/1199	1729/1354	4,643	1,658	5,553
AHYE040GWAC	3	2298/1199	1729/1354	4,073	1,592	4,983
AHYE040GWAD	4	2298/1199	1729/1354	4,643	1,679	5,553
AHYE048GWAA	1	2518/1309	1829/1574	4,073	1,696	4,983
AHYE048GWAB	2	2518/1309	1829/1574	4,643	1,798	5,553
AHYE048GWAC	3	2518/1309	1829/1574	4,073	1,719	4,983
AHYE048GWAD	4	2518/1309	1829/1574	4,643	1,821	5,553
AHYE080GWAA	1	2988/1544	2374/2074	4,953	2,753	5,863
AHYE080GWAB	2	2988/1544	2374/2074	5,603	2,912	6,513
AHYE080GWAC	3	2988/1544	2374/2074	4,953	2,781	5,863
AHYE080GWAD	4	2988/1544	2374/2074	5,603	2,940	6,513
AHYE096GWAA	1	3478/1789	2582/2250	4,953	3,035	5,863
AHYE096GWAB	2	3478/1789	2582/2250	5,603	3,211	6,513
AHYE096GWAC	3	3478/1789	2582/2250	4,953	3,065	5,863
AHYE096GWAD	4	3478/1789	2582/2250	5,603	3,241	6,513

Connectable AHU model name	H (mm)	W (mm)	L (mm)	Kg
AHY* 025GWA*	1064	1154	910	209
AHY* 040GWA*	1199	1354	910	233
AHY* 048GWA*	1309	1574	910	274
AHY* 080GWA*	1544	2074	910	280
AHY* 096GWA*	1789	2250	910	444

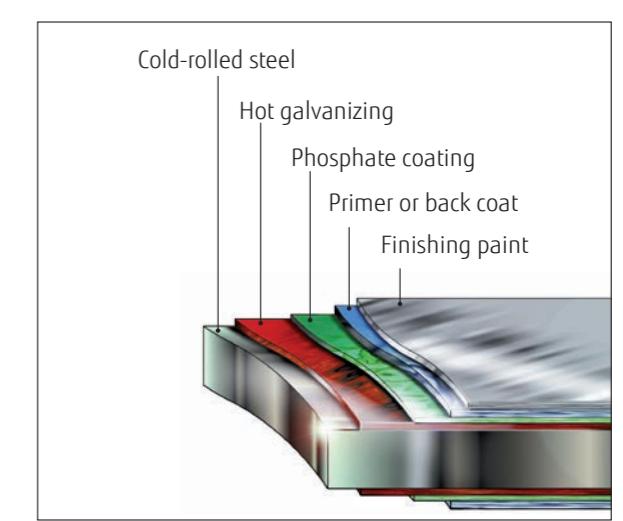

Total Pressure Drop Calculation

Air handling units (AHUs) controlled by EC inverter Plug Fans meet a high range of required airflows and static pressures.

The EC Inverter Plug-Fans allow the user to set various working conditions to meet the needs of the unit directly on site from the control panel on the Electrical Board section. If the wind is weaker than expected, for example, the operating conditions can be changed and adjusted with ease.

Selection procedure


- Select the most suitable AHU model according to the airflow rate.
- Based on the required airflow and overall static pressure value, identify the operating point of the airflow static pressure on the curve for the selected fan.

To calculate the overall static pressure value, refer to the component pressure drop table and add the net static pressure required for the plant.



Fan characteristic curves

Fan type 400 mm

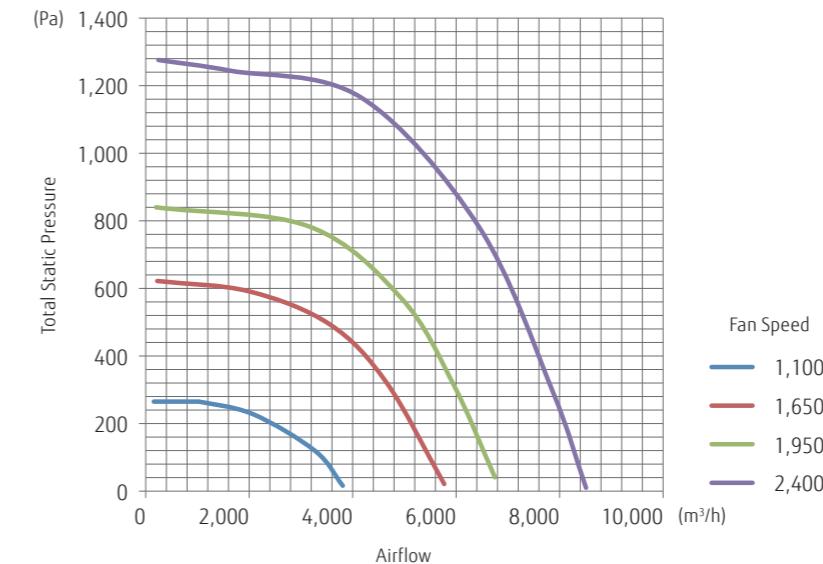


Component pressure drop table


ODU	AHU SIZE	MIN. NOM. MAX.	Airflow		Inlet damper (Config. A-E)	Inlet damper (Config. B-Q)	COARSE 55% filters - supply	ePM1 50% filters	DX coil	Silencer	PHE + dampers 55% filters - supply	PHE + dampers 55% filters - exhaust	COARSE 55% filters - exhaust (Config. D)	Heat wheel - supply	COARSE 55% filters - supply (Config. E)	ePM1 50% filters (Config. E)	Heat wheel - exhaust	COARSE 55% filters - exhaust (Config. E)	Exhaust damper (Config. E)	Humidifier	Electrical heater
			m³/h	Pa	Pa	Pa	Pa	Pa			Pa	Pa	Pa	Pa	Pa	Pa	Pa	Pa	Pa	Pa	
10HP	025	MIN.	4,300	1	12	91	156	55	26	206	120	91	162	93	144	159	84	7	-	-	
		NOM.	4,500	1	13	98	158	59	28	210	122	95	167	93	146	165	95	8	-	-	
		MAX.	5,000	2	16	99	164	71	36	235	147	96	187	95	150	185	96	10	-	-	
14 HP	040	MIN.	5,000	1	4	91	138	37	4	154	70	91	116	89	135	114	91	4	-	-	
		NOM.	7,200	2	13	87	149	68	10	240	145	87	172	93	144	169	94	8	-	-	
		MAX.	8,000	2	16	96	153	82	12	243	165	96	193	94	147	190	96	9	-	-	
18 HP	048	MIN.	8,100	1	12	96	153	50	10	225	139	92	167	94	147	165	92	9	-	-	
		NOM.	8,600	1	13	97	156	55	11	241	155	93	178	95	149	176	93	10	-	-	
		MAX.	9,100	2	15	98	159	60	13	257	171	93	189	95	152	187	93	11	-	-	
2X 14 HP	080	MIN.	11,000	1	8	91	140	30	9	148	62	90	121	90	137	119	90	6	-	-	
		NOM.	14,500	2	14	94	148	47	16	188	101	93	163	93	143	161	93	10	-	-	
		MAX.	16,100	2	17	96	153	56	19	209	122	94	183	94	147	180	94	13	-	-	
2X 18 HP	096	MIN.	16,000	1	10	96	152	37	16	157	74	91	146	92	142	144	91	10	-	-	
		NOM.	17,300	1	11	97	156	42	19	168	86	92	159	93	145	157	92	11	-	-	
		MAX.	18,100	1	13	98	158	46	21	175	93	92	167	93	146	165	92	13	-	-	

Air flow Rate	Total static pressure	Input power	Fan speed (n)	LwAin	LwAout
m³/h	Pa	W	rpm	dB	dB
156	265	124	1100	63	71
334	265	134	1100	63	70
1002	265	187	1100	62	69
1025	265	181	1100	62	69
2072	228	234	1100	58	66
3275	119	224	1100	62	69
3809	16	173	1100	69	74
223	622	352	1650	75	82
2005	591	642	1650	72	79
3564	493	767	1650	68	75
4656	321	708	1650	71	77
5770	21	487	1650	79	83
200	840	509	1950	79	86
3163	783	1154	1950	74	81
4946	570	1223	1950	74	80
5948	316	1027	1950	78	83
6750	41	773	1950	83	87
245	1276	921	2400	85	92
1649	1244	1497	2400	86	92
4163	1165	2223	2400	81	87
6438	783	2237	2400	81	87
7864	296	1738	2400	86	91
8510	10	1389	2392	89	93

Fan type 560 mm

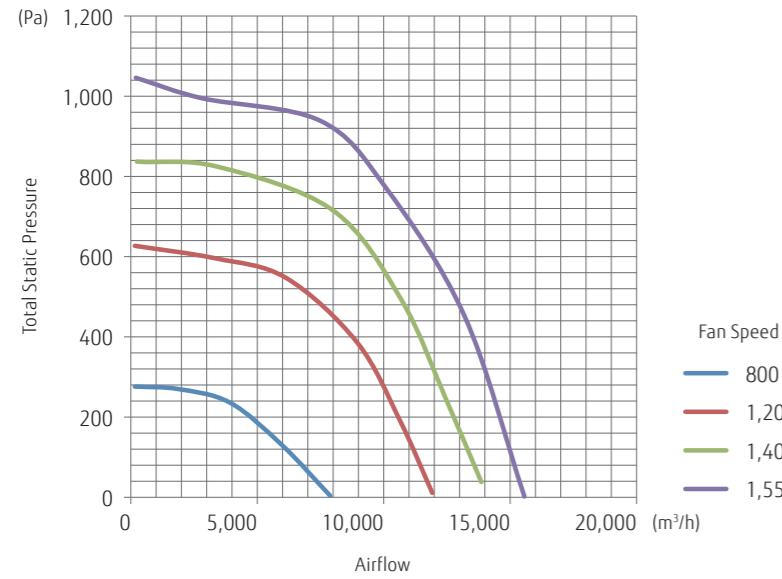

Fan type 710 mm

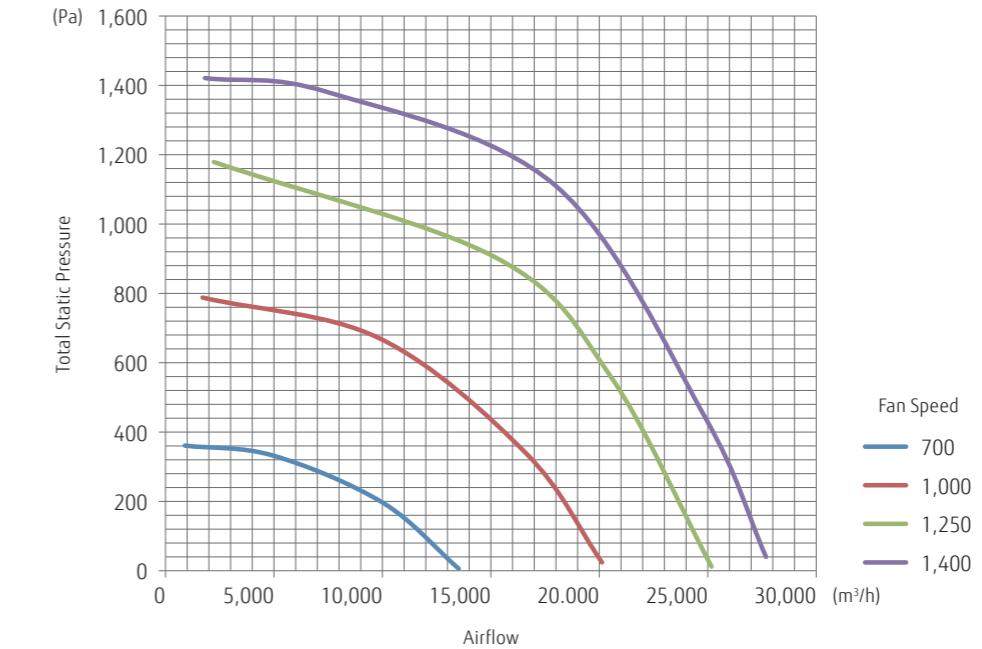

Air flow Rate m³/h	Total static pressure Pa	Input power W	Fan speed (n) rpm	LwAin dB	LwAout dB
158	276	209	800	65	72
1861	270	345	800	65	71
3921	236	438	800	61	67
5980	130	452	800	62	67
7881	4	313	800	69	74
158	627	591	1200	77	83
3327	596	1164	1200	75	82
6139	547	1471	1200	71	77
8950	386	1473	1200	72	78
10653	190	1212	1200	76	82
11921	11	936	1200	80	85
238	837	901	1400	80	87
3446	824	1743	1400	80	87
8000	715	2403	1400	75	81
10693	493	2260	1400	76	82
12475	243	1859	1400	80	86
13861	38	1521	1400	85	89
198	1046	1210	1550	84	90
2812	995	2086	1550	84	91
7485	939	3131	1550	78	84
10059	774	3249	1550	77	84
13188	453	2901	1550	82	88
15564	2	1948	1550	91	94

Air flow Rate m³/h	Total static pressure Pa	Input power W	Fan speed (n) rpm	LwAin dB	LwAout dB
891	361	744	700	71	77
4975	332	1290	700	69	74
10025	196	1427	700	69	75
13515	6	880	700	77	83
1708	788	1693	1000	81	88
9876	670	3179	1000	77	83
16634	338	3084	1000	80	86
20124	24	2177	1000	87	93
2228	1179	3015	1250	87	94
15297	901	6054	1250	83	89
20495	563	5794	1250	86	92
25173	12	3857	1250	92	98
1821	1421	3716	1400	89	96
7500	1380	5851	1400	89	95
17996	1110	8301	1400	86	92
24855	445	6916	1400	91	98
27685	40	5271	1400	95	101

Specifications

Configuration A-B-C									
Model FG	025	040	048	080	096				
Model name	AHYA025GWA*	AHYA040GWA*	AHYA048GWA*	AHYA080GWA*	AHYA096GWA*				
Casing									
Material	Outer skin: 0.6 mm thick pre-painted galvanized sheet; Inner skin: 0.6 mm thick galvanized sheet								
Insulation	Polyurethane foam, 50 mm thick, 45 kg/m³								
Performance									
Cooling capacity	kW	25	40	48	78				
Heating capacity	kW	31.5	45	50	81.5				
Available static pressure	Pa	200	200	200	200				
Power supply	V/Ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50				
Airflow									
Max.	m³/h	5000	8000	9100	16100				
Rated	m³/h	4500	7200	8600	14500				
Min.	m³/h	4300	5000	8100	11000				
Cross-flow heat recovery									
Efficiency (*)	%	—	—	—	—				
DX Coil									
Rows	n°	4							
Coil type	25 × 22 - 3/8"								
Coil duty	Cooling/Heating								
Fluid	R410A								
Pipe material	Copper								
Fin material	Aluminum								
Electrical heating									
Stages	n°	3							
Heating capacity	kW	9	15	18	30				
Humidifier									
Fix steam capacity	kg/h	15	25	30	45				
Fan									
Type	EC inverter Plug Fan								
Motor data	mm	400	560	560	710				
	kW	2.4	3.4	3.4	7.3				
Thermal transmittance of casing (TT) class	T3	T3	T3	T3	T3				
Thermal bridging factor (TBF) class	TB3	TB3	TB3	TB3	TB3				
Casing strength (CS) class	D2 (M)	D2 (M)	D2 (M)	D2 (M)	D2 (M)				
Casing air leakage (CAL) class@-400Pa	L2 (M)	L2 (M)	L2 (M)	L2 (M)	L2 (M)				
Casing air leakage (CAL) class@+700 Pa	> L3 (M)	> L3 (M)	> L3 (M)	> L3 (M)	> L3 (M)				
Filter bypass leakage (FBL) class	F9 (M)	F9 (M)	F9 (M)	F9 (M)	F9 (M)				

(*) at rated airflow

Configuration D						Configuration E								
Model FG	025	040	048	080	096	025	040	048	080	096				
Model name	AHYD025GWA*	AHYD040GWA*	AHYD048GWA*	AHYD080GWA*	AHYD096GWA*	AHYE025GWA*	AHYE040GWA*	AHYE048GWA*	AHYE080GWA*	AHYE096GWA*				
Casing														
Material	Outer skin: 0.6 mm thick pre-painted galvanized sheet; Inner skin: 0.6 mm thick galvanized sheet					Outer skin: 0.6 mm thick pre-painted galvanized sheet; Inner skin: 0.6 mm thick galvanized sheet								
Insulation	Polyurethane foam, 50 mm thick, 45 kg/m³					Polyurethane foam, 50 mm thick, 45 kg/m³								
Performance														
Cooling capacity	kW	25	40	48	78	25	40	48	78	96				
Heating capacity	kW	31.5	45	50	81.5	31.5	45	50	81.5	100				
Available static pressure	Pa	200	200	200	200	200	200	200	200	200				
Power supply	V/Ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50				
Airflow														
Max.	m³/h	5000	8000	9100	16100	5000	8000	9100	16100	18100				
Rated	m³/h	4500	7200	8600	14500	4500	7200	8600	14500	17300				
Min.	m³/h	4300	5000	8100	11000	4300	5000	8100	11000	16000				
Heat recovery														
Efficiency (*)	%	—	—	—	—	73.3	74.4	74.2	73.7	73.6				
DX Coil														
Rows	n°	4				4				4				
Coil type	25 × 22 - 3/8"					25 × 22 - 3/8"								
Coil duty	Cooling/Heating					Cooling/Heating								
Fluid	R410A					R410A								
Pipe material	Copper					Copper								
Fin material	Aluminum					Aluminum								
Electrical heating														
Stages	n°	3				3				3				
Heating capacity	kW	9	15	18	30	9	15	18	30	36				
Humidifier														
Fix steam capacity	kg/h	15	25	30	45	15	25	30	45	60				
Fan														
Type	EC inverter Plug Fan					EC inverter Plug Fan								
Motor data	mm	400	560	560	710	2.4	3.4	3.4	7.3	7.3				
	kW	2.4	3.4	3.4	7.3									
Thermal transmittance of casing (TT) class	T3	T3	T3	T3	T3	T3	T3	T3	T3	T3				
Thermal bridging factor (TBF) class	TB3	TB3	TB3	TB3	TB3	TB3	TB3	TB3	TB3	TB3				
Casing strength (CS) class	D2 (M)	D2 (M)	D2 (M)	D2 (M)	D2 (M)	D2 (M)	D2 (M)	D2 (M)	D2 (M)	D2 (M)				
Casing air leakage (CAL) class@-400Pa	L2 (M)	L2 (M)	L2 (M)	L2 (M)	L2 (M)	L2 (M)	L2 (M)	L2 (M)	L2 (M)	L2 (M)				
Casing air leakage (CAL) class@+700 Pa	> L3 (M)	> L3 (M)	> L3 (M)	> L3 (M)	> L3 (M)	> L3 (M)	> L3 (M)	> L3 (M)	> L3 (M)	> L3 (M)				
Filter bypass leakage (FBL) class	F9 (M)	F9 (M)	F9 (M)	F9 (M)	F9 (M)	F9 (M)	F9 (M)	F9 (M)	F9 (M)	F9 (M)				

(*) at rated airflow

Control system

AHU units include a built-in electrical panel and expansion valve with control PCB. Setpoint is fixed via standard wired control.

The cooling load is determined by the air return temperature and the setpoint of the wired control.

AHU Controller

UTY-TXUX



Features

- Easy to install. Control connects to AHU PLC.
- Controls can be installed after the building is decorated.
- Mode lock function: Allows users to lock the operating mode of the AHU.

Easy operation

This remote controller provides an intuitive user interface with a touch screen display.

Functions

- Schedule setting change
- Set temperature and humidity
- Ambient name
- Alarm setting
- Event setting

Specifications

Model name	UTY-TXUX
Format	mm 120 × 86 × 25
Screen resolution	Display touch color 3.5" 320 × 240
Power supply	24 V AC - 24 V AC/DC
Analogue inputs	1 × Integrated NTC
Connectivity	RS485 - MODBUS® SL, USB Micro-B (debug and programming)
Operating temperature	0 - +50 °C

System controller

UTY-APGXZ1 Software

Features

System controller enables advanced integrated monitoring and control of VRF network systems operating in small to large buildings.

- System controller controls up to 4 VRF network systems, 1,600 indoor units, and 400 outdoor units.
- To accommodate facility management needs, the system controller offers—in addition to precise air conditioning control—remote central control, electricity charge apportionment, schedule management, and energy-saving options for VRF network systems.

Max. Controllable

4 VRF network systems

Max. Controllable

400 outdoor units

Max. Controllable

1,600 indoor units

System controller Lite

UTY-ALGXZ1 + UTY-PLGXX2 Software

Features

System controller Lite offers a set of standard functions to manage air conditioners operating in a small or midsize building.

- System controller Lite controls up to 1 VRF network system, 400 indoor units, and 100 outdoor units.
- In addition to precise air conditioning control, a variety of management-specific applications are available as options, enabling a wider range of control.

Max. Controllable


1 VRF network systems

Max. Controllable

100 outdoor units

Max. Controllable

400 indoor units

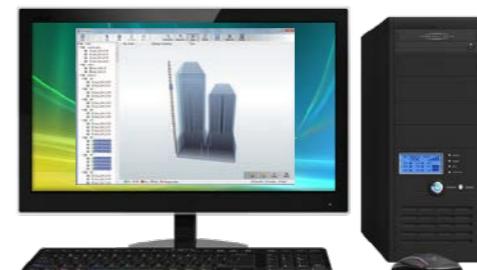

Centralized control is also possible to stop the operation of not only air conditioners, but also lighting and ventilation equipment. These features are useful for managing the energy efficiency of the entire building.

VRF indoor units				
Facilities				Lightning Ventilation Energy recovery ventilator

Summary of functions

Function	Type	System controller		System controller Lite				
		UTY-APGXZ1	Option UTY-PEGXZ1	UTY-ALGXZ1	Option UTY-PLGXR2	Option UTY-PLGXA2	Option UTY-PLGXE2	Option UTY-PLGXX2
System specification	Max. number of VRF networks supported	4	—	1	—	—	—	—
	Max. number of indoor unit and remote controller groups per VRF network	400	—	400	—	—	—	—
	Max. number of outdoor units per VRF network	100	—	100	—	—	—	—
	Max. number of indoor units and remote controller groups per system controller	1600	—	400	—	—	—	—
	Max. number of outdoor units per system controller	400	—	100	—	—	—	—
Site supervision	Multiple site display	10	—	10	—	—	—	—
	Number of buildings per site	20	—	—	—	—	—	—
	Number of floors per site	200	—	—	—	—	—	—
	Number of floors per building	50	—	—	—	—	—	—
	3D graphical layout view	●	—	—	—	—	—	—
	2D graphical layout view	●	—	—	—	—	—	—
	List display	●	—	●	—	—	—	—
Error management	Tree display	●	—	●	—	—	—	—
	Group display	●	—	●	—	—	—	—
	Error notification	●	—	●	—	—	—	—
	Audible alarm	●	—	●	—	—	—	—
History	E-mail notification of errors	●	—	●	—	—	—	—
	Error history	●	—	●	—	—	—	—
	Operation history	●	—	●	—	—	—	—
Operation control	Control history	●	—	●	—	—	—	—
	On/Off	●	—	●	—	—	—	—
	Operation mode*	●	—	●	—	—	—	—
	Room temperature	●	—	●	—	—	—	—
	Fan speed	●	—	●	—	—	—	—
	Airflow direction	●	—	●	—	—	—	—
	Economy mode	●	—	●	—	—	—	—
	Setting temperature range limitation	●	—	●	—	—	—	—
	Anti-freeze	●	—	●	—	—	—	—
	Low noise setting of outdoor units	●	—	●	—	—	—	—
	Individual management	Setting remote control prohibition	●	—	●	—	—	—
	Setting temperature range limitation	●	—	●	—	—	—	—
	Filter sign reset	●	—	●	—	—	—	—
	Other	Memory operations	●	—	●	—	—	—
Schedule	Pattern operations	●	—	●	—	—	—	—
	Annual Schedule	●	—	●	—	—	—	—
	Setting for a specific date	●	—	●	—	—	—	—
	On/Off per day	72	—	72	—	—	—	—
	On/Off per week	504	—	504	—	—	—	—
	Day off	●	—	●	—	—	—	—
	Minimum unit of timer setting (minutes)	10	—	10	—	—	—	—
Remote management	Weekly schedule for low noise mode	●	—	●	—	—	—	—
	Web operation	●	—	●	—	—	—	—
	Remote monitoring	●	—	—	●	—	—	—
	Remote operation control	●	—	—	●	—	—	—
Electricity charge apportionment	Remote function setting	●	—	—	●	—	—	—
	Apportionment charge/bill calculation	●	—	—	—	●	—	—
	Tenant (block) setting	●	—	—	—	●	—	—
	Common facilities apportionment setting	●	—	—	—	●	—	—
	Rated power consumption allotment setting	●	—	—	—	●	—	—
	Individual calculations for cooling and heating	—	—	●	—	●	—	—
	Electricity meter supported	—	●	—	—	●	—	—
Energy saving management	Indoor unit rotation	—	●	—	—	—	●	—
	Peak cut control	—	●	—	—	—	●	—
	Capacity saving for outdoor unit	—	●	—	—	—	●	—
	Record of energy saving operation	—	●	—	—	—	●	—
	Information on energy saving	—	●	—	—	—	●	—
	Power consumption monitor	—	●	—	—	—	●	—
Control of external devices	Electricity meter supported	—	●	—	—	—	●	—
	Monitor	●	—	—	—	—	—	●
	Control	●	—	—	—	—	—	●
Others	Importing and exporting databases	●	—	—	—	—	—	—
	Automatic clock adjustment	●	—	●	—	—	—	—
	Multiple language support	7 languages	—	7 languages	—	—	—	—
	Refrigerant leak detection function	●	—	●	—	—	—	—
	Power shutdown	●	—	●	—	—	—	—

●●: Available. - : Not available.

Computer requirements

The specifications required for the Computer are shown in the table below:


	System controller	System controller Lite					
Operating system	<ul style="list-style-type: none"> Microsoft® Windows® 7 Home Premium (32-bit or 64-bit) SP1, Windows® 7 Professional (32-bit or 64-bit) SP1 Microsoft® Windows® 8.1 (32-bit or 64-bit), Windows® 8.1 Pro (32-bit or 64-bit) Microsoft® Windows® 10 Home (32-bit or 64-bit), Windows® 10 Pro (32-bit or 64-bit) <p>Supported languages: English, Chinese, French, German, Russian, Spanish, and Polish</p>						
CPU	Intel® Core™ i3 2 GHz or higher						
Memory	<ul style="list-style-type: none"> 2 GB or more (for Windows® 7 [32-bit]) 4 GB or more (for Windows® 7 [64-bit], Windows® 8.1, and Windows® 10) 						
HDD	40 GB or more of free space						
Screen resolution	1024 × 768 or higher						
Interface	<ul style="list-style-type: none"> Ethernet port (for getting access to the internet using LAN) or a modem (for getting access to the internet using a landline) Up to 6 USB ports (Only required for a server Computer working as a VRF controller) Maximum of 2 USB ports are required to connect to a White-USB-key/WibuKey Up to 4 USB ports required to connect to a Echelon® U10 USB network interface <p>* Maximum number of required USB ports depends on the applicable system configuration.</p>	<ul style="list-style-type: none"> Ethernet port (for getting access to the internet using LAN) or a modem (for getting access to the internet using a landline) Up to 6 USB ports (Only required for a server Computer working as a VRF controller) Maximum of 4 USB ports are required to connect to a White-USB-key/WibuKey 1 USB port is required for an Echelon® U10 USB Network Interface <p>* The maximum number of required USB ports depends on the applicable system configuration.</p>					
Graphic accelerator	Microsoft® DirectX® 9.0c compatible						
Software	Adobe® Acrobat Reader® 9.0 or later						
	• Echelon® U10 USB Network Interface - TP/FT-10 Channel (Model name: 75010R) (Required for each VRF Network)						
Packing List							
Type	For System controller	For System controller Lite					
System controller	Option Energy manager	System controller Lite	Remote access	Electricity charge apportionment	Energy saving	Central Control	
Model name	UTY-APGXZ1	UTY-PEGXZ1	UTY-ALGXZ1	UTY-PLGXR2	UTY-PLGXA2	UTY-PLGXE2	UTY-PLGXX2
White-USB-key	1	1	1	1	1	1	1

*1: Software protection key to be inserted in a USB slot running System controller or System controller Lite.

System controller or System controller Lite may only run on a Computer with a White-USB-key. However, a White-USB-key is not required for remote VRF Explorer software.


Light Commercial & Commercial, Residential CONTROL SYSTEM & OPTIONAL PARTS

- C-002 Control System Overview
- C-006 Best Control Solution for Each Building Structure
- C-008 Comparison Table of Controllers
- C-048 Control System List
- C-056 Optional Parts Overview
- C-062 Optional Parts List
- C-066 Function List

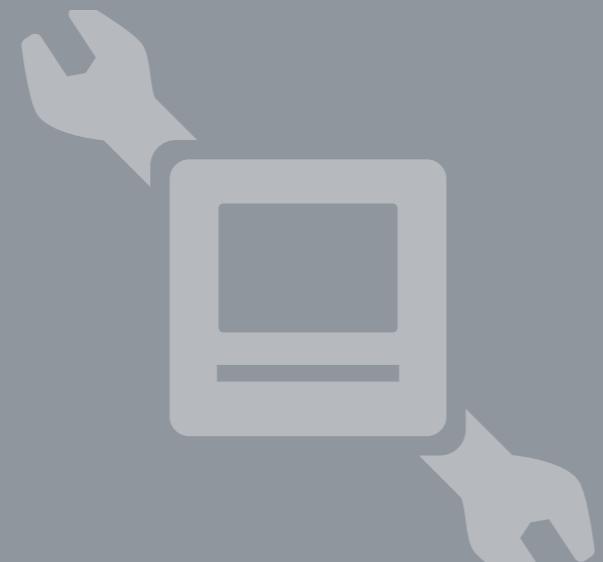

A wide product lineup to meet a variety of needs

We can flexibly meet customer needs through a variety of offerings including wired and wireless individual remote controllers, central remote controllers that simultaneously control multiple indoor units, and a variety of converters that link with other systems.

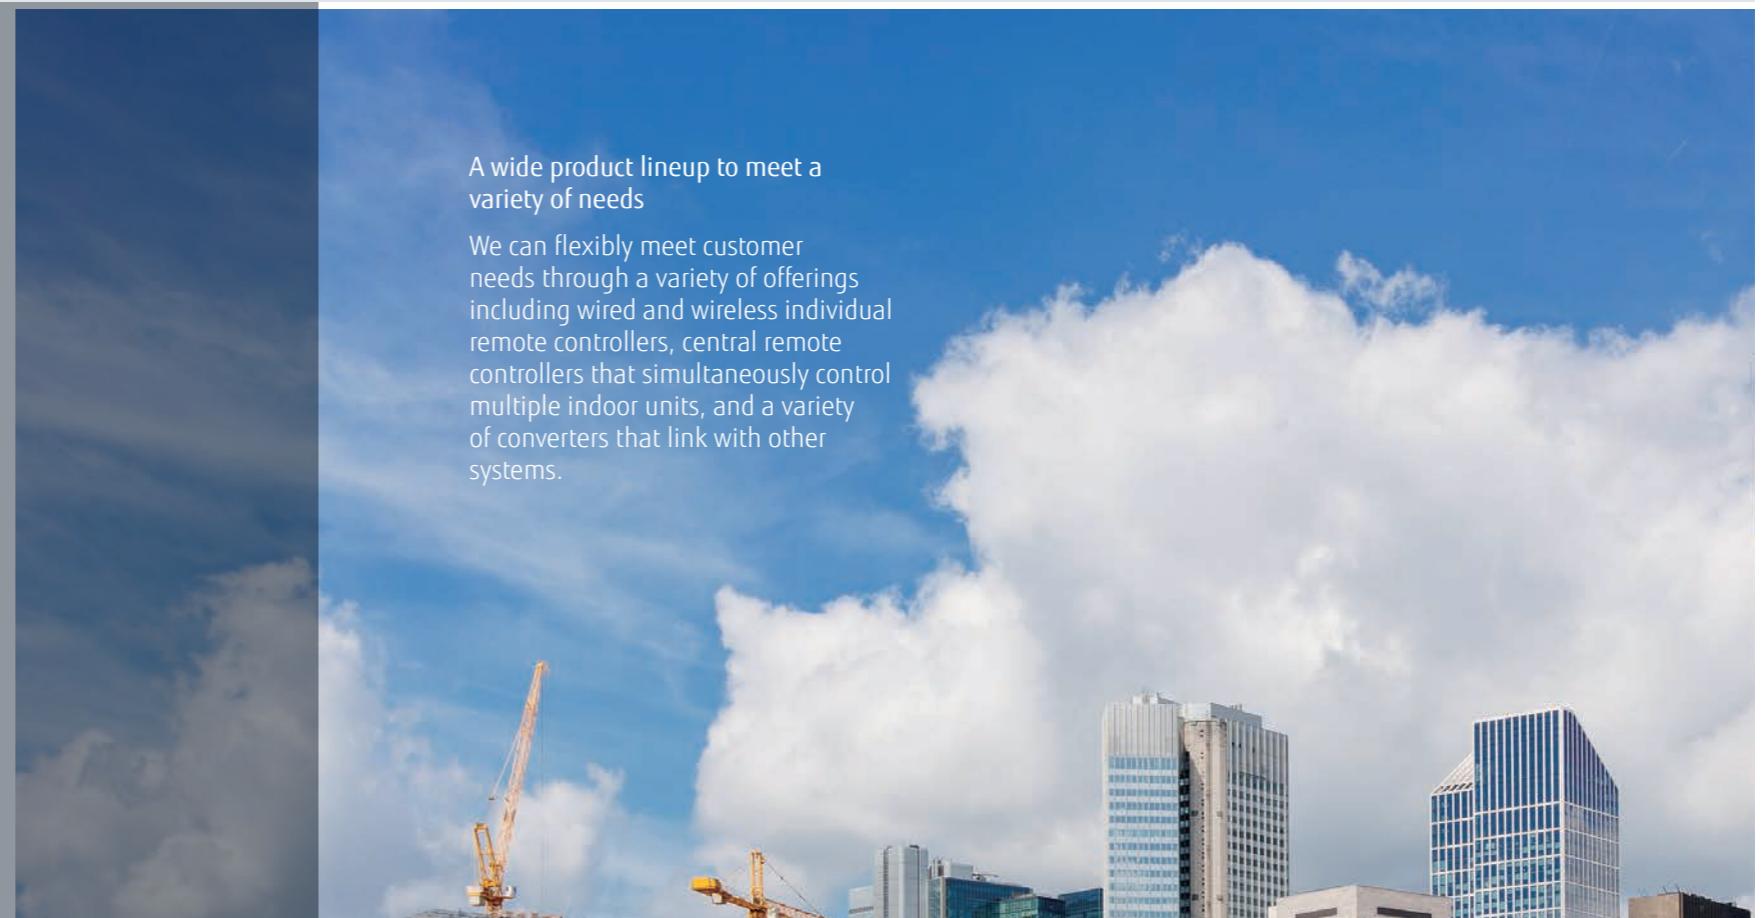

CONTROL SYSTEM

INDIVIDUAL CONTROL

- C-010 Wired Remote Controller (with touch panel)
- C-012 Wired Remote Controller / Compact Wired Remote Controller
- C-013 Wired Remote Controller
- C-014 Simple Remote Controller
- C-015 Wireless Remote Controller
- C-016 IR Receiver Unit

CONVERTERS/ADAPTERS

- C-018 WLAN Adapter
- C-022 Multi-split Protocol WLAN Adapter

CENTRALIZED CONTROL

- C-023 Home Central Remote Controller
- C-024 Central Remote Controller
- C-026 Touch Panel Controller
- C-030 System Controller Software / System controller Lite Software

CONVERTERS/ADAPTERS

- C-034 MODBUS® Converter for Indoor unit
- C-035 MODBUS® Interface
- C-036 MODBUS® Converter for VRF
- C-037 BACnet® interface
- C-038 BACnet® Gateway Software
- C-039 BACnet® Gateway Hardware
- C-040 BACnet®/MODBUS® Router
- C-041 BACnet®/MODBUS® Cloud Device
- C-042 KNX® converter for Indoor unit / KNX® converter for VRF
- C-043 KNX® Interface
- C-044 Network Converter for Single-Split Type
- C-045 Network Converter for LONWORKSTM
- C-046 External switch controller / Signal Amplifier

Optional parts

- C-058 Silver Ion Filter
- C-059 Auto Louver Grille Kit
- C-060 Pressure Sensor Kit
- C-061 External Power Supply Unit
- AIR BEAM Radiation air outlet unit
- C-070 Separation Tube and other piping products

- SPLIT
- MULTI-SPLIT
- VRF J Series
- VRF V Series

Control System Overview

for Split & Multi-split

All indoor units* are equipped with a wireless or wired remote controller as standard. Additional options are available, such as individual remote controllers and central remote controllers. The easy-to-operate central remote controller makes it simple to control the operation mode, temperature, airflow volume, timer, and other functions of each indoor unit from a single location.

* Except for some products

Air Conditioning Individual control

Wired remote controller
A built-in thermo sensor monitors and controls room temperature accurately.

Wireless remote controller
Simple and versatile operations with a choice of 4 different types of timers

Simple remote controller
Compact remote controller with basic functionality

For Ceiling type

For Duct type


For Cassette type

IR receiver unit
This IR receiver unit enables a wireless remote controller to control a duct-type indoor unit.



Air Conditioning Centralized control

Home central remote controller for 5 & 6-unit Multi-split type
Enables individual and central control.

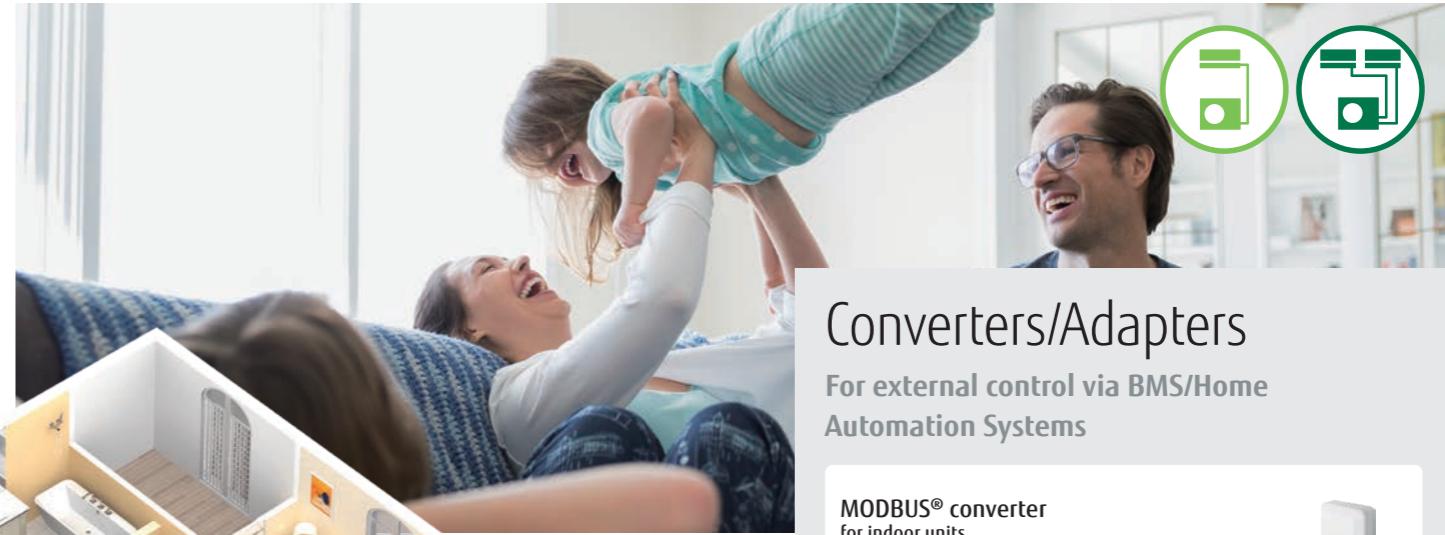

Converters/Adapters

For external control via BMS/Home Automation Systems

MODBUS® converter for indoor units UTY-VMSX	
MODBUS® interface for indoor units UTY-VKSX	
KNX® converter for indoor units UTY-VKSX	
KNX® interface for indoor units UTY-VKSX	
WLAN adapter	
Network converter DC power supply type UTY-VTGX	
Network converter AC power supply type UTY-VTGXV	

Online Control (Wireless Control via Smartphone/Tablet)

With the WLAN adapter and the AIRSTAGE Mobile app, you can control the heating and cooling of your home anytime, anywhere.

WLAN adapter

The dedicated WLAN adapter enables the air conditioner to be operated by smartphone or tablet computer.




AIRSTAGE
Mobile

Download Free
App Store Google play

Simple, user-friendly interface design

The designed screen display makes it easier than ever to operate.

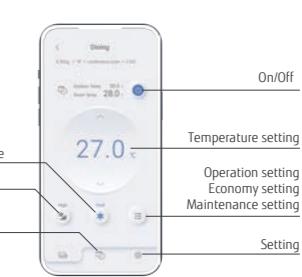

Control System Overview

for VRF


To meet the diverse needs of customers, we offer a variety of control options for our VRF systems, such as individual control, centralized control, and building management system (BMS) options.

Air Conditioning Individual control

- Wired remote controller (with touch pane)**
UTY-RNRYZ5
- Wired remote controller**
UTY-RLRY
- Compact wired remote controller**
UTY-RCRYZ1
- Simple remote controller**
UTY-RSRY
UTY-RHRY
Without operation mode
- Wireless Remote Controller**
UTY-LNHY
- IR receiver unit**
 - For Duct type
 - For One-way flow cassette Series/3D-flow cassette Series/duct type
 - UTY-TRHX
for One-way flow cassette Series 3D flow cassette Series/duct type
 - UTY-LBHXD
for Circular flow cassette Series
 - for Circular flow cassette Series

Air Conditioning Centralized control

- System controller Software**
UTY-APGXZ1/UTY-ALGXZ1 (Lite version)
 - Internet or landline
 - USB adapter*1 (Locally available)
 - Remote/Monitoring side
 - Up to 1600 Indoor units**
 - *1: Echelon® U10 USB Network Interface
*2: The Lite version controls up to 400 indoor units.
- Touch panel controller**
UTY-DTGYZ1
 - Internet or landline
 - Remote/Monitoring side
 - Up to 400 Indoor units**
- Central remote controller**
UTY-DCGYZ2
 - Internet or landline
 - Remote/Monitoring side
 - Up to 100 Indoor units**

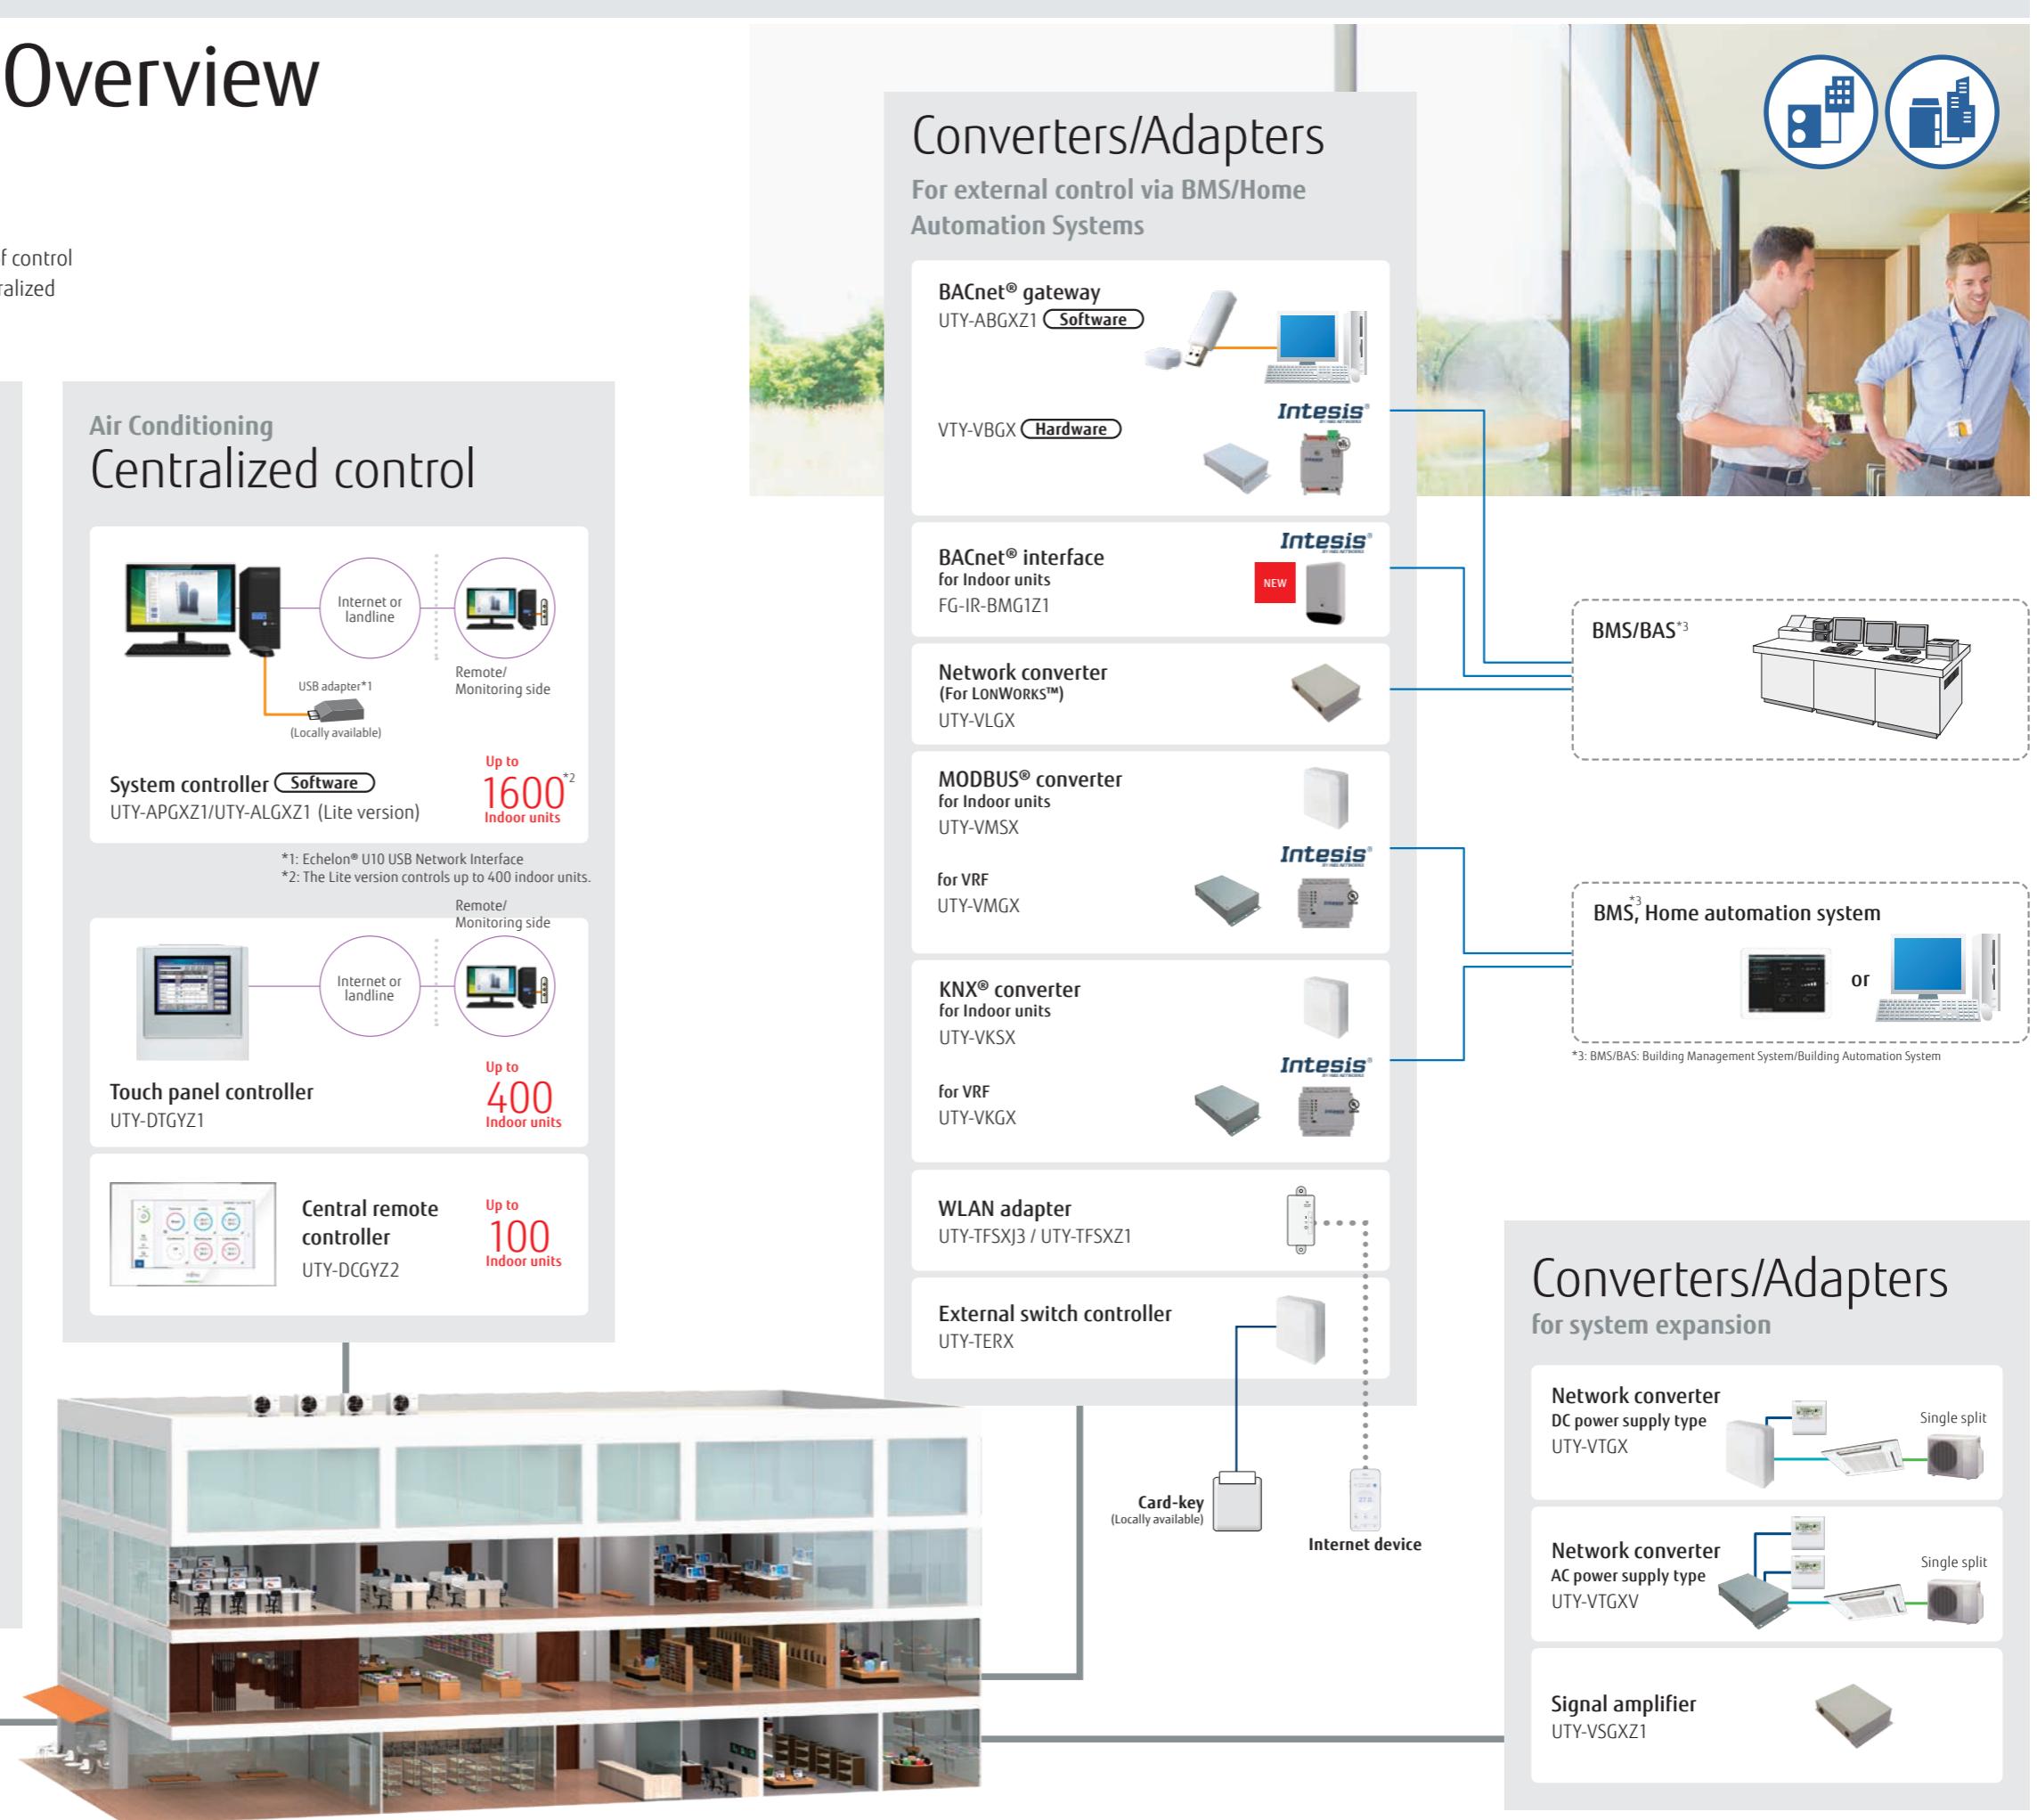

Converters/Adapters for system expansion

- Network converter DC power supply type**
UTY-VTGX
 - Single split
- Network converter AC power supply type**
UTY-VTGXV
 - Single split
- Signal amplifier**
UTY-VSGXZ1

Best control solution for each building structure

Fujitsu General provides the best control solutions suitable for various building structures.

SHOP

Type	Individual control		Centralized control			Integrating control (Interface)		
	Wired remote controller	Central remote controller	Touch panel controller	System controller	Network converter for LONWORKS™	MODBUS® Converter	KNX® converter	
	UTY-RNRYZ5 UTY-RLRY UTY-RVNYM UTY-RCRYZ1	UTY-DCGYZ2	UTY-DTGYZ1	UTY-APGXZ1 UTY-ALGXZ1	UTY-VLGX	UTY-VMGX	UTY-VKGX	
Automatic control of air conditioning (Schedule timer, Weekly timer, etc.)	●	●	●	●				
Controls limited to staff: Remote controller prohibition, Setting temperature range limitation, etc.		●	●	●	●	●	●	
Group control		●	●	●				
Advanced energy saving: Peak cut, Operation of indoor unit rotation, etc.				●				
Remote monitoring management		●	●	●				
Manage multiple sites		●	●	●				
Monitor energy consumption				●				
Control third-party products				●				
Integrate Fujitsu General air conditioning into BMS					●	●	●	

HOTEL

Type	Individual control			Centralized control			Integrating control (Interface)		
	Wired remote controller	Simple remote controller	Wireless remote controller	Central remote controller	Touch panel controller	System controller	BACnet® gateway	Network converter for LONWORKS™	MODBUS® converter
	UTY-RNRYZ5 UTY-RLRY UTY-RCRYZ1	UTY-RSRY UTY-RHRY UTY-RSNYM	UTY-LNHY UTY-LNTY	UTY-DCGYZ2	UTY-DTGYZ1	UTY-APGXZ1 UTY-ALGXZ1	UTY-ABGXZ1 UTY-VBGX	UTY-VLGX	UTY-VMGX
Local control for hotel guests	●	●	●						
Centralized air conditioning control for common areas			●	●	●	●	●	●	●
Limited control for hotel guests			●	●	●	●	●	●	●
Remote monitoring management			●	●	●				
Advanced energy saving: Peak cut, Operation of indoor unit rotation, etc.					●	●			
Monitor energy consumption					●				
Control third-party products					●				
Integrate Fujitsu General air conditioning into BMS						●	●	●	●
Interlock with window contact									●
Interlock with key card									●

OFFICE

Type	Individual control			Centralized control			Integrating control (Interface)		
	Wired remote controller	Simple remote controller	Wireless remote controller	Central remote controller	Touch panel controller	System controller	BACnet® gateway	Network converter for LONWORKS™	MODBUS® converter
	UTY-RNRYZ5 UTY-RLRY UTY-RCRYZ1	UTY-RSRY UTY-RHRY UTY-RSNYM	UTY-LNHY UTY-LNTY	UTY-DCGYZ2	UTY-DTGYZ1	UTY-APGXZ1 UTY-ALGXZ1	UTY-ABGXZ1 UTY-VBGX	UTY-VLGX	UTY-VMGX
Local control for office staff	●	●	●	●					
Automatic control of air conditioning (Schedule timer, Weekly timer, etc.)	●		●	●	●	●	●		
Centralized air conditioning control for management					●	●	●	●	●
Controls limited to staff: Remote controller prohibition, Setting temperature range limitation, etc.				●	●	●	●	●	●
Advanced energy saving: Peak cut, Operation of indoor unit rotation, etc.						●	●		
Remote monitoring management					●	●	●		
Electricity charge apportionment						●	●	●	
Monitor energy consumption							●		
Control third-party products							●		
Integrate Fujitsu General air conditioning into BMS								●	●
Interlock with door contact									●
Interlock with Occupancy sensor for meeting room					●				●

Comparison table of controllers

Item																
	Wired remote controller (with touch panel)	Wired remote controller	Wired remote controller	Wired remote controller	Compact wired remote controller	Simple remote controller	Simple Remote Controller			Wireless remote controller	Wireless remote controller	Home central remote controller (for 5/6-unit multi-split type)	Central remote controller	Touch panel controller	System controller Lite Software	System controller Software
Model name	UTY-RNRYZ5	UTY-RRLY	UTY-RVNYM	UTY-RCRZY1	UTY-RSNYM	UTY-RSRY			UTY-RHRY	UTY-LNHY	UTY-LNTY	UTY-DMMYM	UTY-DCGYZ2	UTY-DTGYZ1	UTY-ALGX1	UTY-APGX1
Maximum number of controllable remote controller groups	1	1	1	1	1	1			1	1	1	1	100	400	400	1600
Maximum number of controllable indoor units	16	16	16	1	16	16			16	16	16	8	100	400	400	1600
Maximum number of controllable groups	—	—	—	—	—	—			—	—	—	—	50	400	400	1600
Air conditioning control functions	ON/OFF	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	Operation mode setting	●	●	●	●	●	●	●	—	●	●	●	●	●	●	●
	Fan speed control	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	Room temperature setting	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	Setting temperature range limitation	●	●	●	●	—	—	●	●	—	—	—	●	●	●	●
	Test operation	●	●	●	●	●	●	●	●	●	●	—	—	●	—	—
	Vertical louver setting	●	●	●	●	●	—	●	●	●	●	—	●	●	●	●
	Horizontal louver setting	●	●	●	●	●	—	—	●	—	—	—	●	●	●	●
	Individual louver control	●	—	—	●	—	—	—	—	—	—	—	●	●	—	—
	Group setting	—	—	—	—	—	—	—	—	—	—	—	●	●	●	●
	Remote controller prohibition	—	—	—	—	—	—	—	—	—	—	●	●	●	●	●
	Anti-freeze setting	●	—	—	●	—	—	—	—	—	—	—	●	●	●	●
	Set temperature auto return	●	●	●	—	—	—	—	—	—	—	—	●	—	—	—
	Economy mode setting	●	●	●	●	●	—	—	●	●	●	●	●	●	●	●
	Occupancy sensor control	●	—	—	—	—	—	—	—	—	—	●	●	●	●	●
Displayed items	Error	●	●	●	●	●	●	●	●	—	—	●	●	●	●	●
	Defrosting	●	●	●	●	●	●	●	●	—	—	—	●	●	●	●
	Current time	●	●	●	●	—	—	—	—	●	●	●	●	●	●	●
	Day of week	●	●	●	●	—	—	—	—	—	—	—	●	●	●	●
	Remote controller prohibition	●	●	●	●	●	●	●	●	—	—	●	●	●	●	●
	Address display	●	●	●	●	●	●	●	●	—	—	—	●	●	●	●
	Room temperature	●	—	●	●	●	—	●	●	—	—	—	●	●	●	●
	Multiple language support	●	—	●	●	—	—	—	—	—	—	—	●	●	●	●
	Setting for daylight saving time	●	—	●	—	—	—	—	—	—	—	●	●	●	●	●
	Name registration	●	—	—	—	—	—	—	—	—	—	—	●	●	●	●
	Backlighting	●	—	●	●	●	●	●	●	—	—	●	●	●	—	—
	2D floor layout/3D building display	—	—	—	—	—	—	—	—	—	—	—	—	—	—	●
	Refrigerant leak detector	—	—	—	—	—	—	—	—	—	—	—	●	●	●	●
Timer	Period	Week	Week	Week	—	—	—	—	—	—	—	—	Week	Week	Year	Year
	ON/OFF, Temp, Mode, Times per day	8	4	8	—	—	—	—	—	—	—	4	20	20	144	144
	ON/OFF timer	●	●	●	●(OFF only)	—	—	—	—	●	●	—	—	—	—	—
	Sleep timer	—	—	—	—	—	—	—	—	●	●	—	—	—	—	—
	Program timer	—	—	—	—	—	—	—	—	●	●	—	—	—	—	—
	Auto-off timer	●	●	●	—	—	—	—	—	—	—	—	●	●	—	—
	Day off	●	●	●	—	—	—	—	—	—	—	●	●	●	●	●
	Minimum unit of timer setting (minutes)	10・30	30	30	—	—	—	—	—	5	5	5	10	10	10	10
Control	Remote monitoring management system	—	—	—	—	—	—	—	—	—	—	—	●	●	●	●
	Electricity charge apportionment	—	—	—	—	—	—	—	—	—	—	—	○	○	●	●
	Error history	●	●	●	—	—	—	—	—	—	—	—	●	●	●	●
	Emergency stop	—	—	—	—	—	—	—	—	—	—	—	●	●	—	—
	Remote monitoring management	—	—	—	—	—	—	—	—	—	—	—	●	●	○	●
	Energy-saving management	—	—	—	—	—	—	—	—	—	—	—	—	—	○	○
	E-mail notification in case of failure	—	—	—	—	—	—	—	—	—	—	—	●	●	●	●
	Key lock	●	Child lock	Child lock	Child lock	—	—	—	—	—	—	Child lock	●	●	●	●
	Low noise mode	—	—	—	—	—	—	—	—	—	—	●	—	●	●	●

*1 "Operation mode" setting not available.

*2 Available only for external input control.

*3 Monitoring sites can be set up.

The main unit side can only be operated to cancel the settings.

*4 Available only when using Wired remote controller.

●: Supported ○: Optional function —: Unsupported

Wired remote controller (with touch panel)

UTY-RNRYZS



Up to
16 indoor units
Up to
1 group

Easy operation due to large high-resolution STN-LCD touch panel screen

- Touch screen LCD
- Built-in daily/weekly timer (ON/OFF, temperature, modes)
- Backlit screen for easy operation in the dark.
- Room temperature display
- Controls up to 16 indoor units
- Supports 12 languages: Chinese, Dutch, English, French, German, Greek, Italian, Polish, Portuguese, Russian, Spanish, and Turkish
- Nonpolar 2-core type


High performance and compact size

A single remote controller controls each connected indoor unit and provides a weekly timer function and a variety of energy-saving options.



Accurate control for comfort

A thermo sensor built into the remote controller monitors room temperature accurately.

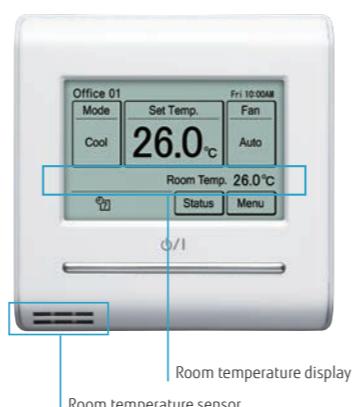


Energy saving controls

Custom Auto

- Maintains 2 separate setpoints for heating and cooling operations.
- Automatically switches between heating and cooling modes.

* Not available for some models

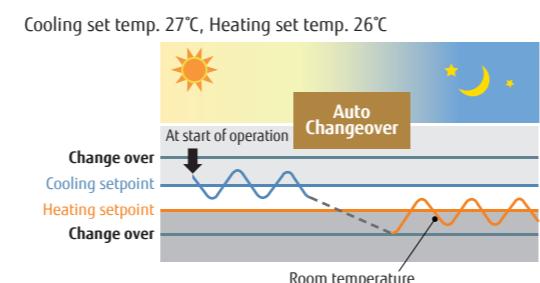


Auto-off timer

- While the Auto-off timer is activated, if the set off time is specified as, for example, one hour, the power will automatically turn off one hour after the start of operation.
- A desired time frame can be specified for the Auto-off timer.
- The off-time can be set from 30 to 240 minutes.

2-setting weekly timer

Set temperature auto return

Setting temperature range limitation

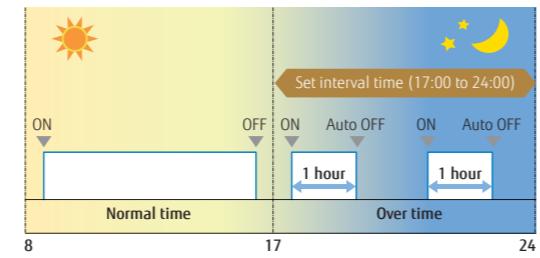


e.g.) Between 17:00 and 24:00 (over time hours), when the 1 hour set off time has elapsed, the system will automatically turn off the indoor unit as it

Features: Wired Remote Controller (Touch Panel)

Refrigerant cycle monitor (Option)

Wired Remote Controller (Touch Panel) will support to display some sensor values for maintenance and service support.

* This function is only supported by split units, using the H-Serial communication protocol! Example: ASYH30KMTB

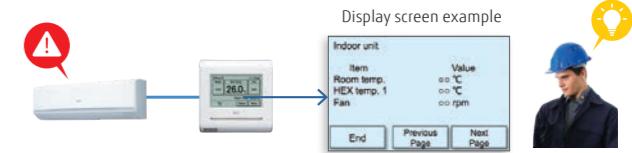


Display screen example



Multi System Control^{*1}


1) Lead Lag Operation

Standby Indoor Unit can be selected in lead lag operation. By this, the Indoor units will last longer than operating by nonstop.

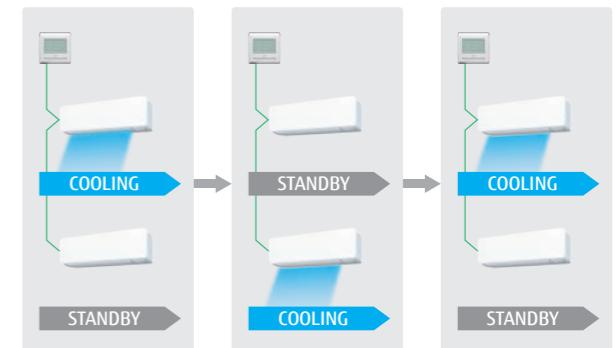


2) Back up operation

In case of unexpected Indoor unit error, other Indoor units will start providing back up operation.

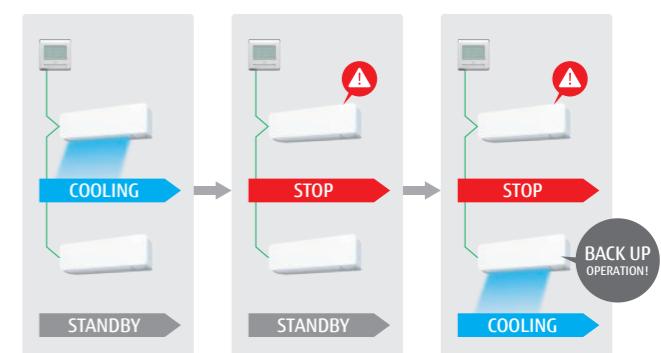

3) Lag Operation

In case of unexpected room temperature rise, other Indoor Units will start providing lag operation.

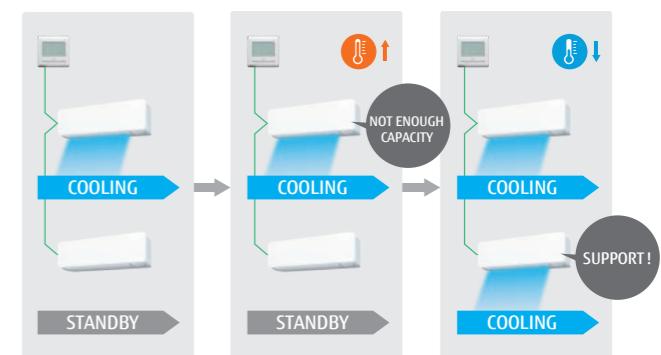

*1: "Lead Lag Setting" is an easy-to-use function for room temperature control when using multiple indoor units, while reducing the burden placed on each indoor unit.

If you wish to make use of this function, ensure you use indoor units equipped with a "Special Cooling" function.

For Split products with "Special Cooling" function, refer to S-054 to S-057.

If you use indoor units that do not have a "Special Cooling" function, under certain conditions, there is a chance that "Backup operation" may not operate correctly, and the "Lead Lag Setting" function will not give the expected results.

Additionally, for rooms that require strict conditions, such as server rooms, please consider other appropriate measures.

Please note that we will not provide compensation for any damages suffered to your appliances or data as a result of using this function. For more details, please confirm with your nearest retail store.

Specifications

Model name	UTY-RNRYZS
Power Source	DC 12 V
Dimensions (H x W x D) (mm)	120 x 120 x 20.4
Weight (g)	220

DC 12 V is supplied by the indoor unit.

Wired remote controller

UTY-RRLRY



Up to
16 indoor units
Up to
1 group

- ON/OFF/Weekly timer settings
- A built-in thermo sensor monitors and controls room temperature accurately.
- When something goes wrong, an error code is displayed.
- 16 error codes from the most recent one will be kept in the history. (Last 16 error codes can be accessed)
- Nonpolar 2-core type

High performance and compact size

A single remote controller controls each connected indoor unit and provides a weekly timer function and a variety of energy-saving options.



Visually intuitive operation

- The operation mode, set temperature, and fan speed are shown prominently on the top screen.
- Each function to be set is indicated by an icon.
- The control guide makes it simple and straightforward to operate a remote controller.



Compact wired remote controller

UTY-RCRYZ1




Up to
1 indoor units
Up to
1 group

- Simple design that matches stylish interiors
- The body of the controller, which is easy to install, is designed to conform to the European standard junction box.
- Can be operated both by wireless and wired remote controller.
- Nonpolar 2-core type


Large screen and simple display

- Large screen but compact size
- Large, easy-to-read letters are used.
- The controls are simple and easy to understand.

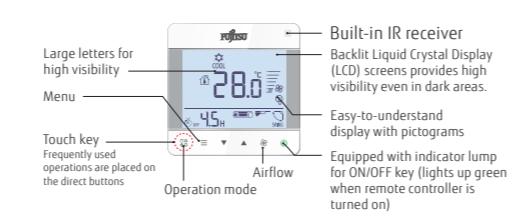

System overview

VRF connection

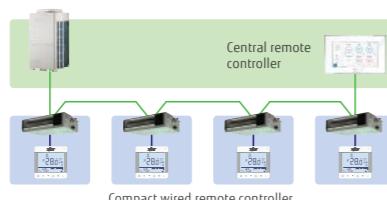

RAC connection



Specifications

Model name	UTY-RRLRY	UTY-RCRYZ1
Power source	12 V DC	12 V DC
Dimensions (H × W × D) (mm)	120 × 120 × 17	86 × 86 × 44
Weight (g)	170	135

12 V DC supplied by an indoor unit

Wired remote controller

UTY-RVNYM




Hi-grade individual control with a wide range of functions.

- 3.7-inch backlit LCD screen.
- Supports energy-saving functions with simple operation.
- Supports 9 languages: English, French, German, Greek, Italian, Portuguese, Russian, Spanish, and Turkish

Visually intuitive operation

- Each function is displayed as an icon.
- Main functions are indicated by large icons: "Mode," "Set Temp," and "Fan."
- Easy operation with control guide display
- Simple operation with easy 4-way navigation pad

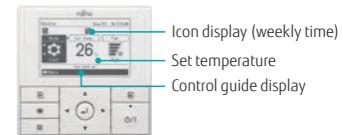

High performance and compact size

- A single remote controller controls each connected indoor unit and provides a variety of energy-saving options.



Wired remote controller

UTY-RNNYM




- Simple operation with Built-in Weekly/Daily Timer.
- Control up to 16 indoor units.
- Up to 2 Wired remote controllers can be connected to a single indoor unit.

Accurate control for comfort

A thermo sensor built into the remote controller monitors room temperature accurately. The wired remote controller and an optional Remote sensor can be installed in any location to meet any requirement.

Examples of sensor changes

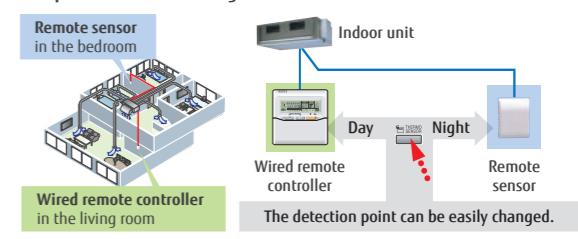

Built-in timer

Weekly timer: ON/OFF time can be set to operate twice for each day of the week.
Temperature setback timer: Sets the time to change the temperature setting and the time to hold the setting for each day of the week.
At "Weekly timer" + "Temperature setback timer" setup

Specifications

Model name	UTY-RVNYM	UTY-RNNYM
Power source	12 V DC	12 V DC
Dimensions (H × W × D) (mm)	120 × 120 × 21.3	120 × 120 × 18
Weight (g)	220	160

Simple remote controller

UTY-RSRY / UTY-RHY (without operation mode)




Up to
16 indoor units
Up to
1 group

Compact remote controller with basic functionality

- Up to 16 indoor units can be controlled with one remote controller.
- Suitable for hotels or offices as it is easily operated with no complex functions.
- Simple design that matches stylish interiors
- Large LCD screen and easy-to-use control buttons
- Backlight: White backlight makes it easy to operate in the dark.
- Nonpolar 2-core type

Supports a variety of applications

- Vertical louver control:** Adjusts the vertical airflow direction of a duct-type indoor unit with an auto louver or a cassette type installed in a hotel room or a conference room.
- Setting temperature range limitation:** Enables an indoor unit to operate in an energy-saving manner in a small building not equipped with a central remote controller.
- Built-in room temperature sensor:** Monitors and controls room temperature accuracy.

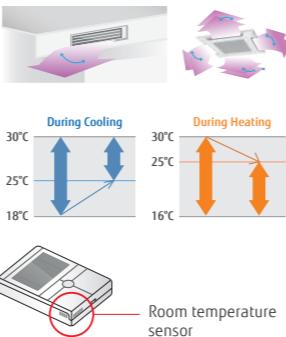

Simple remote controller

UTY-RSNYM



Up to
16 indoor units
Up to
1 group

Compact remote controller with basic functionality

- Up to 16 indoor units can be controlled with one remote controller.
- Suitable for hotels or offices as it is easily operated with no complex functions.
- Backlit screen for easy operation in the dark.
- Polar 3-core type

Easy-to-use operation

- Enables basic control of an indoor unit, such as ON/OFF, fan speed, operation mode select, and room temperature setting.
- A large ON/OFF button is located in the middle for quick access.
- Works with other individual control units.
- When something goes wrong, an error indicator will appear, and diagnostics can be performed with the remote controller.

Specifications

Model name	UTY-RSRY	UTY-RHY	UTY-RSNYM
Power source	12 V DC	12 V DC	12 V DC
Dimensions (H × W × D) (mm)	120 × 75 × 19.4	120 × 75 × 19.4	120 × 75 × 19.4
Weight (g)	120	120	120

12 V DC supplied by an indoor unit

Wireless remote controller

UTY-LNTY



Up to
16 indoor units

Up to
1 group
Up to
4 different daily timers

Simple and versatile operations with a choice of 4 different types of timers

- Controls up to 16 indoor units.

Built-in timer

- 4 timer programs: ON/OFF/Program/Sleep
Program timer: Sets ON/OFF time once for every 24 hours.
Sleep timer: Adjusts the set temperature automatically while the sleep timer is on.

Easy installation and operation

- Different codes can be assigned to up to 4 indoor units to prevent a mix-up.
Wide and precise transmitting range

Wireless remote controller

UTY-LNHY



Up to
16 indoor units

Up to
1 group
Up to
4 different daily timers

Simple and versatile operations with a choice of 4 different types of timers

- Controls up to 16 indoor units.

Built-in timer


- 4 timer programs: ON/OFF/Program/Sleep
Program timer: Sets ON/OFF time once for every 24 hours.
Sleep timer: Adjusts the set temperature automatically while the sleep timer is on.

Easy installation and operation

- Different codes can be assigned to up to 4 indoor units to prevent a mix-up.
Wide and precise transmitting range

IR receiver unit for duct type

UTY-LRHYM / UTY-LBTYM

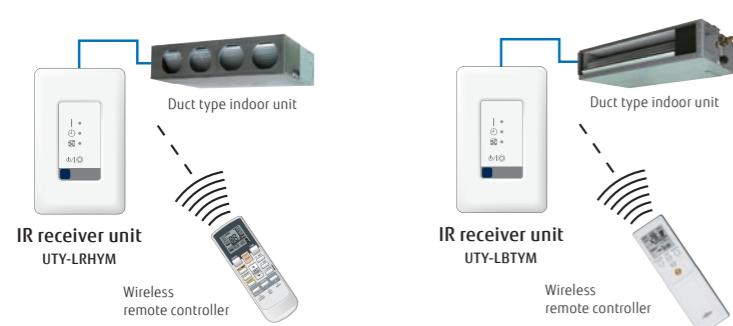

The wireless remote controller controls duct type indoor units.

IR receiver unit for Cassette


UTY-LBTYC



Cassette type indoor unit can be controlled with a Wireless remote controller.

IR receiver unit for ceiling type

UTY-LBTYH

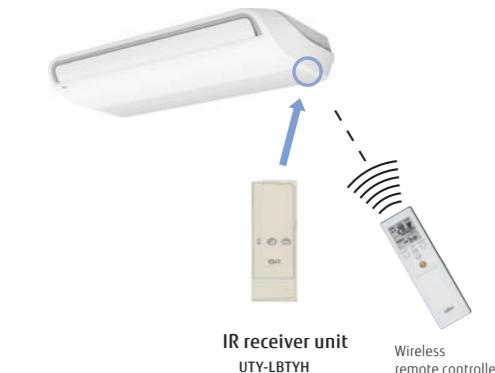

The wireless remote controller controls ceiling type indoor units.

Specifications

< Wireless Remote Controller >

Model name	UTY-LRHYM	UTY-LBTYM	UTY-LBTYC	UTY-LBTYH
Battery	1.5 V (R03/LR03/AAA)	1.5 V (R03/LR03/AAA)	1.5 V (R03/LR03/AAA)	1.5 V (R03/LR03/AAA)
Dimensions (H × W × D) (mm)	170 × 56 × 19	205 × 61 × 17	205 × 61 × 17	205 × 61 × 17
Weight (g)	85	125	125	125
< IR Reciver Unit >				
Battery	DC5V	DC5V	DC5V	DC5V
Dimensions (H × W × D) (mm)	145 × 90 × 30	145 × 90 × 30	-*	-*
Weight (g)	150	150	140	100

DC 5 V is supplied the indoor unit.

*It will replace the parts of the indoor unit to be connected.



IR receiver unit for duct type

UTB-YWC / UTY-TRHX

The wireless remote controller controls duct type* indoor units.

*Large airflow duct types do not work with this IR receiver unit.



*A separate wireless remote control (model: UTY-LNHY) is required.

IR receiver unit for Cassette

UTY-LBHxD / UTY-TRHX

Cassette type indoor unit can be controlled with a Wireless remote controller.



*A separate wireless remote control (model: UTY-LNHY) is required.



Specifications

< Wireless Remote Controller >

Model name	UTB-YWC	UTY-LBHxD	UTY-TRHX
Battery	1.5 V (R03/LR03/AAA)	1.5 V (R03/LR03/AAA)	1.5 V (R03/LR03/AAA)
Dimensions (H × W × D) (mm)	170 × 56 × 19	170 × 56 × 19	170 × 56 × 19
Weight (g)	85	85	85
< IR Reciver Unit >			
Battery	DC5V	DC5V	DC5V
Dimensions (H × W × D) (mm)	145 × 90 × 30	-*	145 × 90 × 30
Weight (g)	150	140	150

DC 5 V is supplied the indoor unit.

*It will replace the parts of the indoor unit to be connected.



WLAN adapter

UTY-TFSXH3 / UTY-TFSXJ3



"AIRSTAGE Mobile" is an application software that enables you to manage the Fujitsu General's air conditioner(s) with a mobile device from anywhere.

- Maximum 5 accounts per 1 indoor unit
- Room / Outdoor temperature display
- Can be used for a Single / Multi and VRF indoor units.
- No separate external power supply required

Up to
1 indoor units

Main Functions


- ON / OFF
- Operation mode
- Fan speed
- Louver position
- Set temperature control
- Weekly timer
- Room temperature display
- Outdoor temperature display
- Error display

*Contents of display differ depending on the type of indoor unit.

New Design!

Ease of use is pursued to achieve a stylish design.

The more legible and accessible timer UI enables effortless schedule management.

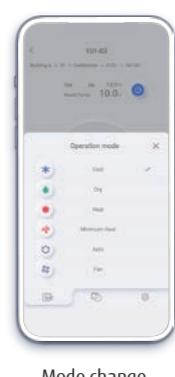

Mode change



Fan speed change




Weekly timer

Features: AIRSTAGE Mobile



Centralized operation for flexible remote management of all air conditioners

AIRSTAGE Mobile is ideal for a wide range of applications, from large residential buildings to smaller commercial spaces such as offices and stores. Anyone who has a smartphone and an adapter can easily manage the system at a low cost.

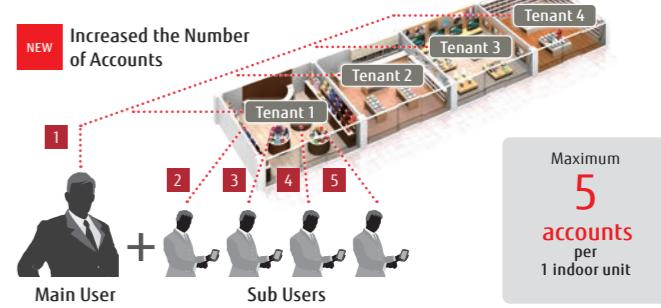

Hierarchical group management


Multiple air conditioners can be combined into a single group for centralized operation. Several groups can also be organized at once. Grouping the air conditioners by building, floor, or room makes it easy for users to monitor their operation status and operate them quickly.

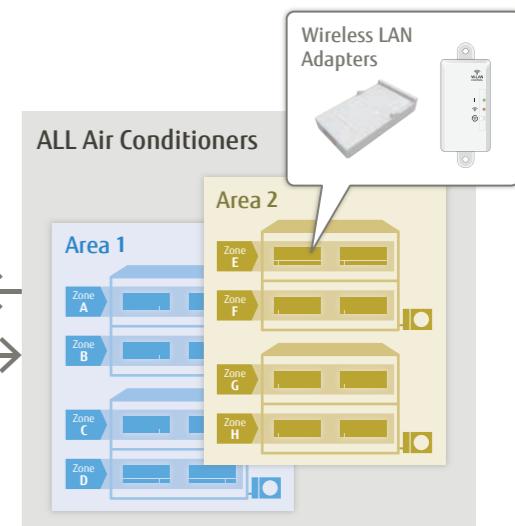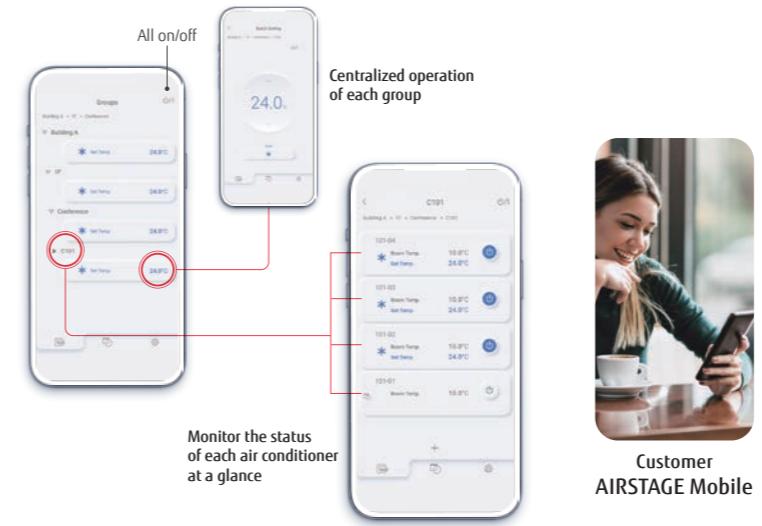

*One wireless LAN adapter is required per indoor unit.

Operate air conditioner and check its operation status just by talking to it

Connecting with a smart speaker allows the user to operate the air conditioner and check its operation status just by talking to it.

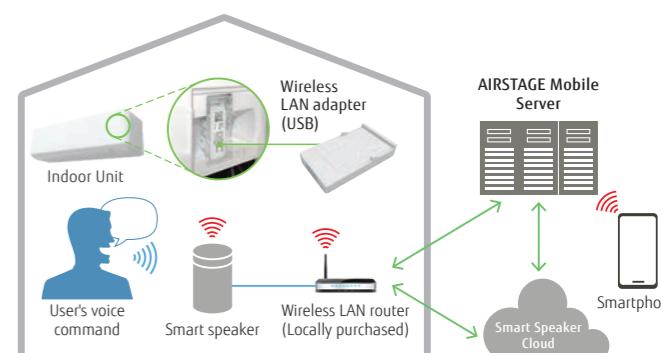

* The new WLAN adapters for AIRSTAGE Mobile are upper compatible for the indoor units that can connect the following WLAN adapters for FG Lair.

	CN connector type	USB type
for FG Lair	UTY-TFSXZ1	UTY-TFSXF2
for AIRSTAGE Mobile	UTY-TFSXJ3	UTY-TFSXH3

Specifications


Model name	UTY-TFSXJ3(CN connector type)	UTY-TFSXH3
Dimensions (H × W × D) (mm)	71 × 38 × 15	56.7 × 34 × 9.72
Weight (g)	35	30

WLAN adapter


UTY-TFNXZ1 / UTY-TFSXZ1 / UTY-TFSXF2

USB type for single-split models
UTY-TFSXF2


- This interface provides the most advanced solution for the remote management of an air conditioning system by using smartphones, tablets, and computers.
- No separate external power supply required
- Can be used for a Single / Multi and VRF indoor units.

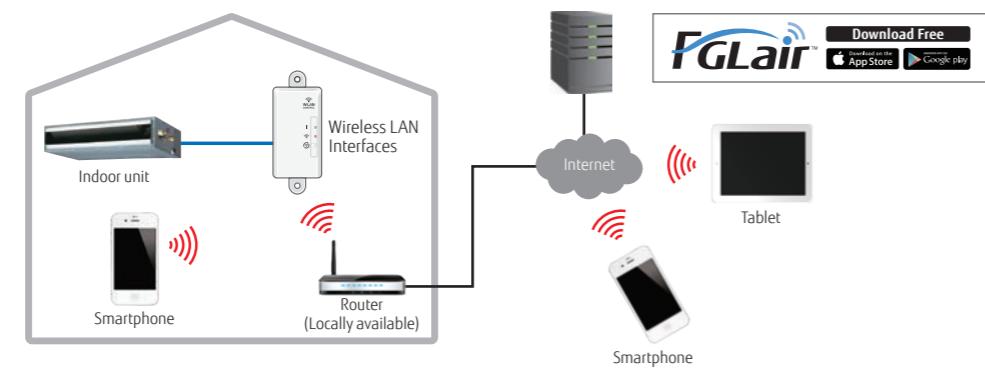UTY-TFNXZ1
(3-wire RC-line type)
UTY-TFSXZ1
(CN connector type)Up to
1 indoor units**Basic control**


- Turning the units on and off
- Mode control (Heat, Cool, Dry, Auto, Fan)
- Fan speed control
- Louver position (airflow direction setting)
- Timer operation setting (Weekly timer)
- Economy mode setting

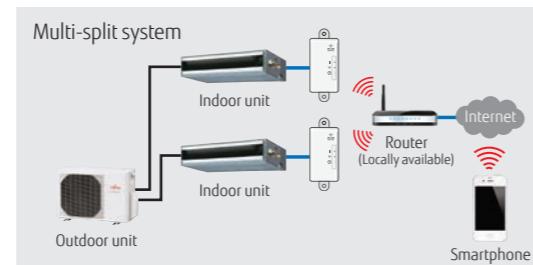**Multiple air conditioning management**

- Manage multiple air conditioning systems in different locations.

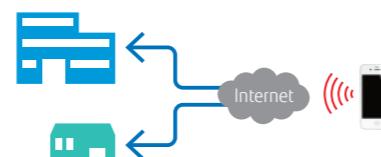**Error alert and e-mail notice**

- E-mail notification alerts
- Air conditioning malfunction alert
- Enables quick service response when errors occur.

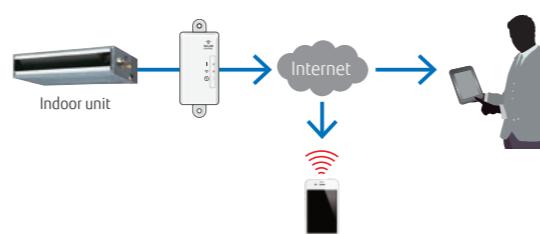**WLAN adapter (USB type)**
UTY-TFSXF2

A compact USB type is available. No need for specialized installation.
Easily installed on the indoor unit.

**Specifications**

Model name	UTY-TFNXZ1(3-wire RC-line type)	UTY-TFSXZ1(CN connector type)	UTY-TFSXF2
Dimensions (H × W × D) (mm)	71 × 38 × 15	71 × 38 × 15	56.7 × 34 × 9.72
Weight (g)	35	35	30

WLAN adapter


FG-RC-WIF1Z2 / FG-IR-WIF1Z1 / FG-AC-WIF1Z1

FG-RC-WIF1Z2
(3-wire RC-line type)FG-AC-WIF1Z1
(CN connector type)FG-IR-WIF1Z1
(IR type)Up to
1 indoor units**AC Cloud Control**


- This interface provides the most advanced solution for the remote management of an air conditioning system by using smartphones, tablets, and computers.
- No separate external power supply required

Installation example


[3-wire RC-line type/CN connector type]

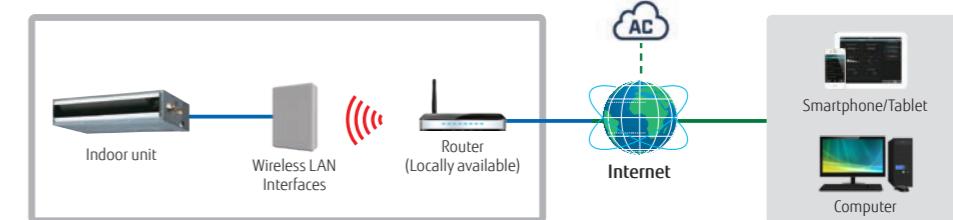

[IR type] Connection to wall-mounted type

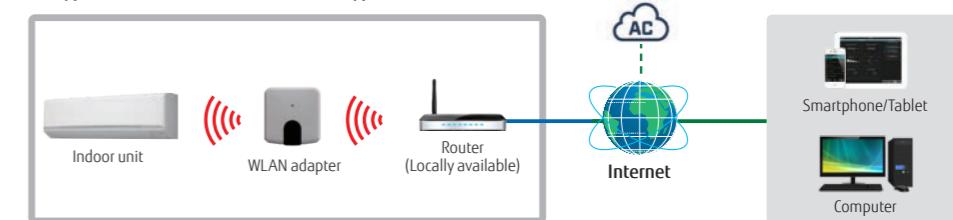

[IR type] Connects to the product with the optional receiver kit

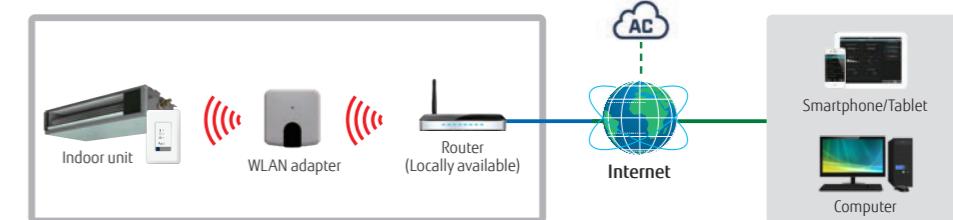**Basic control**

- | | | |
|---|----------------------------|--------------------------------|
| • Turning air conditioner on and off | • Fan speed control | • Multiple language support |
| • Mode select (Heat, Cool, Dry, Auto, Fan) | • Room temperature display | • One single scene is created. |
| • Louver position (airflow direction setting) | • Setting temperature | |

Advanced control (optional functions)

- Climate-based operation modes (ECO, Comfort, and Powerful) (to be available in the future)
- Schedule functions (ON/OFF, modes, set temperature, fan speed, louver position)
- Setting temperature range limitation
- Multiple Scenes and Calendars are created.
- Smart Speaker compatibility
- Advanced internet service connections

Notification and operation history

- E-mail notification alerts
- Air conditioning malfunction alert
- Connectivity monitoring and alert
- Operation history (to be available in the future)

Multiple protocol WLAN adapter

FG-RC-WMP1Z1 / FG-IR-WMP1Z1 / FG-AC-WMP1Z1


**Intesis®**FG-RC-WMP1Z1
(3-wire RC-line type)

AC Cloud Control


- Air conditioner control of Home Automation systems via wireless LAN connection.
- No separate external power supply required

Installation example

[3-wire RC-line type/CN connector type]

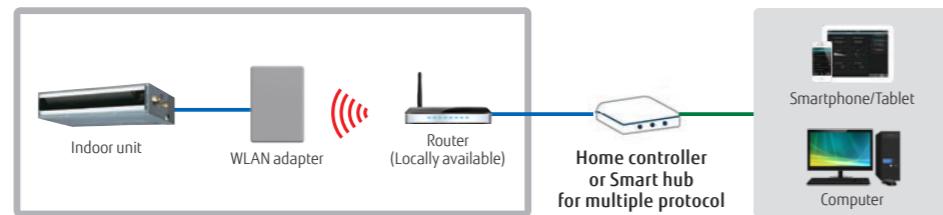

[IR type]

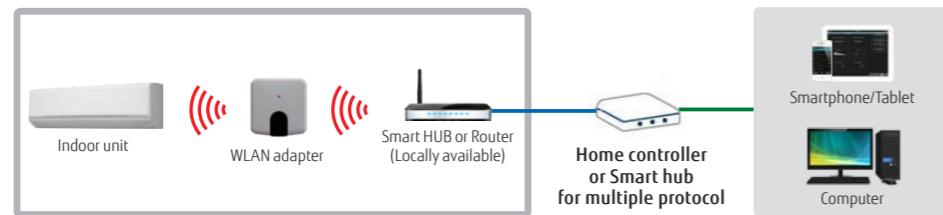

*IR receiver required for other than wall-mounted type.

Up to
1 indoor units

Specifications

Model name	FG-RC-WMP1Z1 (3-wire RC-line type)	FG-AC-WMP1Z1 (CN connector type)	FG-IR-WMP1Z1 (IR type)
Number of controllable groups	1	1	1
Dimensions (H × W × D) (mm)	70 × 100 × 28	127 × 50 × 17	81 × 78 × 28
Weight (g)	98	80	76


Multiple protocol LAN adapter

FG-TL-MBS16Z1

**Intesis®**Up to
16 indoor units

Installation example

[VRF type]

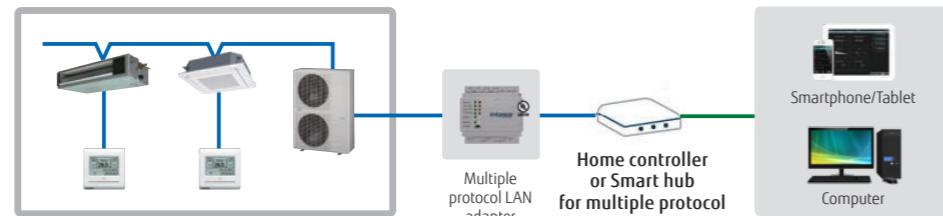

*No separate external power supply required

Specifications

Model name	FG-TL-MBS16Z1 (VRF type)
Power supply	9 to 36 V DC, Max.: 140 mA or 24 V AC 50/60 Hz, Max.: 127 mA.*
Input power (W)	1.7
Dimensions (H × W × D) (mm)	90 × 88 × 56
Weight (g)	330

*24 V DC power supply is recommended.

Home central remote controller


UTY-DMMYM / UTY-DMMYM1



For 5-unit and 6-unit multi-split type

- Batched control of up to 6 indoor units For all indoor units connected to the remote controllers, the Home central remote controller sets room temperature, airflow volume, and remote controller prohibition from other remote controllers at once.
- Supports 9 languages: English, French, German, Greek, Italian, Portuguese, Russian, Spanish, and Turkish.
- Large backlit LED screen
- Large, easy-to-see operation panel


Example of system configuration

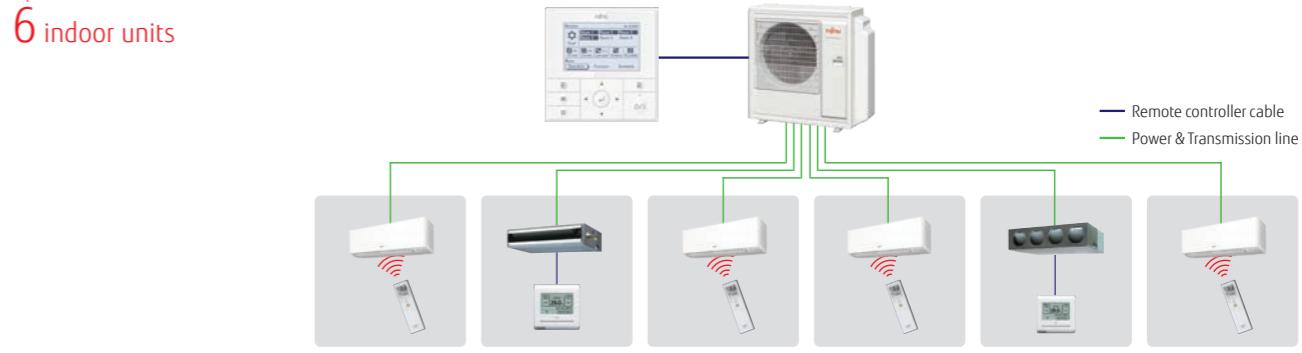

Home central remote controller

Weekly timer

Up to 4 ON/OFF settings can be programmed per day. Two weekly patterns can be set, one for the cooling season and the other for the heating season.

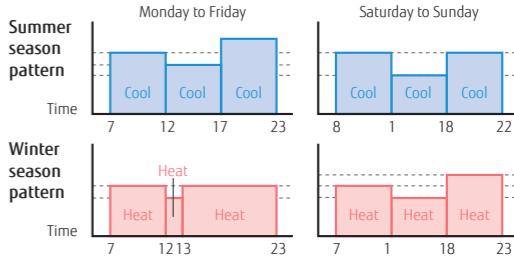

Low noise operation

You can choose from 4 low noise levels depending on the installation environment. ON/OFF timing of low noise mode can be set with the timer.


10 °C heat operation

When you leave the house, the air conditioner runs a minimum heating operation to maintain the room temperature at 10°C.

*Consult your dealer for conditions of use.

Economy operation

When you select energy-saving economy mode, the temperature setting for the indoor unit increases (during cooling operation) or decreases (during heating operation) by 1°C and the maximum electric value of the outdoor unit is suppressed.

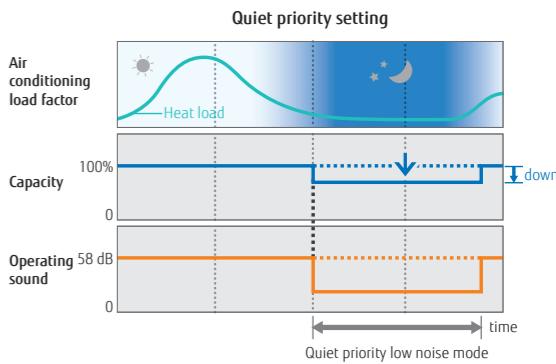

Prohibiting local control, including settings such as child lock

The Home central remote controller is equipped with a lock function to prevent unauthorized operation from the remote controllers of the indoor unit in each room. The Home central remote controller is equipped with a child lock to prevent children from accidentally turning the air conditioner on or off or changing its settings.

Specifications

Model name	UTY-DMMYM/UTY-DMMYM1
Power source	12 V DC
Dimensions (H × W × D) (mm)	120 × 120 × 21.3
Weight (g)	220

Central Remote Controller

UTY-DGYZ2



Up to
100 indoor units
Up to
50 groups



For tenants in small to midsize commercial premises

- Individual control and monitoring of up to 100 indoor units
- 7.0inch TFT color screen
- Visually intuitive operation
- Room temperature display by indoor unit sensor & remote controller sensor
- 50 Remote Controller Groups Display & remote controller group rename
- Supports 12 languages: Chinese, Dutch, English, French, German, Greek, Italian, Polish, Portuguese, Russian, Spanish, and Turkish


Easy operation

Air conditioning management by detecting room temperatures of each room

The room temperature detected with indoor unit sensor or remote controller sensor can be displayed. New model can detect the room temperature by indoor units sensors even if wired remote controllers are not connected to the indoor units.

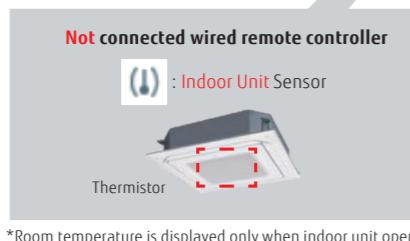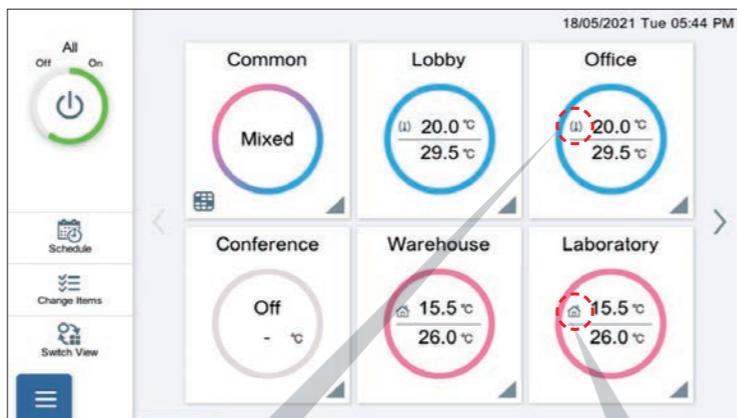

*Room temperature is displayed only when indoor unit operates.

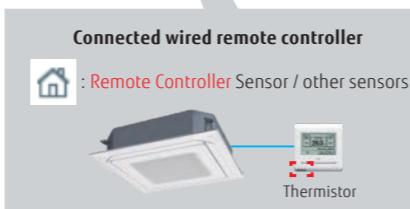

50 Remote Controller Groups Display

The group display and the 50 remote controller groups display can be switched easily. Users can choose which display is better, depending on the situation.


Group Display



Manage & Monitor
by each Groups





50 Remote Controller Groups Display

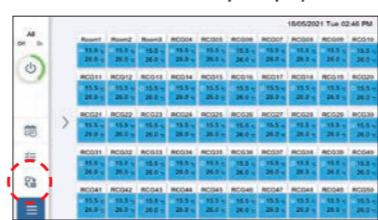

Manage & Monitor
by 50 Remote Controller Groups

Remote Controller Groups Rename

The remote controller group names can be changed. Users can know easily where the air conditioning is located by changing the remote controller group names.

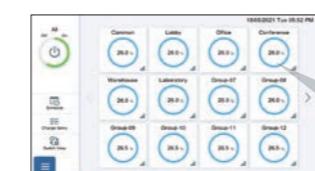


Features: Central Remote Controller


- Easy intuitive operation from the touch panel display.
- All functions can be accessed through the monitoring screen showing a pop-up window for detailed operation.



Monitoring screen

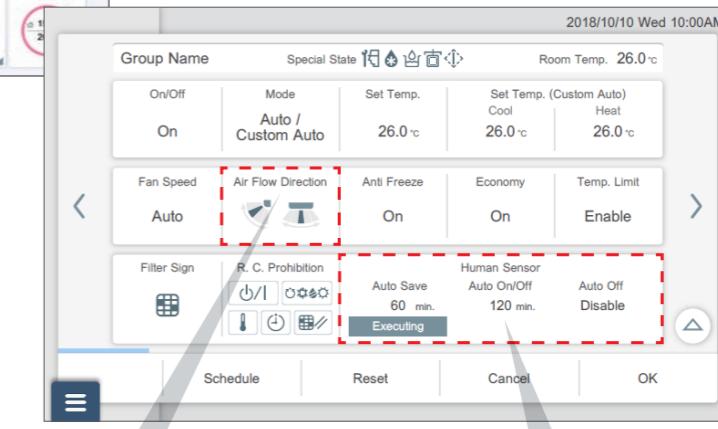

Individual setting

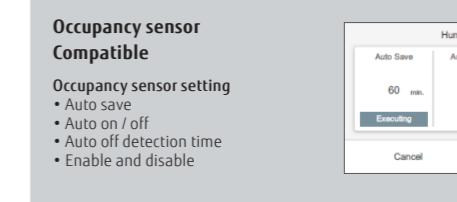


Remote Management

Remote monitoring / Remote operation

New central remote controller can control your tenant's air conditioner anytime and anywhere.

When the central remote controller manages the indoor units of some tenants, air conditioning of each tenant can be managed separately online.

Increased the Number of Accounts

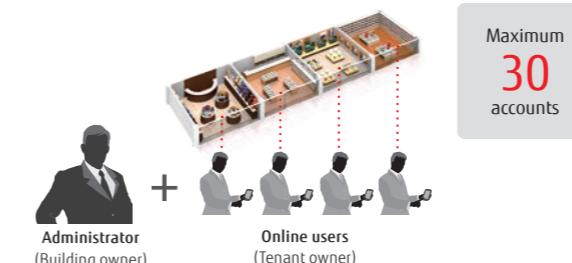

Trouble support function

Display error details

Display descriptive explanation when an error occurs



Sensor value monitoring function

Monitor sensor data of indoor unit / outdoor unit, send mail

Notify room temperature by email*

Notify by e-mail when the temperature around the air conditioner is too high or too low

*:This function is available only when using wired remote controller.

Touch panel controller

UTY-DTGYZ1




Up to
400 indoor units
Up to
100 outdoor units
Up to
400 groups

- Large 7.5-inch TFT color LCD screen
- Touch screen operation
- Stylish design to fit nicely into any room environment
- Controls up to 400 indoor units.
- Icon or list view can be selected in monitoring mode.
- Supports 7 languages: Chinese, English, French, German, Polish, Russian, and Spanish.
- Mounted with LAN adapter for remote control & operation, external input/output with emergency stop and batch ON/OFF

Easy operation

- Wide range of simple-to-understand icons
- Operate by pressing the icons on the screen with your finger or a stylus.
- The color on the back identifies the current control operation; blue is for monitoring and green is for operational control.

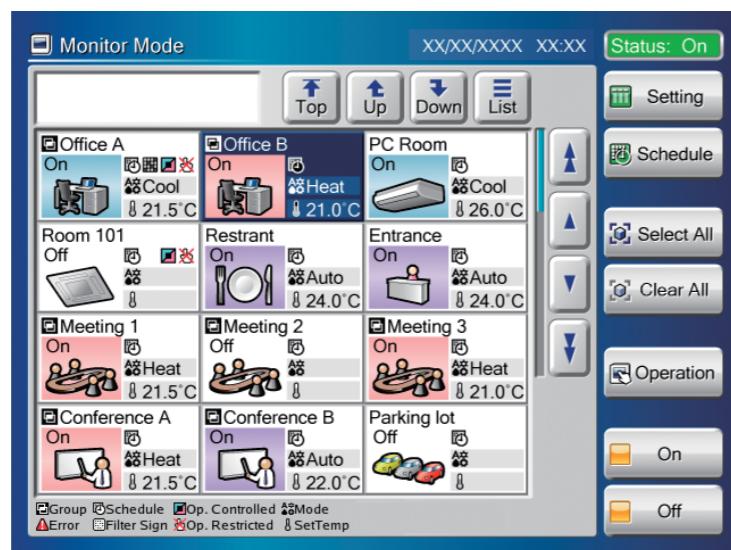

Easy maintenance

- The flat touch panel can be easily cleaned.
- Touch panel controller with non-glare coating to prevent finger marks
- Front cover for easy removal.




Easy installation

- The touch panel controller can be mounted on a wall.
- Flat back surface enables easy installation anywhere on a wall.
- No additional parts or components required for installation



Controls up to 400 indoor units.

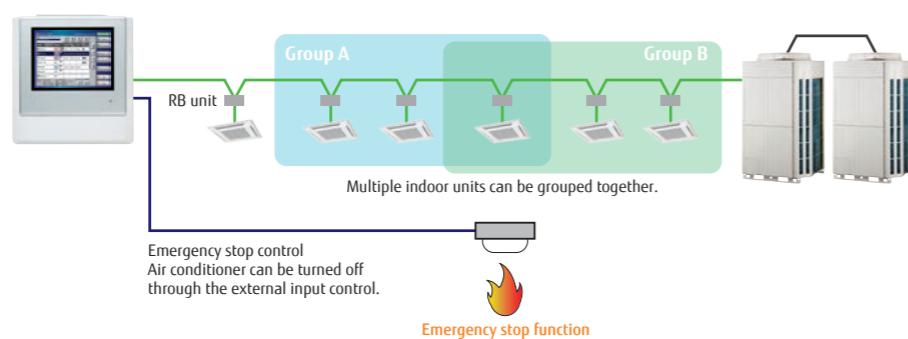

Features:

Control & monitoring


- Control and monitor Fujitsu General air conditioners via LAN or internet.
- Users and tenants can manage their assigned equipment from anywhere by computer or tablet.
- When something goes wrong, an error notice is sent by e-mail for prompt troubleshooting.

Operation status monitoring



Tablet


E-mail notification of errors



Computer



LAN or Internet

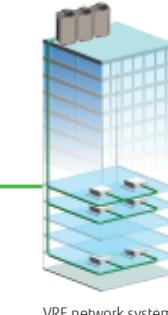

VRF network system

Smartphone


Model name	Browser
Nexus 6P (Android 7.1.1)	Google Chrome 5.5
iPhone 7 (iOS 10.1)	Safari 10

Tablet

Model name	Browser
iPad Pro 9.7 inch (iOS 10.2.1)	Safari 10

Flexible access permissions can be granted to users at each point level.

The administrator can register multiple users and permit them to access any indoor unit and any functions.

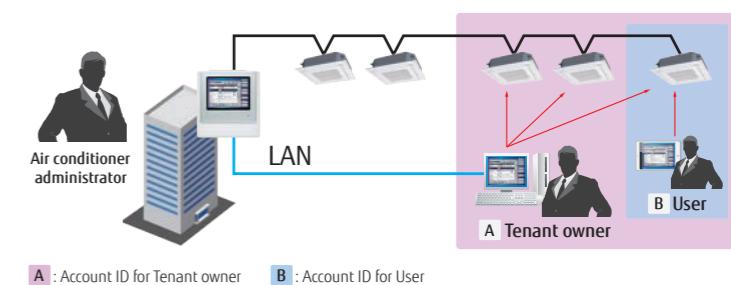

Additional languages


Supports 7 languages as standard: Chinese, English, French, German, Polish, Russian, and Spanish.
Create a language database to integrate additional languages into the remote device.
The added languages will only be displayed on the remote device and cannot be added to the Touch panel controller.



Electricity charge apportionment (Option: UTY-PTGXA)

- Energy cost can be calculated and allocated to each billing user in proportion to the amount of energy used for air conditioning.

- Apportionment charge/bill calculation
- Tenant (block) setting
- Common facilities apportionment setting
- Rated power consumption allotment setting
- Individual calculations for cooling and heating
- Electricity meter supported

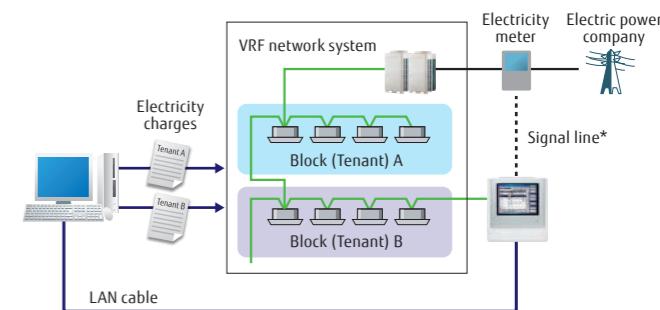

* An electricity usage meter can be connected to an external input connector of the Touch panel controller. In that case, the meter cannot be connected to an outdoor unit at the same time.


Features:**Automatic setting for daylight saving time****Functions provided**

1) Schedule setting for daylight saving time



- It prevents the user from forgetting to set daylight saving time. In addition, it saves time and effort for the user.

Automatic clock adjustment

2) Time can be set for all controllers in a batch automatically.

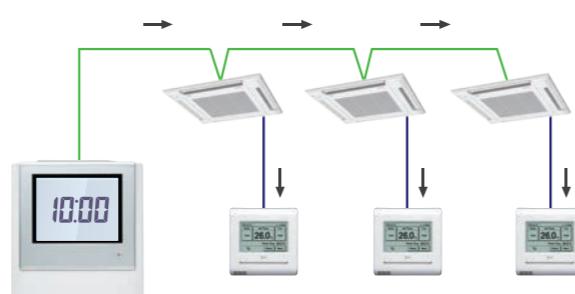**Outdoor unit low noise operation**

You can choose from 4 low noise levels depending on the installation environment.
ON/OFF timing of low noise mode can be set with the timer.

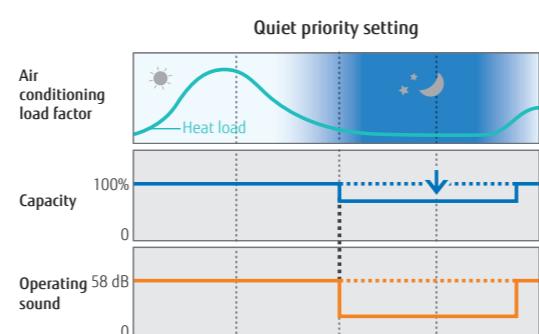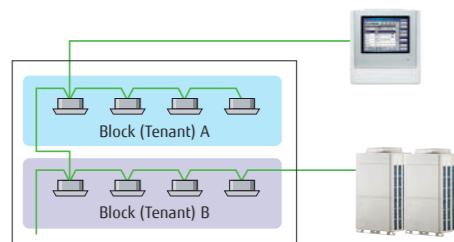
**Energy-saving controls****Custom Auto**

- Maintains 2 separate setpoints for heating and cooling operations.
- Automatically switches between heating and cooling modes.

* Not available for some models



Cooling set temp. 28°C, Heating set temp. 18°C

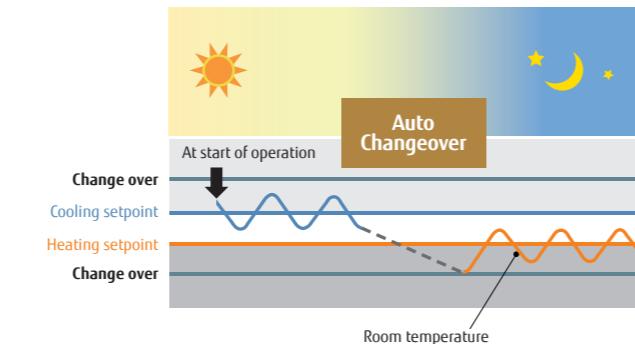**Refrigerant leak detector**

Refrigerant leakage status is indicated by the management equipment. A pop-up message is displayed to notify the user, and the refrigerant is shut off.

**FUNCTIONS SUMMARY**

	UTY-DTGYZ1	Monitoring side
Air conditioning control functions		
ON/OFF	●	●
Operation mode setting*	●	●
Fan speed control	●	●
Room temperature setting	●	●
Setting temperature range limitation	●	●
Test operation	●	●
Vertical louver setting	●	●
Horizontal louver setting	●	●
Individual louver control	●* ¹	●
Group setting	●	●
Remote controller prohibition	●	●
Anti-freeze setting	●	●
Set temperature auto return	—	●
Energy-saving controls	—	●
Economy mode setting	●	●
Occupancy sensor control	—	●
Displayed items		
Error	●	●
Defrosting	●	●
Current time	●	●
Day of week	●	●
Remote controller prohibition	●	●
Cooling/heating priority	●	●
Address display	●	●
Room temperature	●* ³	●* ³
Multiple language support	●	●
Setting for daylight saving time	●	●
Time zone setting	●	●
Name registration	●	●
Backlighting	●	●
Language setting	7	7+other
Filter sign reset	●	●
Memory operations	●	●
Refrigerant leak detector	●	●

●: Supported ○: Optional function —: Not supported

*1 Only setting cancellation can be operated.

*2 Only available for external input control.

*3 Available only when using a Wired remote controller.

	UTY-DTGYZ1	Monitoring side
Timer		
Schedule timer	Period ON/OFF, Temp, Mode, Times per day	Year 20 20
ON/OFF timer	—	—
Sleep timer	—	—
Program timer	—	—
Auto-off timer	—	●
Day off	●	●
Minimum unit of timer setting (minutes)	10	10
Control		
Remote monitoring management system	●	●
Electricity charge apportionment	○	○
Error history	●	●
Emergency stop	●* ²	●* ²
Remote monitoring management	—	●
Energy-saving management	—	—
E-mail notification in case of failure	—	●
Key lock	●	—
Low noise mode	●	●

System controller

UTY-APGXZ1 Software

Up to
4 VRF network systems
Up to
400 outdoor units
Up to
1,600 indoor units



System controller enables advanced integrated monitoring and control of VRF network systems operating in small to large buildings.

- Up to 1,600 indoor units and 400 outdoor units on up to 4 VRF network systems can be controlled.
- To accommodate facility management needs, the system controller offers—in addition to precise air conditioning control—remote central control, electricity charge apportionment, schedule management, and energy-saving options for VRF network systems.
- Supports 7 languages: Chinese, English, French, German, Polish, Russian, and Spanish.

System controller Lite

UTY-ALGXZ1 Software

Up to
1 VRF network systems
Up to
100 outdoor units
Up to
400 indoor units




System controller Lite offers a set of standard functions to manage air conditioners operating in a small or midsize building.

- Up to 400 indoor units and 100 outdoor units on a VRF network system can be controlled.
- In addition to precise air conditioning control, a variety of applications are available as options to offer a wider range of control.
- Supports 7 languages: Chinese, English, French, German, Polish, Russian, and Spanish.

Visually intuitive operation

Click & Operate: The visual representation of the property is shown on the screen from the perspective most suitable for operation (Click & Operate) You can select from among 4 display options: site, building, floor, and list.

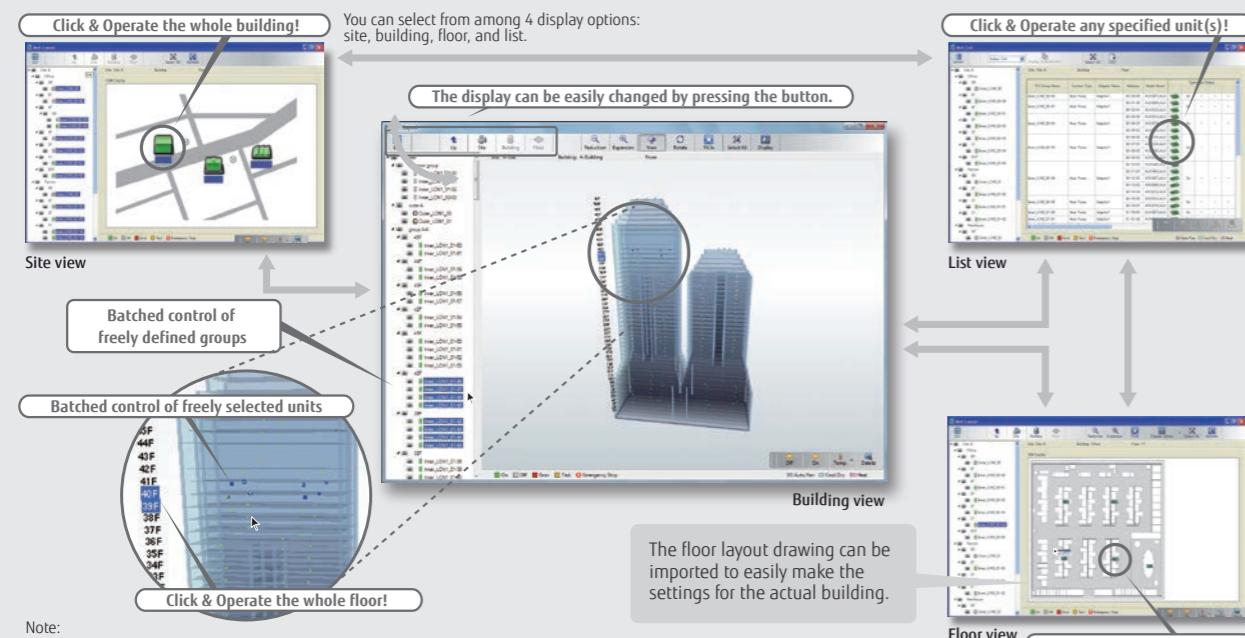


Features:

Third-party devices connected via MODBUS® can be controlled.

Standard for System Controller **Option** for System controller Lite UTY-PLGXX2

When a MODBUS® adapter (locally available) is connected to a computer, electrical equipment and devices supported by MODBUS® can be monitored and controlled centrally from the computer. The central control can reduce wasted energy throughout an entire building resulting from a failure to turn equipment off during or after work, as well as reduce the need for on-site patrols.

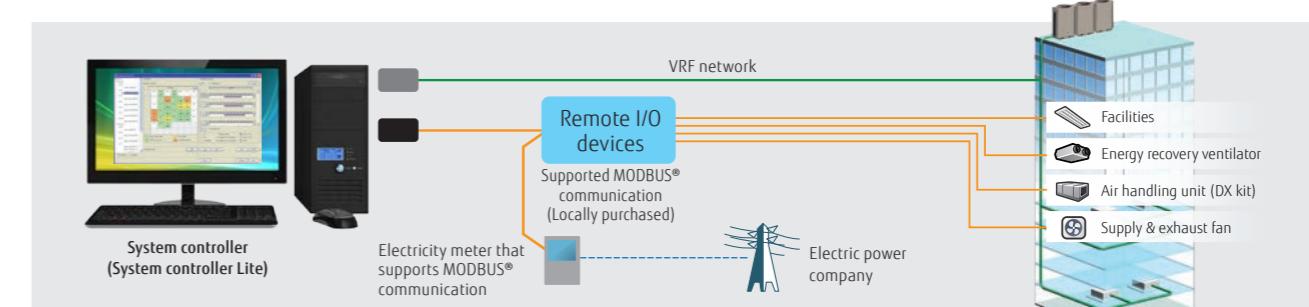

Wide-ranging operation and data management

Standard System controller and System controller Lite

Schedule management

- An annual schedule can be arranged for each remote controller group or user-defined group.
- ON/OFF, operation mode, remote controller prohibition, and temperature settings can be programmed for up to 143 times per day at 10-minute intervals and for up to 101 configurations for each remote controller group.
- Settings can be programmed for a period that spans midnight.
- Allows for the programming of special settings for weekends, holidays, and store closings throughout the year.
- Low noise operation of outdoor units can be scheduled.



Electricity charge apportionment

Standard on System controller
Option System controller Lite UTY-PLGXA2

Electricity charge apportionment method

This is a method to calculate monthly energy costs to be allocated to each tenant based on the amount of energy used by their air conditioners. The first step is to determine exactly how much energy is consumed by air conditioners in each tenant space. The second step is to divide the total energy charge billed by an electric power company based on the amount of energy used by each tenant to determine the energy cost to be allocated to each of them. (See figure on right)

The calculation takes into consideration such factors as the number of unused rooms and nighttime electricity rate, which are shown in detail on an energy cost allocation schedule.

Wide-ranging control of indoor and outdoor units

- The operation status and mode of each indoor unit are displayed.
- Turn on and off each indoor unit and switch its operation mode.
- Setting temperature range limitation
- Low noise setting of outdoor units

Remote controller prohibition

Prohibits the operation mode, temperature setting, or ON/OFF of an indoor unit.

Error alert and e-mail notice

When something goes wrong, an error message is shown in a popup on a computer display with a chime, and an e-mail notice is sent. Errors of the past one year are logged and can be reviewed.

Operation and control history


A history of operation status and control can be maintained and retrieved.

Importing and exporting databases

Only an administrator is authorized to import and export registration, layout, and image data.

Automatic clock adjustment

Time can be set for all controllers in batch automatically.

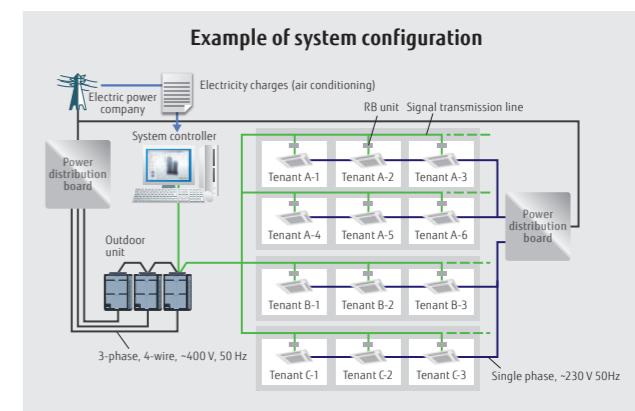

Features:**Remote monitoring management**

Standard on System controller
Option System controller Lite UTY-PLGXR2





The System controller can be used on site or remotely over networks for remote central control.

The System controller requires 2 software programs working together: The VRF controller runs on site and communicates with the VRF system;

The VRF explorer, which runs at a remote location, provides a user interface and communicates with the VRF controller.


The VRF controller and the VRF explorer run on a single computer or on different computers connected on a network.

A computer running VRF explorer can centrally control up to 10 VRF system sites having up to 20 buildings each.

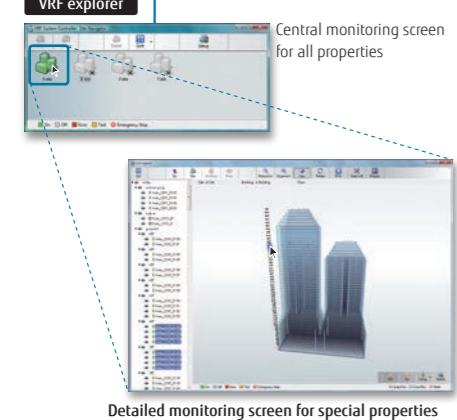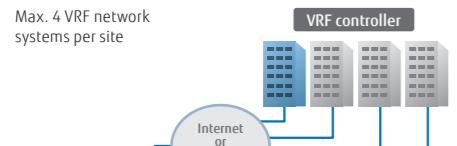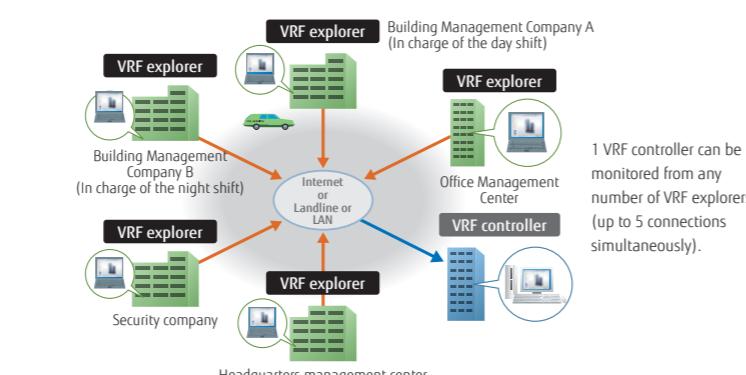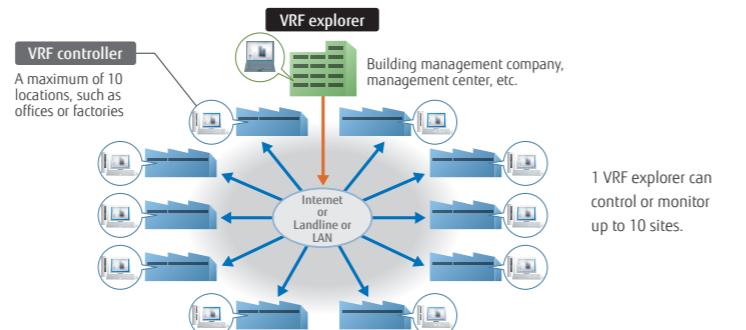On site central control**Remote central control****Energy-saving management**

Option System controller UTY-PEGXZ1
Option System controller Lite UTY-PLGXE2

A variety of energy-saving options can be selected depending on the season, weather, and time of day. Excellent energy-saving operation is performed while keeping users comfortable.

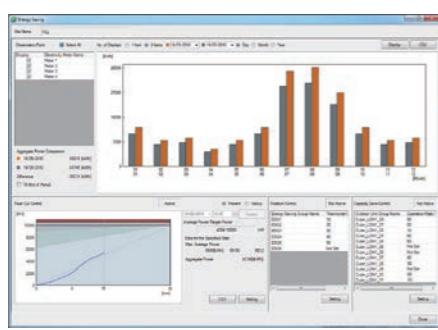

Energy saving graph data: This chart compares the energy consumption for the current month with the previous month and with the same month of the previous year to keep track of the energy-saving performance.

Indoor unit rotation

Indoor units can be automatically rotated to operate within a group in accordance with a predetermined annual schedule to reduce power consumption while keeping users comfortable. The operation stoppage rate can be selected for an indoor unit.

Peak-cut mode

The system controller monitors the connected power meter and controls the energy to maintain the target power consumption set for each time period by changing the set temperature of the indoor units or turning off the thermostat so as to keep the users comfortable. Indoor units to be controlled can be grouped in many ways, and the control level can be set for each group.

Capacity saving for outdoor unit

The upper limit on the capacity of an outdoor unit can be adjusted to reduce power consumption during a hot summer or cold winter by averaging out the power-saving performance of each refrigerant system. The upper limit on capacity can be set at 50% of the rated capacity or more.

Summary of functions

Functions	Type	System controller		System controller Lite			
		UTY-APGXZ1	Option UTY-PEGXZ1	UTY-ALGXZ1	Option UTY-PLGXR2	Option UTY-PLGA2	Option UTY-PLGE2
Specifications		Max. number of VRF networks supported	4	—	1	—	—
		Max. number of indoor unit and remote controller groups per VRF network	400	—	400	—	—
		Max. number of outdoor units per VRF network	100	—	100	—	—
		Max. number of indoor units and remote controller groups per System controller	1600	—	400	—	—
		Max. number of outdoor units per System controller	400	—	100	—	—
Site supervision		Multiple site display	10	—	10	—	—
		Number of buildings per site	20	—	—	—	—
		Number of floors per site	200	—	—	—	—
		Number of floors per building	50	—	—	—	—
Error management		3D graphical layout view	●	—	—	—	—
		2D graphical layout view	●	—	—	—	—
History		List display	●	—	●	—	—
		Tree display	●	—	●	—	—
		Group display	—	—	—	—	—
Error management		Error notification	●	—	●	—	—
		Audible alarm	—	—	—	—	—
		E-mail notification of errors	—	—	—	—	—
Operation control		Error history	●	—	—	—	—
		Operation history	●	—	●	—	—
		Control history	—	—	—	—	—
Individual control		ON/OFF	●	—	—	—	—
		Operation mode*	—	—	—	—	—
		Room temperature	●	—	—	—	—
		Fan speed	—	—	—	—	—
		Airflow direction	—	—	—	—	—
		Economy mode	—	—	—	—	—
		Setting temperature range limitation	●	—	●	—	—
		Anti-freeze	—	—	—	—	—
		Low noise setting of outdoor units	—	—	—	—	—
Individual management		Remote controller prohibition	●	—	—	—	—
		Setting temperature range limitation	—	—	—	—	—
		Filter sign reset	—	—	—	—	—
Other		Memory operations	●	—	—	—	—
		Pattern operations	—	—	—	—	—
Schedule		Annual Schedule	●	—	—	—	—
		Setting for a specific date	—	—	—	—	—
		ON/OFF per day	72	—	72	—	—
		ON/OFF per week	504	—	504	—	—
		Day off	●	—	—	—	—
		Minimum unit of timer setting (minutes)	10	—	10	—	—
		Weekly schedule for low noise mode	●	—	●	—	—
Remote monitoring management		Web Operation	●	—	—	—	—
		Remote monitoring	—	—	●	—	—
		Remote operation control	—	—	●	—	—
		Remote function setting	—	—	—	—	—
Electricity charge apportionment		Apportionment charge/bill calculation	—	—	—	—	—
		Tenant (block) setting	●	—	—	●	—
		Common facilities apportionment setting	—	—	—	●	—
		Rated power consumption allotment setting	●	—	—	●	—
		Individual calculations for cooling and heating	—	—	●	—	—
		Electricity meter supported	—	—	—	●	—
Energy-saving management		Indoor unit rotation	—	—	—	●	—
		Peak cut control	—	—	—	●	—
		Capacity saving for outdoor unit	—	—	—	●	—
		Record of energy-saving operation	—	—	—	●	—
		Information on energy saving	—	—	—	●	—
		Power consumption monitor	—	—	—	●	—
		Electricity meter supported	—	—	—	●	—
Control of external devices		Monitor	●	—	—	—	—
		Control	—	—	—	—	●
		Importing and exporting databases	●	—	—	—	—
		Automatic clock adjustment	●	—	—	—	—
Others		Multiple language support	7 languages	—	7 languages	—	—
		Refrigerant leak detector	●	—	●	—	—
		Power shutdown	●	—	●	—	—

●: Available -: Not available

Computer requirements

The specifications required for the computer are shown in the table below:

	System controller	System controller Lite
Operating system	<ul style="list-style-type: none"> Microsoft® Windows® 7 Home Premium (32-bit or 64-bit) SP1, Windows® 7 Professional (32-bit or 64-bit) SP1 Microsoft® Windows® 8.1 (32-bit or 64-bit), Windows® 8.1 Pro (32-bit or 64-bit) Microsoft® Windows® 10 Home (32-bit or 64-bit), Windows® 10 Pro (32-bit or 64-bit) Supports 7 languages: English, Chinese, French, German, Russian, Spanish, and Polish	
CPU	Intel® Core™ i3 2 GHz or higher	
Memory	<ul style="list-style-type: none"> 2 GB or more (for Windows® 7 [32-bit]) 4 GB or more (for Windows® 7 [64-bit], Windows® 8.1, and Windows® 10) 	
HDD	40 GB or more of free space	
Displayed items	1024 x 768 or higher resolution	
Interfaces	<ul style="list-style-type: none"> Ethernet port (for getting access to the internet using LAN) or a modem (for getting access to the internet via landline) Up to 6 USB ports (Only required for a server computer working as a VRF controller) <ul style="list-style-type: none"> Maximum of 2 USB ports are required to connect to a White-USB-key/WibuKey Up to 4 USB ports required to connect to an Echelon® U10 USB network interface * Maximum number of required USB ports depends on the applicable system configuration. 	<ul style="list-style-type: none"> Ethernet port (for getting access to the internet using LAN) or a modem (for getting access to the internet via landline) Up to 6 USB ports (Only required for a server computer working as a VRF controller) <ul style="list-style-type: none"> Maximum of 4 USB ports are required to connect to a White-USB-key/WibuKey 1 USB port is required for an Echelon® U10 USB Network interface * The maximum number of required USB ports depends on the applicable system configuration.
Graphic accelerator	Microsoft® DirectX® 9.0c compatible	
Software	Adobe® Acrobat Reader® 9.0 or later	
	• Echelon® U10 USB Network interface - TP/FT-10 Channel (Model name: 75010R) (Required for each VRF Network)	

Packing list

Type	For System controller		For System controller Lite				
	System controller	Option Energy manager	System controller Lite	Remote access	Electricity charge apportionment	Energy saving	Centralized control
Model name	UTY-APGXZ1	UTY-PEGXZ1	UTY-ALGXZ1	UTY-PLGXR2	UTY-PLGXA2	UTY-PLGXE2	UTY-PLGX2
White-USB-key	1	1	1	1	1	1	1

*1: Software protection key to be inserted in a USB slot running System controller or System controller Lite.


System controller or System controller Lite may only run on a PC with a WHITE-USB-KEY. However, a WHITE-USB-KEY is not required for remote VRF explorer software.

MODBUS® converter for Indoor unit

UTY-VMSX




Up to
1 indoor unit

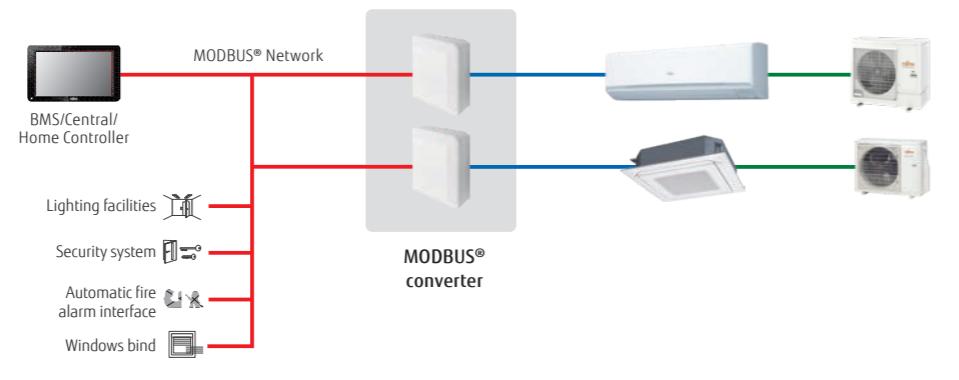

Easy Installation

Easy to install with minimal wiring and without the need for a power supply cable to the converter

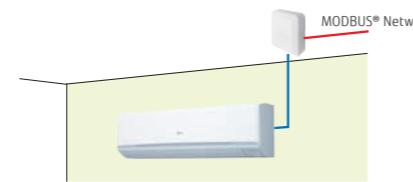

Basic control

- Turning the units on and off
- Mode control (Heat, Cool, Dry, Auto, Fan)
- Fan speed control
- Louver position (airflow direction setting)
- Room temperature setting and display
- Economy mode setting
- Error status

Specifications

Model name	UTY-VMSX
Power supply	12 V DC
Input power (W)	Max. 1.2 W
Dimensions (H × W × D) (mm)	140 × 117 × 43
Weight (g)	200
Maximum number of connectable indoor units per MODBUS® converter	1

Modbus communication specifications

Transfer mode	RTU mode
Communication speed	9600/19200 bps
Data bit	8
Parity	even/odd/none
Stop bit	1/2 (no parity)
Network	RS485
Maximum cable length	1000 m (3280 ft)

MODBUS® interface

FG-RC-MBS1Z1 / FG-AC-MBS1Z1 / FG-IR-BMG1Z1

Intesis
BY HMI NETWORKS



FG-RC-MBS1Z1
(3-wire RC-line type)

Intesis
BY HMI NETWORKS



FG-AC-MBS1Z1
(CN connector type)

Intesis
BY HMI NETWORKS



FG-IR-BMG1Z1
(IR type)


NEW

Up to
1 indoor unit


MODBUS® interface enables air conditioners to be fully integrated into a MODBUS® network.

- Small, compact, and easy to install on DIN rails.
- No separate external power supply required.
- MODBUS® interface enables central monitoring and control of air conditioners from BMS.

Installation example

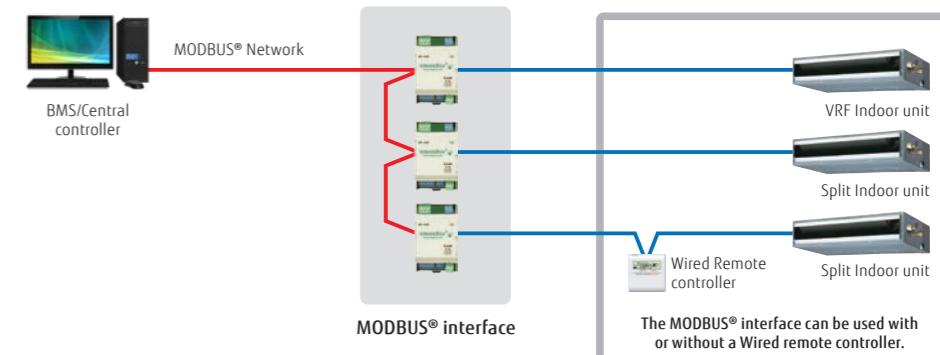

[IR type] Connection to wall-mounted type

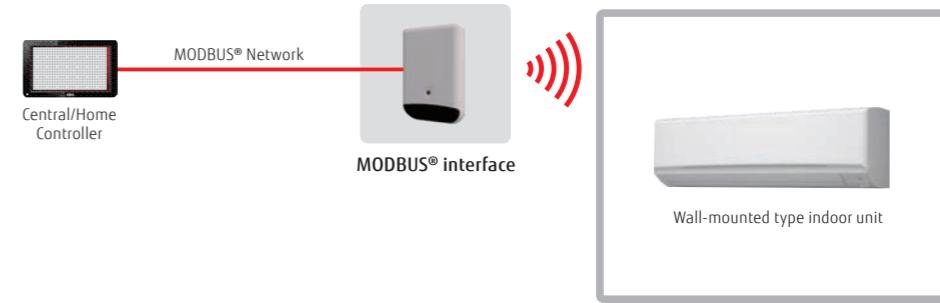

Specifications

Model name	FG-RC-MBS1Z1 (3-wire RC-line type)	FG-AC-MBS1Z1 (CN connector type)	FG-IR-BMG1Z1 (IR type)
Number of controllable groups	1	1	1
Dimensions (H × W × D) (mm)	93 × 53 × 58	93 × 53 × 58	93 × 60 × 21
Weight (g)	85	85	55

MODBUS® converter for VRF

UTY-VMGX / FG-TL-MBS16Z1



UTY-VMGX



Up to
9 units per VRF system
Up to
100 outdoor units
Up to
128 indoor units



FG-TL-MBS16Z1

Up to
16 indoor units
Up to
16 outdoor units
Up to
128 indoor units

Installation example

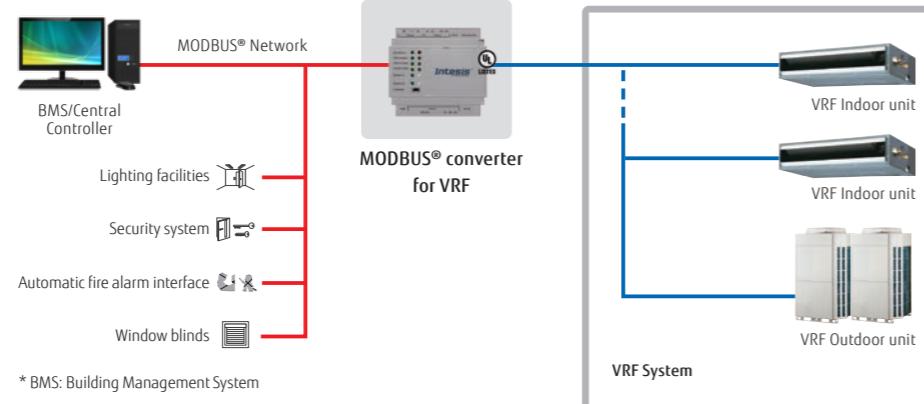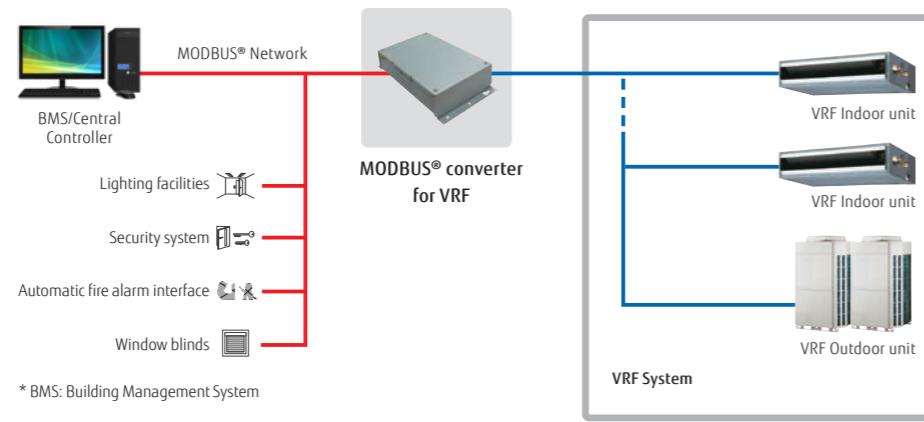

Specifications

Model name	UTY-VMGX	FG-TL-MBS16Z1
Power supply	Single phase ~220 to 240 V 50/60 Hz	9 to 36 V DC, Max.: 140 mA or 24 V AC 50/60 Hz, Max.: 127 mA.*
Input power (W)	Max. 2	1.7
Dimensions (H × W × D) (mm)	54 × 260 × 150	90 × 88 × 56
Weight (g)	1,100	330

*24 V DC power supply is recommended.


BACnet® interface

FG-AC-BAC1Z1 / FG-IR-BMG1Z1


FG-AC-BAC1Z1
(CN connector type)FG-IR-BMG1Z1
(IR type)Up to
1 indoor units

- BACnet® interface connects BMS and a Fujitsu General split/multi-split/VRF system.
- Compatible with BACnet® (ANSI/ASHRAE-135-2012) application-specific controller (B-ASC).
- Compatible with BACnet®/IP over Ethernet.

Installation example

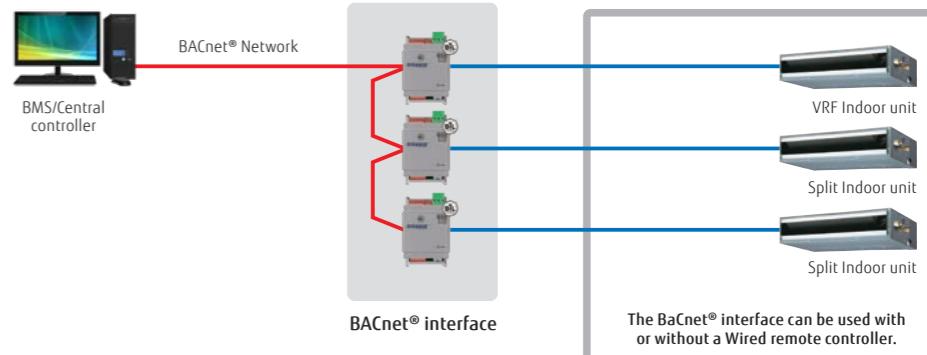

[IR type] Connection to wall-mounted type

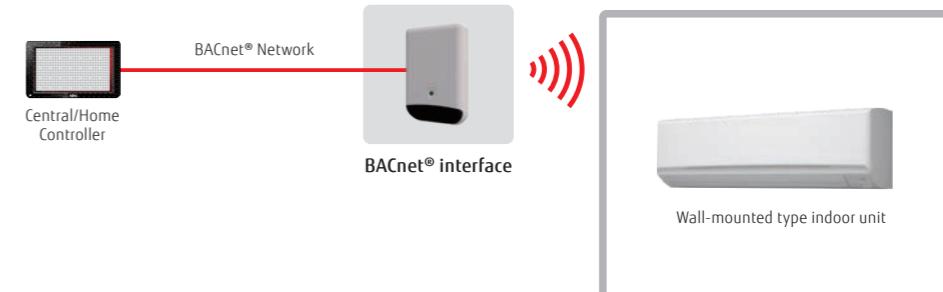

Specifications

Model name	FG-AC-BAC1Z1 (CN connector type)	FG-IR-BMG1Z1 (IR type)
Number of controllable groups	1	1
Dimensions (H × W × D) (mm)	93 × 53 × 58	93 × 60 × 21
Weight (g)	85	55

12 V DC supplied by an indoor unit

BACnet® gateway


UTY-ABGXZ1 Software

White-USB-key
(Software Protection Key)

Bacnet® is a registered trademark of ASHRAE. ASHRAE does not endorse, approve or test products for compliance with ASHRAE standards. Compliance of listed products to the requirements of ASHRAE Standard 135 is the responsibility of Bacnet International (BI). BI is a registered trademark of Bacnet International.

Up to
4 VRF network systems
Up to
400 outdoor units
Up to
1,600 indoor units

Installation example

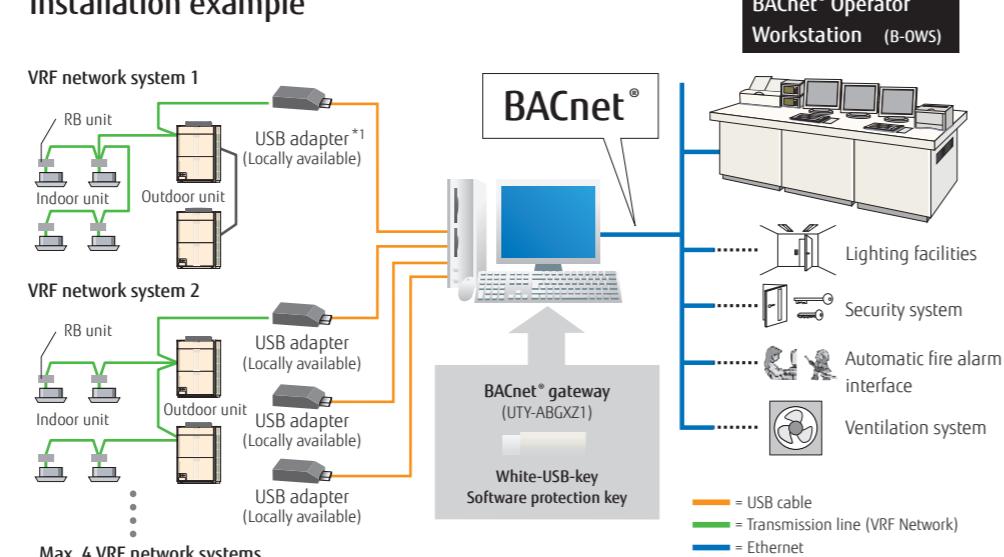

*1: U10 USB network interface available from Echelon® Corporation.

Computer requirements

	UTY-ABGXZ1
Operating system	<ul style="list-style-type: none"> Microsoft® Windows® 7 Home Premium (32-bit or 64-bit) SP1, Windows® 7 Professional (32-bit or 64-bit) SP1 Microsoft® Windows® 8.1 (32-bit or 64-bit), Windows® 8.1 Pro (32-bit or 64-bit) Microsoft® Windows® 10 Home (32-bit or 64-bit), Windows® 10 Pro (32-bit or 64-bit) Supported languages: Chinese, English, French, German, Polish, Russian, and Spanish
CPU	Intel® Core™ i3 2 GHz or higher
Memory	<ul style="list-style-type: none"> 2 GB or more (for Windows® 7 [32-bit]) 4 GB or more (for Windows® 7 [64-bit], Windows® 8.1, and Windows® 10)
HDD	40 GB or more of free space
Displayed items	1024 × 768 or higher resolution
Interfaces	<ul style="list-style-type: none"> Ethernet port (for getting access to the internet using LAN) Up to 5 USB ports <ul style="list-style-type: none"> - 1 USB port required to connect to a White-USB-key/WibuKey - Up to 4 USB ports required to connect to an Echelon® U10 USB network interface <p>*The maximum number of required USB ports varies depending on the applicable system configuration.</p>
Software	Adobe® Acrobat Reader® 9.0 or later
• Echelon® U10 USB Network interface – TP/FT-10 Channel (Model name: 75010R) (Required for each VRF Network)	
Packing list	
Name and shape	Quantity Application
White-USB-key	1 Includes the software, user's manual, and license for BACnet® gateway.

BACnet® gateway

UTY-VBGX Hardware




Bacnet® is a registered trademark of ASHRAE. ASHRAE does not endorse, approve or test products for compliance with ASHRAE standards. Compliance of listed products to the requirements of ASHRAE Standard 135 is the responsibility of Bacnet International (BI). BI is a registered trademark of Bacnet International.

Up to
1 VRF network systems
Up to
32 refrigerant systems
Up to
128 indoor units

- BACnet® gateway connects BMS and a Fujitsu General VRF system.
- Up to 128 indoor units and 32 refrigerant systems can be connected to a single BACnet® gateway.
- Compatible with BACnet® (ANSI/ASHRAE-135-2012) application-specific controller (B-ASC)
- Compatible with BACnet®/IP over Ethernet.

Installation example

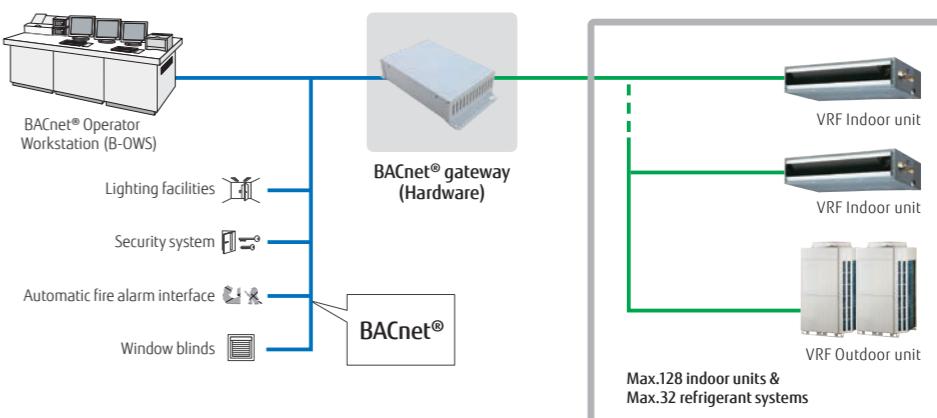

Specifications

Model name	UTY-VBGX
Number of controllable indoor units	128
Number of controllable refrigerant systems	32
Number of controllable VRF networks	1
Number of connectable units / one VRF network	4
Power supply	Single phase, 100-240 V, 50/60 Hz
Power consumption (W)	4.6 (max.)
Dimensions (H × W × D) (mm)	59.6 × 270.4 × 176
Weight (g)	1200

BACnet®/MODBUS® Router


FG-RTR-BAC32Z1 / FG-RTR-MBS32Z1

Intesis
BY HMS NETWORKSFG-RTR-BAC32Z1
(BAC net)**Intesis**
BY HMS NETWORKSFG-RTR-MBS32Z1
(MODBUS®)**Routing between BaCnet® MS/TP and BaCnet® IP networks**


- Routing between BaCnet® MS/TP and BaCnet® IP networks
- Routing between MODBUS® RTU and MODBUS® TCP networks

Installation example

[BaCnet® type]

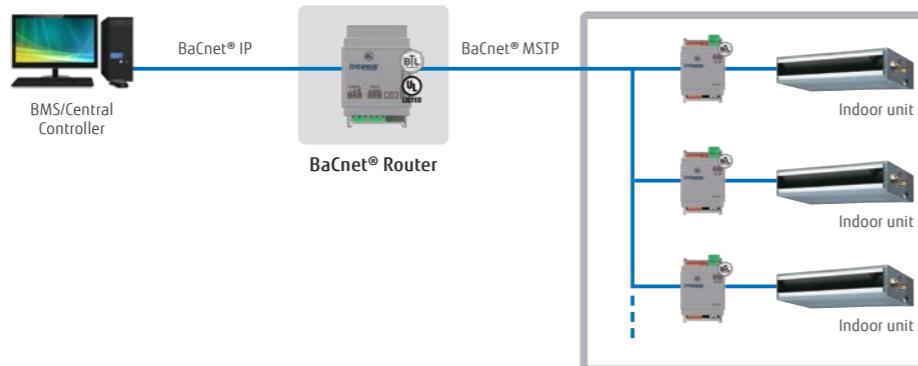

[MODBUS® type]

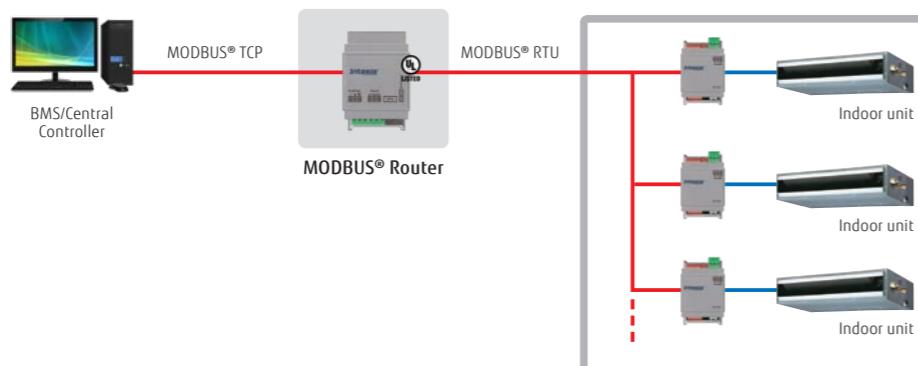**BACnet®/MODBUS® Cloud Device**


FG-CLD-BMG4Z1 / FG-CLD-BMG8Z1 / FG-CLD-BMG16Z1 / FG-CLD-BMG32Z1

Intesis
BY HMS NETWORKS

FG-CLD-BMG4/8/16/32Z1

- The most powerful configuration tool common to all BACnet® gateways provides the system integrators with the power to configure and monitor their systems in an easy and reliable manner.

- A simple, easy-to-use description for the ST Cloud Web and App User Interface, with all widgets customizable to the user's needs, enabling system integrators to easily offer the best user experience to customers who are in control of their BaCnet® or MODBUS® devices.

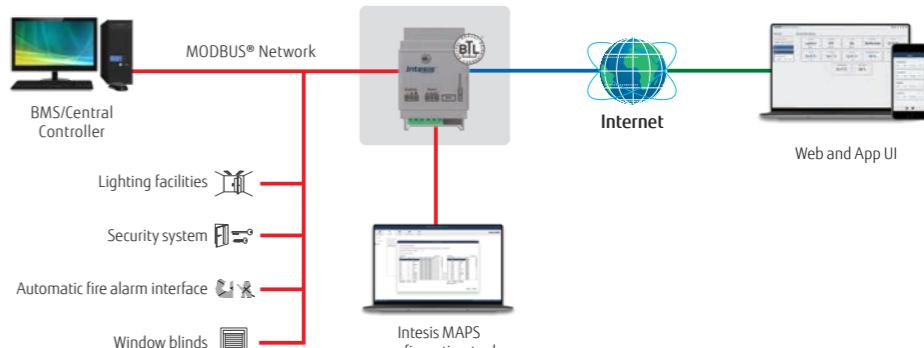Installation example

*BMS: Building Management System

Gateway features

- BaCnet® IP/MSTP or MODBUS® TCP/RTU connectivity
- Up to 32 devices can be connected to each gateway.
- Up to 12 widgets per device
- Easy device configuration with Intesis MAPS

Next-generation services

- Industrial-grade connectivity now for building automation
- Fast and scalable real-time edge connectivity over HMS HubTM
- Full data control and protection
- Secure and remote updates during the application lifetime

System Features

- Monitor and control all devices in an intuitive way
- Comes with a native iOS and Android app and a web interface
- Create scenes and interact with multiple concurrent devices
- Calendar that shows the daily planned installation commands
- Notifications keep you updated about system status
- Device sharing and usage permissions management
- Multiple site management from a common dashboard

Specifications

Model name	FG-RTR-BAC32Z1 (MS/TP to IP)	FG-RTR-MBS32Z1 (RTU to TCP)
Number of routable devices (max.)	32	32
Power supply	9 to 36 V DC, Max.: 140 mA or 24 V AC 50/60 Hz, Max.: 127 mA	9 to 36 V DC, Max.: 140 mA or 24 V AC 50/60 Hz, Max.: 127 mA
Power consumption (W)	1.7	1.7
Dimensions (H x W x D) (mm)	93 x 53 x 58	93 x 53 x 58
Weight (g)	150	150

Specifications


Model name	FG-CLD-BMG4Z1	FG-CLD-BMG8Z1	FG-CLD-BMG16Z1	FG-CLD-BMG32Z1
Number of connectable BaCnet® (IP/MSTP) or MODBUS® (TCP/RTU) devices	4	8	16	32
Power supply	9 to 24 V DC, 50/60Hz			
Power consumption (W)	1.7	1.7	1.7	1.7
Dimensions (H x W x D) (mm)	93 x 53 x 58			
Weight (g)	150	150	150	150

KNX® converter for indoor unit


UTY-VKSX

Up to
1 indoor unit**KNX® Converter enables individual control of an indoor unit.**

- The new KNX® converter connects a central or home controller and a Fujitsu General indoor unit.
- Compact and lightweight design

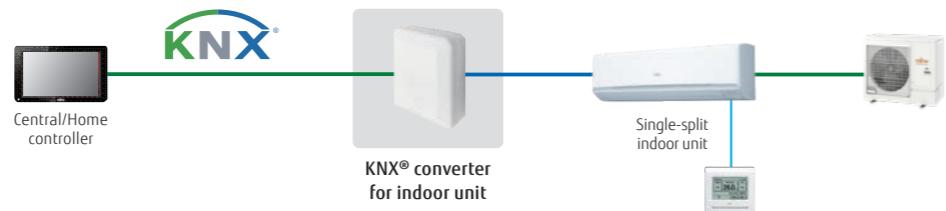**KNX® converter** for VRF

UTY-VKGX / FG-TL-KNX16Z1

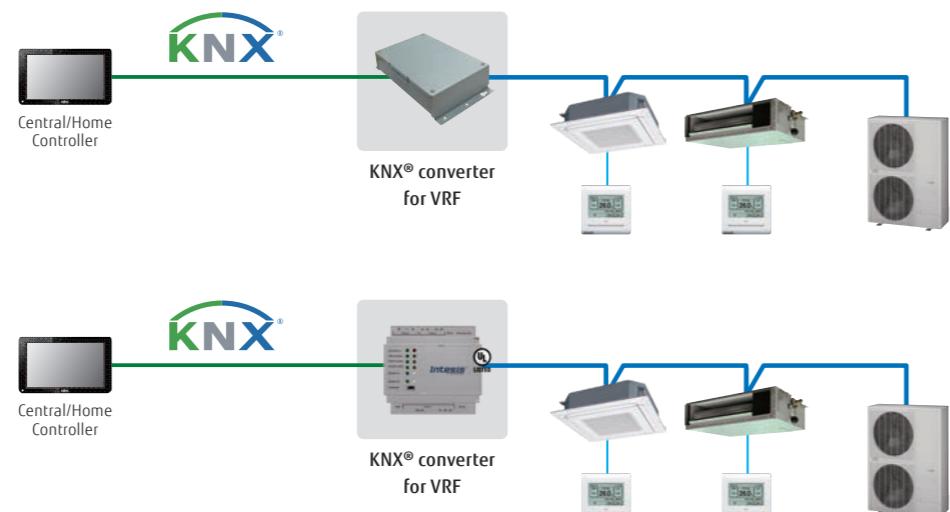Up to
100 outdoor units
Up to
128 indoor units**Intesis®**
BY HHS NETWORKSUp to
16 indoor units
Up to
16 outdoor units**Installation example****Specifications**

Model name	UTY-VKSX	UTY-VKGX	FG-TL-KNX16Z1
Power supply	12 V DC	Single phase ~220 to 240 V 50/60 Hz	9 to 36 V DC, Max.: 140 mA or 24 V AC 50/60 Hz, Max.: 127 mA.*
Input power (W)	0.6	1.5	1.6
Dimensions (H × W × D) (mm)	140 × 117 × 43	54 × 260 × 150	90 × 88 × 56
Weight (g)	215	1,200	340

*24 V DC power supply is recommended.

KNX® interface


FG-RC-KNX1Z1 / FG-AC-KNX1Z1 / FG-IR-KNX1Z1

Intesis®
BY HHS NETWORKSFG-RC-KNX1Z1
(3-wire RC-line type)FG-AC-KNX1Z1
(CN connector type)FG-IR-KNX1Z1
(IR type)**The KNX® interface enables air conditioners to be fully integrated into a KNX® network system.**


- Simple installation due to small and compact size.
- No separate external power supply required (only KNX® bus power required)

Installation example


[3-wire RC-line type/CN connector type]

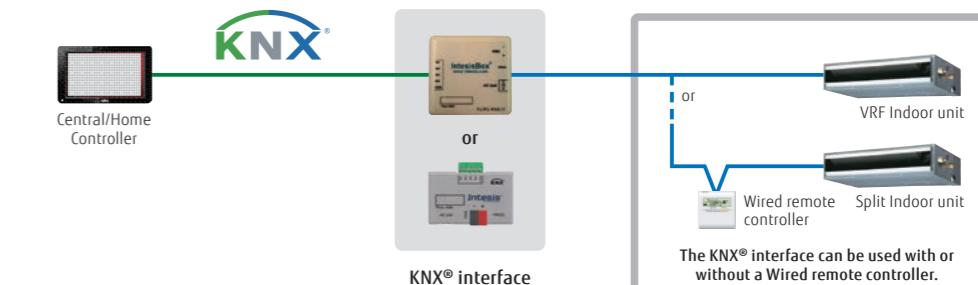

[IR type] Connection to wall-mounted type

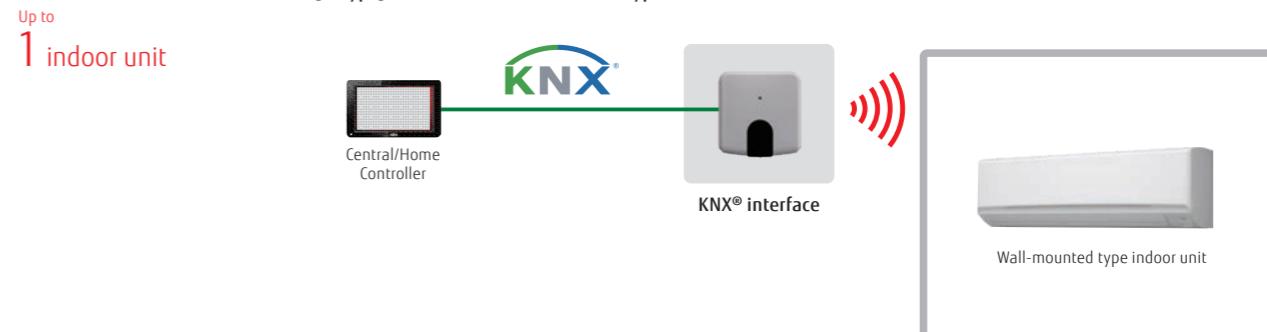

[IR type] Connection to a product other than wall-mounted type

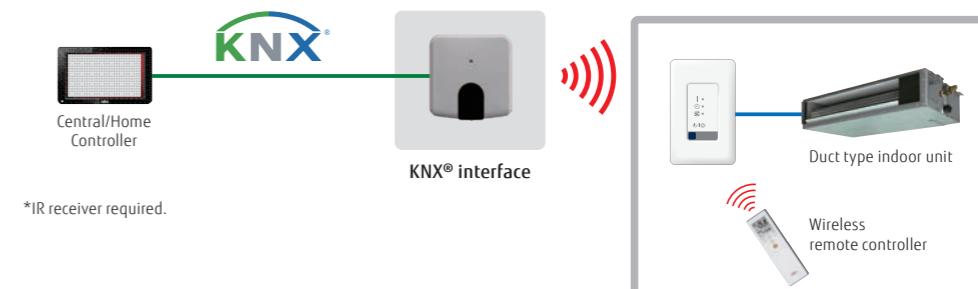

*IR receiver required.

Network converter for single-split type


UTY-VTGX / UTY-VTGXV

UTY-VTGX
DC power supply typeUTY-VGXV
AC power supply typeUp to
16 single indoor unitsUp to
1 groupUp to
100 Network Converters


- A network converter is required when connecting a single-split system to a VRF network system.
- Compact and lightweight design
- Connectable to both nonpolar 2-core and polar 3-core remote controllers

Installation example


- A 1-remote-controller type and a 2-remote-controller type are available.
- Power supply (220 to 240 V AC, 50/60 Hz) is required for the 2-remote-controllers type.

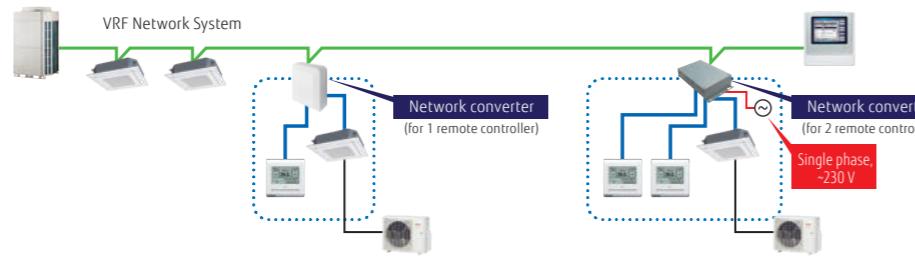

- Both nonpolar 2-core and polar 3-core type Wired remote controllers can be connected.

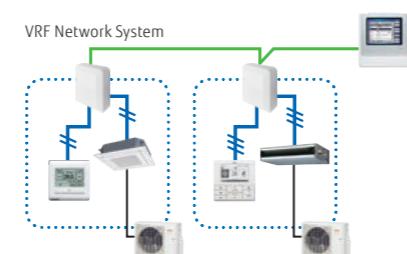

- Central control can be provided for single-split systems. (Up to 100 network converters can be connected in a VRF network system)

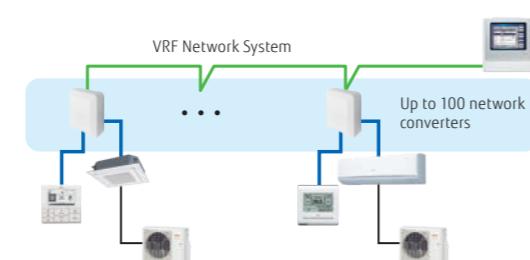**Specifications**


Model name	UTY-VTGX		UTY-VGXV
Power supply	Polar 3-core 12 V DC	Nonpolar 2-core DC 12 V	Single phase ~220 to 240 V 50/60 Hz
Input power (W)	Max. 1.2 W		Max. 3
Dimensions (H × W × D) (mm)	140 × 117 × 43		54 × 260 × 150
Weight (g)	250		1,100

Network converter for LONWORKS™

UTY-VLGX



- Connects the VRF network system to a LONWORKS™ open network to manage small and midsized BMS and VRF network system.
- The UTY-VLGX enables centralized monitoring and control of VRF network system from a BMS via a LONWORKS™ interface.
- Up to 128 Indoor units can be connected to one network converter for LONWORKS™

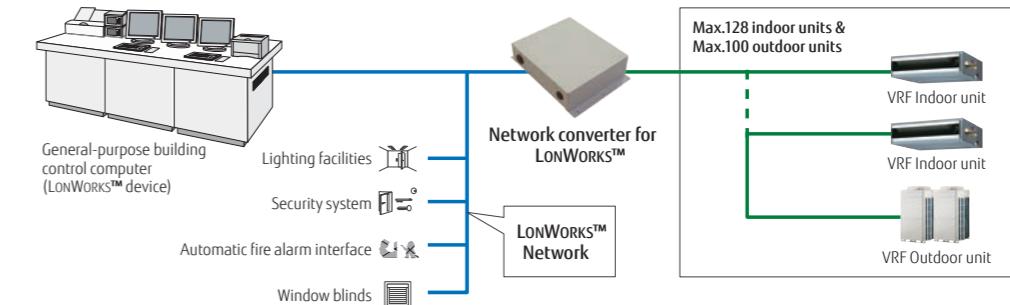Installation example**Specifications**

Model name	UTY-VLGX
Power supply	Single phase ~208 to 240 V 50/60 Hz
Power consumption (W)	4.5
Dimensions (H × W × D) (mm)	67 × 288 × 211
Weight (g)	1,500

Transmission specifications (BMS side)

Transmission speed	78 kbps
Transceiver	FT-X1 (available from Echelon® Corporation)
Transmission line form	Free topology
Terminal resistor	(converter to be attached at the terminal of a network)

External switch controller

UTY-TERX


Up to
1 group

Air conditioner switching can be controlled by connecting this external switch controller to other sensor switches.

- In combination with a commercially available card-key switch or other sensors, this External switch controller enables the control of ON/OFF, room temperature, and fan speed of connected air conditioners as well as master control functions. This makes this product an ideal choice for use in hotel rooms.
- Card key or other sensor switches are locally available.
- The set temperature can be specified at two points each for cooling and heating operations (4 points in total).

Installation example

Occupancy sensor monitors the movement of a person in a room. When it detects that the person has left the room, it switches the air conditioner to low-capacity mode. When a person returns to the room, the air conditioner returns to the previous operation mode.

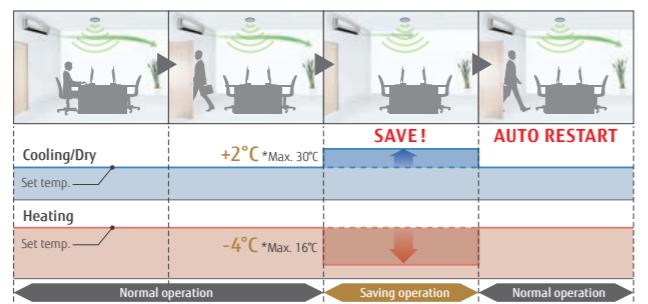

Occupancy sensor equipment needs to be purchased separately.
Occupancy sensor is not mounted on an External switch controller.


Signal amplifier

UTY-VSGXZ1



- The transmission line can be extended up to 3,600 m using multiple Signal amplifiers.
- Up to 8 Signal amplifiers can be added in a VRF network system.
- A Signal amplifier is required.
 - When the total wiring length of the transmission line exceeds 500 m.
 - When the total number of units on the transmission line exceeds 64.

Installation example

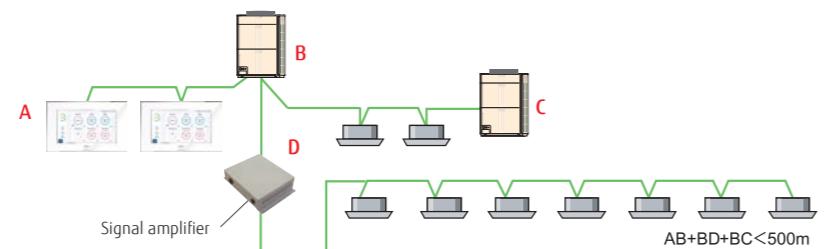

Specifications

Model name	UTY-VSGXZ1	UTY-TERX
Power supply	Single phase ~208 to 240 V 50/60 Hz	6.5 to 16 V DC
Power consumption (W)	4.5	-
Dimensions (H × W × D) (mm)	67 × 288 × 211	140 × 117 × 43
Weight (g)	1,500	250

12 V DC supplied by an indoor unit



Controller system list (available) for Split/Multi-split

Controller Options/Accessories:



Type	Refrigerant	Indoor unit												Indoor unit						Multi-split				Outdoor unit		
		Wall-mounted				Cassette		Duct						Duct				Floor		Ceiling		Multi-split				Single phase
		Designer Series		Standard Series		ECO Series	Compact 4-way flow Series	Circular flow Series	Slim	Medium static pressure [High-Efficiency & Comfort]	Medium static pressure [Compact]	Medium static pressure [Standard]	High static pressure	BIG	Floor	Ceiling	Wall-mounted	Compact cassette	Mini duct	Slim duct	5/6-unit multi-split					
	R32	ASYG 07/09/12/14 KGTf, KGtE	ASYG 07/09/12/14 KETf, KETf-B KETe, KETe-B	ASYG 07/09/12/14 KMcf, KMce	ASYG 18/24KMT	ASYH 30/36KMTB	ASYG 07/09/12 KPCE	AUXG 09/12/14/18 KVLA	AUXG 18/22/24/30/36/45/54 KRLB	ARXG 09/12/14/18 KLLAP	ARXH 22/24/30/36/45/54 KHTAP	ARXG 12/14/18/22/24/30/36/45/54 KMLA	ARXG 45/54KHTB			AGYG 09/12/14 KVCA	ABYG 09/12/14 KVCA	ASYG 22KMT	AUXG 07KVLA	ARXG 07KLLAP	A0YG36KBTA5					
	R410A														ARYG 60LHTA	ARYG 72/90LHTA						A0YG45LBLA6				
Controller																										
Wired remote controller																										
Simple remote controller	Nonpolar 2-core type	Polar 3-core type																								
Home central remote controller																										
Wireless remote controller																										
IR receiver unit with Wireless remote controller	For Duct type																									
	For Duct type	For Cassette type	For Ceiling type																							

*1: Available only when the WLAN adapter (UY-TFSXF2) is removed. *2 Available only when the WLAN adapter (UY-TFSXZ1) is removed.
*3 Consult your dealer for conditions of use.

Controller system list (available) for Split/Multi-split

Controller Options/Accessories:



Type	Refrigerant	Indoor unit																Indoor unit						Multi-split					
		Wall-mounted						Cassette		Duct						Duct		High static pressure		BIG		Floor	Ceiling	Wall-mounted	Compact cassette	Mini duct	Slim duct		
		Designer Series		Standard Series		ECO Series		Compact 4-way flow Series	Circular flow Series	Slim	Medium static pressure (High Efficiency & Comfort)	Medium static pressure (Compat)	Medium static pressure (Standard)	ARXG 12/14/18/22/24/30/36/45/54 KHTAP	ARXG 12/14/18/22/24/30/36/45/54 KHTAP	ARXG 22/24/30/36/45/54 KMLA	ARXG 45/54KHTB	AGYG 09/12/14 KVCA	ABYG 18/22/24/30/36/45/54 KRTA	ASYG 22KMTE	AUXG 07KVLA	ARXG 07/09/12/14/18 KSLAP	ARXG 07KLLAP						
	R32	ASYG 07/09/12/14 KGT, KETF, KGTE	ASYG 07/09/12/14 KETF, KETF-B, KETE, KETE-B	ASYG 07/09/12/14 KMCF, KMCE	ASYG 18/24KMTE	ASYH 30/36KMTB	ASYG 07/09/12 KPCE	ASYG 18/24KLCA	AUXG 09/12/14/18 KLLAP	AUXG 18/22/24/30/36/45/54 KVLB	ARXG 22/24/30/36/45/54 KHTAP	ARXG 12/14/18/22/24/30/36/45/54 KHTAP	ARXG 22/24/30/36/45/54 KMLA	ARXG 45/54KHTB	AGYG 09/12/14 KVCA	ABYG 18/22/24/30/36/45/54 KRTA	ASYG 22KMTE	AUXG 07KVLA	ARXG 07/09/12/14/18 KSLAP	ARXG 07KLLAP									
	R410A														ARYG 60LHTA	ARYG 72/90LHTA													
Interfaces	MODBUS® Converter		● UTY-VMSX						● UTY-VMSX				● UTY-VMSX				● UTY-VMSX	● UTY-VMSX*	● UTY-VMSX	● UTY-VMSX*	● UTY-VMSX				● UTY-VMSX				
MODBUS® interface			● FG-AC-MBS1Z1						● FG-RC-MBS1Z1 FG-AC-MBS1Z1				● FG-RC-MBS1Z1 FG-AC-MBS1Z1	● FG-RC-MBS1Z1 FG-AC-MBS1Z1	● FG-RC-MBS1Z1 FG-AC-MBS1Z1				● FG-RC-MBS1Z1 FG-AC-MBS1Z1				● FG-RC-MBS1Z1 FG-AC-MBS1Z1				● FG-RC-MBS1Z1 FG-AC-MBS1Z1		
			● FG-IR-BMG1Z1						● FG-IR-BMG1Z1+ UTY-LBTYC				● FG-IR-BMG1Z1+ UTY-LBTYM				● FG-IR-BMG1Z1+ UTY-LRHYM				● FG-IR-BMG1Z1		● FG-IR-BMG1Z1+ UTY-LBTYH		● FG-IR-BMG1Z1		● FG-IR-BMG1Z1+ UTY-LBTYM		
KNX® converter			● UTY-VKSX						● UTY-VKSX				● UTY-VKSX				● UTY-VKSX	● UTY-VKSX*	● UTY-VKSX	● UTY-VKSX*	● UTY-VKSX				● UTY-VKSX				
KNX® interface			● FG-AC-KNX1Z1						● FG-RC-KNX1Z1 FG-AC-KNX1Z1				● FG-RC-KNX1Z1 FG-AC-KNX1Z1	● FG-RC-KNX1Z1 FG-AC-KNX1Z1	● FG-RC-KNX1Z1 FG-AC-KNX1Z1				● FG-AC-KNX1Z1				● FG-RC-KNX1Z1 FG-AC-KNX1Z1				● FG-RC-KNX1Z1 FG-AC-KNX1Z1		
			● FG-IR-KNX1Z1						● FG-IR-KNX1Z1+ UTY-LBTYC				● FG-IR-KNX1Z1+ UTY-LBTYM				● FG-IR-KNX1Z1+ UTY-LRHYM				● FG-IR-KNX1Z1		● FG-IR-KNX1Z1+ UTY-LBTYH		● FG-IR-KNX1Z1		● FG-IR-KNX1Z1+ UTY-LBTYM		
WLAN adapter									● UTY-TFSXJ3 UTY-TFSXZ1				● UTY-TFSXJ3 UTY-TFSXZ1				● UTY-TFNXZ1	● UTY-TFSXJ3 UTY-TFSXZ1				● UTY-TFSXJ3 UTY-TFSXZ1				● UTY-TFSXJ3 UTY-TFSXZ1			
			● Accessory (KGTF, KETF, KMCF) (KGTE, KETE, KETE-B, KMCE) UTY-TFSXH3, UTY-TFSXF2						● UTY-TFSXH3 UTY-TFSXF2																	● UTY-TFSXH3 UTY-TFSXF2			
			● FG-AC-WIF1Z1						● FG-RC-WIF1Z2 FG-AC-WIF1Z1				● FG-RC-WIF1Z2 FG-AC-WIF1Z1	● FG-AC-WIF1Z1	● FG-RC-WIF1Z2 FG-AC-WIF1Z1				● FG-AC-WIF1Z1				● FG-RC-WIF1Z2 FG-AC-WIF1Z1				● FG-RC-WIF1Z2 FG-AC-WIF1Z1		
			● FG-IR-WIF1Z1						● FG-IR-WIF1Z1+ UTY-LBTYC				● FG-IR-WIF1Z1+ UTY-LBTYM				● FG-IR-WIF1Z1+ UTY-LRHYM				● FG-IR-WIF1Z1		● FG-IR-WIF1Z1+ UTY-LBTYH		● FG-IR-WIF1Z1		● FG-IR-WIF1Z1+ UTY-LBTYM		
			● FG-AC-WMP1Z1						● FG-RC-WMP1Z1 FG-AC-WMP1Z1				● FG-RC-WMP1Z1 FG-AC-WMP1Z1	● FG-AC-WMP1Z1	● FG-RC-WMP1Z1 FG-AC-WMP1Z1				● FG-AC-WMP1Z1				● FG-RC-WMP1Z1 FG-AC-WMP1Z1				● FG-RC-WMP1Z1 FG-AC-WMP1Z1		
			● FG-IR-WMP1Z1						● FG-IR-WMP1Z1+ UTY-LBTYC				● FG-IR-WMP1Z1+ UTY-LBTYM				● FG-IR-WMP1Z1+ UTY-LRHYM				● FG-IR-WMP1Z1		● FG-IR-WMP1Z1+ UTY-LBTYH		● FG-IR-WMP1Z1		● FG-IR-WMP1Z1+ UTY-LBTYM		
External switch controller			● UTY-TERX+UTY-TWRXZ2						● UTY-TERX				● UTY-TERX				● UTY-TERX+ UTY-TWRXZ3	● UTY-TERX	● UTY-TERX	● UTY-TERX+ UTY-TWRXZ2	● UTY-TERX				● UTY-TERX				
Network converter for single-split type			● UTY-VTGX+UTY-TWRXZ2 or UTY-VIGXV+UTY-TWRXZ2						● UTY-VTGX UTY-VIGXV				● UTY-VTGX UTY-VIGXV				● UTY-VTGX+ UTY-TWRXZ3 UTY-VIGXV+ UTY-TWRXZ3	● UTY-VTGX	● UTY-VTGX	● UTY-VTGX+ UTY-TWRXZ2 UTY-VIGXV+ UTY-TWRXZ2	● UTY-VTGX				● UTY-VTGX UTY-VIGXV				

*1: Available only when the WLAN adapter (UY-TFSXF2) is removed. *2 Available only when the WLAN adapter (UY-TFSXZ1) is removed.
 *3: For compatibility of the new WLAN adapters with the indoor units which are not listed in this catalogue, please refer to page C-019.

Controller System List (available) for VRF

Controller Options:



Type	Refrigerant	Indoor unit																Indoor unit								
		Cassette						Duct						Duct		Floor		Ceiling/Floor	Ceiling	Wall-mounted						
		One-way flow	3D flow	Compact Grid type/ Standard type	Slim type	Large type	Low static pressure duct			Medium static pressure		High static pressure	Normal	Normal	-	External EEV										
					Circular flow		Mini (With drain pump)	Slim (With drain pump)		High Efficiency																
	R410A	AUXV 004/007/009/ 012/014/018/ 024GLEH	AUXS 018/024 GLEH	AUXB 004/007/009/ 012/014/018/ 024GLEH	AUXM 018/024/030 GLEH	AUXK 018/024/030/ 034/036/045/ 054GLEH	ARXK 004/007/009/ 012/014/018/ 024GLGH	ARXD 04GALH	ARXD 007/009/012/ 014/018/024 GLEH	ARXP 018/030 GLFH	ARXA 024/030/ 036/045 GLEH	ARXC 036/045/060/ 072/090/096 GTEH	AGYA 004/007/ 009/012/014 GCGH	AGYE 004/007/ 009/012/014 GCEH	ABYA 012/014/ 018/024 GTEH	ABYA 030/036/ 045/054 GTEH	ASYA 004/007/009 GCGH	ASYE 004/007/009 GCEH	ASYA 012/014GCGH	ASYE 012/014GCEH	ASYA 18/24GBCH	ASYA 030/034GTEH				
Controllers																										
Wired remote controller																										
Simple remote controller																										
Wireless remote controller																										
IR receiver unit																										
Central remote controller																										
Touch panel controller																										
System controller, System controller Lite																										

Controller System List (available) for VRF

Controller Options:



Type	Refrigerant	Indoor unit														Indoor unit										
		Cassette						Duct						Duct		Floor		Ceiling/Floor	Ceiling	Wall-mounted						
		One-way flow	3D flow	Compact Grid type/ Standard type	Slim type	Large type	Circular flow	Mini (With drain pump)	Low static pressure duct		Medium static pressure	High static pressure	Normal	Normal	-	external EEV										
					Grid type/ Standard type	Large type			Low static pressure duct	High Efficiency																
	R410A	AUXV 004/007/009/ 012/014/018/ 024GLEH	AUXS 018/024 GLEH	AUXB 004/007/009/ 012/014/018/ 024GLEH	AUXM 018/024/030/ 034/036/045/ 054GLEH	AUXK 018/024/030/ 034/036/045/ 054GLEH	ARXK 004/007/009/ 012/014/018/ 024GLCH	ARXD 04GALH	ARXD 007/009/012/ 014/018/024 GLEH	ARXP 018/030 GLFH	ARXA 024/030/ 036/045 GLEH	ARXC 036/045/060/ 072/090/096 GTEH	AGYA 004/007/ 009/012/014 GCGH	AGYE 004/007/ 009/012/014 GCEH	ABYA 012/014/ 018/024 GTEH	ABYA 030/036/ 045/054 GTEH	ASYA 004/007/009 GCGH	ASYE 004/007/009 GCEH	ASYA 012/014GCEH	ASYA 18/24GBCH	ASYA 030/034GTEH					
Interfaces																										
BACnet® gateway																										
Network converter for LONWORKS™																										
MODBUS® Converter																										
MODBUS® interface																										
KNX® converter																										
KNX® interface																										
WLAN adapter																										
External switch controller																										


*1: For compatibility of the new WLAN adapters with the indoor units which are not listed in this catalogue, please refer to page C-019.

Optional parts overview


For Split & Multi-split, VRF

A variety of optional parts are available to enable installation of the selected indoor unit properly according to the environment.

Optional Parts For Cassette

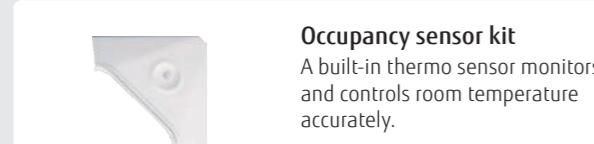

Occupancy sensor kit
A built-in thermo sensor monitors and controls room temperature accurately.

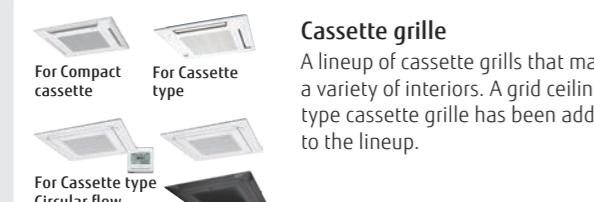


Cassette grille
A lineup of cassette grilles that match a variety of interiors. A grid ceiling-type cassette grille has been added to the lineup.



Silver ion filter
The Silver ion filter helps to keep indoor air free from viruses, bacteria and molds.*




Fresh air intake kit
Fresh air can be taken in by a fan connected to an external control unit.

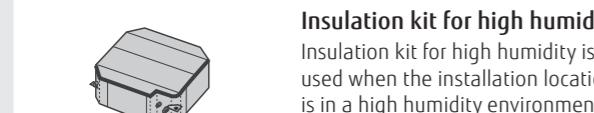

Insulation kit for high humidity
Insulation kit for high humidity is used when the installation location is in a high humidity environment.



Air outlet shutter plate
Airflow directions can be changed to 3 directions using the Air outlet shutter plate depending on the installation location.

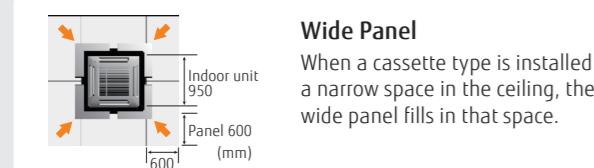


Wide Panel
When a cassette type is installed in a narrow space in the ceiling, the wide panel fills in that space.




Panel spacer
If the ceiling space is tight and the main body protrudes from the ceiling surface, a panel spacer can be used as a decorative trim.

Optional Parts For V-IV

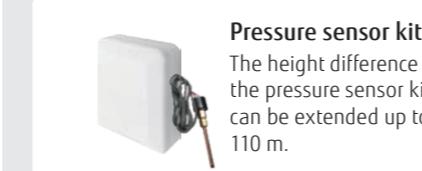

Pressure sensor kit
The height difference of the pressure sensor kit can be extended up to 110 m.

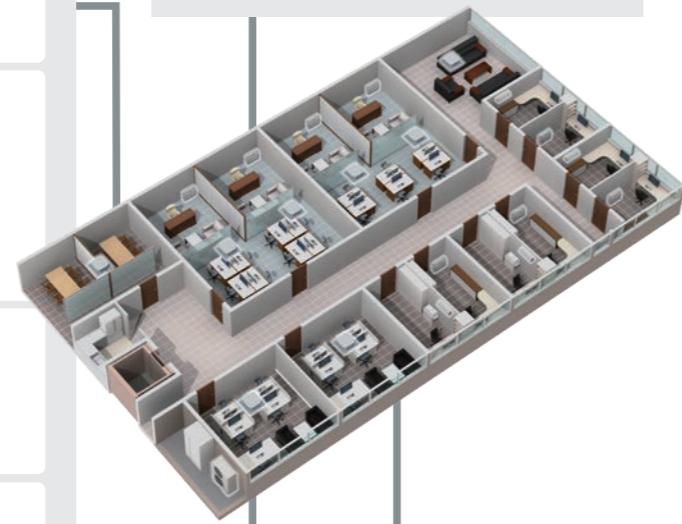


Optional Parts For Floor



Half concealed kit
Used to half conceal a floor type indoor unit in the wall.




Silver ion filter
The Silver ion filter helps to keep indoor air free from viruses, bacteria and molds.*

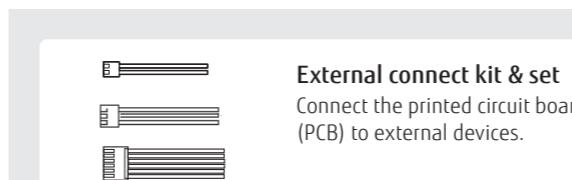

External connect kit & set
Connect the printed circuit board (PCB) to external devices.



Connection Units
Connection units are available to separate the pipes when connecting multiple indoor units in a Multi-split type or VRF system.

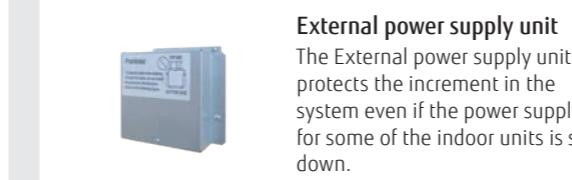

External power supply unit
The External power supply unit protects the increment in the system even if the power supply for some of the indoor units is shut down.


Optional Parts For Duct & Ceiling



Auto louver grille kit
The optional clean-looking flat Auto louver grille blends into any interior and provides a comfortable airflow.



Remote sensor unit
The remote sensor provides additional convenience.



Silver ion filter
The Silver ion filter helps to keep indoor air free from viruses, bacteria and molds.*



Long-life filter
Captures grit and dust. Long-life design with consideration of running costs.



Flange
Flanges are used when connecting a medium static pressure duct type and a ceiling type with air intake and exhaust ducts.



Drain pump unit
Drains water that has accumulated during operation.

Connection Parts



Communication kit
Required for a wall-mounted type when the External connect kit set or a Wired remote controller is connected to the indoor unit.



External input and output PCB
For Wall-mounted, Duct, or Cassette type, these parts are required when the external input and output function is used.



Connection Units
Connection units are available to separate the pipes when connecting multiple indoor units in a Multi-split type or VRF system.



External power supply unit
The External power supply unit protects the increment in the system even if the power supply for some of the indoor units is shut down.



External input and output PCB box & bracket
Box and bracket for installing the External input and output PCB.

Silver Ion Filter

UTR-FA16-5 / UTR-FA13-3 / UTR-FA03-5 / UTD-HFAA / UTD-HFRA / UTD-HFTA / UTD-HFTB / UTD-HFTC / UTD-HFNC / UTD-HFNB / UTD-HFNA / UTD-HFND / UTD-HFKB / UTD-HFKA



For Wall mounted / Floor
UTR-FA16-5 / UTR-FA13-3
UTR-FA03-5

For Cassette
UTD-HFAA / UTD-HFRA


For Duct
UTD-HFTA / UTD-HFTB
UTD-HFTC / UTD-HFNC
UTD-HFNB / UTD-HFNA
UTD-HFND / UTD-HFKB
UTD-HFKA

The Silver ion filter helps to keep indoor air free from viruses, bacteria and molds.

(Not a result of experiments in an actual use environment. Silver ion filter inhibits activity or growth of microorganism, but do not prevent infection.)

The silver ion filter inhibits the activities of viruses^{*1}, bacteria^{*2} and molds^{*3} trapped on the filter.

(Only effective when the microorganism is trapped on the filter with dust or droplet)

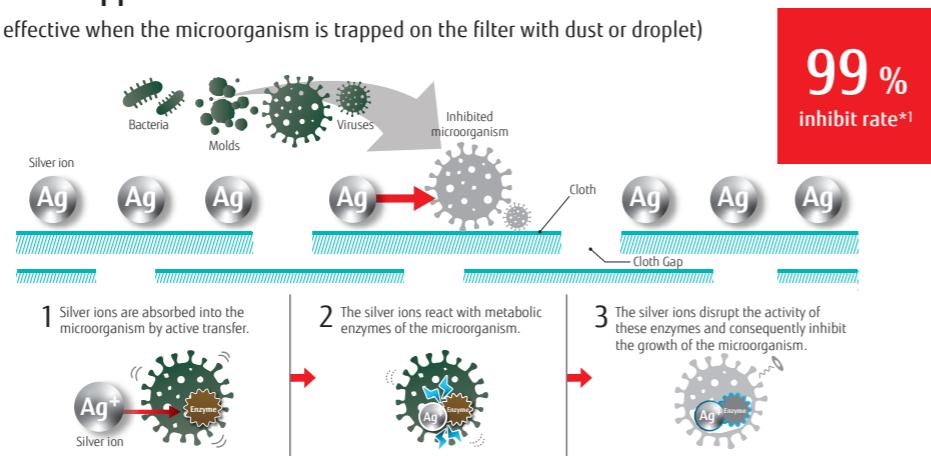


*1 [Testing organization] Kitasato Research Center for Environmental Science [Test Report] No. 2020_0408 [Test virus] Escherichia coli phage Obeta NBRC 20012 (1 type) [Test Method] Based on the antiviral test method for textile products (JIS L 1922)
[Test results] Inhibited by at least 99% in 24 hours. Not tested to prevent transmission of SARS-CoV-2.

*2 [Testing organization] Kitasato Research Center for Environmental Science [Test Report] No. 2020_0409 [Test bacteria] Escherichia coli NBRC 3972 (1 type)
[Test Method] Based on the determination of antibacterial activity and efficacy of textile products (JIS L 1902)
[Test results] The growth of the test bacteria was inhibited by 24 hours testing

*3 [Testing organization] Kitasato Research Center for Environmental Science [Test Report] No. 2020_0410 [Test fungi] Aspergillus Niger NBRC 105649 and other fungi (3 types) [Test Method] Based on the test for fungus resistance (JIS Z 2911)
[Test results] The growth of the fungus was inhibited by 28 days testing

The filter is easily removable* and hand-washable.

(*Wall mounted and floor models only)

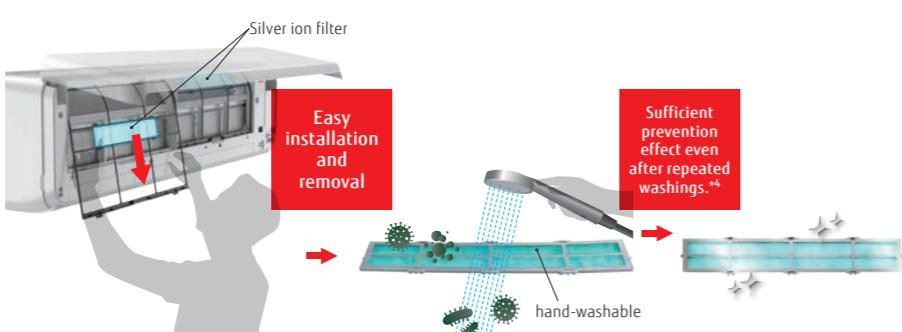

*4 Hand-washing or vacuuming by 3 months is recommended. Cleaning frequency varies depending on the environment of use.

Specifications

Model name	For Wall mounted / Floor					for Cassette									
	UTR-FA16-5	UTR-FA13-3	UTR-FA03-5	UTD-HFAA	UTD-HFRA	UTD-HFTA	UTD-HFTB	UTD-HFTC	UTD-HFNC	UTD-HFNB	UTD-HFNA	UTD-HFND	UTD-HFKB	UTD-HFKA	
Net Dimension (H × W × D)	mm	35 × 210 × 6	50 × 364 × 6	43 × 272 × 6	350 × 125 × 6	550 × 136 × 6	290 × 70 × 6	390 × 70 × 6	290 × 70 × 6	620 × 88 × 6	420 × 88 × 6	620 × 88 × 6	500 × 79 × 6	420 × 125 × 6	620 × 108 × 6
Weight	g	2	2	2	7	23	6	8	10	10	16	12	16	2	20
Quantity		2	2	2	1	1	2	2	1	2	2	2	2	2	2
for Duct															
Net Dimension (H × W × D)	mm	290 × 70 × 6	390 × 70 × 6	290 × 70 × 6	620 × 88 × 6	420 × 88 × 6	620 × 88 × 6	500 × 79 × 6	420 × 125 × 6	620 × 108 × 6					
Weight	g	6	8	10	8	10	16	12	16	2	2	2	2	2	20
Quantity		2	2	3	1	2	2	2	2	2	2	2	2	2	2

Auto louver grille kit

UTD-GXTA-W / UTD-GXTB-W / UTD-GXTC-W




The optional clean-looking flat Auto louver grille kit blends into any interior and provides a comfortable airflow.




Flexible Control

- The Auto louver grille of the indoor unit can be operated in conjunction with the remote control of the indoor unit.
- Vertical auto swing**
 - Auto airflow direction and auto swing
 - 4 steps selectable
- Auto-closing louver**
The louvers will automatically close when the indoor unit stops operating.

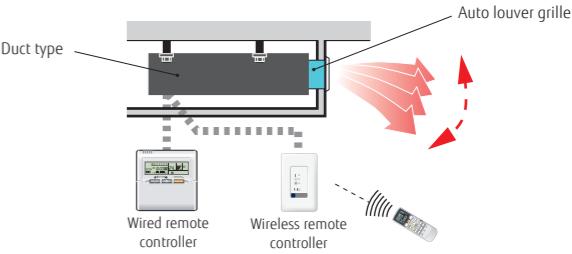

Dimensions

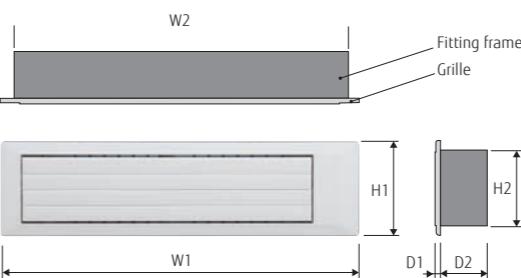

Unit: mm						
Model name	W1	W2	H1	H2	D1	D2
UTD-GXTA-W	683	645				
UTD-GXTB-W	883	845	180	148	9	84
UTD-GXTC-W	1,083	1,045				

Specifications

Model name		UTD-GXTA-W	UTD-GXTB-W	UTD-GXTC-W
Applicable indoor unit		ARYG07/09LLTA ARYG12/14LLTB ARXG09/12/14KLLAP ARYG07/09/12/14LSLAP ARXD007/09/012/014GLEH (for VRF) ARXK004/007/009/012/014GLEH (for VRF) ARXD04GALH (for VRF)	ARYG18LLTB ARYG18KLLAP ARYG18LSLAP ARXD018GLEH (for VRF) ARXK018GLEH (for VRF)	ARXD024GLEH (for VRF) ARXK024GLEH (for VRF)
Power supply		Connecting with Control box of indoor unit		
Fixing Auto louver grille		Screwed to Flange or Square duct		
Extension Square duct limit		1.0 m (Max. duct length between indoor unit and Auto louver grille)		
Net Dimensions (H × W × D)	mm	180 × 683 × (84 + 9)	180 × 883 × (84 + 9)	180 × 1,083 × (84 + 9)
Weight	Net Gross kg (lbs)	2.0 (4.4)	2.5 (5.6)	3.0 (6.7)
Color		White		
Louver motor		Stepping motor		
Accessories		Fitting Flame, etc.		
Operating range	Cooling	°C	18 to 32	
	% RH		80 % or less	
	Heating	°C	16 to 30	


Pressure sensor kit

UTY-SPWX




Design flexibility


The height difference between the outdoor unit and the indoor unit is normally 50 m for the V-IV Series, but can be extended to 110 m by installing the Pressure sensor kit.
(Can only be connected to the V-IV Series. Also, it can only be connected to outdoor units using outdoor unit software compatible with the product.)

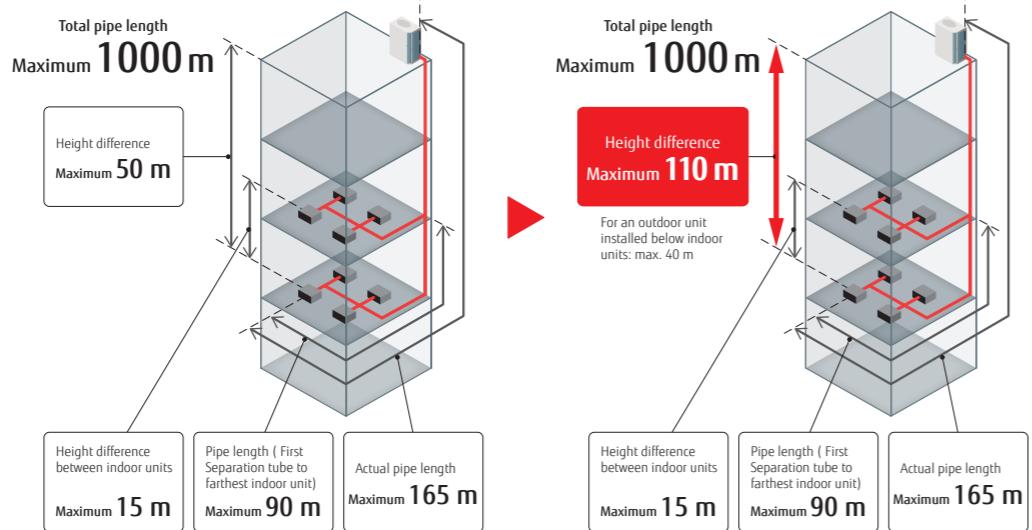

System overview

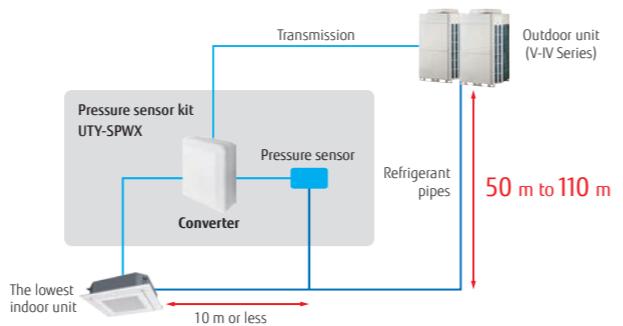

Pressure sensor kit

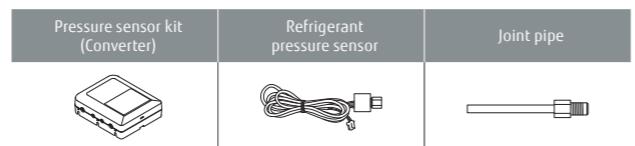

Specifications

Model name	UTY-SPWX
Power supply	9 to 16 V DC
Dimensions (H × W × D) (mm)	140 × 117 × 43
Weight (g)	200



External power supply unit

UTZ-GXXA / UTZ-GXXC




The External power supply unit protects the increment in the system even if the power supply for some of the indoor units is shut down.

Connects to the External power supply unit to supply power to the indoor unit from the auxiliary power supply. This allows for continuous operation without system errors. Built-in relays reduce installation time and cost. The UTY-GXXC has a built-in relay, which reduces installation time and cost.

High reliability

- A: Interruption of the main power supply is detected by the power cut-off detection part.
- B: Supplies power for driving the expansion valve of the indoor unit. (12 V or 5 V DC)
- C: Gives notification of the power supply from the External power supply unit.

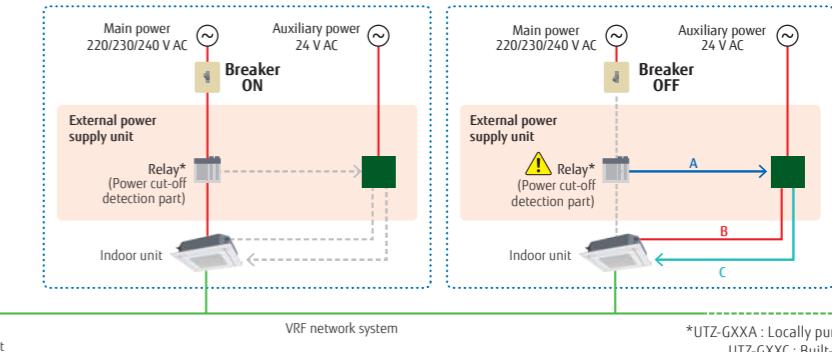

*UTZ-GXXA : Locally purchased
UTZ-GXXC : Built-in relay

Note

- When changing the power supply voltage to 24 V AC, use a power transformer with an insulated structure that complies with the regulations* of the installation region.
- A powered-off indoor unit driven by the External power supply unit is treated in the same way as an operation-off unit in the electricity charge appointment function. If standby power is generated, the result of the electricity charge appointment may not be zero.

* UL Class II or IEC 61558 Class III, for example.

Specifications


Model name	UTZ-GXXA	UTZ-GXXC
Power supply	24 V AC 50/60 Hz	
Dimensions (H × W × D) (mm)	97 × 200 × 178	
Weight (g)	800	

AIR BEAM Radiation air outlet unit


*Production by order
Contact us for more details.



Key component

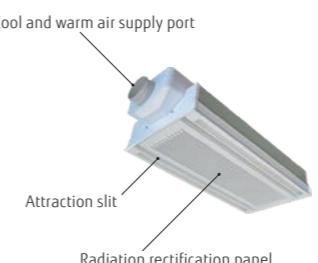

Cross-section view

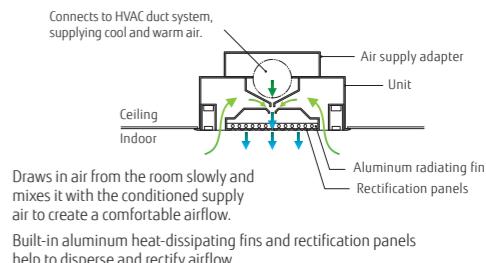

Airflow rate (m³/h)	180 (160-215)	270 (240-325)
Grid	600 × 2	600 × 3
AIR BEAM For system ceiling (Integrated type)	KS-180	KS-270

Optional parts list for Split/Multi-split



Type	Refrigerant	Indoor unit												Indoor unit				Multi-split				
		Wall-mounted						Cassette						Duct			Duct	Floor	Ceiling	4-way flow Compact cassette	Mini duct	Slim duct
		Designer Series		Standard Series		ECO Series		4-way flow Compact	Circular flow	Slim	Medium static pressure (High-Efficiency & Comfort)	Medium static pressure (Compact)	Medium static pressure (Standard)	High static pressure	Big							
		ASYG 07/09/12/14 KGTF, KGTE	ASYG 07/09/12/14 KETF, KETF-B KETE, KETE-B	ASYG 07/09/12/14 KMCF, KMCE ASYH30/36KMTB	ASYH30/36KMTB	ASYG 07/09/12 KPCE	ASYG18/24KLCA	AUXG 09/12/14/ 18/22/24 KVLA	AUXG 18/22/24/ 30/36/45/54 KRLB	ARXG 09/12/14/18 KLLAP	ARXH 22/24/30/ 36/45/54 KMTAP	ARXG 12/14/18/22/ 24/30/36/45/54 KHTAP	ARXG22KMLB, ARXG 24/30/36/45 KMLA	ARXG45/54KHTB			AGYG 09/12/14 KVCA	ABYG 18/22/24/30/ 36/45/54 KRTA	AUXG07KVLA	ARXG 07/09/12/14/18 KSLAP	ARXG07KLLAP	
																		AUYG07/09LVLA	ARYG07/09LSLAP	ARYG07/09LLTA		
Occupancy sensor kit									● UTY-SHZXC													
Remote sensor unit		The remote sensor provides additional convenience.										● UTY-XSZX1								● UTY-XSZX1		
Cassette grille								● UTG-UFYF-W	● UTG-UKYA-W, UTG-UKYC-W, UTG-UKYA-B									● UTG-UFYF-W (KVLA), UTG-UFYD-W (LVLA)				
Auto louver grille kit										● UTD-GXTA-W (09/12/14) UTD-GXTB-W (18)										● UTD-GXTA-W (07/09/12/14), UTD-GXTB-W (18)		
Silver ion filter			● UTR-FA16-5		● UTR-FA13-3		● UTR-FA16-5		● UTD-HFAA	● UTD-HFRA	● UTD-HFTA (09/12/14) UTD-HFTB (18)	● UTD-HFN (22/24), UTD-HFN (30/36/45/54)	● UTD-HFN (12/14) UTD-HFN (8/22/24/30) UTD-HFN (36/45/54)	● UTD-HFNC (12/14) UTD-HFN (8/22/24/30) UTD-HFN (36/45/54)	● UTD-HFND	● UTD-HFKB (45/54)	● UTD-HFKA	● UTR-FA03-5	● UTD-HFAA	● UTD-HFTA (07/09/12/14) UTD-HFTB (18)	● UTD-HFTA	
Long-life filter											● UTD-LFDB (22/24), UTD-LFNA (30/36/45/54)	● UTD-LFNA (36/45/54) UTD-LFNB (18/22/24/30) UTD-LFNC (12/14)	● UTD-LFNA (36/45/54) UTD-LFNB (18/22/24/30) UTD-LFNC (12/14)	● UTD-LF25NA	● UTD-LF60KA (45/54)	● UTD-LFKA						
Flange													● UTD-SF045T UTD-RF204									
Drain pump unit																						
Wide Panel									● UTG-AKXA-W													
Panel spacer									● UTG-BKXA-W													
Fresh air intake kit								● UTZ-VXAA	● UTZ-VXRA									● UTZ-VXAA				
Air outlet shutter plate								● UTR-YDZB	● UTR-YDZK									● UTR-YDZB				
Insulation kit for high humidity								● UTZ-KXGC	● UTZ-KXRA									● UTZ-KXGC				
Half concealed kit														● UTR-STA								
L-type piping kit													● UTP-FX24A (18/22/24) UTP-FX35A (30/36/45/54)									

Optional parts list for VRF



Type	Refrigerant	Indoor unit																		Outdoor unit				
		Cassette						Duct									Duct			Indoor unit				V-IV Series
		One-way flow	3D flow	Compact grid type/ Standard type	Slim type	Large type	Low static pressure duct			Medium static pressure	High static pressure		-	external EEV	Floor/Ceiling	Ceiling	-	external EEV	-	-				
					Circular flow		Mini (With drain pump)	Slim (With drain pump)			Normal	Normal												
	AUXV 004/007/009/ 012/014/018/ 024GLEH	AUXS 018/024GLEH	AUXB 004/007/009/ 012/014/018/ 024GLEH	AUXM 018/024/030 GLEH	AUXK 018/024/030/ 034/036/045/ 054GLEH	ARXK 004/007/009/ 012/014/018/ 024GLGH	ARXD 007/009/012/ 014/018/024 GLEH	ARXP 018/030 GLFH	ARXA 024/030/ 036/045 GLEH	ARXC 036/045/060 GTEH	ARXC 072/090/096 GTEH	AGYA 004/007/ 009/012/014 GCGH	AGYE 004/007/ 009/012/014 GCEH	ABYA 012/014/ 018/024 GTEH	ASYA 004/007/009 012/014 GCGH	ASYE 004/007/009 012/014 GCEH	ASYA 18/24GBCH	ASYA 030/034GTEH	AJY 072/090/108/ 126/144/162 LALDH					
Occupancy sensor kit					UTY-SHZXC																			
Remote sensor unit							UTY-XSZXZ1				UTY-XSZXZ1													
Cassette grille																								
Auto louver grille kit							UTD-GXTA-W (4-14), UTD-GXTB-W (18), UTD-GXTC-W (24)																	
Silver ion filter																								
Long-life filter																								
Flange																								
Drain Pump Unit																								
Wide Panel																								
Panel spacer																								
Fresh air intake kit*1																								
Air outlet shutter plate:																								
Insulation kit for high humidity																								
Half concealed kit																								
External power supply unit																								
Pressure sensor kit																								

Function list for Split/Multi-split



External input and output function/External connect kit/communication kit

Type	Refrigerant	Indoor unit														Outdoor unit																		
		Wall-mounted						Cassette		Duct						Duct	Floor	Ceiling	Wall-mounted	Mini duct	Slim duct		Compact cassette	Single split		Simultaneous multi-split								
		Designer Series		Standard Series		ECO Series		Compact 4-way flow Series	Circular flow Series	Slim	Medium static pressure (High-Efficiency & Comfort)	Medium static pressure (Compact)	Medium static pressure (Standard)	High static pressure		Big	Floor	Ceiling	Wall-mounted	Mini duct	Slim duct		Compact cassette	Single split		Simultaneous multi-split								
	R32	ASYG 07/09/12/14 KGTF, KGTE	ASVG 07/09/12/14 KETF, KETE-B KETE, KETE-B	ASYG 07/09/12/14 KMCF, KMCE	ASVG 18/24KMTE	ASVH 30/36KMTB	ASVG 18/24KLCA	AUXG 09/12/14/ 18/22/24/ KVA	AUXG 09/12/14/ 18/22/24/ KVA	ARXG 22/24/30/ 36/45/54/ KMTAP	ARXG 22/24/30/ 36/45/54/ KMTAP	ARXG 22MLB, ARXG 24/30/36/ KSMLA	AUXG 45/54KHTB		AGYG 09/12/14 KVCA	ABNG 18/22/24/ 30/36/45/ 54KRTA	ASVG 18/24KLAP	ARXG 07/14/18/ KSLAP	ARXG 07KLLAP		ARYG 07/09LSLAP	ARYG 07/09LLTA	AUYG 07/09LVLA	AOYG 30/36/45/54 KGTA	AOYG 36/45/54 KGTA	AOYG 36/45/54 KGTA	AOYG 36/45/54 KGTA	AOYG 36/45/54 KGTA	AOYG 36/45/54 KGTA					
Indoor	Operation/Stop	●○ UTY-XCSXZ+ UTY-XWZXZ						PCB Terminal ●○ UTY-XCSX+ UTY-GXRA	PCB Terminal ●○ UTY-XCSX+ UTY-GXDA	PCB Terminal ●○ UTY-XCSX+ UTY-GXNA	PCB Terminal	PCB Terminal ●○ UTY-XCSX+ UTY-GXA	PCB Terminal ●○ UTY-XCSA	PCB Terminal ●○ UTY-XESK	UTY-XWZXZ	PCB Terminal ●○ UTY-XCSX+ UTY-GXA	UTY-XWZXZ	PCB Terminal ●○ UTY-XCSX+ UTY-GXA	UTY-XWZXZ	PCB Terminal ●○ UTY-XCSA	PCB Terminal ●○ UTY-XESK	UTD-ECSSA	PCB Terminal ●○ UTY-XCSX+ UTY-GXA	UTY-XWZXZ	PCB Terminal ●○ UTY-XCSA	PCB Terminal ●○ UTY-XESK	UTY-XWZXZ	PCB Terminal ●○ UTY-XCSA	PCB Terminal ●○ UTY-XESK	UTY-XWZXZ				
Indoor	Forced stop	●○ UTY-XCSXZ+ UTY-XWZXZ						PCB Terminal						PCB Terminal	UTD-ECSSA	PCB Terminal ●○ UTY-XCSX+ UTY-GXA	UTY-XWZXZ	PCB Terminal ●○ UTY-XCSX+ UTY-GXA	UTY-XWZXZ	PCB Terminal ●○ UTY-XCSA	PCB Terminal ●○ UTY-XESK	UTY-XWZXZ	PCB Terminal ●○ UTY-XCSA	PCB Terminal ●○ UTY-XESK	UTY-XWZXZ	PCB Terminal ●○ UTY-XCSA	PCB Terminal ●○ UTY-XESK	UTY-XWZXZ	PCB Terminal ●○ UTY-XCSA	PCB Terminal ●○ UTY-XESK	UTY-XWZXZ			
Indoor	Forced Thermostat off	●○ UTY-XCSXZ+ UTY-XWZXZ						●○ UTY-XCSX+ UTY-GXRA		●○ UTY-XCSX+ UTY-GXDA	●○ UTY-XCSX+ UTY-GXNA		●○ UTY-XCSX+ UTY-GXA	UTD-ECSSA	UTY-XESK	UTY-XWZXZ	●○ UTY-XCSX+ UTY-GXA	UTY-XWZXZ	●○ UTY-XCSX+ UTY-GXA	UTY-XWZXZ	●○ UTY-XCSA	UTY-XESK	UTY-XWZXZ	●○ UTY-XCSX+ UTY-GXA	UTY-XWZXZ	●○ UTY-XCSA	UTY-XESK	UTY-XWZXZ	●○ UTY-XCSX+ UTY-GXA	UTY-XWZXZ	●○ UTY-XCSA	UTY-XESK	UTY-XWZXZ	
Indoor	Low noise mode operation																																	
Indoor	Outdoor unit operation peak control																																	
Indoor	Operation status	●○ UTY-XCSXZ+ UTY-XWZXZ						●○ UTY-XCSX+ UTY-GXRA	UTY-XWZXZ	●○ UTY-XCSX+ UTY-GXDA	●○ UTY-XCSX+ UTY-GXNA	UTY-XWZXZ	●○ UTY-XCSX+ UTY-GXA	UTD-ECSSA	UTY-XESK	UTY-XWZXZ	●○ UTY-XCSX+ UTY-GXA	UTY-XWZXZ	●○ UTY-XCSX+ UTY-GXA	UTY-XWZXZ	●○ UTY-XCSA	UTY-XESK	UTY-XWZXZ	●○ UTY-XCSX+ UTY-GXA	UTY-XWZXZ	●○ UTY-XCSA	UTY-XESK	UTY-XWZXZ	●○ UTY-XCSX+ UTY-GXA	UTY-XWZXZ	●○ UTY-XCSA	UTY-XESK	UTY-XWZXZ	
Indoor	Error status	●○ UTY-XCSXZ+ UTY-XWZXZ						●○ UTY-XCSX+ UTY-GXRA	UTY-XWZXZ	●○ UTY-XCSX+ UTY-GXDA	●○ UTY-XCSX+ UTY-GXNA		●○ UTY-XCSX+ UTY-GXA	UTY-XWZXZ			●○ UTY-XCSX+ UTY-GXA	UTY-XWZXZ			●○ UTY-XCSA	UTY-XESK	UTY-XWZXZ	●○ UTY-XCSX+ UTY-GXA	UTY-XWZXZ			●○ UTY-XCSA	UTY-XESK	UTY-XWZXZ	●○ UTY-XCSX+ UTY-GXA	UTY-XWZXZ		
Indoor	Compressor status																																	
Indoor	Indoor unit fan operation status	●○ UTY-XCSXZ+ UTY-XWZXZ						●○ UTY-XCSX+ UTY-GXRA	UTY-XWZXZ	●○ UTY-XCSX+ UTY-GXDA	●○ UTY-XCSX+ UTY-GXNA	UTY-XWZXZ	●○ UTY-XCSX+ UTY-GXA	UTD-ECSSA	UTY-XESK	UTY-XWZXZ	●○ UTY-XCSX+ UTY-GXA	UTY-XWZXZ	●○ UTY-XCSX+ UTY-GXA	UTY-XWZXZ	●○ UTY-XCSA	UTY-XESK	UTY-XWZXZ	●○ UTY-XCSX+ UTY-GXA	UTY-XWZXZ	●○ UTY-XCSA	UTY-XESK	UTY-XWZXZ	●○ UTY-XCSX+ UTY-GXA	UTY-XWZXZ	●○ UTY-XCSA	UTY-XESK	UTY-XWZXZ	
Indoor	Setpoint attainment status																																	
Indoor	Auxiliary heater output							●○ UTY-XCSX+ UTY-GXRA	UTY-XWZXZ	●○ UTY-XCSX+ UTY-GXDA	●○ UTY-XCSX+ UTY-GXNA	UTY-XWZXZ	●○ UTY-XCSX+ UTY-GXA	UTD-ECSSA	UTY-XESK	UTY-XWZXZ	●○ UTY-XCSX+ UTY-GXA	UTY-XWZXZ			●○ UTY-XCSX+ UTY-GXA	UTY-XWZXZ			●○ UTY-XCSA	UTY-XESK	UTY-XWZXZ	●○ UTY-XCSX+ UTY-GXA	UTY-XWZXZ			●○ UTY-XCSA	UTY-XESK	UTY-XWZXZ

*1: Included in Fresh air intake kit (UTZ-VXAA or UTZ-VXRA) *2: Functionality for installation in a server room

●: Dry Contact ○: Apply Voltage

For SPLIT/MULTI-SPLIT/SIMULTANEOUS MULTI-SPLIT

Communication kit	External input and output PCB	External input and output PCB box	External input and output PCB bracket
UTY-TWRXZ3	UTY-TWRXZ2	UTY-XCSX1 (wire length 280 mm) UTY-XCSX2 (wire length 80 mm) for Wall-mounted type	UTY-XCSX for Duct and Cassette types UTZ-GXDA (for Duct) UTZ-GXRA (for Cassette) UTZ-GXE (for Ceiling) UTZ-GNA

Communication system

External connect kit		
For indoor unit		
UTY-XWZX	UTY-XWZX5	UTY-XWZXZG
UTY-XWZX	UTY-XWZX5	UTY-XWZXZG
UTY-XWZXZG	UTY-XWZXZG	UTY-XWZXZG
For outdoor unit		
UTY-XWZXZ	UTY-XWZXZ	UTY-XWZXZ

External control set

For indoor unit	
UTD-ECSSA	UTD-ECSSA
UTD-ECSSA	UTD-ECSSA

Function list for VRF



External input and output function/External connect kit


Type	Refrigerant	Indoor unit												Outdoor unit						controller	Other					
		Cassette					Duct				Floor			Indoor unit			Wall-mounted			Outdoor unit				Central remote controller	RB unit	
		One-way flow	3D flow	Compact grid type/ Standard type	Slim type	Large type	Circular flow		Mini (With drain pump)	Slim (With drain pump)	High Efficiency	Normal	Normal	EEV external	Floor/Ceiling		-	EEV external	-	J-IVL	J-IV	J-IVS	V-IV	VR-IV		
R410A	AUXV 004/007/009/ 012/014/018/ 024GLEH	AUXS 018/024 GLEH	AUXB 004/007/009/ 012/014/018/ 024GLEH	AUXM 018/024/030 GLEH	AUXX 016/024/030/ 034/036/045/ 054GLEH	ARXX 004/007/009/ 012/014/016/ 024GLEH	ARXD 007/009/012/ 014/018/024 GLEH	ARXP 018/030 GLEH	ARXA 024/030/ 036/045 GLEH	ARXC 036/045/060 072/080/096 GLEH	AGYA 004/007/ 009/010/014 GCEH	AGYE 004/007/ 009/010/014 GCEH	ABYA 012/014/018/ 024GTEH	ABYA 030/036/045/ 054GTEH	ASYA 004/007/009/ 012/014/014 GCEH	ASYE 004/007/009/ 012/014/014 GCEH	ASYA 030/034GTEH	ASYA 18/24GBCH	ASYA 040/045/054 126/144/162 LELDH	AJY 040/045/054 126/144/162 LELDH	AJY 040/045/054 126/144/162 LELDH	AJY 040/045/054 126/144/162 LELDH	AJY 040/045/054 126/144/162 LELDH	AJY 040/045/054 126/144/162 LELDH	UTP-RX01AH UTP-RX01B UTP-RX01C UTP-RX04AH UTP-RX08AH UTP-RX12AH	UTY-DCGY22
Indo	Operation/Stop																									
All On/All Off																								● UTY-XWZXZ7 ○ UTY-XWZXZ8		
Group stop																								● UTY-XWZXZ6		
Forced stop																								● UTY-XWZXZD ○ UTY-XWZXZB		
Emergency stop																								● UTY-XWZXZ6 ● UTY-XWZXZ7 ● UTY-XWZXZ8		
Forced thermostat off																								● UTY-XWZXZE ○ UTY-XWZXZ7		
Low noise mode operation																								● UTY-XWZXZ6		
Cooling/Heating priority																								● UTY-XWZXZ6 ● UTY-XWZXZB		
Outdoor unit operation peak control																								● UTY-XWZXZ6		
Power usage information from electricity meter																								● UTY-XWZXZF		
Indo	Operation status																							○ UTY-XWZXZ6 ○ UTY-XWZXZA		
Error status																								○ UTY-XWZXZ6 ○ UTY-XWZXZA		
Indoor unit fan operation status																										
Auxiliary heater output																										
Base pan heater																								● UTY-XWZXZ9 ● UTY-XWZXZ9		

*2: The Touch panel controller has the functions of dry contact and voltage application, but the external connection kit described above is not necessary because the touch panel controller has an external input terminal block.

● Dry Contact ○: Apply Voltage

Communication system

External connect kit

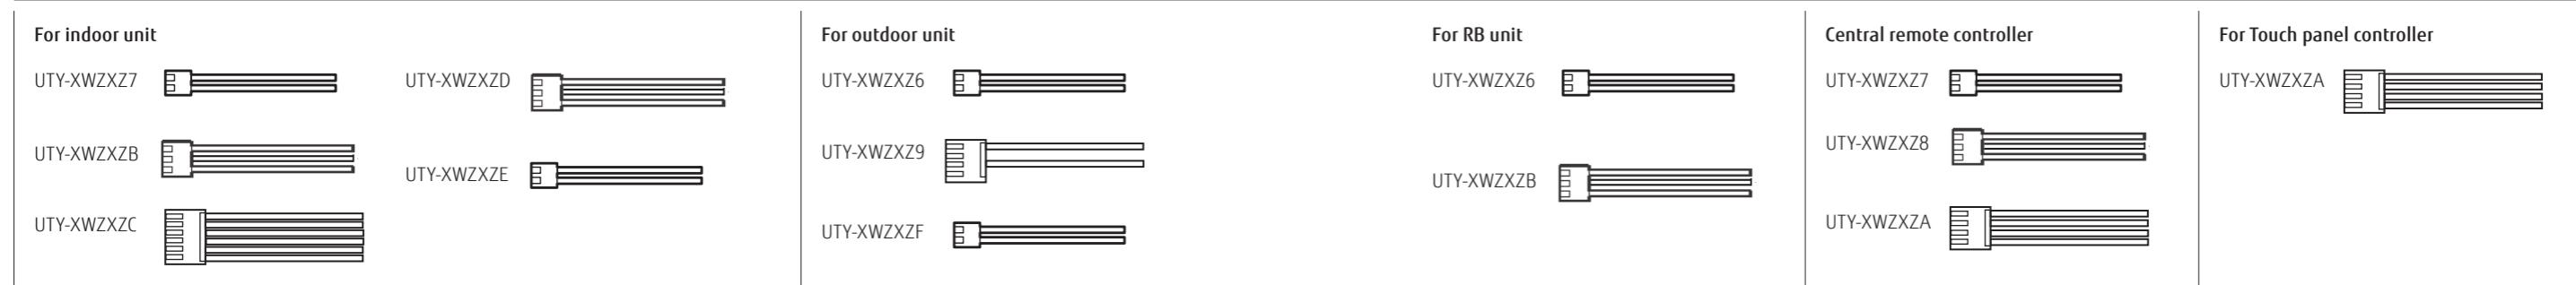

Separation tube



For SPLIT/MULTI-SPLIT/SIMULTANEOUS MULTI-SPLIT

Separation tube

UTP-SX236A / UTP-SX254A
For 3-phase simultaneous multi-split



UTP-SX354A
For 3-phase simultaneous multi-split



UTP-SX272A
For Simultaneous multi-split Twin/
Triple/Double Twin

UTP-SX372A
For Simultaneous multi-split Twin/
Triple/Double Twin



for VRF

Separation tube

UTP-AX054A

Gas pipe



Liquid pipe



UTP-AX090A

Gas pipe



Liquid pipe



UTP-AX180A

Gas pipe



Liquid pipe



UTP-AX567A

Gas pipe




Liquid pipe



Header

UTR-H0906L / UTR-H1806L

Gas pipe



Liquid pipe

UTR-H0908L / UTR-H1808L

Gas pipe



UTP-J0906A / UTP-J1806A

Suction gas pipe



Discharge gas pipe



Liquid pipe



UTP-J0908A / UTP-J1808A

Suction gas pipe



Discharge gas pipe



Liquid pipe



Outdoor unit branch kit

UTP-CX567A

Gas Pipe



Liquid Pipe

UTP-DX567A

Suction Gas Pipe



Discharge Gas Pipe

UTP-EX060A


Gas Pipe



Liquid Pipe

UTP-EX096A

Gas Pipe



Liquid Pipe



for VRF

EV kit

Model name \leq 09: UTR-EV09XB
Model name \geq 12: UTR-EV14XB
for compact wall-mounted type



RB unit

UTP-RX01AH / UTP-RX01BH /
UTP-RX01CH
Single type



UTP-RX04BH
Multi-split type



UTP-RX08AH
Multi-split type



UTP-RX12AH
Multi-split type



Specifications

Separation tube

Model name	UTP-AX054A	UTP-AX090A	UTP-AX180A	UTP-AX567A
Total cooling capacity of indoor unit (kW)	19.6 or less	28.0 or less	28.1 to 56.0	56.1 or more

Model name	UTP-BX090A	UTP-BX180A	UTP-BX567A
Total cooling capacity of indoor unit (kW)	28.0 or less	28.1 to 56.0	56.1 or more

Model name	UTP-BX090A	UTP-BX180A	UTP-BX567A
Total cooling capacity of indoor unit (kW)	28.0 or less	28.1 to 56.0	56.1 or more

Model name	UTP-BX090A	UTP-BX180A	UTP-BX567A
Total cooling capacity of indoor unit (kW)	28.0 or less	28.1 to 56.0	56.1 or more

Model name	UTP-BX090A	UTP-BX180A	UTP-BX567A
Total cooling capacity of indoor unit (kW)	28.0 or less	28.1 to 56.0	56.1 or more

Model name	UTP-BX090A	UTP-BX180A	UTP-BX567A
Total cooling capacity of indoor unit (kW)	28.0 or less	28.1 to 56.0	56.1 or more

Model name	UTP-BX090A	UTP-BX180A	UTP-BX567A
Total cooling capacity of indoor unit (kW)	28.0 or less	28.1 to 56.0	56.1 or more

Model name	UTP-BX090A	UTP-BX180A	UTP-BX567A
Total cooling capacity of indoor unit (kW)	28.0 or less	28.1 to 56.0	56.1 or more

Model name	UTP-BX090A	UTP-BX180A	UTP-BX567A
Total cooling capacity of indoor unit (kW)	28.0 or less	28.1 to 56.0	56.1 or more

Model name	UTP-BX090A	UTP-BX180A	UTP-BX567A
Total cooling capacity of indoor unit (kW)	28.0 or less	28.1 to 56.0	56.1 or more

Model name	UTP-BX090A	UTP-BX180A	UTP-BX567A
Total cooling capacity of indoor unit (kW)	28.0 or less	28.1 to 56.0	56.1 or more

Model name	UTP-BX090A	UTP-BX180A	UTP-BX567A
Total cooling capacity of indoor unit (kW)	28.0 or less	28.1 to 56.0	56.1 or more

Model name	UTP-BX090A
------------	------------

Residential AIR TO WATER

- W-002 WATERSTAGE Overview
- W-004 WATERSTAGE Lineup
- W-006 Benefits
- W-008 Home Heating & Domestic Hot Water Supply
- W-010 High-Efficiency Technology
- W-012 Split Type
 - Comfort Series
 - Super High Power Series
 - High Power Series
- W-018 Split DHW Integrated Type
 - Comfort Series
 - Super High Power Series
 - High Power Series
- W-024 Control Overview
- W-026 Comfort Control
- W-028 System Configuration
- W-030 Case Studies
- W-032 Simple Installation
- Easy Installation & Maintenance
- W-034 Installation Requirements
- W-036 AIR TO WATER Optional Parts

A photograph of a modern kitchen interior. Large floor-to-ceiling windows provide a view of a snowy outdoor area. The kitchen features light-colored wooden cabinets and a central island with a white sink and a chrome faucet. A modern chandelier hangs above the island. The overall aesthetic is clean and contemporary.

WATERSTAGE™
Innovative solutions for Home Heating
SPLIT TYPE/SPLIT DHW INTEGRATED TYPE

AIR TO WATER
Residential



Three different models of Fujitsu General Limited heat pump units are displayed. From left to right: a large outdoor unit with two circular fans and the Fujitsu logo; a smaller rectangular indoor unit; and a tall, slim vertical indoor unit. All units are white with black trim and have the Fujitsu logo on them.

FUJITSU GENERAL LIMITED

WATERSTAGE Overview

Solutions that meet a variety of needs

Water heated by WATERSTAGE using clean energy is delivered reliably and comfortably throughout the house, including the living room, bedrooms, and bathrooms.

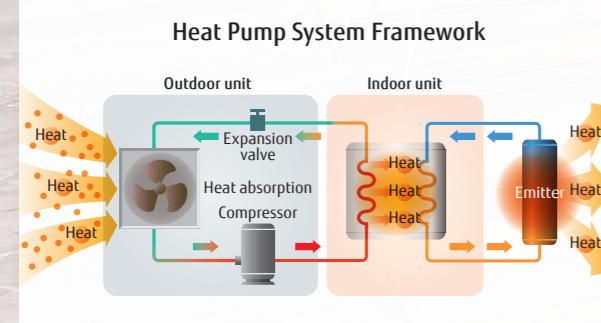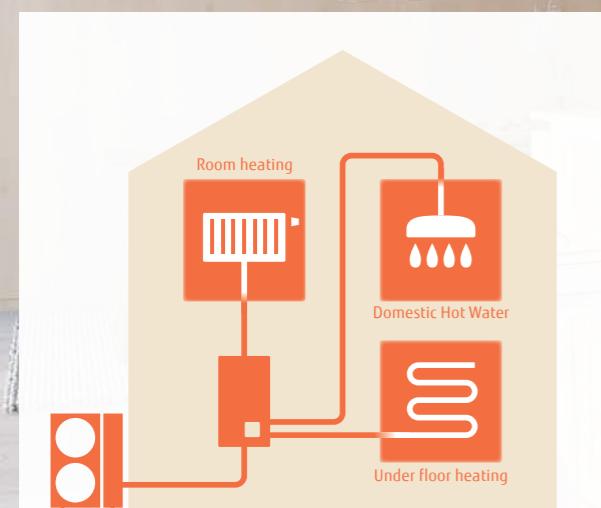

24 Models


Fujitsu General WATERSTAGE heat pumps offer a variety of high-efficiency renewable central heating systems that absorb energy primarily from the air.




Optimized refrigerant cycle operation

Super High Power and High Power Series deliver high performance and efficiency with twin sensors and hot water heating technology.

Split Type

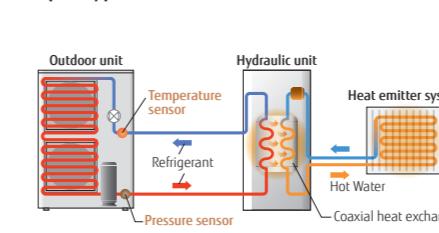


Split DHW Integrated Type

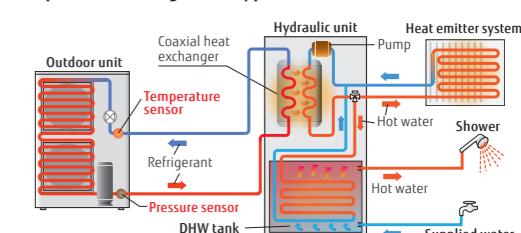

What is a heat pump?


A heat pump extracts heat energy from the atmosphere. It requires only 1 kWh of electricity to generate 3 to 5 kWh of thermal energy.

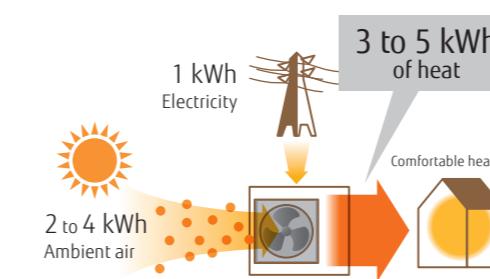

Primary energy usage reduced substantially

Proportion of primary energy converted into heating energy is 100%

Primary Energy Consumption*

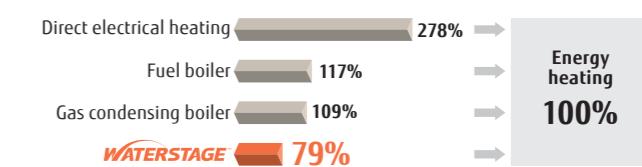

* The amount of electricity loss varies according to the power plant. Typical energy efficiency of a power plant: 36%

WATERSTAGE Lineup



Type	Split Type						Split DHW Integrated Type							
	Super High Power Series		High Power Series		Comfort Series		Super High Power Series		High Power Series		Comfort Series			
Hydraulic unit														
Outdoor unit														
Capacity range	16 kW	15/17 kW	11/14 kW	11/14/16 kW	5/6 kW	8 kW	10 kW	16 kW	15/17 kW	11/14 kW	11/14/16 kW	5/6 kW	8 kW	10 kW
System outline	<ul style="list-style-type: none"> Supplies 60°C hot water even when the outdoor temperature is -20°C. Supplies 55°C hot water even when the outdoor temperature is -22°C. Can be used with a variety of heating systems, including underfloor heating and radiators.* Heating and DHW supply in one system.* Equipped with additional electric heater for backup Up to two independent control circuits.* Cascade connection is possible for up to three systems.* Cooling operation is possible.* Operating range is -25 to 35°C. 		<ul style="list-style-type: none"> Supplies 60°C hot water even when the outdoor temperature is -20°C. Supplies 55°C hot water even when the outdoor temperature is -22°C. Can be used with a variety of heating systems, including underfloor heating and radiators.* Heating and DHW supply in one system.* Equipped with additional electric heater for backup Up to two independent control circuits.* Cooling operation is possible.* Operating range is -25 to 35°C. 		<ul style="list-style-type: none"> Supplies 55°C hot water even when the outdoor temperature is -10°C. Supplies 55°C hot water even when the outdoor temperature is -20°C. Can be used with a variety of heating systems, including underfloor heating and radiators.* Space saving heating and DHW supply in a single Hydraulic unit Equipped with additional electric heater for backup Up to two independent control circuits.* Cooling operation is possible.* Operating range is -25 to 35°C. 		<ul style="list-style-type: none"> Supplies 60°C hot water even when the outdoor temperature is -10°C. Supplies 55°C hot water even when the outdoor temperature is -20°C. Can be used with a variety of heating systems, including underfloor heating and radiators.* Heating and DHW supply in one system. Equipped with additional electric heater for backup Up to two independent control circuits.* Cooling operation is possible.* Operating range is -20 to 35°C. Can be used with a variety of heating systems, including underfloor heating and radiators.* 		<ul style="list-style-type: none"> Supplies 55°C hot water even when the outdoor temperature is -10°C. Heating and DHW supply in one system. Equipped with additional electric heater for backup Up to two independent control circuits.* Cooling operation is possible.* Operating range is -20 to 35°C. Can be used with a variety of heating systems, including underfloor heating and radiators.* 		<ul style="list-style-type: none"> Supplies 55°C hot water even when the outdoor temperature is -10°C. Heating and DHW supply in one system. Equipped with additional electric heater for backup Up to two independent control circuits.* Cooling operation is possible.* Operating range is -20 to 35°C. Can be used with a variety of heating systems, including underfloor heating and radiators.* 			
Power source	Single phase, ~230 V, 50 Hz	3-phase, ~400 V, 50 Hz	Single phase, ~230 V, 50 Hz	3-phase, ~400 V, 50 Hz	Single phase, ~230 V, 50 Hz		Single phase, ~230 V, 50 Hz	3-phase, ~400 V, 50 Hz	Single phase, ~230 V, 50 Hz	3-phase, ~400 V, 50 Hz	Single phase, ~230 V, 50 Hz	3-phase, ~400 V, 50 Hz	Single phase, ~230 V, 50 Hz	
5 kW					WSYA050ML3 WOYA060KLT								WGYA050ML3 WOYA060KLT	
6 kW					WSYA080ML3 WOYA060KLT								WGYA080ML3 WOYA060KLT	
8 kW					WSYA080ML3 WOYA080KLT								WGYA080ML3 WOYA080KLT	
10 kW					WSYA100ML3 WOYA100KLT								WGYA100ML3 WOYA100KLT	
11 kW			WSYG140DG6 WOYG112LHT	WSYK160DG9 WOYK112LCTA					WGYG140DG6 WOYG112LHT	WGKY160DG9 WOYK112LCTA				
14 kW			WSYG140DG6 WOYG140LCTA	WSYK160DG9 WOYK140LCTA					WGYG140DG6 WOYG140LCTA	WGKY160DG9 WOYK140LCTA				
15 kW		WSYK170DJ9 WOYK150LJL					WGKY170DJ9 WOYK150LJL							
16 kW	WSYG160DJ6 WOYG160LJL			WSYK160DG9 WOYK160LCTA			WGYG160DJ6 WOYG160LJL			WGKY170DJ9 WOYK160LCTA				
17 kW		WSYK170DJ9 WOYK170LJL						WGKY170DJ9 WOYK170LJL						


* Please refer to page W-036 and W-037 for optional parts information.

Benefits

Less CO₂ Emissions

WATERSTAGE is an environmentally friendly system that emits substantially less carbon dioxide than conventional gas and hydrocarbon combustion systems.

Average annual CO₂ emissions

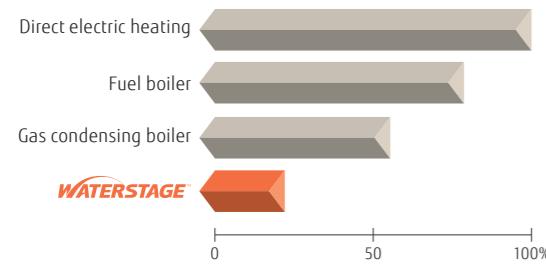

*Calculations based on energy efficiency data provided by the European Programme for Energy Efficiency in EU-27: 89% for fuel boilers; 93% for gas boiler

Clean and Healthy

As a WATERSTAGE system does not use a burner to heat water, it does not produce NOx or other harmful substances.



Environmentally friendly heating system



Low Running Cost

High-efficiency heat pump technology keeps the running cost of a WATERSTAGE system.

Average annual running cost



*The running cost may vary depending on a system's installation, geographical location, and operating conditions.



Easy Installation and Maintenance

All components are built into a compact outdoor unit or a Hydraulic unit.

- No chimney sweep
- No pollution
- Low maintenance cost

Well-designed Hydraulic unit
The sophisticated arrangement of Hydraulic units makes piping and maintenance work easy.

Energy Efficiency Standards Product labels

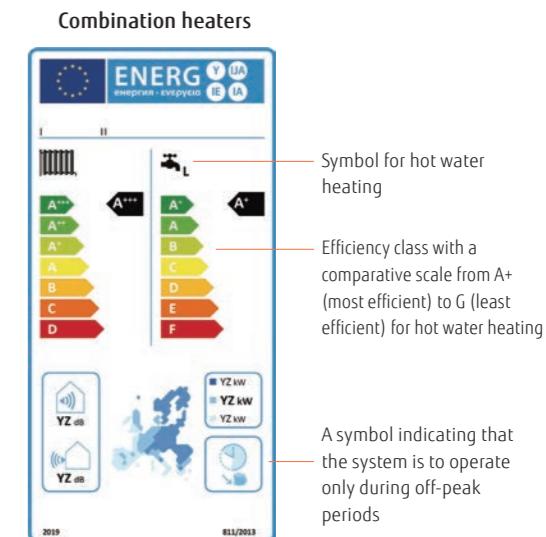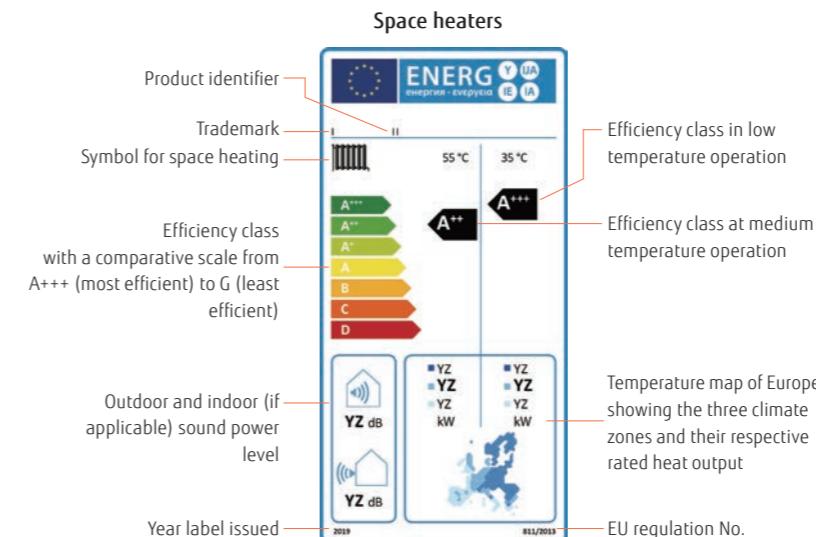

The Ecodesign Directive Lot 1 Regulation 813/2013

The Ecodesign directive defines a regulatory framework for improving the environmental performance of energy-related products (ErP) through design.

Since September 26, 2015, the Ecodesign Directive has applied to space heaters, including heat pumps and fossil fuel fired boilers, combination heaters for space and hot water heating, water heaters, and water storage tanks.

All of these products must meet minimum requirements for energy efficiency^{*1} and maximum sound power level. The minimum energy efficiency class were raised on September 26, 2017, and the maximum sound levels were lowered on September 26, 2018.

^{*1:} Energy efficiency is expressed in terms of seasonal space heating efficiencies (η_s). The value is based upon the Seasonal Coefficient of Performance (SCOP).

The Energy Labelling Directive (EU) No. 811/2013

Energy label is intended to enable consumers to make direct comparisons of energy use and product features. All labels should indicate the product identifier, efficiency class, sound power level, and heat output. Heat generators are rated A+++ to D. There are two different product labels. One for space heaters and one for combination heaters.

EHPA Quality Label



Fujitsu General's WATERSTAGE² has acquired the EHPA Quality Label³ through testing in accordance with the International Standards EN14511 and EN17025. The EHPA Quality Label³ is a label that shows the end-consumer a quality heat pump unit on the market.

²: 3-phase High Power Series only
³: Learn more about the validity of the mark at www.ehpa.org/quality/quality-label/

SG ready Label



SG ready is a label issued to heat pumps and their control technologies that meet the requirements set by BWP⁴, and technologies that conform to their standards can be integrated into a smart grid. SG ready labeled heat pumps receive signals from the power grid and PV systems with regard to energy and renewable energy sources such as wind, solar, and water. All of Fujitsu General's new heat pump series are SG ready compatible.

⁴: BWP: Bundesverband Wärmepumpe e. V. (Federal German Heat Pump Association)

Seasonal space heating Energy efficiency class

Except low temp. HP 55°C	Low temp. HP 35°C
A+++ $\eta_s \geq 150$	$\eta_s \geq 175$
A++ $125 \leq \eta_s < 150$	$150 \leq \eta_s < 175$
A+ $98 \leq \eta_s < 125$	$123 \leq \eta_s < 150$
A $90 \leq \eta_s < 98$	$115 \leq \eta_s < 123$
B $82 \leq \eta_s < 90$	$107 \leq \eta_s < 115$
C $75 \leq \eta_s < 82$	$100 \leq \eta_s < 107$
D $36 \leq \eta_s < 75$	$61 \leq \eta_s < 100$
E $34 \leq \eta_s < 36$	$59 \leq \eta_s < 61$
F $30 \leq \eta_s < 34$	$55 \leq \eta_s < 59$
G $\eta_s < 30$	$\eta_s < 55$

The CEN Heat Pump KEYMARK




The Heat Pump KEYMARK is a full certificate supporting the quality of heat pumps in the European market. The Heat Pump KEYMARK is a voluntary, independent, European certification mark (ISO Type 5 Certification) for all heat pumps, combination heat pumps, and hot water heaters (as covered by Ecodesign, EU Regulation 813/2013 and 814/2013). Fujitsu General's WATERSTAGE⁵ has acquired the KEYMARK certificate⁶.

⁵: R32 refrigerant comfort model only
⁶: Learn more about the validity of the mark at [www.heatpumpkeymark.com/about/](http://heatpumpkeymark.com/about/)

Home Heating & Domestic Hot Water Supply

A wide range of products to suit regional characteristics, family structures, and usage patterns. We provide a variety of products to meet the needs of customers from the heating-centered High Power Series to the reasonably priced Compact Series.

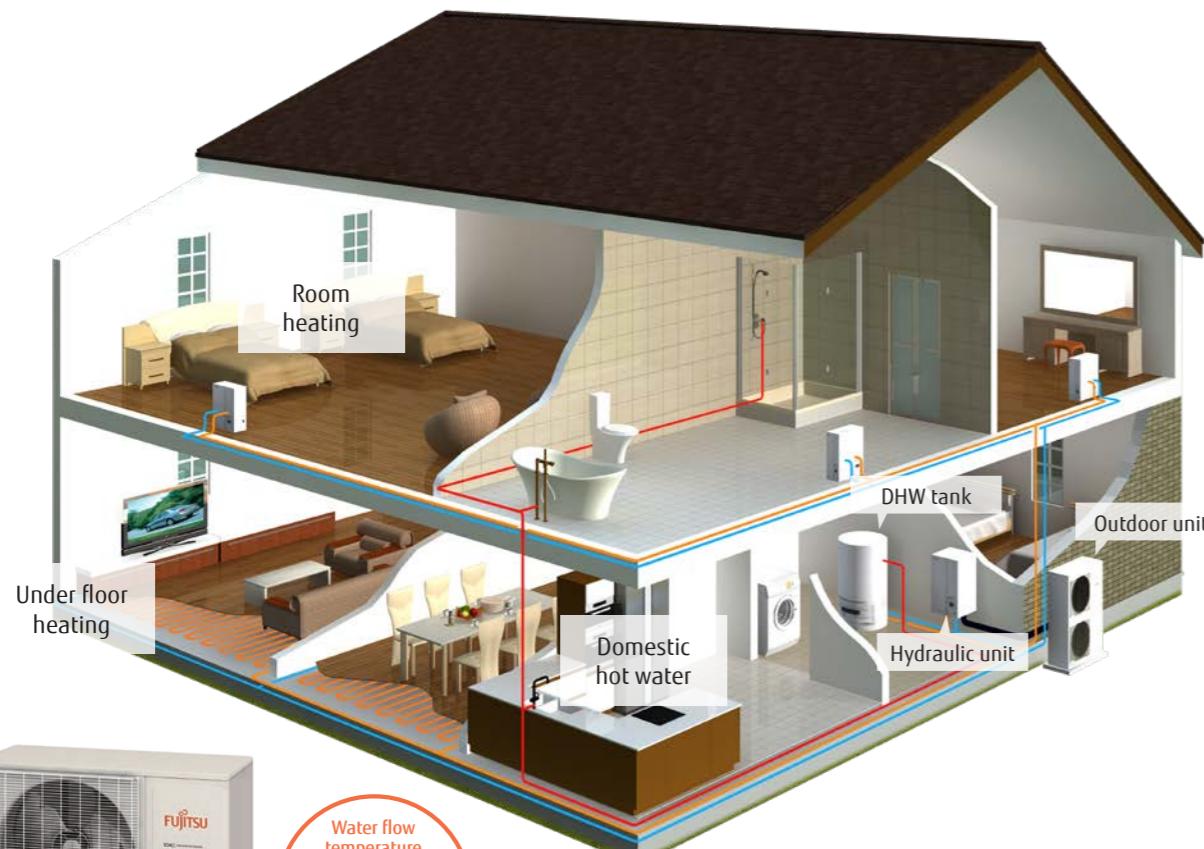

**Water flow temperature
60°C**

Super High Power Series
Single phase: 16 kW
3-phase: 15/17 kW

High water flow temperature

The temperature of water flow can be maintained at 60°C without using a backup heater, even when the outdoor temperature drops to -20°C.

Floor heating and domestic hot water supply

Outdoor units and hydraulic indoor units can be installed flexibly and easily. Hydraulic units installed inside the house prevent the circulating water from freezing. More units can be cascaded together to provide a greater heating capacity with greater flexibility.*1

*1: High Power Series only

REFRIGERANT
R32



Adopting R32 refrigerant

R32 refrigerant is an environmentally friendly refrigerant with a significantly lower Global Warming Potential (GWP) than conventional refrigerants.




+ DHW tank

A DHW tank (optional) can be connected to supply hot water.

+ Boiler

By combining with an existing boiler, powerful heating can be achieved even at low outdoor temperature.

* Please refer to page W-036 and W-037 for optional parts information.

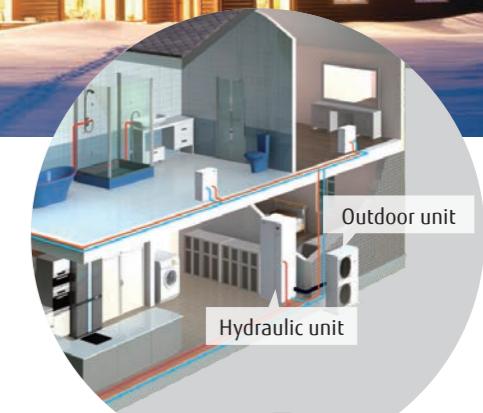


Stylish space saving solution with built-in DHW tank



Built-in DHW tank saves a great deal of space.

Existing boilers can be replaced easily. A higher heating capacity can be achieved with the flexibility to cascade more units.

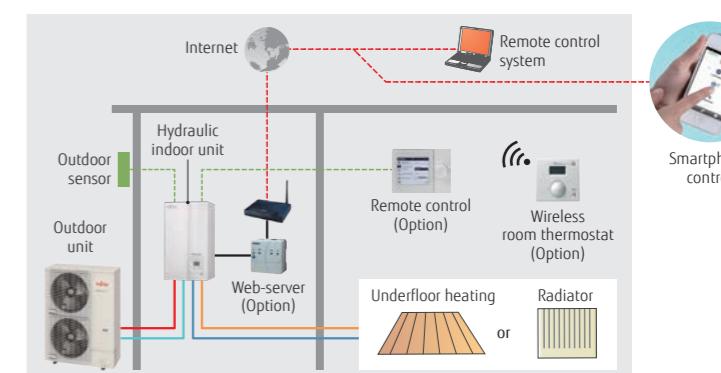

Smart control

To meet the diverse needs of customers, we offer a variety of control options, such as individual control and remote control options.

High-Efficiency Technology



Twin-Rotary Compressor




For Outdoor unit

Twin-Rotary Compressor with Linear Control Injection Port

The compressor achieves a high condensing temperature without overheating the discharge gas temperature due to the Linear control injection process used during compression. This makes the condensing temperature higher than in a normal circuit. Higher water temperatures can be achieved by controlling the injection volume according to usage conditions.

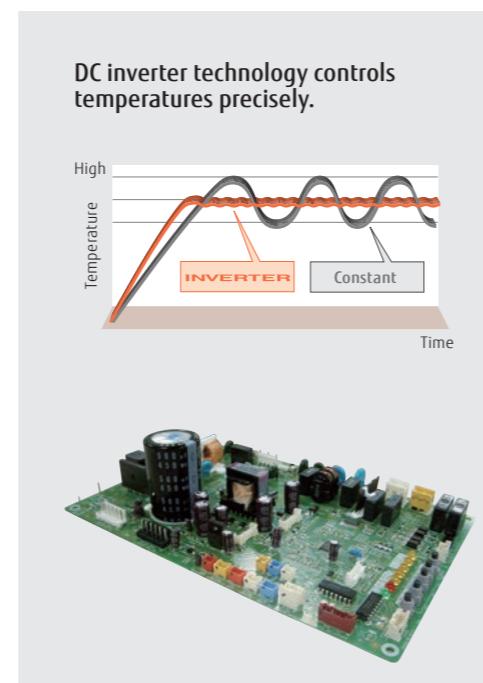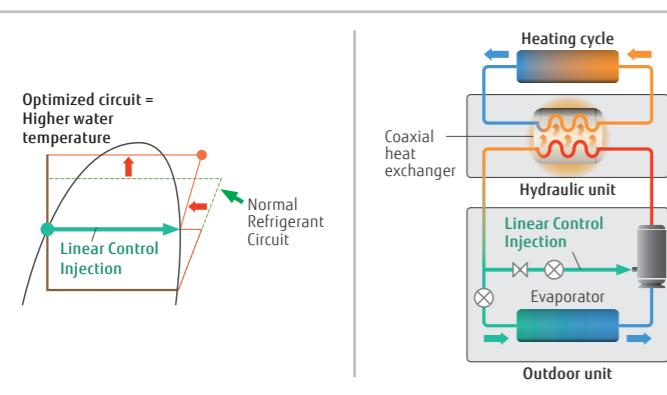

High-durability coaxial heat exchanger

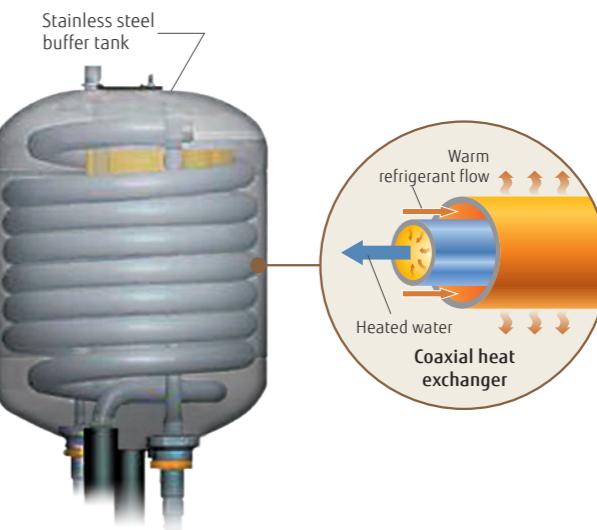

For Hydraulic unit

Stainless steel buffer tank

Heat exchange amount is 25% higher than the previous model. Energy-saving performance has also been improved.

- Anti-corrosion protection
- No flow switch required
- Anti-freeze protection not required



Class A Pump

Energy-saving pump with the ability to adjust the flow rate and pressure to a constant level



SPLIT TYPE Comfort Series



High water flow temperature

The temperature of water flow is up to 55°C without a backup heater. Hot water supply temperature can be maintained even at -10°C outdoor temperature.

* If you want to raise the temperature of the water supply to above the maximum temperature, use a backup heater to supplement the primary heater.




High COP

Heat pumps of WATERSTAGE ATW Systems work more efficiently and consume less energy than conventional heating systems.



*Temperature application: Heating temp. 35°C

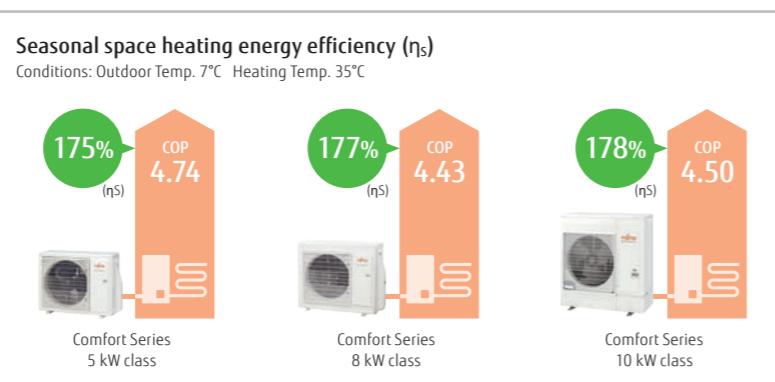

Outdoor unit technology



DC Fan Motor
High-performance, high-efficiency small DC fan motor mounted



DC Twin-Rotary Compressor
High-efficiency DC twin-rotary compressor



DC Inverter
DC inverter provides smooth water temperature control.

Hydraulic unit:
WSYA050ML3 / WSYA080ML3 /
WSYA100ML3
Outdoor unit:
WOYA060KLT / WOYA080KLT /
WOYA100KLT



Specifications

Model Name	Hydraulic unit	WSYA050ML3	WSYA080ML3	WSYA080ML3	WSYA100ML3
Capacity Range	Outdoor unit	WOYA060KLT	WOYA060KLT	WOYA080KLT	WOYA100KLT
7°C/35°C floor heating * ¹	Heating capacity kW	4.50	5.50	7.50	9.50
	Input power kW	0.949	1.18	1.69	2.11
	COP	4.74	4.65	4.43	4.50
2°C/35°C floor heating * ¹	Heating capacity kW	4.50	5.30	6.30	9.30
	Input power kW	1.33	1.65	1.96	3.08
	COP	3.39	3.22	3.21	3.02
-7°C/35°C floor heating * ¹	Heating capacity kW	4.40	5.00	5.70	8.90
	Input power kW	1.59	1.90	2.13	3.36
	COP	2.76	2.63	2.68	2.65
-7°C/55°C Radiator * ¹	Heating capacity kW	3.90	4.25	5.30	8.00
	Input power kW	2.11	2.25	2.79	4.10
	COP	1.85	1.89	1.90	1.95
Space heating characteristics *²					
Temperature application °C		55	35	55	35
Energy efficiency class		A++	A+++	A++	A+++
Rated heat output (P_{rated}) kW		5	5	6	7
Seasonal space heating energy efficiency (η_s) %		125	175	125	177
Annual energy consumption kWh		3,035	2,322	3,411	2,594
Sound power level * ³ dB(A)	Hydraulic unit	40	-	40	-
	Outdoor unit	57	-	57	-
Hydraulic unit specifications					
Power source					Single phase, ~230 V, 50 Hz
Dimensions H × W × D mm		847 × 450 × 493	847 × 450 × 493	847 × 450 × 493	847 × 450 × 493
Weight (Net) kg		47	47	47	47
Water circulation Min./Max. L/min		7.6/22.0	8.5/22.0	10.0/22.0	13.2/30.0
Buffer tank capacity L		16	16	16	16
Expansion vessel capacity L		8	8	8	8
Water flow temperature range °C	Max.	55	55	55	55
Water pipe connection diameter Flow/Return mm	Ø25.4/Ø25.4	Ø25.4/Ø25.4	Ø25.4/Ø25.4	Ø25.4/Ø25.4	Ø25.4/Ø25.4
Backup heater Capacity kW		3.0	3.0	3.0	3.0
Outdoor unit specifications					
Power source					Single phase, ~230 V, 50 Hz
Current Max. A		13.0	13.0	18.0	19.0
Dimensions H × W × D mm		632 × 799 × 290	632 × 799 × 290	716 × 820 × 315	998 × 940 × 320
Weight (Net) kg		39	39	42	62
Refrigerant Type (Global Warming Potential)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)
Charge kg	0.97	0.97	1.02	1.63	
Additional refrigerant charge g/m	25	25	25	25	20
Connection pipe Diameter Liquid mm	6.35	6.35	6.35	6.35	9.52
	Gas mm	12.70	12.70	12.70	15.88
Length Min./Max. m	3/30	3/30	3/30	3/30	3/30
Length (Pre-charge) m	15	15	15	15	20
Height difference Max. m	20	20	20	20	20
Operating range Heating °C	-20 to 35	-20 to 35	-20 to 35	-20 to 35	-20 to 35

*1: Heating capacity, input power, and COP are measured using the EN14511 standard. Actual usage environments, such as the operating modes of the heating equipment, room temperature, and controller settings, may cause differences in values between those listed in the catalog and the actual performance characteristics.


*2: Information about ErP can be downloaded from our website at www.fujitsu-general.com/global/support/downloads/search/

*3: The sound power level values are based on EN12102 standard measurements under EN14825 standard conditions.


Dimensions

(Unit: mm)


Outdoor unit:
WOYA060KLT

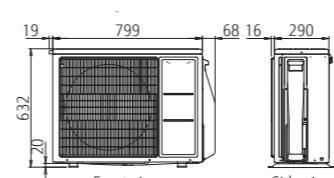

WOYA080KLT


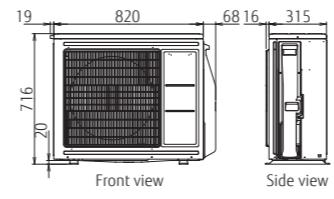


WOYA100KLT

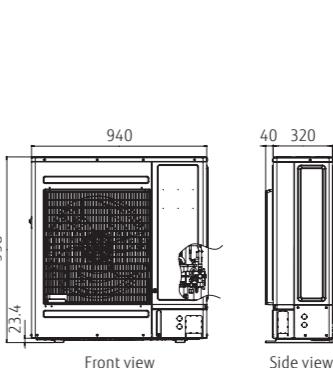

Hydraulic unit:

WSYA050ML3/WSYA080ML3/WSYA100ML3




Split Type Super High Power Series



High water flow temperature

The temperature of water flow can be maintained at 60°C without using a backup heater, even when the outdoor temperature drops to -20°C. The system can supply 55°C water without a backup heater at an outdoor temperature of -22°C.

* If you want to raise the temperature of the water supply to above the maximum temperature, use a backup heater to supplement the primary heater.

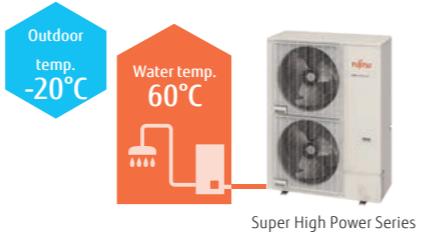


Super High Power Series

High COP

Heat pumps of WATERSTAGE ATW Systems work more efficiently and consume less energy than conventional heating systems.

Energy efficiency class

A⁺⁺

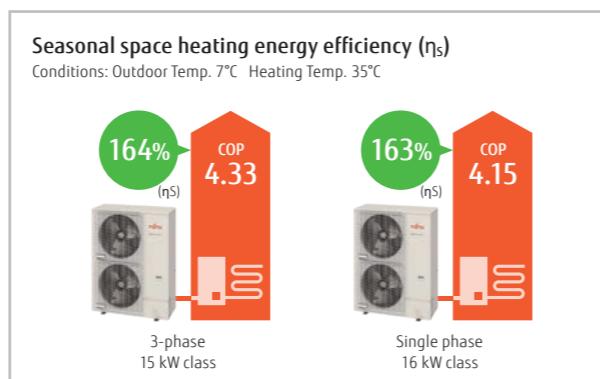

Operating range extended to -25°C

Operating range improved down to -25°C outdoor temperature



Hydraulic unit:
WSYG160DJ6 / [3-phase] WSYK170DJ9
Outdoor unit:
WOYG160LJL
[3-phase] WOYK150LJL / WOYK170LJL



Outdoor unit
Single phase 16 kW
3-phase 15/17 kW

Specifications

Model Name	Hydraulic unit	WSYG160DJ6	WSYK170DJ9	WOYK150LJL	WOYK170LJL
Capacity range		16	15	17	
7°C/35°C floor heating * ¹	Heating capacity kW	16.00	15.00		17.00
	Input power kW	3.86	3.46		4.10
	COP	4.15	4.33		4.15
2°C/35°C floor heating * ¹	Heating capacity kW	13.30	13.20		13.50
	Input power kW	4.25	4.06		4.27
	COP	3.13	3.25		3.16
-7°C/35°C floor heating * ¹	Heating capacity kW	14.50	13.20		15.00
	Input power kW	5.27	4.55		5.32
	COP	2.75	2.90		2.82
-7°C/55°C Radiator * ¹	Heating capacity kW	10.90	13.20		14.20
	Input power kW	5.89	6.77		7.40
	COP	1.85	1.95		1.92
Space heating characteristics*²					
Temperature application	°C	55	35	55	35
Energy efficiency class		A++	A++	A++	A++
Rated heat output (P_{rated})	kW	14	16	17	17
Seasonal space heating energy efficiency (η_s)	%	125	163	130	164
Annual energy consumption	kWh	8,757	8,014	9,915	8,606
Sound power level	Hydraulic unit dB(A)	45	45	45	45
	Outdoor unit dB(A)	67	66	67	66
Hydraulic unit specifications					
Power source		Single phase, ~230 V, 50 Hz		3-phase, ~400 V, 50 Hz	
Dimensions H x W x D	mm	805 x 450 x 471		805 x 450 x 471	
Weight (Net)	kg	52.5		52.5	
Water circulation	Min./Max. L/min	26.4/57.8		24.0/54.2	
Buffer tank capacity	L	22		22	
Expansion vessel capacity	L	10		10	
Water flow temperature range	Max. °C	60		60	
Water pipe connection diameter	Flow/Return mm	Ø25.4/Ø25.4		Ø25.4/Ø25.4	
Backup heater	Capacity kW	6.0 (3.0 kW x 2 pcs.)		9.0 (3.0 kW x 3 pcs.)	
Outdoor unit specifications					
Power source		Single phase, ~230 V, 50 Hz		3-phase, ~400 V, 50 Hz	
Current	Max. A	28.0		14.0	
Dimensions H x W x D	mm	1,428 x 1,080 x 480		1,428 x 1,080 x 480	
Weight (Net)	kg	137		138	
Refrigerant	Type (Global Warming Potential)	R410A (2,088)			
Additional refrigerant charge	Charge kg	3.80		3.80	
Connection pipe	Diameter Liquid mm	Ø9.52		Ø9.52	
	(Gas mm)	Ø15.88		Ø15.88	
	Length Min./Max. m	5/30		5/30	
	Length (Pre-charge) m	15		15	
	Height difference Max. m		25/15 (Outdoor unit: Upper/Lower)		
Operating range	Heating °C	-25 to 35		-25 to 35	


*1: Heating capacity, input power, and COP are measured using the EN14511 standard. Actual usage environments, such as the operating modes of the heating equipment, room temperature, and controller settings, may cause differences in values between those listed in the catalog and the actual performance characteristics.

*2: Information about ErP can be downloaded from our website at www.fujitsu-general.com/global/support/downloads/search/


Dimensions

(Unit: mm)

Outdoor unit:
Single phase: WOYG160LJL
3-phase: WOYK150LJL / WOYK170LJL

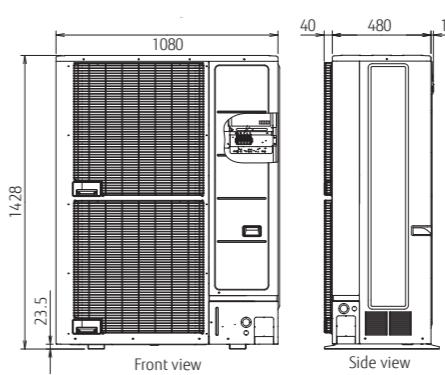

Hydraulic unit:
Single phase: WSYG160DJ6
3-phase: WSYK170DJ9

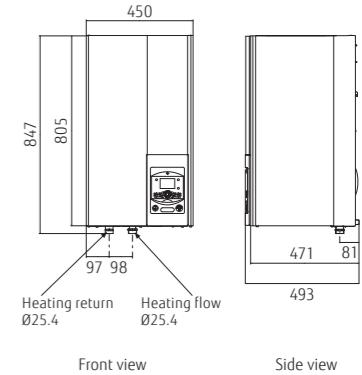

Split Type High Power Series



High water flow temperature

The temperature of water flow can be maintained at 60°C without using a backup heater, even when the outdoor temperature drops to -20°C.

* If you want to raise the temperature of the water supply to above the maximum temperature, use a backup heater to supplement the primary heater.




High COP

Heat pumps of WATERSTAGE ATW Systems work more efficiently and consume less energy than conventional heating systems.

Energy efficiency class



*Temperature application: Heating temp. 35°C

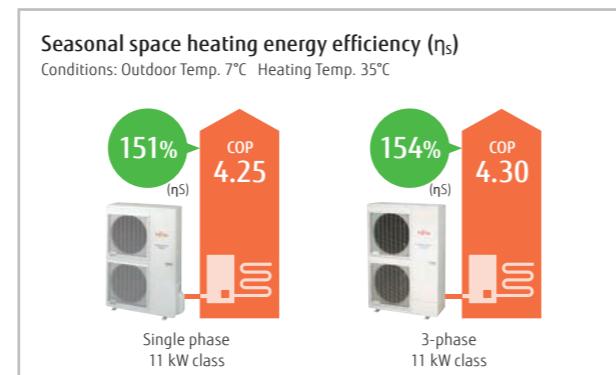

Hydraulic unit:
WSYG140DG6 / [3-phase] WSYK160DG9
Outdoor unit:
WOYG112LHT / WOYG140LCTA
[3-phase] WOYK112LCTA / WOYK140LCTA /
WOYK160LCTA



Specifications

Model Name	Hydraulic unit	WSYG140DG6	WSYG140DG6	WSYK160DG9	WSYK160DG9	WSYK160DG9	
Capacity range	Outdoor unit	WOYG112LHT	WOYG140LCTA	WOYK112LCTA	WOYK140LCTA	WOYK160LCTA	
7°C/35°C floor heating *1	Heating capacity kW	10.80	13.50	10.80	13.50	15.17	
	Input power kW	2.54	3.23	2.51	3.20	3.70	
	COP	4.25	4.18	4.30	4.22	4.10	
2°C/35°C floor heating *1	Heating capacity kW	10.77	12.00	10.77	13.00	13.50	
	Input power kW	3.44	3.87	3.40	4.15	4.34	
	COP	3.13	3.10	3.17	3.13	3.11	
-7°C/35°C floor heating*1	Heating capacity kW	10.38	11.54	10.38	12.20	13.50	
	Input power kW	2.40	2.27	2.43	2.38	2.50	
	COP	4.32	5.08	4.28	5.13	5.40	
-7°C/55°C Radiator*1	Heating capacity kW	7.57	9.20	9.27	10.10	11.00	
	Input power kW	4.57	5.08	5.09	5.65	6.29	
	COP	1.66	1.81	1.82	1.79	1.75	
Space heating characteristics*2							
Temperature application °C	55	35	55	35	35	35	
Energy efficiency class	A+	A++	A+	A+	A++	A+	
Rated heat output (P_{rated}) kW	9	11	11	13	9	11	
Seasonal space heating energy efficiency (η_s) %	112	151	113	148	112	154	
Annual energy consumption kWh	6,704	6,062	8,041	6,824	6,669	5,930	
Sound power level dB(A)	46	46	46	46	46	46	
Hydraulic unit specifications							
Power source	Single phase, ~230 V, 50 Hz						
Dimensions H x W x D mm	800 x 450 x 457						
Weight (Net) kg	42						
Water circulation Min./Max. L/min	19.5/39.0						
Buffer tank capacity L	16						
Expansion vessel capacity L	8						
Water flow temperature range °C	60						
Water pipe connection diameter Flow/Return mm	Ø25.4/Ø25.4						
Backup heater Capacity kW	6.0 (3.0 kW x 2 pcs.)						
Outdoor unit specifications							
Power source	Single phase, ~230 V, 50 Hz						
Current Max. A	22.0						
Dimensions H x W x D mm	800 x 450 x 457						
Weight (Net) kg	42						
Refrigerant Type (Global Warming Potential)	R410A (2,088)						
Additional refrigerant charge kg	2.50						
Connection pipe Diameter mm	50						
	Liquid	Ø9.52					
	Gas	Ø15.88					
	Length Min./Max. m	5/20					
	Length (Pre-charge) m	15					
	Height difference Max. m	15					
Operating range Heating °C	-25 to 35						

*1: Heating capacity, input power, and COP are measured using the EN14511 standard. Actual usage environments, such as the operating modes of the heating equipment, room temperature, and controller settings, may cause differences in values between those listed in the catalog and the actual performance characteristics.


*2: Information about ErP can be downloaded from our website at www.fujitsu-general.com/global/support/downloads/search/

Dimensions

(Unit: mm)

Outdoor unit:
Single phase: WOYG112LHT/WOYG140LCTA

3-phase: WOYK112LCTA/WOYK140LCTA/WOYK160LCTA

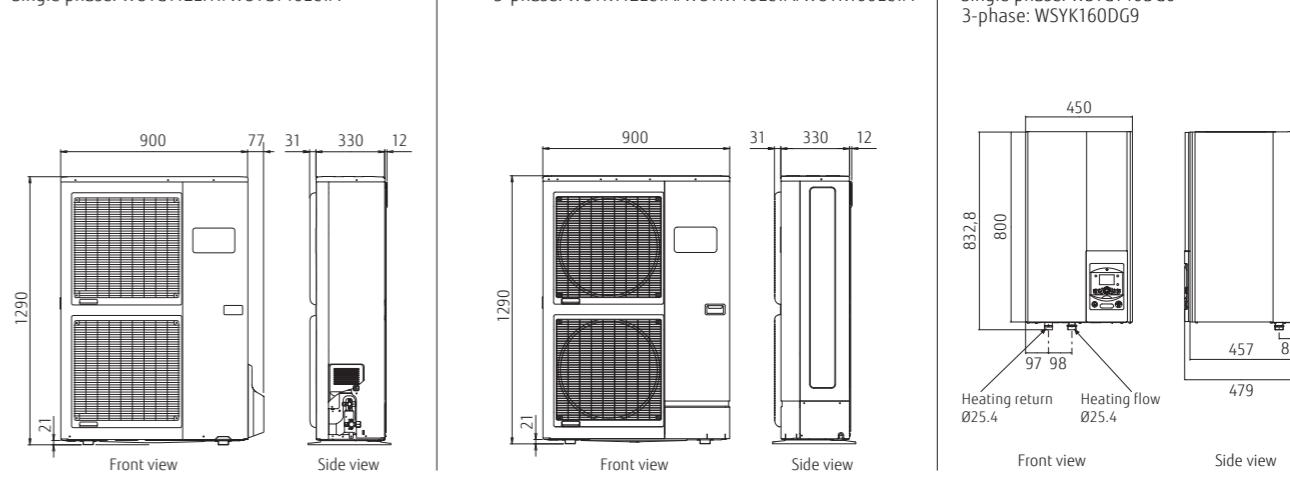

Hydraulic unit:
Single phase: WSYG140DG6
3-phase: WSYK160DG9

Split DHW Integrated Type

Comfort Series



High water flow temperature

The temperature of water flow is up to 55°C without a backup heater. Hot water supply temperature can be maintained even at -10°C outdoor temperature.

* If you want to raise the temperature of the water supply to above the maximum temperature, use a backup heater to supplement the primary heater.




Comfort Series

High COP

Heat pumps of WATERSTAGE ATW Systems work more efficiently and consume less energy than conventional heating systems.



*Temperature application: Heating temp. 35°C

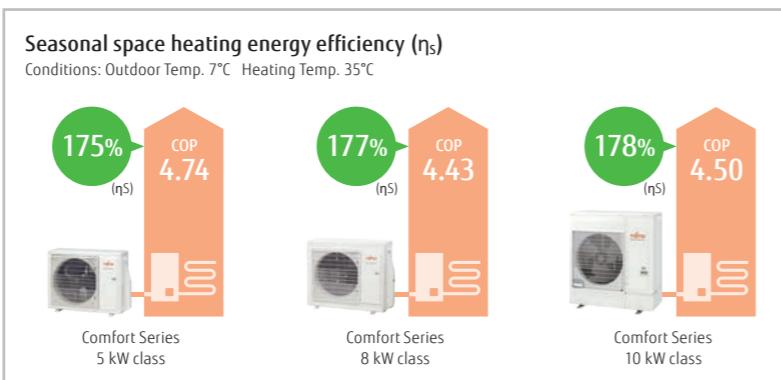

Outdoor unit technology



- DC Fan Motor**
High-performance, high-efficiency small DC fan motor mounted
- DC Twin-Rotary Compressor**
High-efficiency DC twin-rotary compressor
- DC Inverter**
DC inverter provides smooth water temperature control.

Hydraulic unit:
WGYA050ML3 / WGYA080ML3 /
WGYA100ML3
Outdoor unit:
WOYA060KLT / WOYA080KLT /
WOYA100KLT



Specifications

Model Name	Hydraulic unit Outdoor unit	WGYA050ML3 WOYA060KLT	WGYA080ML3 WOYA080KLT	WGYA080ML3 WOYA080KLT	WGYA100ML3 WOYA100KLT
Capacity range		5	6	8	10
7°C/35°C floor heating * ¹	Heating capacity Input power COP	4.50 0.949 4.74	5.50 1.18 4.65	7.50 1.69 4.43	9.50 2.11 4.50
2°C/35°C floor heating * ¹	Heating capacity Input power COP	4.50 1.33 3.39	5.30 1.65 3.22	6.30 1.96 3.21	9.30 3.08 3.02
-7°C/35°C floor heating* ¹	Heating capacity Input power COP	4.40 1.59 2.76	5.00 1.90 2.63	5.70 2.13 2.68	8.90 3.36 2.65
-7°C/55°C Radiator* ¹	Heating capacity Input power COP	3.90 2.11 1.85	4.25 2.25 1.89	5.30 2.79 1.90	8.00 4.10 1.95
Space heating characteristics*²					
Temperature application	°C	55 A++	35 A++	55 A++	35 A++
Energy efficiency class		5 A++	5 A++	6 A++	7 A++
Rated heat output (P_{rated})	kW	5 5	5 5	6 6	7 8
Seasonal space heating energy efficiency (η_s)	%	125 175	125 175	128 177	130 178
Annual energy consumption	kWh	3,035 2,322	3,411 2,594	3,903 2,982	5,083 3,875
Sound power level* ³	Hydraulic unit Outdoor unit	40 57	40 57	40 60	40 62
Domestic hot water characteristics*²					
Load profile	L	L	L	L	L
Energy efficiency class	A+	A+	A+	A+	A+
Energy efficiency (qwh)	%	130 130	130 130	130 130	130 130
Annual electricity consumption	kWh	793 793	793 793	793 793	793 793
Hydraulic unit specifications					
Power source	Single phase, ~230 V, 50 Hz				
Dimensions H × W × D	mm	1,863 × 648 × 700	1,863 × 648 × 700	1,863 × 648 × 700	1,863 × 648 × 700
Weight (Net)	kg	145	145	145	145
Water circulation	Min./Max. L/min	7.6/22.0	8.5/22.0	10.0/22.0	13.2/30.0
DHW capacity	L	190	190	190	190
Electrical heater capacity	Heating kW	3.0	3.0	3.0	3.0
Buffer tank capacity	L	16	16	16	16
Expansion vessel capacity	L	8	8	8	8
Water flow temperature range	Max. °C	55	55	55	55
Water pipe connection diameter	Flow/Return mm	Ø25.4/Ø25.4	Ø25.4/Ø25.4	Ø25.4/Ø25.4	Ø25.4/Ø25.4
Hot water pipe connection diameter	mm	Ø19.05	Ø19.05	Ø19.05	Ø19.05
Outdoor unit specifications					
Power source	Single phase, ~230 V, 50 Hz				
Current	Max. A	13.0	13.0	18.0	19.0
Dimensions H × W × D	mm	632 × 799 × 290	632 × 799 × 290	716 × 820 × 315	998 × 940 × 320
Weight (Net)	kg	39	39	42	62
Refrigerant	Type (Global Warming Potential) R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)
Additional refrigerant charge	Charge kg	0.97	0.97	1.02	1.63
Connection pipe	Liquid Diameter mm	6.35	6.35	6.35	9.52
	Gas Diameter mm	12.70	12.70	12.70	15.88
	Length Min./Max. m	3/30	3/30	3/30	3/30
	Length (Pre-charge) m	15	15	15	20
	Height difference Max. m	20	20	20	20
Operating range	Heating °C	-20 to 35	-20 to 35	-20 to 35	-20 to 35

*1: Heating capacity, input power, and COP are measured using the EN14511 standard. Actual usage environments, such as the operating modes of the heating equipment, room temperature, and controller settings, may cause differences in values between those listed in the catalog and the actual performance characteristics.


*2: Information about ErP can be downloaded from our website at www.fujitsu-general.com/global/support/downloads/search/

*3: The sound power level values are based on EN12102 standard measurements under EN14825 standard conditions.

Dimensions

(Unit: mm)

Outdoor unit:
WOYA060KLT

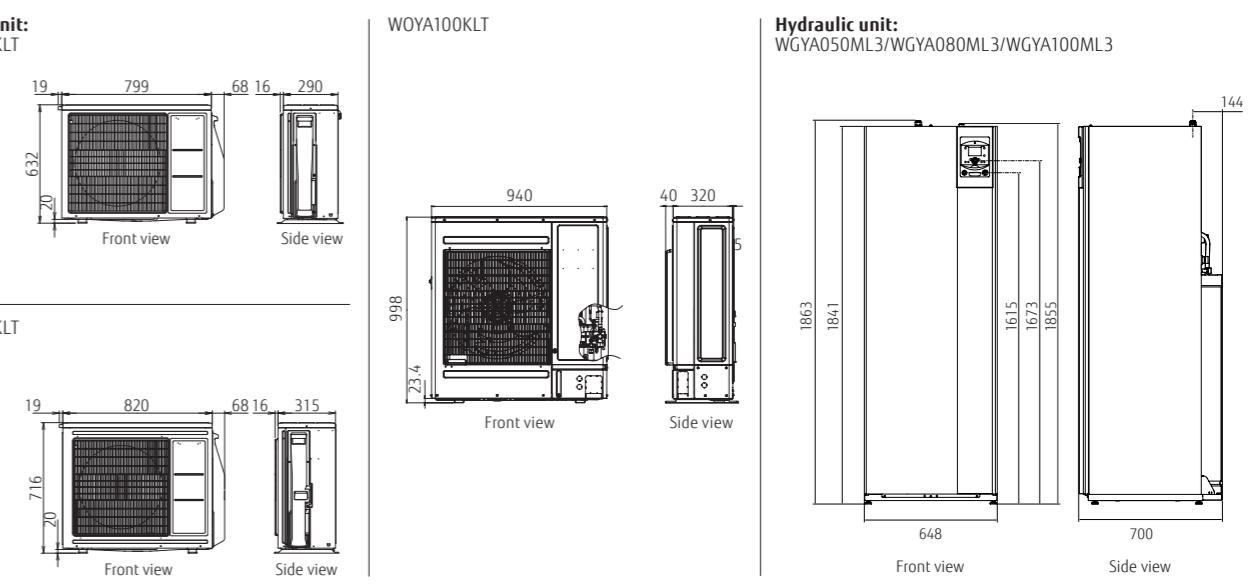

Hydraulic unit:
WGYA050ML3/WGYA080ML3/WGYA100ML3



Split DHW Integrated Type


Super High Power Series



High water flow temperature

The temperature of water flow can be maintained at 60°C without using a backup heater, even when the outdoor temperature drops to -20°C. The system can supply 55°C water without a backup heater at an outdoor temperature of -22°C.

* If you want to raise the temperature of the water supply to above the maximum temperature, use a backup heater to supplement the primary heater.

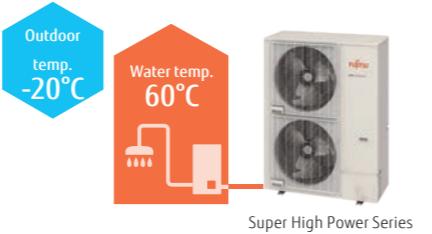


Super High Power Series

High COP

Heat pumps of WATERSTAGE ATW Systems work more efficiently and consume less energy than conventional heating systems.

Energy efficiency class

A⁺⁺

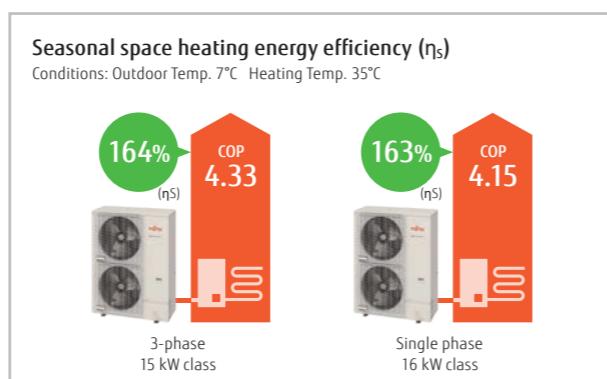

Operating range extended to -25°C

Operating range improved down to -25°C outdoor temperature



Hydraulic unit:
WGYG160DJ6 / [3-phase] WGYK170DJ9
Outdoor unit:
WOYG160LJL
[3-phase] WOYK150LJL / WOYK170LJL



Hydraulic unit
Single phase/
3-phase



Outdoor unit
Single phase 16 kW
3-phase 15/17 kW

Specifications

Model Name	Hydraulic unit	WGYG160DJ6	WGYK170DJ9	WOYK150LJL	WOYK170LJL	WGYK170DJ9
Capacity range	Outdoor unit	WOYG160LJL	16	15	17	WOYK170LJL
7°C/35°C floor heating *1	Heating capacity kW	16.00	15.00			17.00
	Input power kW	3.86	3.46			4.10
	COP	4.15	4.33			4.15
2°C/35°C floor heating *1	Heating capacity kW	13.30	13.20			13.50
	Input power kW	4.25	4.06			4.27
	COP	3.13	3.25			3.16
-7°C/35°C floor heating*1	Heating capacity kW	14.50	13.20			15.00
	Input power kW	5.27	4.55			5.32
	COP	2.75	2.90			2.82
-7°C/55°C Radiator*1	Heating capacity kW	10.90	13.20			14.20
	Input power kW	5.89	6.77			7.40
	COP	1.85	1.95			1.92
Space heating characteristics*2						
Temperature application	°C	55	35	55	35	55
Energy efficiency class		A++	A++	A++	A++	A++
Rated heat output (P_{rated})	kW	14	16	16	17	17
Seasonal space heating energy efficiency (η_s)	%	125	163	130	164	130
Annual energy consumption	kWh	8,757	8,014	9,915	8,606	10,232
Sound power level	Hydraulic unit dB(A)	45	45	45	45	45
	Outdoor unit dB(A)	67	66	67	66	68
Domestic hot water characteristics*2						
Load profile		L	A			
Energy efficiency class				109		
Energy efficiency (ηwh)	%			941		
Hydraulic unit specifications						
Power source		Single phase, ~230 V, 50 Hz	3-phase, ~400 V, 50 Hz			
Dimensions H × W × D	mm	1,841 × 648 × 698				
Weight (Net)	kg	166				
Water circulation	Min./Max. L/min	26.4/57.8	24.0/54.2	27.3/61.4		
DHW capacity	L	190				
Electrical heater capacity	Heating kW	6.0 (3.0 kW × 2 pcs.)	9.0 (3.0 kW × 3 pcs.)			
Buffer tank capacity	L	22				
Expansion vessel capacity	L	12				
Water flow temperature range	Max. °C	60				
Water pipe connection diameter	Flow/Return mm	Ø25.4/Ø25.4				
Hot water pipe connection diameter	mm	Ø19.05				
Outdoor unit specifications						
Power source		Single phase, ~230 V, 50 Hz	3-phase, ~400 V, 50 Hz			
Current	Max. A	28.0	14.0			
Dimensions H × W × D	mm	1,428 × 1,080 × 480	1,428 × 1,080 × 480			
Weight (Net)	kg	137	138			
Refrigerant	Type (Global Warming Potential)	R410A (2,088)	R410A (2,088)			
	Charge kg	3.80	3.80			
Additional refrigerant charge	g/m	50	50			
Connection pipe	Liquid mm	Ø9.52	Ø9.52			
	Gas Ø15.88	Ø15.88	Ø15.88			
	Length Min./Max. m	5/30	5/30			
	Length (Pre-charge) m	15	15			
Operating range	Max. Heating °C	25/15 (Outdoor unit: Upper/Lower)	25/15 (Outdoor unit: Upper/Lower)			
		-25 to 35	-25 to 35			

*1: Heating capacity, input power, and COP are measured using the EN14511 standard. Actual usage environments, such as the operating modes of the heating equipment, room temperature, and controller settings, may cause differences in values between those listed in the catalog and the actual performance characteristics.


*2: Information about ErP can be downloaded from our website at www.fujitsu-general.com/global/support/downloads/search/

Dimensions


(Unit: mm)

Outdoor unit:

Single phase: WOYG160LJL
3-phase: WOYK150LJL/WOYK170LJL

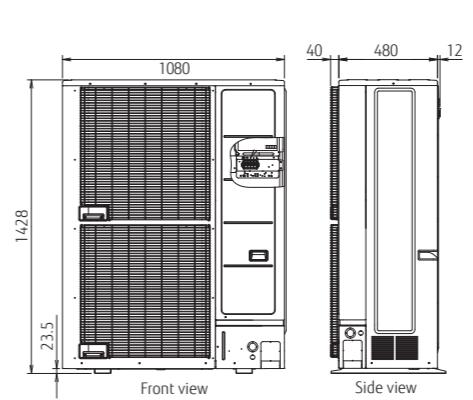


Hydraulic unit:
Single phase: WGYG160DJ6
3-phase: WGYK170DJ9

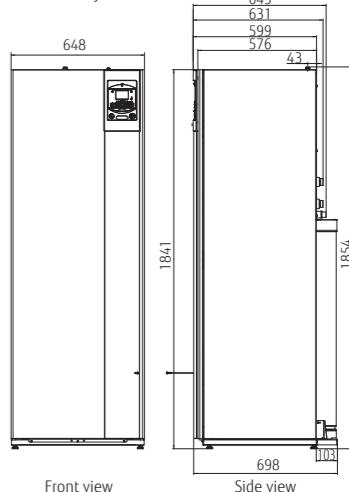

Split DHW Integrated Type

High Power Series

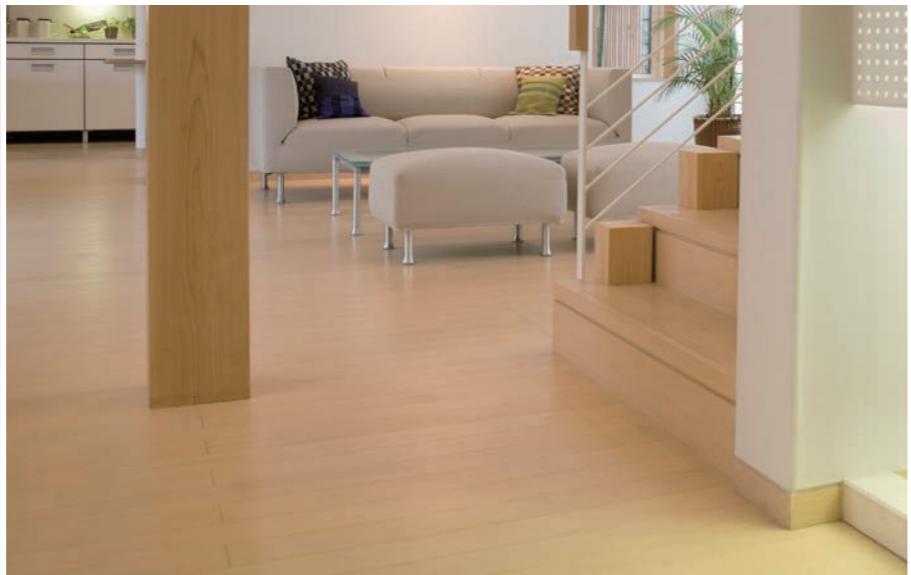

High water flow temperature

The temperature of water flow can be maintained at 60°C without using a backup heater, even when the outdoor temperature drops to -20°C.

* If you want to raise the temperature of the water supply to above the maximum temperature, use a backup heater to supplement the primary heater.




High COP

Heat pumps of WATERSTAGE ATW Systems work more efficiently and consume less energy than conventional heating systems.




*Temperature application: Heating temp. 35°C

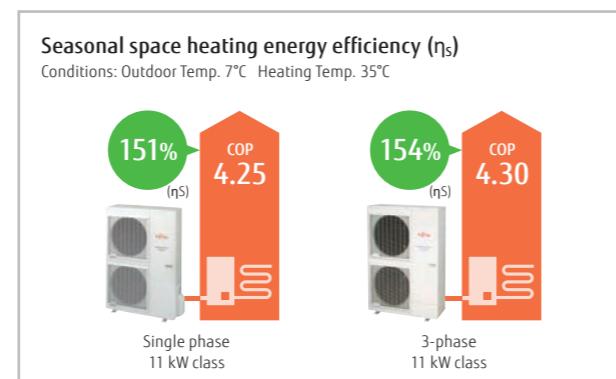

Optimized refrigerant cycle operation

The High Power Series deliver high performance and efficiency with twin sensors and hot water heating technology.

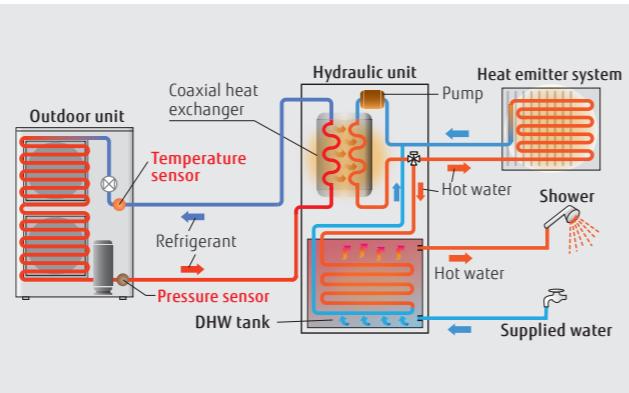

Hydraulic unit:
WGYG140DG6 / [3-phase] WGYK160DG9
Outdoor unit:
WOYG112LHT / WOYG140LCTA
[3-phase] WOYK112LCTA / WOYK140LCTA /
WOYK160LCTA



Specifications

Model Name	Hydraulic unit Outdoor unit	WGYG140DG6 WOYG112LHT	WGYG140DG6 WOYG140LCTA	WGYK160DG9 WOYK112LCTA	WGYK160DG9 WOYK140LCTA	WGYK160DG9 WOYK160LCTA
Capacity range		11	14	11	14	16
7°C/35°C floor heating * ¹	Heating capacity kW	10.80	13.50	10.80	13.50	15.17
	Input power kW	2.54	3.23	2.51	3.20	3.70
	COP	4.25	4.18	4.30	4.22	4.10
2°C/35°C floor heating * ¹	Heating capacity kW	10.77	12.00	10.77	13.00	13.50
	Input power kW	3.44	3.87	3.40	4.15	4.34
	COP	3.13	3.10	3.17	3.13	3.11
-7°C/35°C floor heating * ¹	Heating capacity kW	10.38	11.54	10.38	12.20	13.50
	Input power kW	4.32	5.08	4.28	5.13	5.40
	COP	2.40	2.27	2.43	2.38	2.50
-7°C/55°C Radiator* ¹	Heating capacity kW	7.57	9.20	9.27	10.10	11.00
	Input power kW	4.57	5.08	5.09	5.65	6.29
	COP	1.66	1.81	1.82	1.79	1.75

Space heating characteristics*²

Temperature application	°C	55	35	55	35	55	35	55	35	55	35
Energy efficiency class		A+	A++	A+	A+	A+	A++	A+	A++	A+	A+
Rated heat output (P_{rated})	kW	9	11	11	13	9	11	11	13	13	14
Seasonal space heating energy efficiency (η_s)	%	112	151	113	148	112	154	117	150	117	149
Annual energy consumption	kWh	6,704	6,062	8,041	6,824	6,669	5,930	7,803	6,738	9,062	7,408
Sound power level	Hydraulic unit Outdoor unit	46 dB(A)	46 68	46 69	46 69	46 68	46 70	46 68	46 71	46 71	46 71

Domestic hot water characteristics*²

Load profile	L
Energy efficiency class	A
Energy efficiency(n_{ab})	%
Annual electricity consumption	kWh

Hydraulic unit specifications

Power source	Single phase, ~230 V, 50 Hz	3-phase, ~400 V, 50 Hz
Dimensions H × W × D	1,840 × 648 × 698	
Weight (Net)	152 kg	
Water circulation	Min./Max. L/min	19.5/39.0 24.4/28.7 19.5/39.0 24.4/48.7 27.4/54.8
DHW capacity	L	190
Electrical heater capacity	Heating kW	6.0 (3.0 kW × 2 pcs.) 9.0 (3.0 kW × 3 pcs.)
Buffer tank capacity	L	16
Expansion vessel capacity	L	12
Water flow temperature range	Max. °C	60
Water pipe connection diameter	Flow/Return mm	Ø25.4/Ø25.4
Hot water pipe connection diameter	mm	Ø19.05

Outdoor unit specifications

Power source	Single phase, ~230 V, 50 Hz	3-phase, ~400 V, 50 Hz
Current	Max. A	22.0 25.0 9.0 9.5 10.5
Dimensions H × W × D	mm	1,290 × 900 × 330
Weight (Net)	kg	92 99
Refrigerant	Type (Global Warming Potential) Charge kg	R410A (2,088) 2.50
Additional refrigerant charge	g/m	50
Connection pipe	Diameter Liquid Gas mm Length Min./Max. m Length (Pre-charge) m Height difference Max. Heating °C	Ø9.52 Ø15.88 5/20 15 15 -25 to 35



*1: Heating capacity, input power, and COP are measured using the EN14511 standard. Actual usage environments, such as the operating modes of the heating equipment, room temperature, and controller settings, may cause differences in values between those listed in the catalog and the actual performance characteristics.

*2: Information about ErP can be downloaded from our website at www.fujitsu-general.com/global/support/downloads/search/


Dimensions

(Unit: mm)

Outdoor unit:
Single phase: WOYG112LHT/WOYG140LCTA

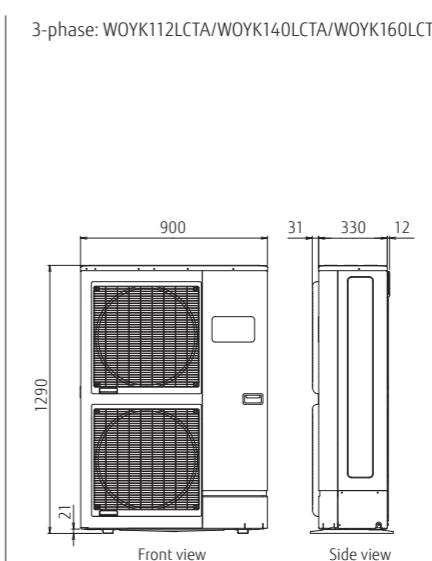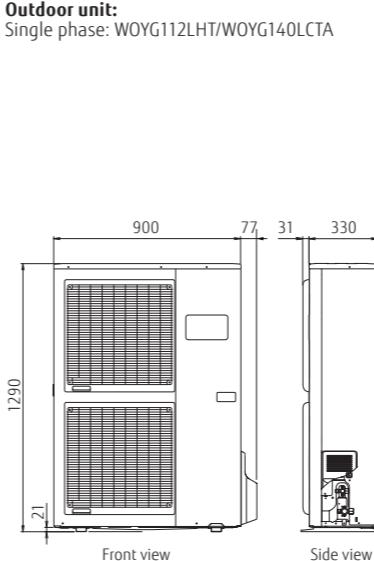


Hydraulic unit:
Single phase: WGYG140DG6
3-phase: WGYK160DG9


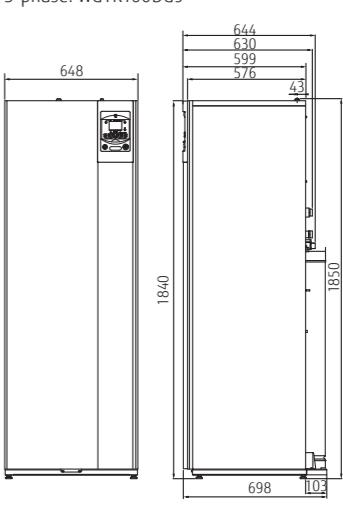


Control Overview


To meet the diverse needs of customers, we offer a variety of control options, such as individual control and remote control options.

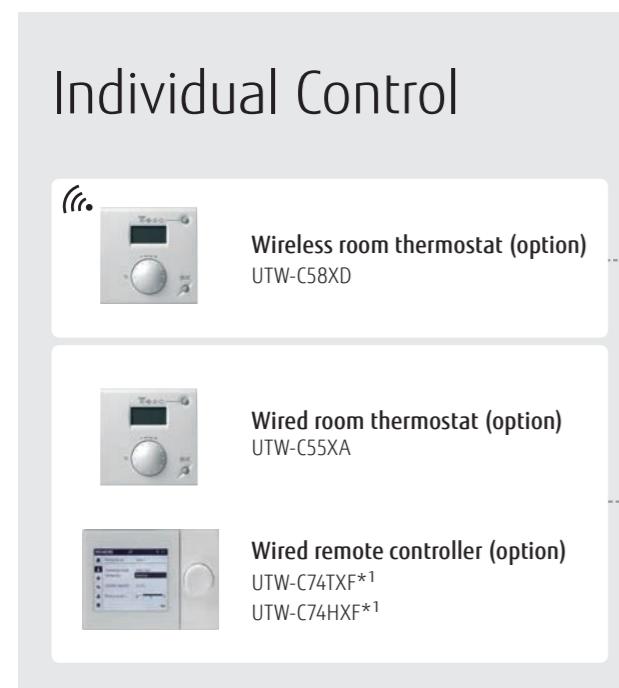

Service & Maintenance Tool

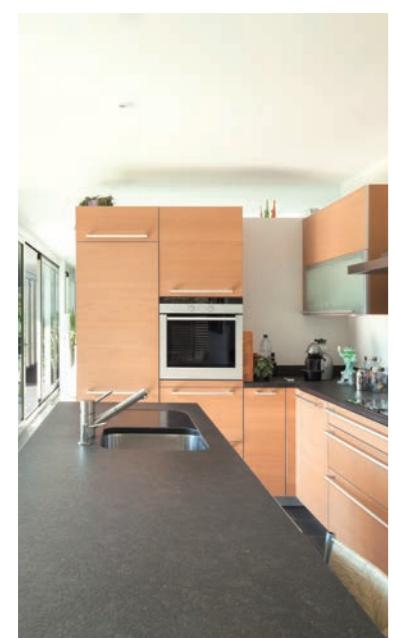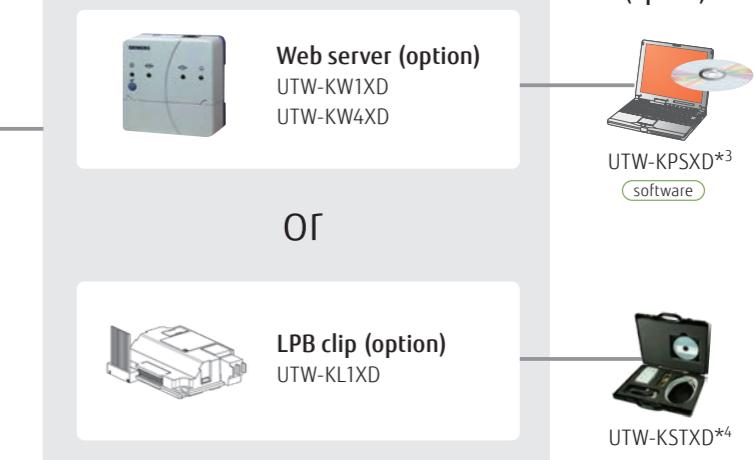

Adapters for external devices

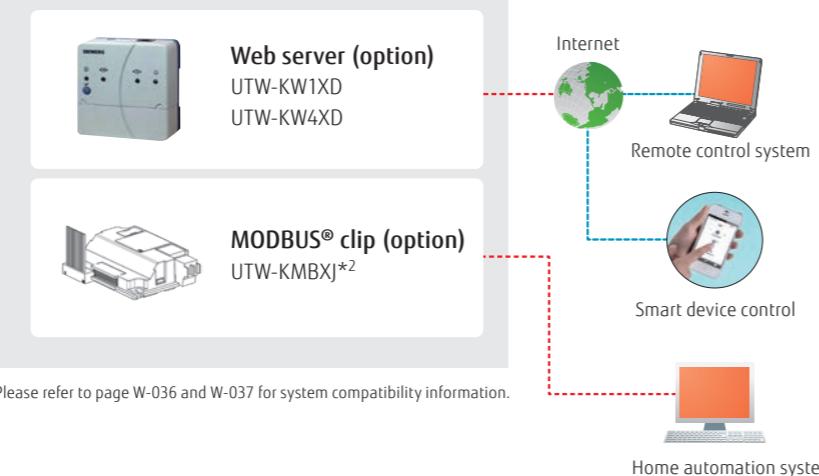

Hydraulic unit Controller

Easy-to-set operation modes

- Selecting the heating mode and domestic hot water (DHW) operation

Large liquid crystal display

- Shows operation status
- Shows error messages
- Messages in plain text

Navigation and setting

- Select from heating menu
- Setting Time program



HMI kit (option)
UTW-KHMXE
Supports multiple languages

Comfort Control

The high-grade heating controller automatically adjusts the flow temperature according to the climate conditions to maintain the room and domestic hot water temperatures at the desired levels.

Hydraulic unit Controller

4 Heating modes

1. Automatic mode

Enables automatic switching between Comfort mode and Reduce mode according to time program

2. Reduce mode

Maintains water temperature at a lower level

3. Comfort mode

Maintains water temperature at a comfortable level

4. Protection mode


Activates frost protection in standby operation



Useful Features


Automatic heating curve control

Automatic temperature regulation according to heating curve (depending on heating terminal and outdoor temperature)

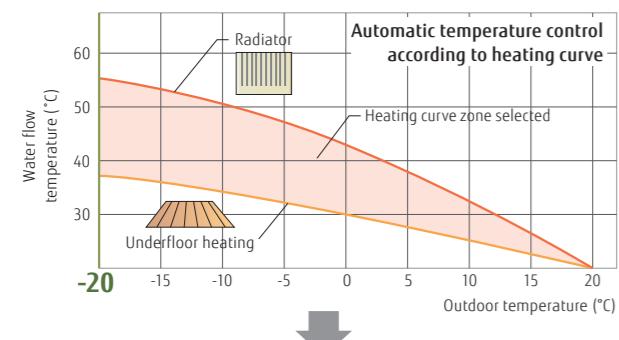

The heating curve will shift to adjust the room temperature setting.

Can be fine-adjusted when it is too warm or too cold.

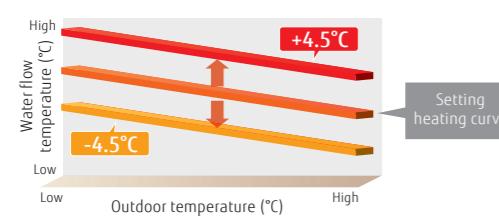

Quick recovery from defrosting

Maintains room temperature by boost start operation during defrosting.


Auto changeover

When cooling mode is selected, the system automatically switches between cooling and heating modes depending on the outdoor temperature to serve as an all-season air conditioner.

2-zone independent control

2-zone independent control (For example, the individual control of 2 underfloor heating zones or the combination of 1 underfloor heating zone and 1 radiator zone)*1


*1: Optional parts required

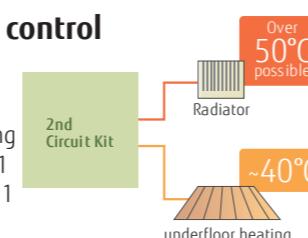

2-stage low-noise mode

The outdoor unit can be switched to quiet mode, depending on the installation environment.

*Effective only for High Power Series

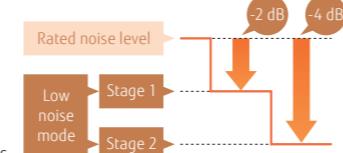

Backup heater operation

Backup heater maintains a comfortable room temperature even when the outside temperature is low. The backup heater is intelligently controlled as a safety backup for very cold days and nights, and only operates when really needed.

Energy Saving

Time program

- The timer is easy to set.
- You can select the heating mode in conjunction with various times of the day.

Day-weekly timer

- Allows up to 3 settings per day.
- Allows individual settings for each day of the week.

Holiday timer

- Allows up to 8 settings.
- While you are away from home for an extended period during winter, the system prevents your room or house from freezing.

Peak cut Function^{*2}

Sets the peak current value to reduce power consumption.

Mode	Ratio to reduce power consumption
1	100%
2	75%
3	50%
4	Almost 0%

* Please refer to page W-036 and W-037 for optional parts information.



Safety Features


Anti-Legionella function

Prevents the growth of Legionella bacteria in the DHW tank to supply safe and clean hot water at all times.




Anti-freeze function

When the outside temperature drops below a specified level, the compressor will self-activate and water will also be automatically circulated to prevent freezing.

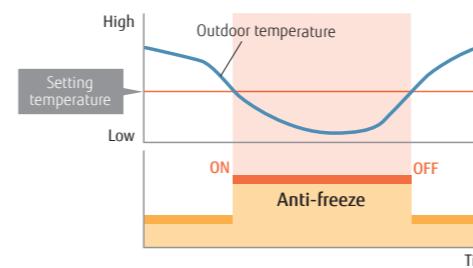


Emergency operation

If an outdoor unit fails to operate, a built-in backup heater or an external boiler is activated to supply an uninterrupted supply of hot water to the house.

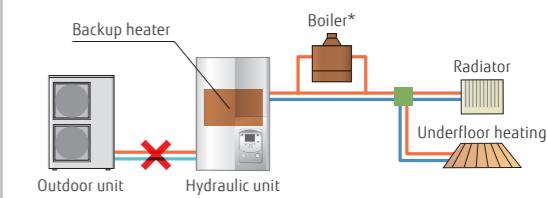


Error and Maintenance Alarm

Enables quick error-handling services and maintenance

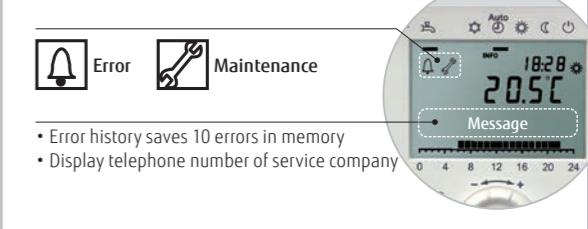


System Configuration

Split Type

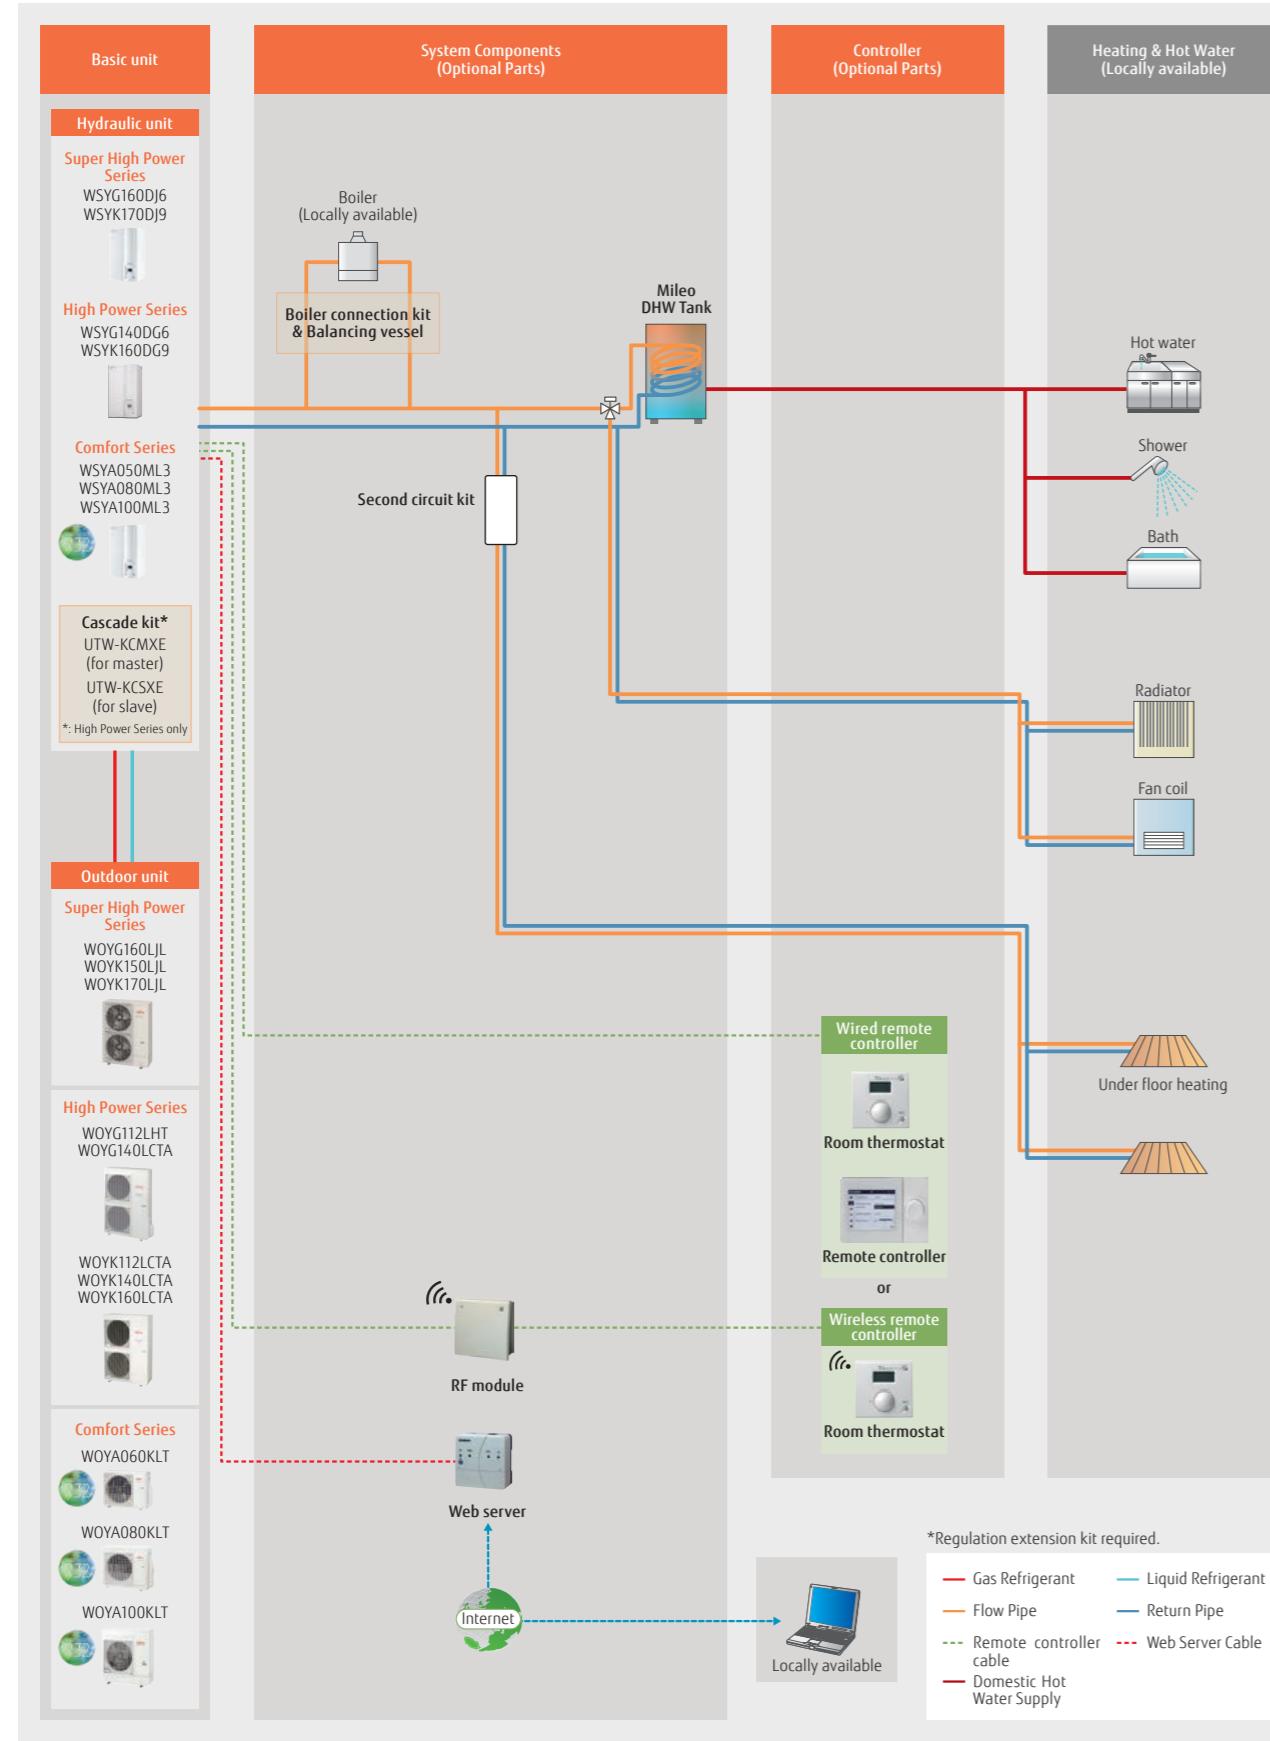

Split DHW Integrated Type

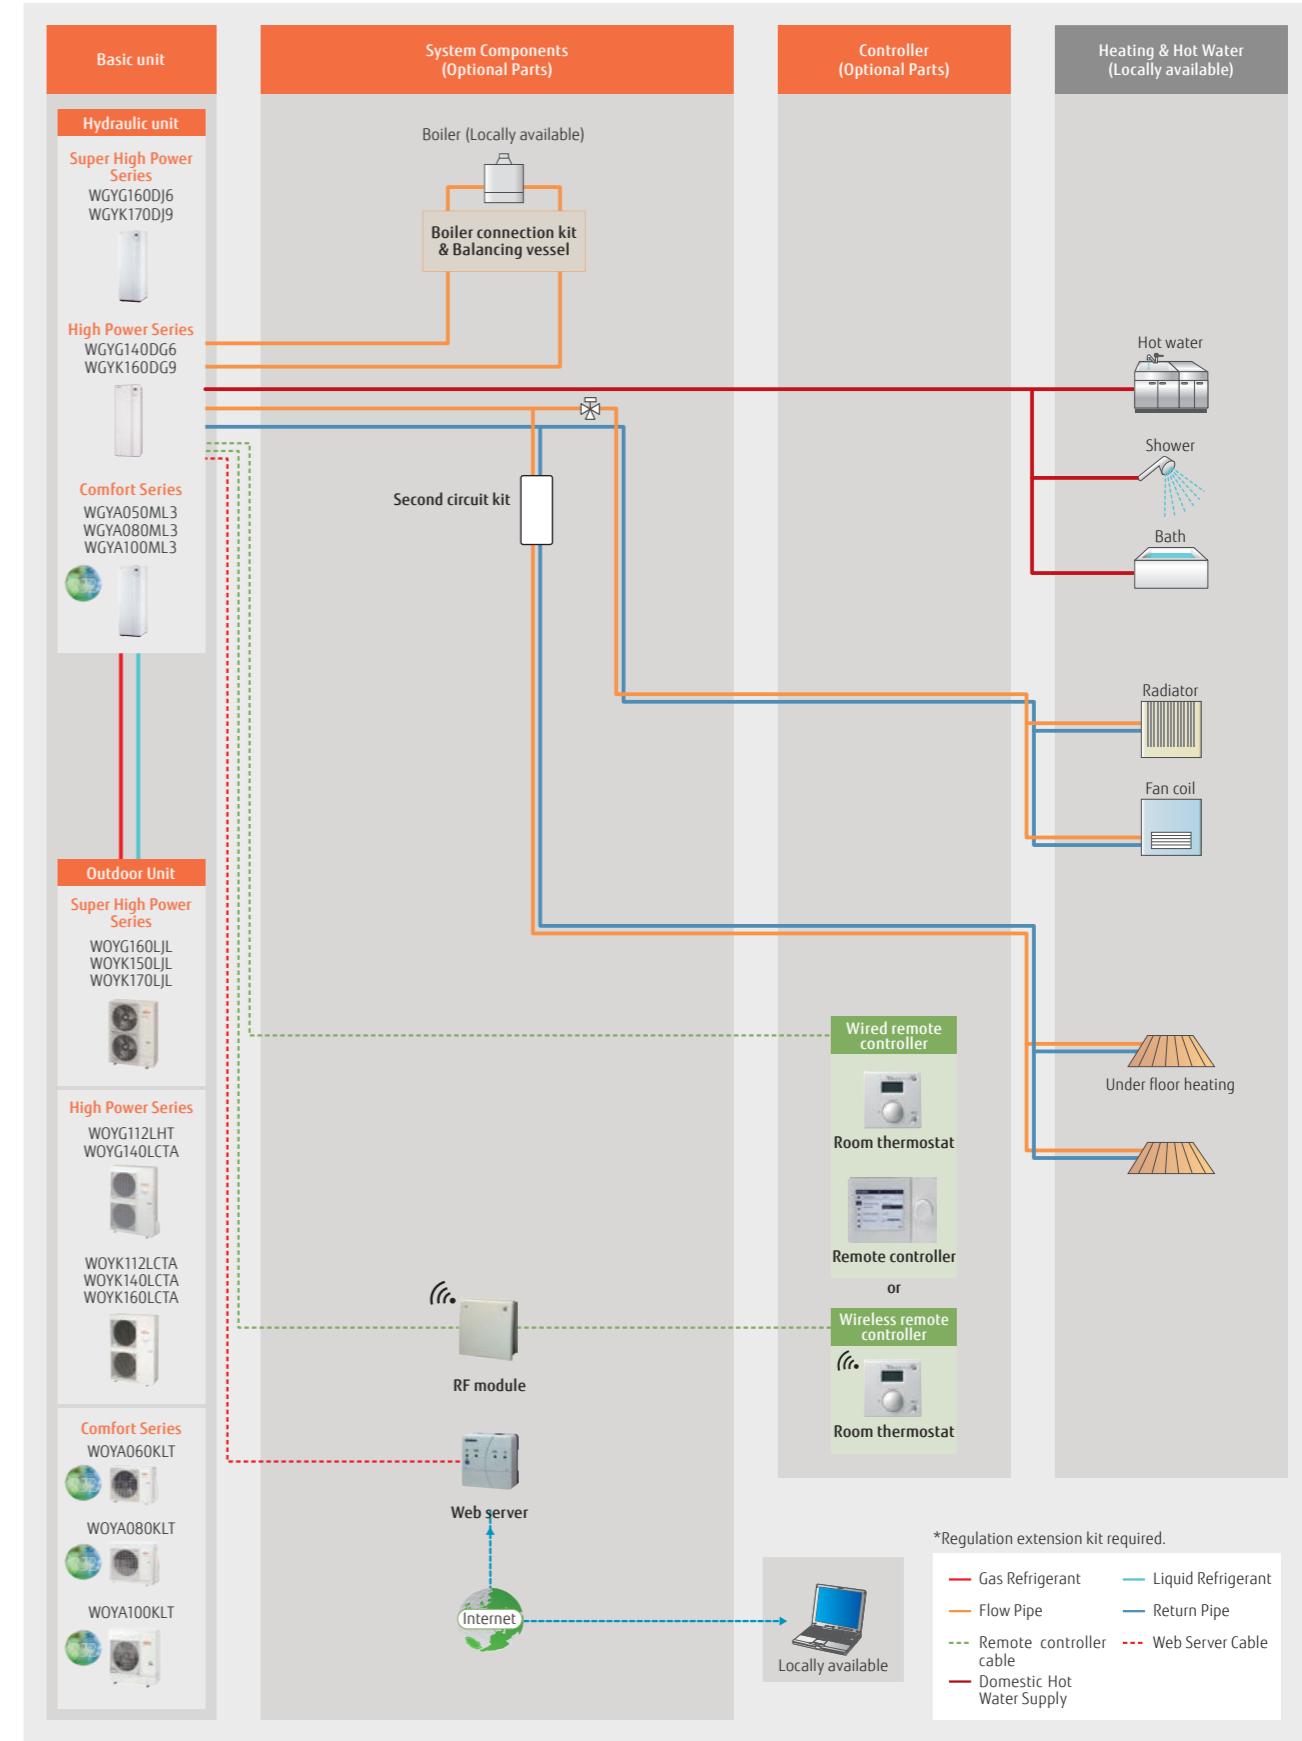


Case Studies


Split Type

**2-emitter simultaneous heating
(Individual control)**



Underfloor heating + Radiator

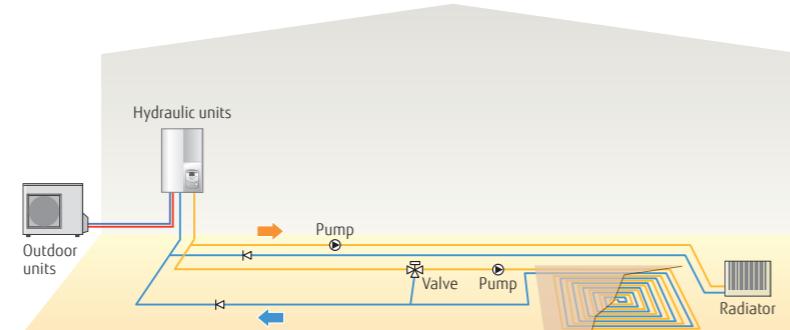

**Boiler connected to heating
(Boiler + Heating)**

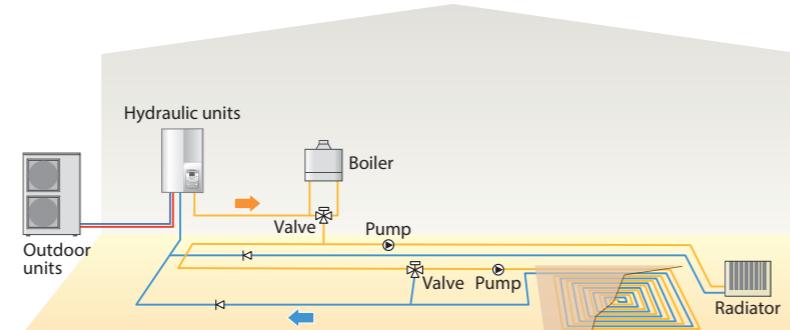


**2-emitter simultaneous heating &
domestic hot water supply (Cascade)**

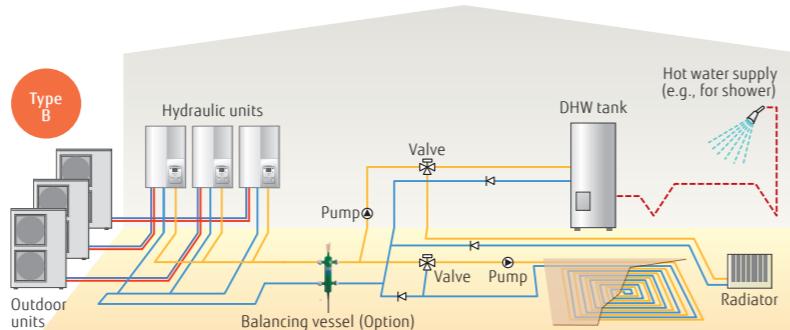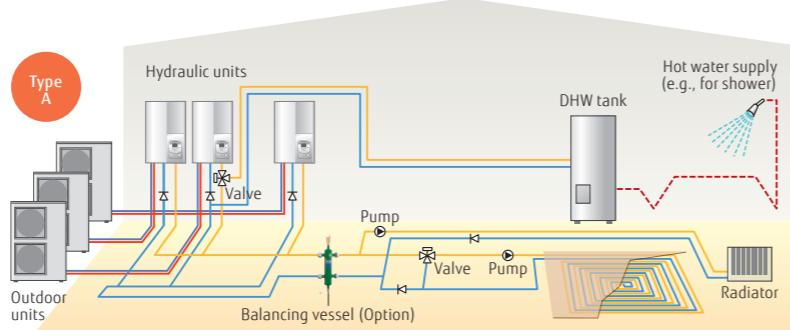

Split DHW Integrated Type


Single heating & domestic hot water supply

Radiator + domestic hot water supply

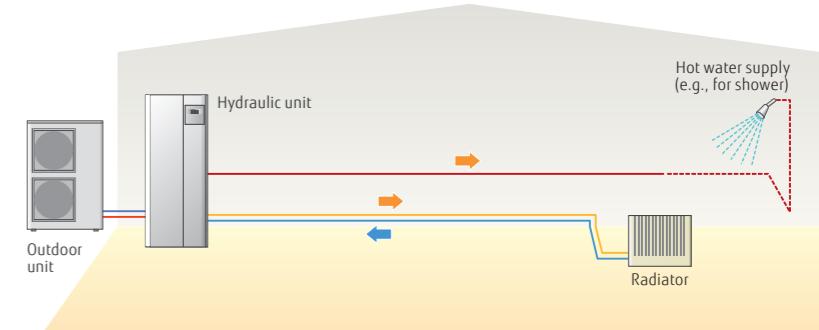


**2-emitter simultaneous heating
(Individual control) & domestic hot water supply**

Radiator + domestic hot water supply

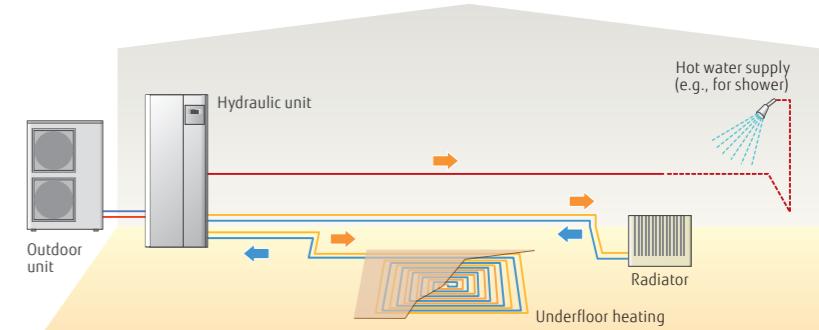

**Boiler connected to heating (Boiler + Heating)
and domestic hot water supply**

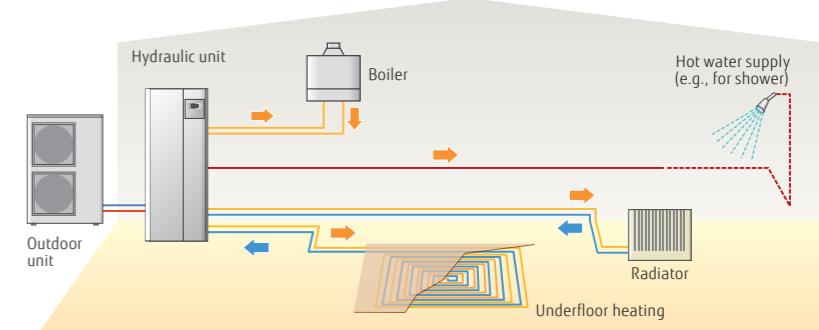


*The hydraulic layouts shown are mainly representation. Please check with local dealer for actual hydraulic connections.

*The hydraulic layouts shown are mainly representation. Please check with local dealer for actual hydraulic connections.

Simple installation

Presetting configurations

A controller installed makes it easy to configure the system without having to set each component or unit individually.


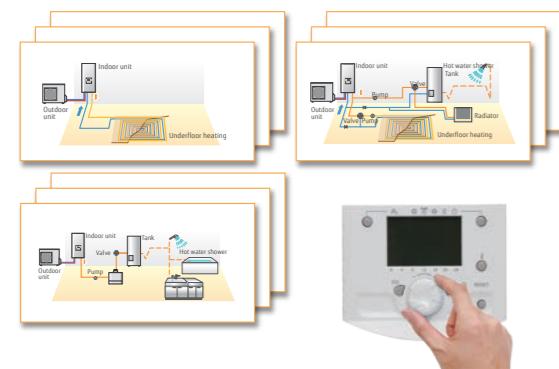


8 simple patterns for system presetting
(Duo heating: 12 patterns)

Configuration (Parameter 5700)	Installation type
Presetting 1	1 heating circuit
Presetting 2	2 heating circuits
Presetting 3	1 heating circuit with boiler backup
Presetting 4	2 heating circuits with boiler backup
Presetting 5	1/2 heating circuit with buffer control
Presetting 6	1/2 heating circuit with buffer control and boiler backup
Presetting 7	Cascade connection Primary
Presetting 8	Cascade connection A
Presetting 9	Cascade connection B/C


- DHW & solar control auto detection
- Cascade connection only available in High Power models.

Controller with a large liquid crystal display and buttons for easy function setting

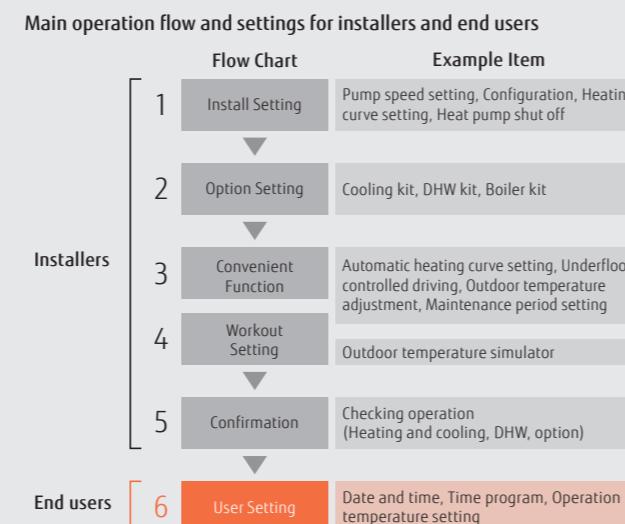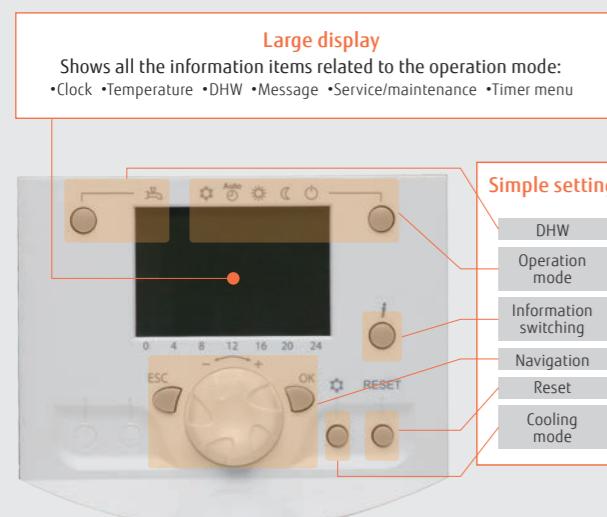

Easy Installation & Maintenance


- All hydraulic safety and control components are built in with no additional selection required.
- Lifting bars for installation free of difficulty or risk
- Easy access for maintenance
- Refrigerant pump down operation

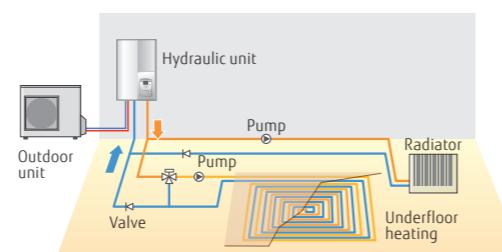

The outdoor temperatures can be simulated in the range of -50°C to +50°C.



Concrete floor drying

Allows the concrete surrounding the hot-water pipes to dry more quickly, shortening the construction period for underfloor heating installations.

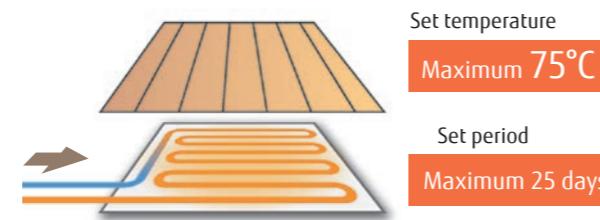

Maintenance Support

Diagnostics functions for troubleshooting

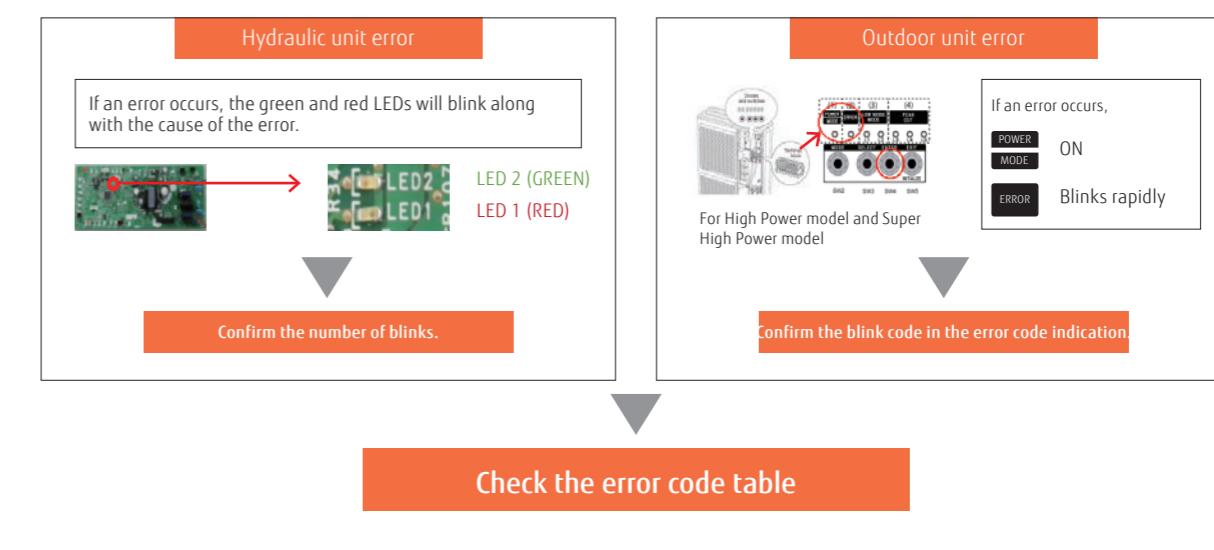
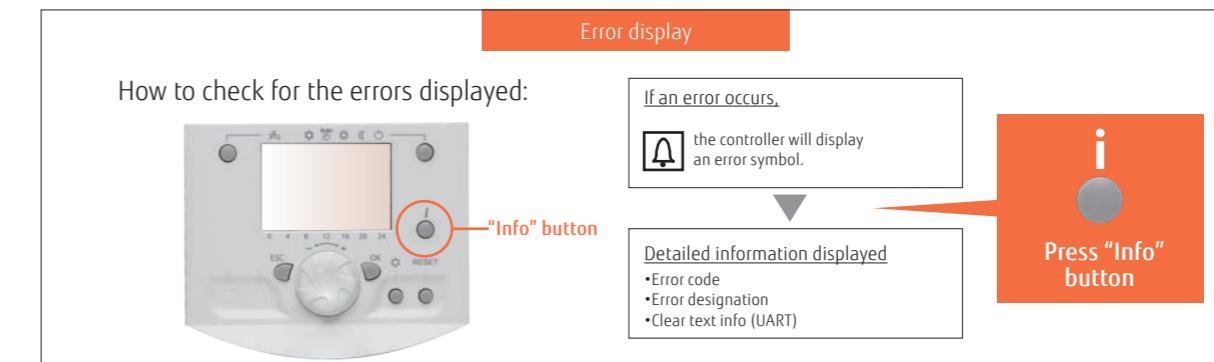


Installation requirements

Installation of equipment & electrical wiring



Split type Hydraulic unit

- The Hydraulic unit is hung on the wall.
- Weight ≤ 88 kg (including water)
- Space for maintenance needs to be taken into consideration.

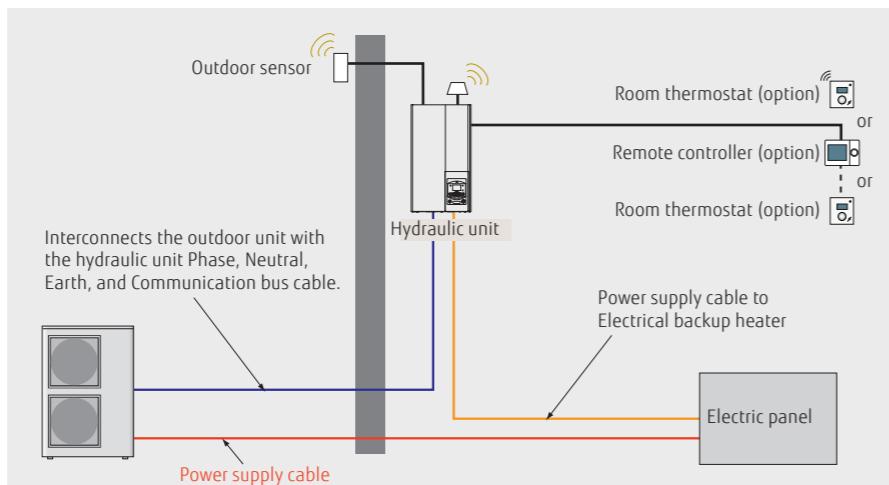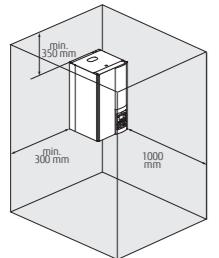



Split DHW Integrated Type Hydraulic Unit

- Floor standing
- Weight ≤ 393 kg (including water)
- Space for maintenance needs to be taken into consideration.

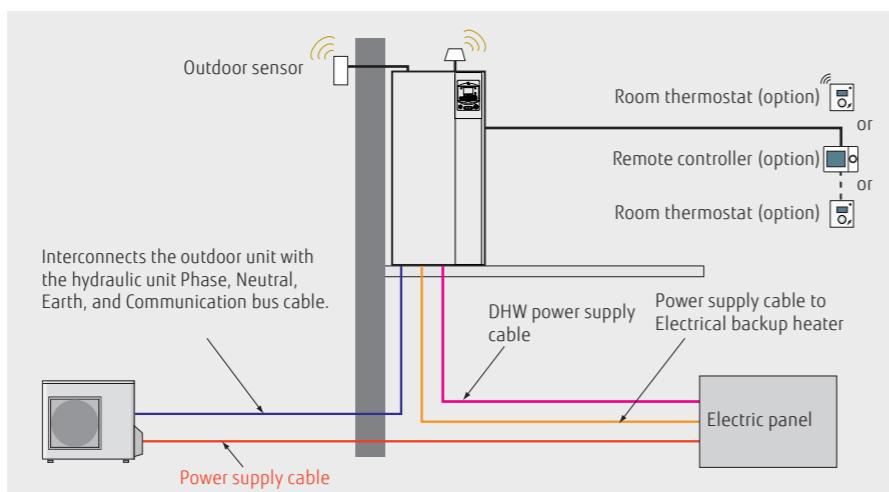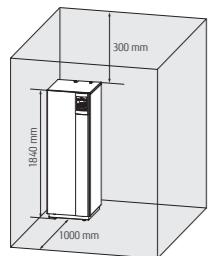

Piping and Wiring Split type

Series	Capacity range (kW)	Pipe diameter (Liquid/Gas) (mm)	H1 (m)	H2 (m)	L (m)			
R32 Comfort	5	6.35/12.70	+20	-20	3-30			
	6							
	8							
	10	9.52/15.88						
High Power	11	9.52/15.88						
	14							
	16							
Super High Power	15	9.52/15.88	+15	-25	5-30			
	16							
	17							

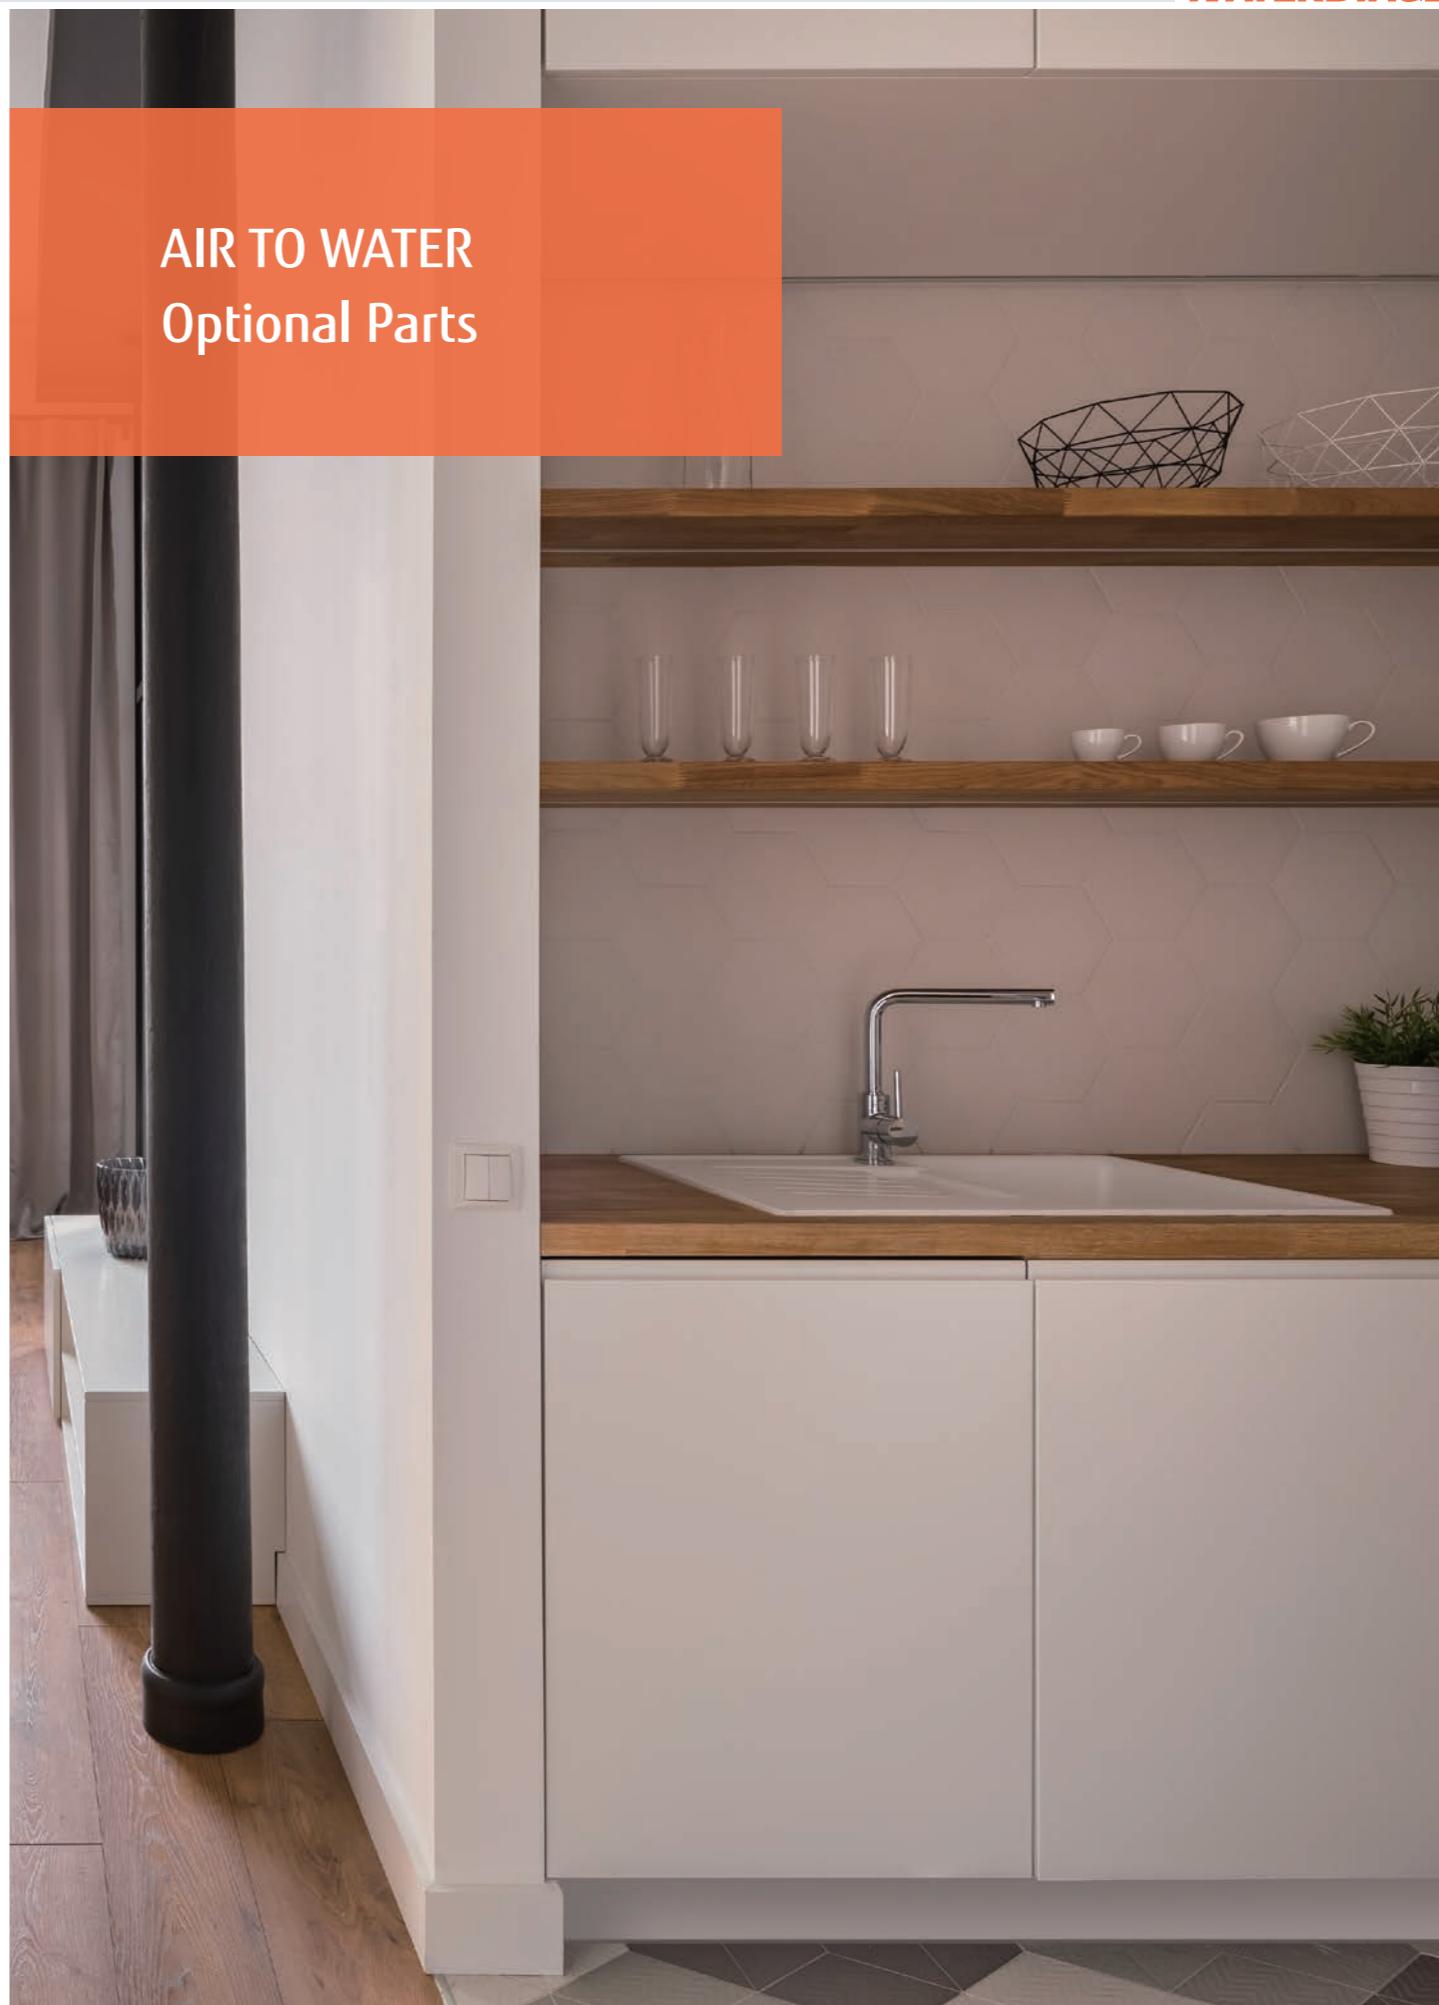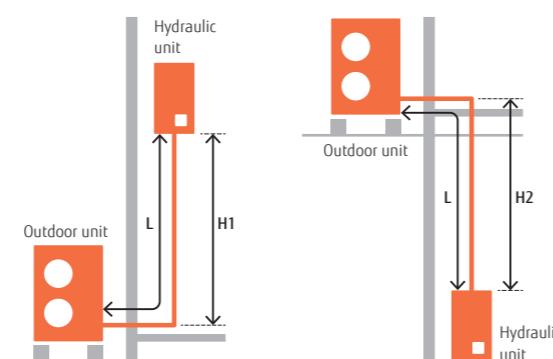

Optional Parts

*1: Split DHW integrated type supplies DHW without the DHW kit and DHW tank.

*2: Includes 19 languages with no need to prepare an RC for Eastern Europe separately.

C74TXF has a built-in room temperature sensor.

*3: UTM_KL1XP is required for the connection.

*4: UTW-KW1XD or UTW-KW4XD is required for the connection.

*5: Additional Spare parts 9708302034 (Analogue interface PCB) and 109696 (connection wire) are required.


*6: The UTW-KREXD (Regulation extension kit) is not included but is required for connection.

*7: The connection of UTW-KW4XD for simultaneous control of multiple ATW units is only possible for cascade systems.

●: Available -: Not Available

SUPPORT

- Sp-002 AIRSTAGE Support
- Sp-004 HVAC system design Support Tool
- Sp-006 WATERSTAGE Support Tool
- Sp-008 Quick Service & Maintenance
- Sp-010 Service Tool
- Sp-011 Web Monitoring Tool

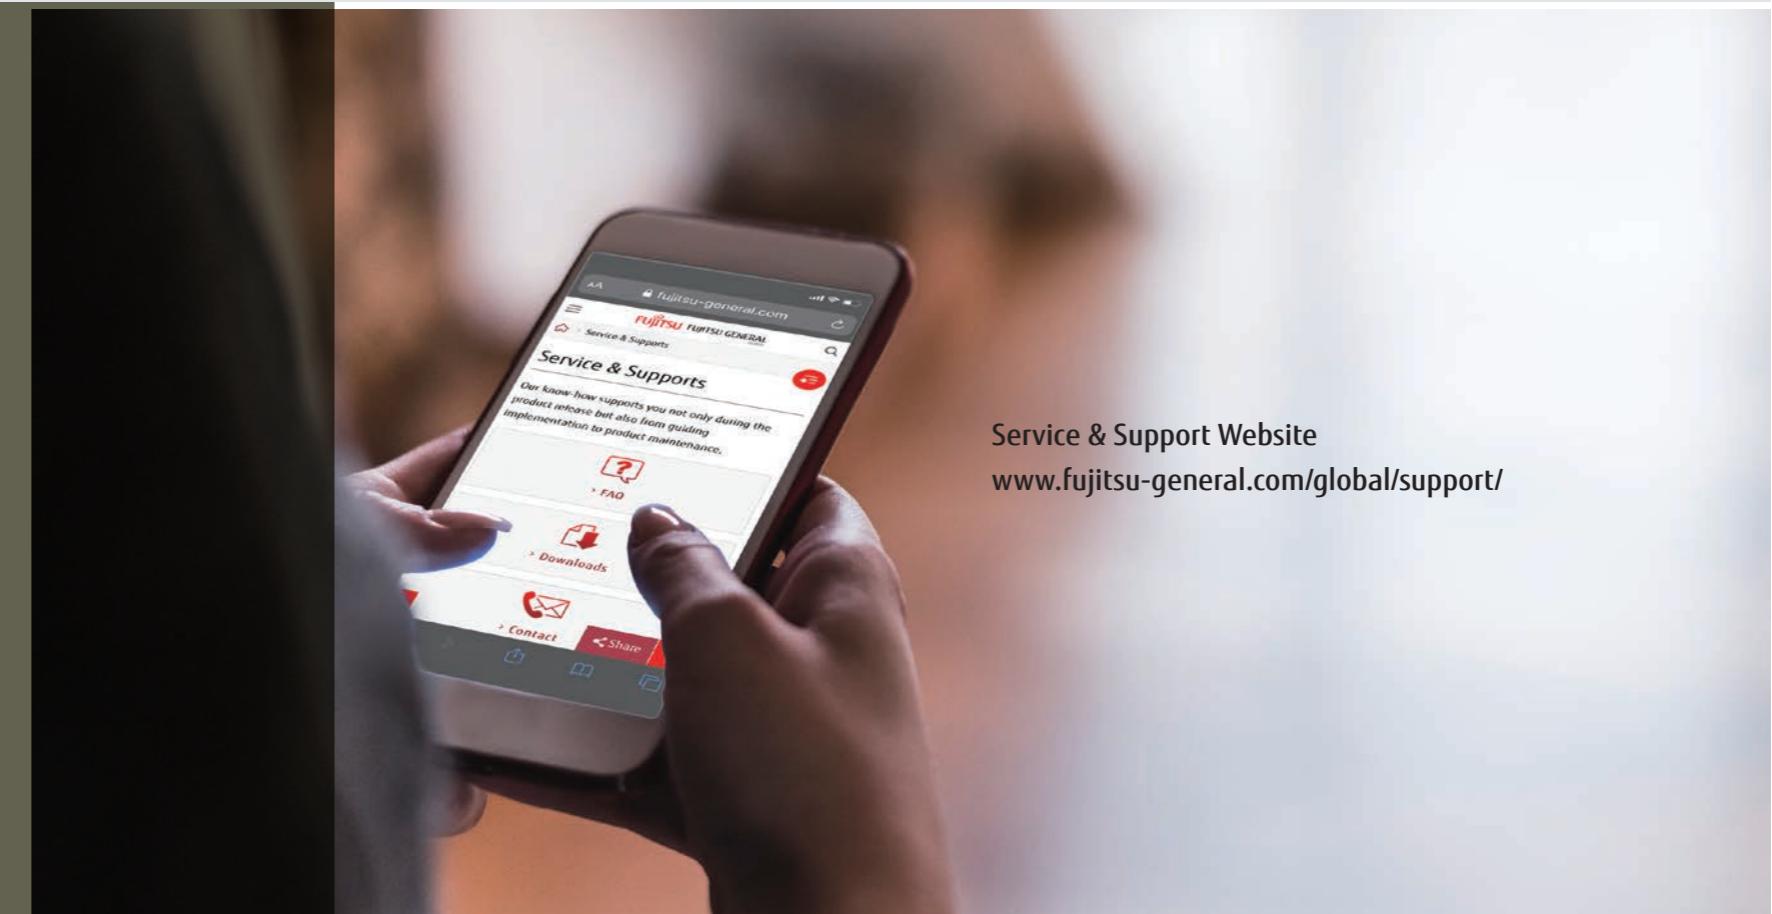

Service & Support Website
www.fujitsu-general.com/global/support/

Our knowledgeable sales and service representatives assist you, from product selection to installation and maintenance.

Category	Information material	Tool
Product training	●	Mobile technician
Product information seeking	● ● ● ● ●	Service tool and Web monitoring tool
Technical information seeking	● ●	CFD simulation
Model selection	●	WATERSTAGE proposer
Design	● ● ●	Design simulator (Room air conditioner, Packaged air conditioner, and VRV)
Verification		WATERSTAGE Package label creator
Installation	●	Service manual
After-sales service		Installation manuals
		3D CAD (Revit) data
		2D CAD data
		Certification data
		Design & Technical manuals
		Operation manuals
		Promotional movies
		Brochures
		Product news
		Product technical training material
Product sales training material		Product training material

AIRSTAGE Support

Fujitsu General provides engineers and consultants with a wide range of product and technical information. In addition, we conduct research on new products and support design activities. We provide a wide range of support services from design to installation to maintain high quality.




Technical information

We provide equipment selection software that facilitates the design of air conditioning systems by providing performance data for the units and estimation for model selection.

Features

- Design & Technical manuals
- Model selection & estimation
- Certification data
- 2D/3D CAD data

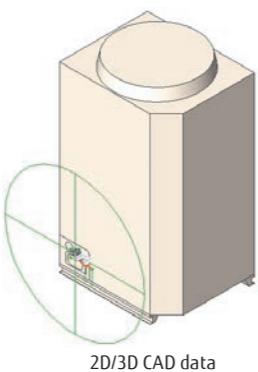


2D/3D CAD data

Technical support

Technical support is offered at every stage, from design through to installation, to assist in optimizing air conditioning solutions.

Features

- CFD simulation
- Guidelines
- Commissioning support

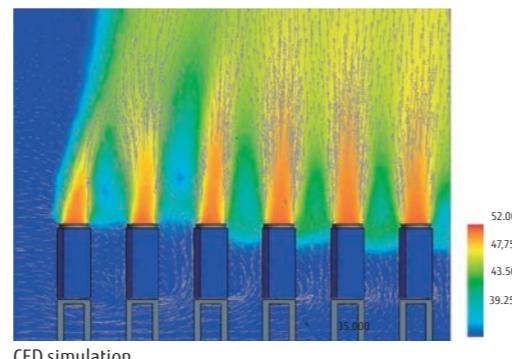

CFD simulation

Product information

Information on new models is provided in the form of documents and movies in a timely manner for release, readily downloadable from the private section of our website. Contact your Fujitsu General representative for access information.


Features

- Product news
- Brochures & manuals
- Promotional movies



Commissioning support

<https://www.fujitsu-general.com/eu/support/downloads/vrf/>

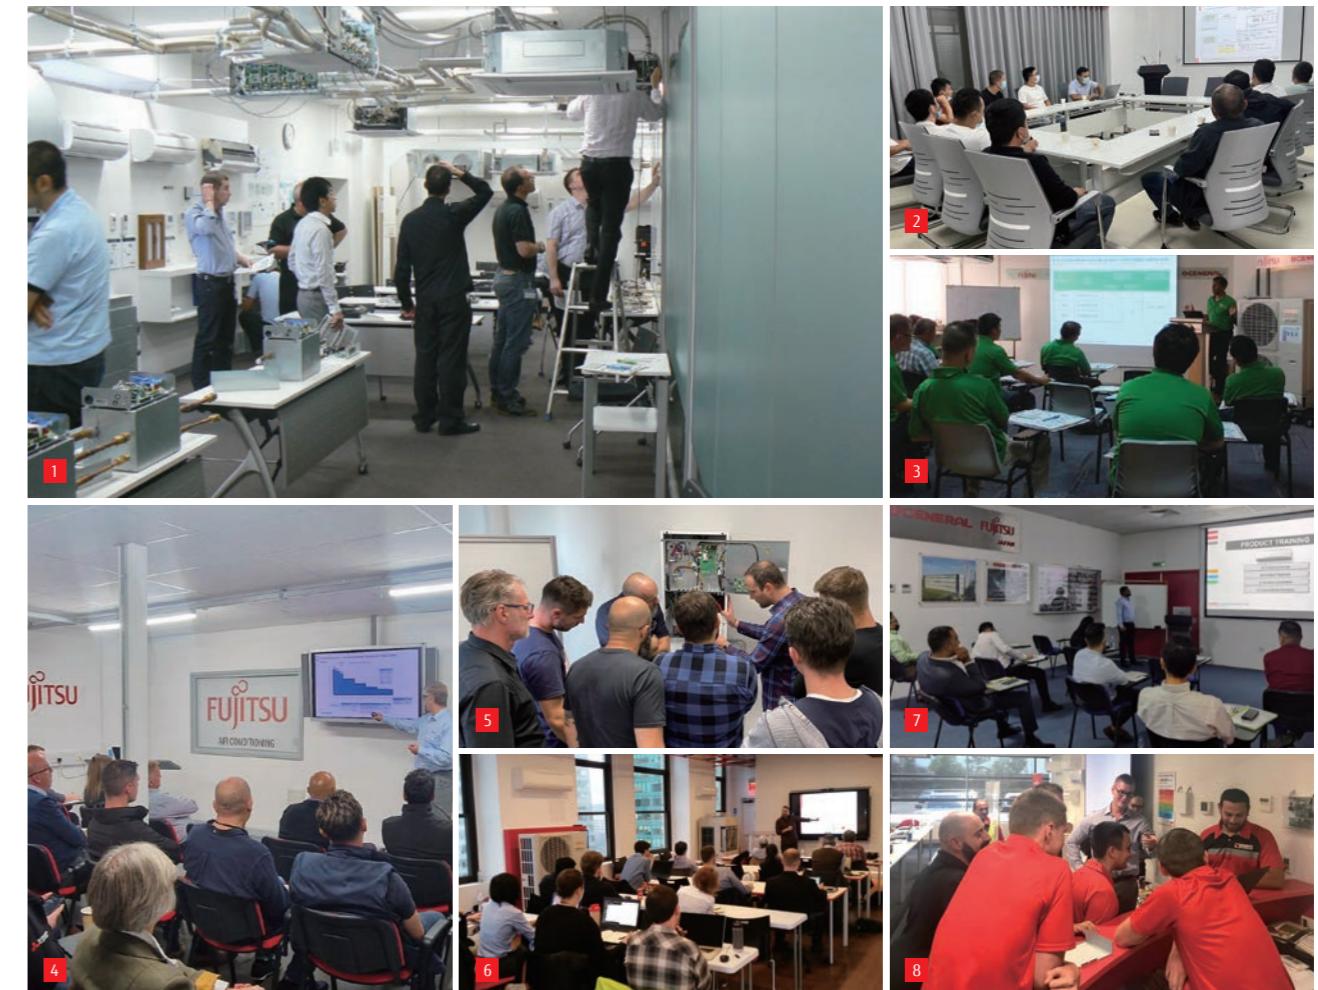

Fujitsu General regularly provides professional product, technical and service training at its training facilities worldwide. These research facilities also support the development of human resources with advanced technical skills.

Features

- Designing VRF systems
- On-site training for control systems


- 1 Head office training center in Japan
- 2 Training center in China
- 3 Asia training center in Singapore
- 4 Europe training center in the United Kingdom
- 5 Europe training center in Germany
- 6 America training center in the United States
- 7 Middle East training center in the UAE
- 8 Oceania training center in Australia

HVAC system design Support tool

Put the charts and pens away and design your projects on a computer using the Design simulator. Everything from selecting indoor and outdoor units, allocating controls and optional parts through to designing the piping and wiring systems is made easier using the program's built-in features.

Once the project design is complete, the Export function makes it easy to generate material lists, product specifications, and refrigerant calculations, and more. You can also export in Word, Excel, and Acrobat formats, as well as group CAD data related to your project.

Design simulator

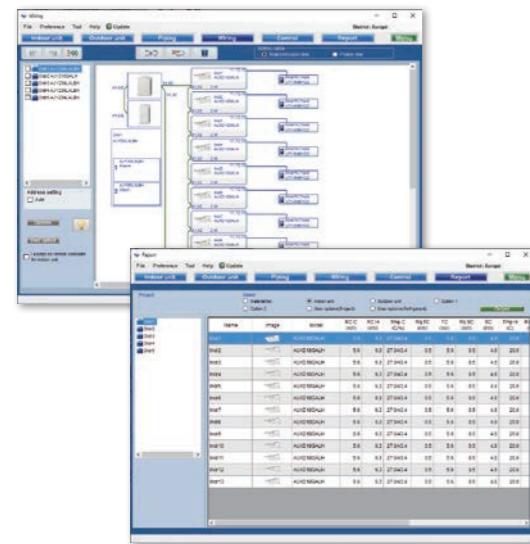

Automatically create model selection information


- The required performance, type, and temperature conditions for each indoor unit are entered and then dragged and dropped onto the outdoor unit to automatically set each unit.
- Creates piping and wiring diagrams automatically to facilitate branching, grouping, and option settings.
- The additional refrigerant charging is automatically calculated when the pipe length is entered.
- Easy configuration of remote controller groups, central controller, and converters.
- The equipment list including the equipment information is created automatically.



Outputs in the format that matches the application

You can export your project information in a number of industry standard file formats.

- Word format (rtf) (doc)
- Excel format (csv)
- Acrobat format (pdf)
- 2D CAD data (DXF)

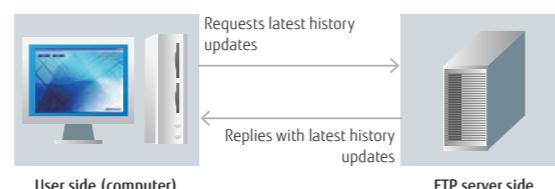

Update your Design simulator

The database can be updated easily online with the AutoUpdate function using FTP.



BIM

Building information modeling




BIM files of Fujitsu General's products are available on BIMobject®

Fujitsu General is releasing BIM files of our products on the BIMobject® website BIMobject.com.

Outline of BIMobject®

BIMobject® is a game changer for the construction industry, offering development, maintenance, and syndication of objects on the world's largest BIM platform.

bimobject®
www.bimobject.com/en

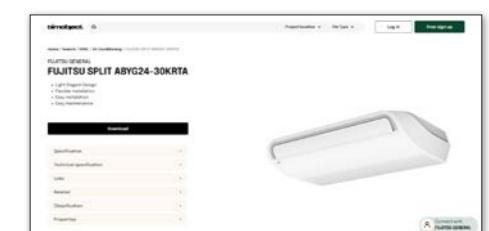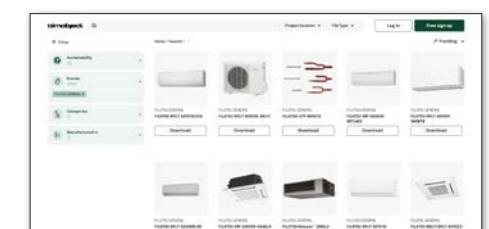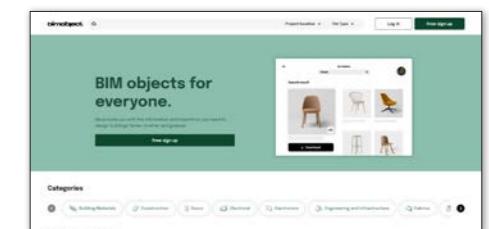

About BIM files

- BIM files can be viewed in Autodesk Revit® 2018 version or later.
- In each BIM file, the location of the connectors for the refrigerant and drain pipe is different.
- Each BIM file includes several family types.
- A catalog and specification sheet is available in Revit file format for each product.

R RFA (Revit data)

A data format available for BIM-designed projects

Data content

- Shape (Size)
- Drain direction
- Pipe direction
- Power supply location
- It contains information about the above specifications.



Type catalog with product specifications




A

DWG

a standard data format used for Autodesk products



DXF
Intermediate data commonly available in CAD products

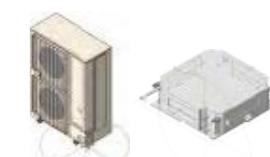



Data content

- Shape (Size)

*To learn more about how to use BIM files, refer to the instructional video on each product page. youtu.be/wfL-hwFQ7dM

WATERSTAGE Support tool

Fujitsu General's software for WATERSTAGE automatically creates a combination of WATERSTAGE equipment by simply providing a few parameters.
Supports multiple languages with an automatic update function.

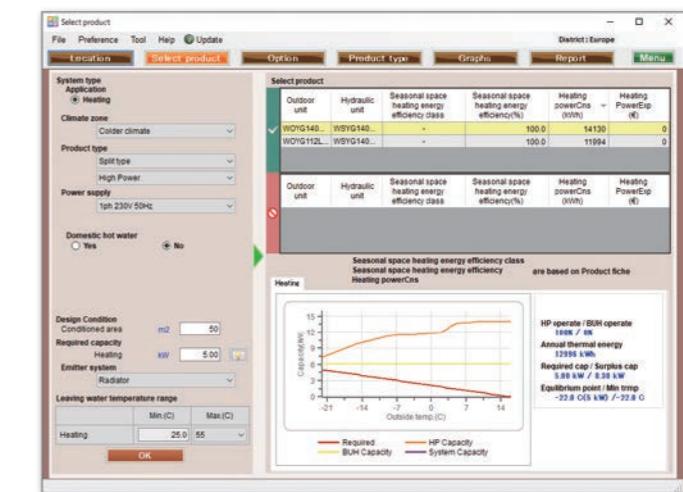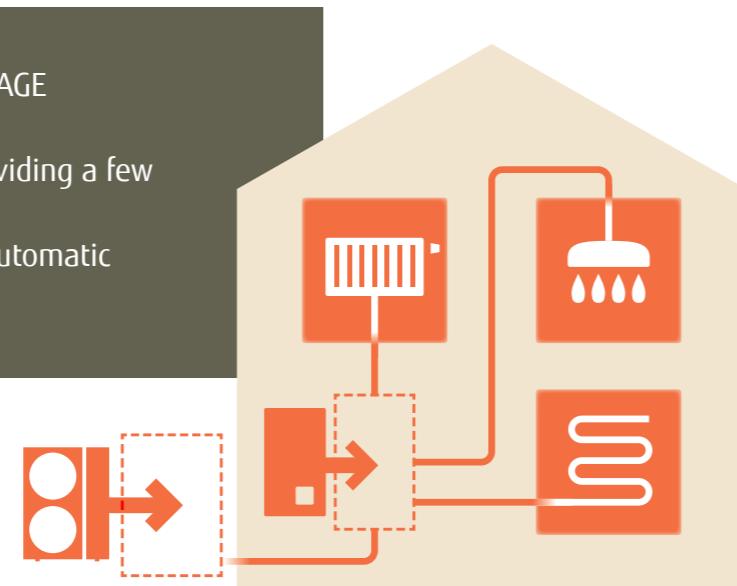

WATERSTAGE proposer

Selecting models with detailed technical information

- Simply enter the region where the equipment will be installed, the required heating capacity, the method of heating and other factors, and the software will select the appropriate equipment automatically.



The images of the optional items will help you configure your system correctly. If more than one WATERSTAGE equipment is required, all relevant option items will be selected automatically.



The selected unit can be modified after reviewing the overall system configuration.
The images and the list of devices are displayed at the same time, helping to avoid mistakes in device selection.

WATERSTAGE Package label creator

Download Energy labels and Fiches from our website

ErP documents such as Energy labels, Product fiches, Package labels, Package lists, Information sheets, and EC Declarations can be searched for and downloaded from our website.

We will also provide an online service in the future so that installers can easily create various package labels and package fiches for different models.

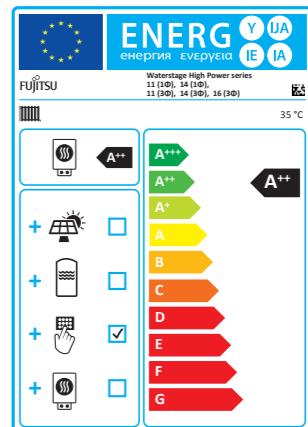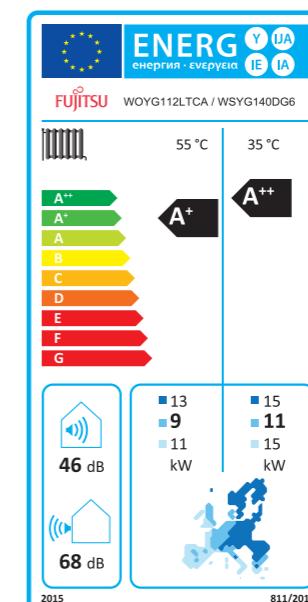

Quick service & maintenance

In the unlikely event that a problem should occur with the unit or system, a wide variety of support tools are available to assist with prompt service and maintenance anytime, anywhere, including error code displays on the product, service tools to check the detailed status of the entire system, and remote monitoring tools using the internet.




Easy maintenance & monitoring

Designed for easy maintenance

The operating status of the air conditioner and detailed trouble conditions are displayed on the 7-segment indicator lamp on the outdoor unit printed circuit board (PCB) and on the screen of the remote controller. Check the status of the unit quickly for a prompt response.


- Display the operation mode at the time.
- Discharge temperature and pressure
- Compressor operation status
- "Address/Type/Number" of the outdoor unit
- Error code

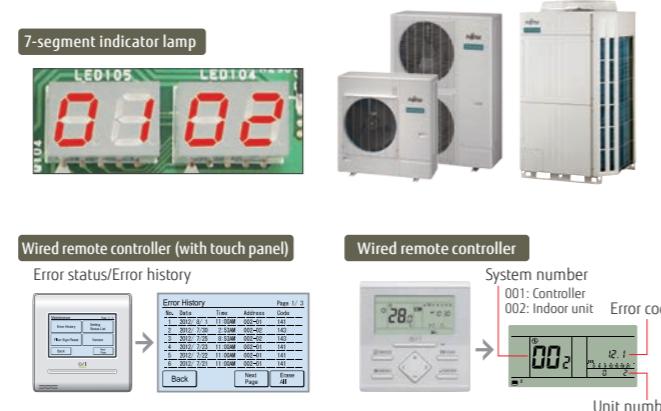

Error diagnosis by Service tool

Connect Service tool to check the status details of units, from single split to VRF, on a computer screen. Check the errors quickly for prompt countermeasures.


- Operating status/control
- Monitoring operating conditions
- Monitoring sensor data
- Indicating trend graphs
- Error history
- Indicating refrigerant circuit diagrams (for VRF)

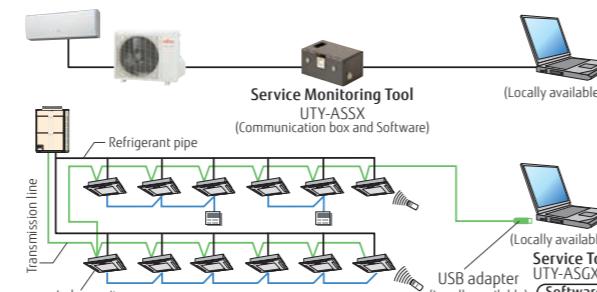

Remote monitoring

VRF system operating status and trouble status details can be monitored remotely at any time via the internet.


Prompt coordination is available with service personnel.

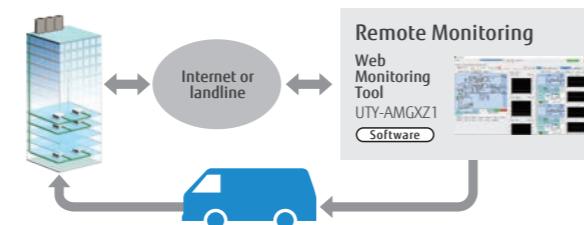

Mobile troubleshooting App for iOS and Android™ devices

We will release an App for troubleshooting tools for iPhone, iPod touch and other Apple devices, and Android products for Fujitsu General air conditioners (Room air conditioner/Packaged air conditioners VRF and ATW, "AIRSTAGE Mobile", and R32 calculation of allowable refrigerant capacity)

Use Error Code Check, Troubleshooting, and Sensor Check to understand the status of your air conditioner.

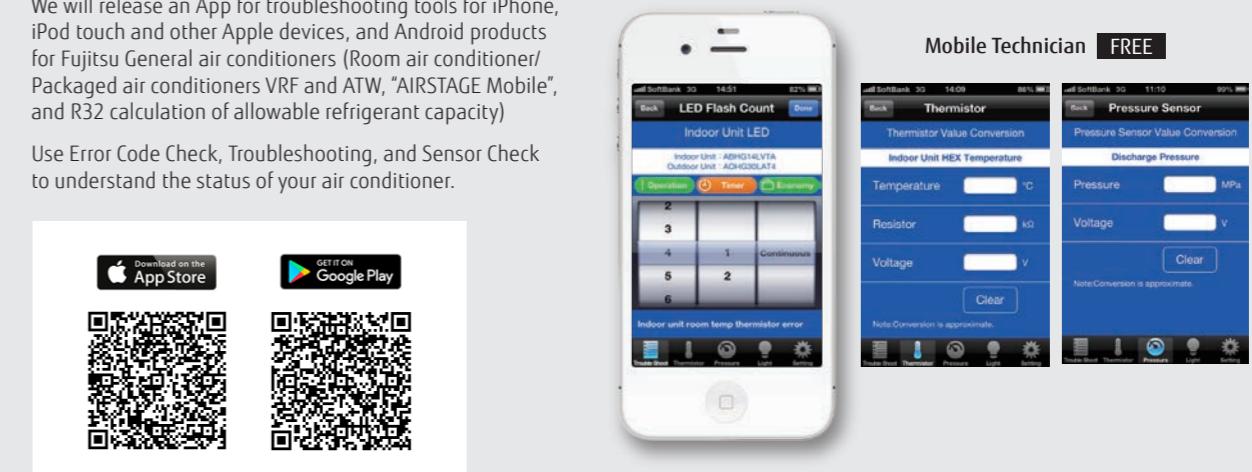


Service monitoring tool

for Single split, Multi-split & Air to water



- A quick overview of the temperature sensor readings and the electronic expansion valves (EEVs), fans, compressors and other control components
- It is not always easy to read the temperature sensor and know the status of the control components. So let the Service monitoring tool judge them.
- Visualizes protected operations
- Troubleshoots intermittent problems effectively
- Provides proof of normal operation to customers during periodical maintenance

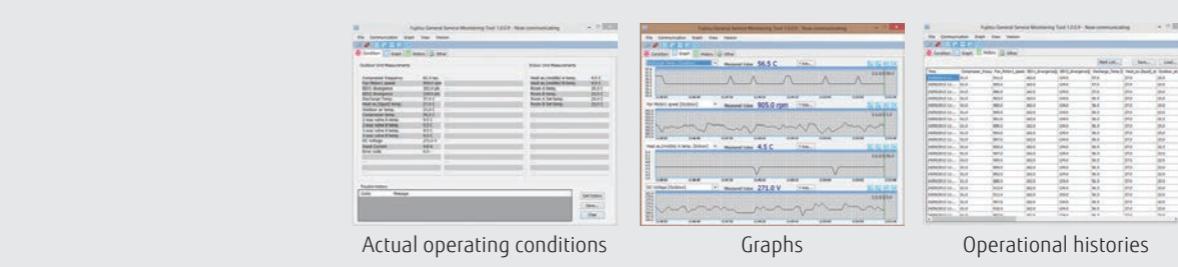

UTY-ASSX	
Dimensions (H × W × D) (mm)	60 × 160 × 160
Weight (g)	500

Service tool

UTY-ASGXZ1

Extensive monitoring and analysis functions that make installation and maintenance easier


- The operation status of the system can be monitored and analyzed to detect any malfunctions.
- Data on the operation status of the system can be stored on a computer to allow for remote access.
- Up to 400 indoor units in a single VRF network system can be controlled and monitored for a large building or hotel.
- This software can be connected to any point of transmission line with a USB adapter (locally available).

* Saved data can be displayed offline. Note that the data saved by the following software applications cannot be displayed.

- UTR-YSTB/UTR-YSTC (Service tool)
- UTR-YMSA (Web monitoring tool)


Automatic operation check for refrigeration cycles

Once installed, the Service tool automatically checks for refrigeration cycles. The self-diagnosis function determines whether each sensor value is normal, which reduces the need for manual checks. The result of a diagnosis can be provided in a report.

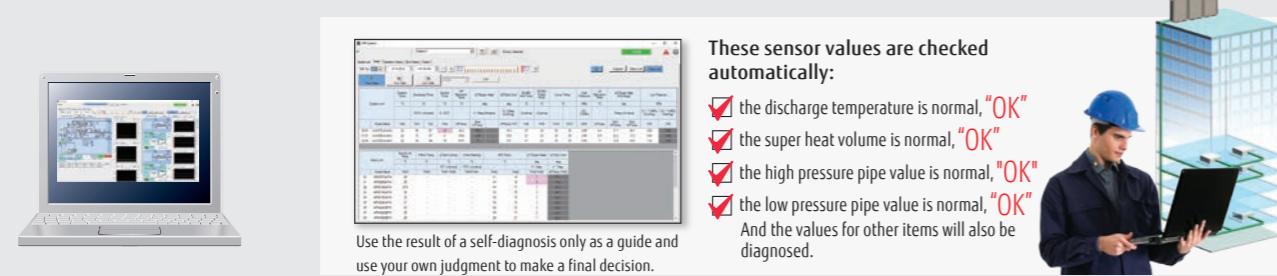

Remote technical support and maintenance

On-site check screen can be shared between on-site staff and a service technician in a remote location. When a service technician visits the site for troubleshooting, the system's operation status can be shared in real time with a remote service center for assistance. On-site staff can have an online chat with a remote service center to get further assistance.

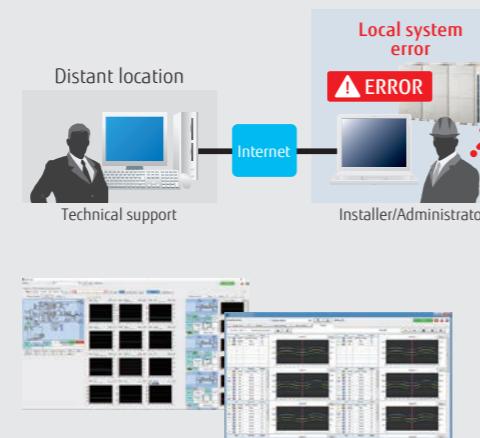

Trend charts

Previous-generation application could display only 3 sets of data from sensors. However, the current generation of the service tool displays multiple charts simultaneously so that refrigeration cycles can be monitored and checked in greater detail.

Computer requirements

UTY-ASGXZ1	
Operating system	<ul style="list-style-type: none"> Microsoft® Windows® 7 Professional (32-bit or 64-bit) SP1 Microsoft® Windows® 8.1 Pro (32-bit or 64-bit) Microsoft® Windows® 10 Pro (32-bit or 64-bit)
CPU	1 GHz or higher
Memory	<ul style="list-style-type: none"> 1 GB or more (for Windows® 7 [32-bit], Windows® 8.1 [32-bit], and Windows® 10 [32-bit]) 2 GB or more (for Windows® 7 [64-bit], Windows® 8.1 [64-bit], and Windows® 10 [64-bit])
HDD	40 GB or more of free space
Screen resolution	1366 × 768 pixels or higher
Interface	<ul style="list-style-type: none"> USB port for U10 USB Network interface and software protection key
Software	Internet Explorer® 11 or Microsoft Edge

Packing list

Name	Quantity	Application
White-USB-key (Software protection key)	1	Software protection key to be connected to a USB port on a Service tool-installed computer. This software runs only on a computer with WibuKey.

- Computer requirements
- Echelon® U10 USB Network Interface - TP/FT-10 Channel (Model name: 75010R) (Required for each VRF Network)

Web monitoring tool


UTY-AMGXZ1

Features

- Troubleshooting is performed by monitoring each air conditioning unit remotely during a periodical system check.
- An error notification is automatically transmitted to several locations via the internet*1.
- Requires either a dedicated internet connection or landline to operate.
- The occurrence of an error can be confirmed through an error alert and equipment status information obtained from a remote location.
- Monitoring data can be downloaded in a remote location. These data can be accessed and displayed even when the service tool is in offline mode.
- Can be viewed on the monitoring computer's Web browser without installing any special software.

*1: Internet e-mail access required.


Web Monitoring System

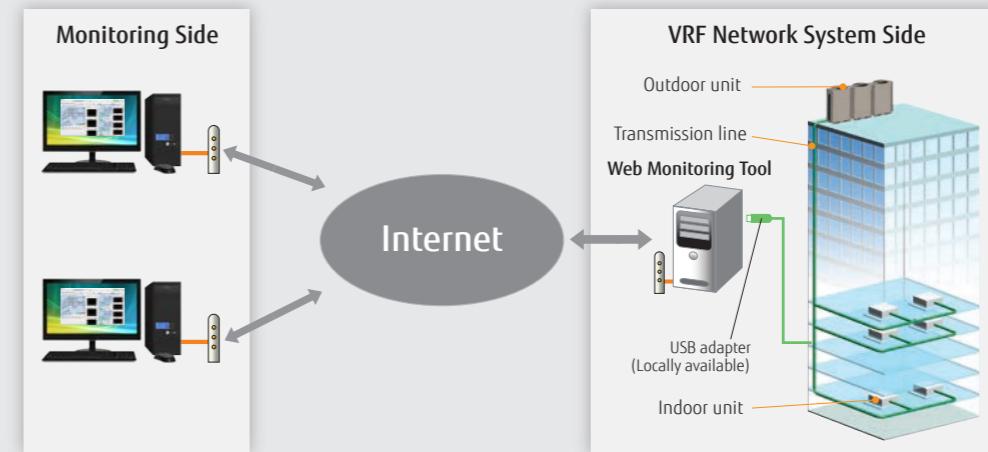

Supporting up to 4 VRF network systems

Up to 4 USB adapters can be connected to a computer, enabling the monitoring of up to 1,600 indoor units.

Suitable for use in a large building or hotel.

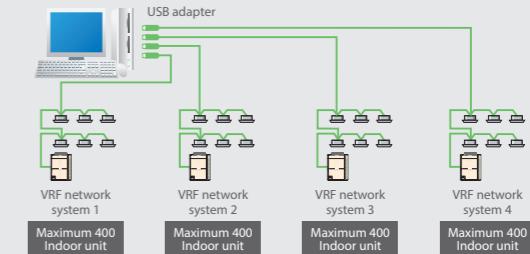

Computer requirements

UTY-AMGXZ1	
Operating system	<ul style="list-style-type: none"> Microsoft® Windows® 7 Professional (32-bit or 64-bit) SP1 Microsoft® Windows® 8.1 Pro (32-bit or 64-bit) Microsoft® Windows® 10 Pro (32-bit or 64-bit)
CPU	1 GHz or higher
Memory	<ul style="list-style-type: none"> 1 GB or more (for Windows® 7 [32-bit], Windows® 8.1 [32-bit], and Windows® 10 [32-bit]) 2 GB or more (for Windows® 7 [64-bit], Windows® 8.1 [64-bit], and Windows® 10 [64-bit])
HDD	40 GB or more of free space
Screen resolution	1366 × 768 pixels or higher
Interface	<ul style="list-style-type: none"> USB ports (one for U10 USB Network interface and up to 4 ports for software protection keys) Interface for remote connection: <ul style="list-style-type: none"> - Landline: Modem is required. - Internet using LAN: Ethernet port is required.
Software	Internet Explorer® 11 or Microsoft Edge

Packing list

Name	Quantity	Application
White-USB-key (Software protection key)	1	Software protection key to be connected to a USB port on a Service tool-installed computer. This software runs only on a computer with WibuKey.

- Computer requirements
- Echelon® U10 USB Network Interface - TP/FT-10 Channel (Model name: 75010R) (Required for each VRF Network)