

## Cassette (24,000 BTU) Indoor Unit For Heat-recovery/Heat-pump Airstage VRF System

Job Name \_\_\_\_\_  
 Location \_\_\_\_\_  
 Engineer \_\_\_\_\_  
 Submitted To \_\_\_\_\_  
 Submitted By \_\_\_\_\_  
 Reference \_\_\_\_\_

Date \_\_\_\_\_  
 Approval \_\_\_\_\_  
 Construction \_\_\_\_\_  
 Unit No \_\_\_\_\_  
 Drawing No \_\_\_\_\_

### FEATURES

- Quiet 3 speed fan
- Built-in high-lift drain pump
- Optional IR Receiver
- Support for fresh-air intake kit
- Grille includes built-in modulating louvers
- Grille must be ordered separately (UTG-LCGVCW)
- Auxiliary heat operation capability
- 10 year Extended Warranty on parts and compressor. See Warranty Statement.



### PIPING ACCESSORIES

UTP-AX090A	Separation Tube - 2-Pipe - 90 MBH or Less
UTP-AX180A	Separation Tube - 2-Pipe - 91 to 180 MBH
UTP-AX567A	Separation Tube - 2-Pipe - 180 MBH or More

### CONTROLLER

UTY-RNRUZ2	Individual Touch Panel Controller (Wired Remote)
UTY-RSRY	Simple Remote (WITH Master Control) 2-Wire
UTY-RHRY	Simple Remote (WITHOUT Master Control) 2-Wire
UTY-RHKU	Simple Remote (WITHOUT Master Control) (1/16 units)
UTY-LNHU	Wireless Remote Controller (requires IR Receiver)
UTY-DCGY	Central Remote Controller (100 units)
UTY-DTGYZ1	Touch Panel Controller with Internet (400 units)

### ACCESSORIES

#N/A	#N/A
UTZ-VXGA	Fresh Air Intake kit for Cassette
UTR-YDZC	Air Outlet Shutter Plate for Cassette
UTZ-KXGB	Insulation Kit for High Humidity for Slim Cassette
UTY-TEKX	External Switch Controller. Use with 3-Wire remotes only.
UTY-XSZX	Remote Sensor for ducted units

### WEIGHT AND DIMENSIONS

Enclosure - Net Weight - lbs [kg]	49 [22]
Enclosure - Gross Weight - lbs [kg]	60 [27]
Dimensions - Net (H x W x D) - in [mm]	9-11/16 x 33-1/16 x 33-1/16 [246 x 840 x 840]
Dimensions - Gross (H x W x D) - in [mm]	12-1/2 x 37-13/16 x 38-9/16 [318 x 960 x 980]
Grille Weight Net - lbs [kg]	13 [5.5]
Grille Weight Gross - lbs [kg]	19 [8.5]
Grille Dimensions Net (H x W x D) - in [mm]	1-15/16 x 37-3/8 x 37-3/8 [50 x 950 x 950]
Grille Dimensions Gross (H x W x D) - in [mm]	4-1/2 x 40-3/16 x 39-3/8 [115 x 1,020 x 1,000]

### CAPACITY

Capacity - Cooling - Btu/h [kW]	24,000 [7]
Capacity - Heating - Btu/h [kW]	27,000 [7.9]

### ELECTRICAL

Power Source	208 / 230V, 1-Phase, 60Hz
Available Voltage Range - VAC	187 to 253
Input Power - W	46
Full Load Amps - FLA - A	0.34
Max Circuit Breaker - A	15
Minimum Circuit Ampacity - MCA - A	0.43
Fuse - A (V)	3.15 (250)

### FAN

Fan Type	Turbo
Airflow Rate - High - CFM [m³/h]	753 [1,280]
Airflow Rate - Medium - CFM [m³/h]	612 [1,040]
Airflow Rate - Low - CFM [m³/h]	512 [870]

### SOUND PRESSURE

Sound Pressure Level - dB(A)	29/33/38
------------------------------	----------

### WIRING

Communication Cable	LonWorks (Fujitsu Pink Cable. See AE Bulletin 009)
---------------------	--

### PIPING

Connection Pipe Diameter - Liquid (Flare) - in [mm]	ø 3/8 [9.52]
Connection Pipe Diameter - Gas (Flare) - in [mm]	ø 5/8 [15.88]
Connection Pipe Diameter - Drain (ID; OD) - in [mm]	ø 3/4 [19]
Drain-Pump	Built-in
Drain-Pump Lift - in [mm]	33 7/16 [850]

### ETL

E.T.L.	3170288
--------	---------

### TEMPERATURE SETTINGS

Operating Temp. Cooling (DB) - °F [°C]	64 to 90 [18 to 32]
Operating Temp. Heating (DB) - °F [°C]	50 to 86 [10 to 30]

Note: Specifications are based on the following conditions:  
 Cooling: Indoor temperature of 80°F (26.7°C) DB/67°F (19.4°C) WB, and outdoor temperature of 95°F (35°C) DB/75°F (23.9°C) WB. Heating: Indoor temperature of 70°F (21.1°C) DB/60°F (15.6°C) WB, and outdoor temperature of 47°F (8.3°C) DB/43°F (6.1°C) WB. Pipe length: 25ft. (7.5m), Height difference: 0ft. (0m) (Outdoor unit - indoor unit).




Fujitsu General America, Inc.  
 353 Route 46 West  
 Fairfield, NJ 07004  
 Toll Free: (888) 888-3424  
 Fax: (973) 836-0453  
 www.airstagevrf.com

Cassette (24,000 BTU) Indoor Unit  
For Heat-recovery/Heat-pump Airstage VRF System

DIMENSIONS

Unit: In. (mm)

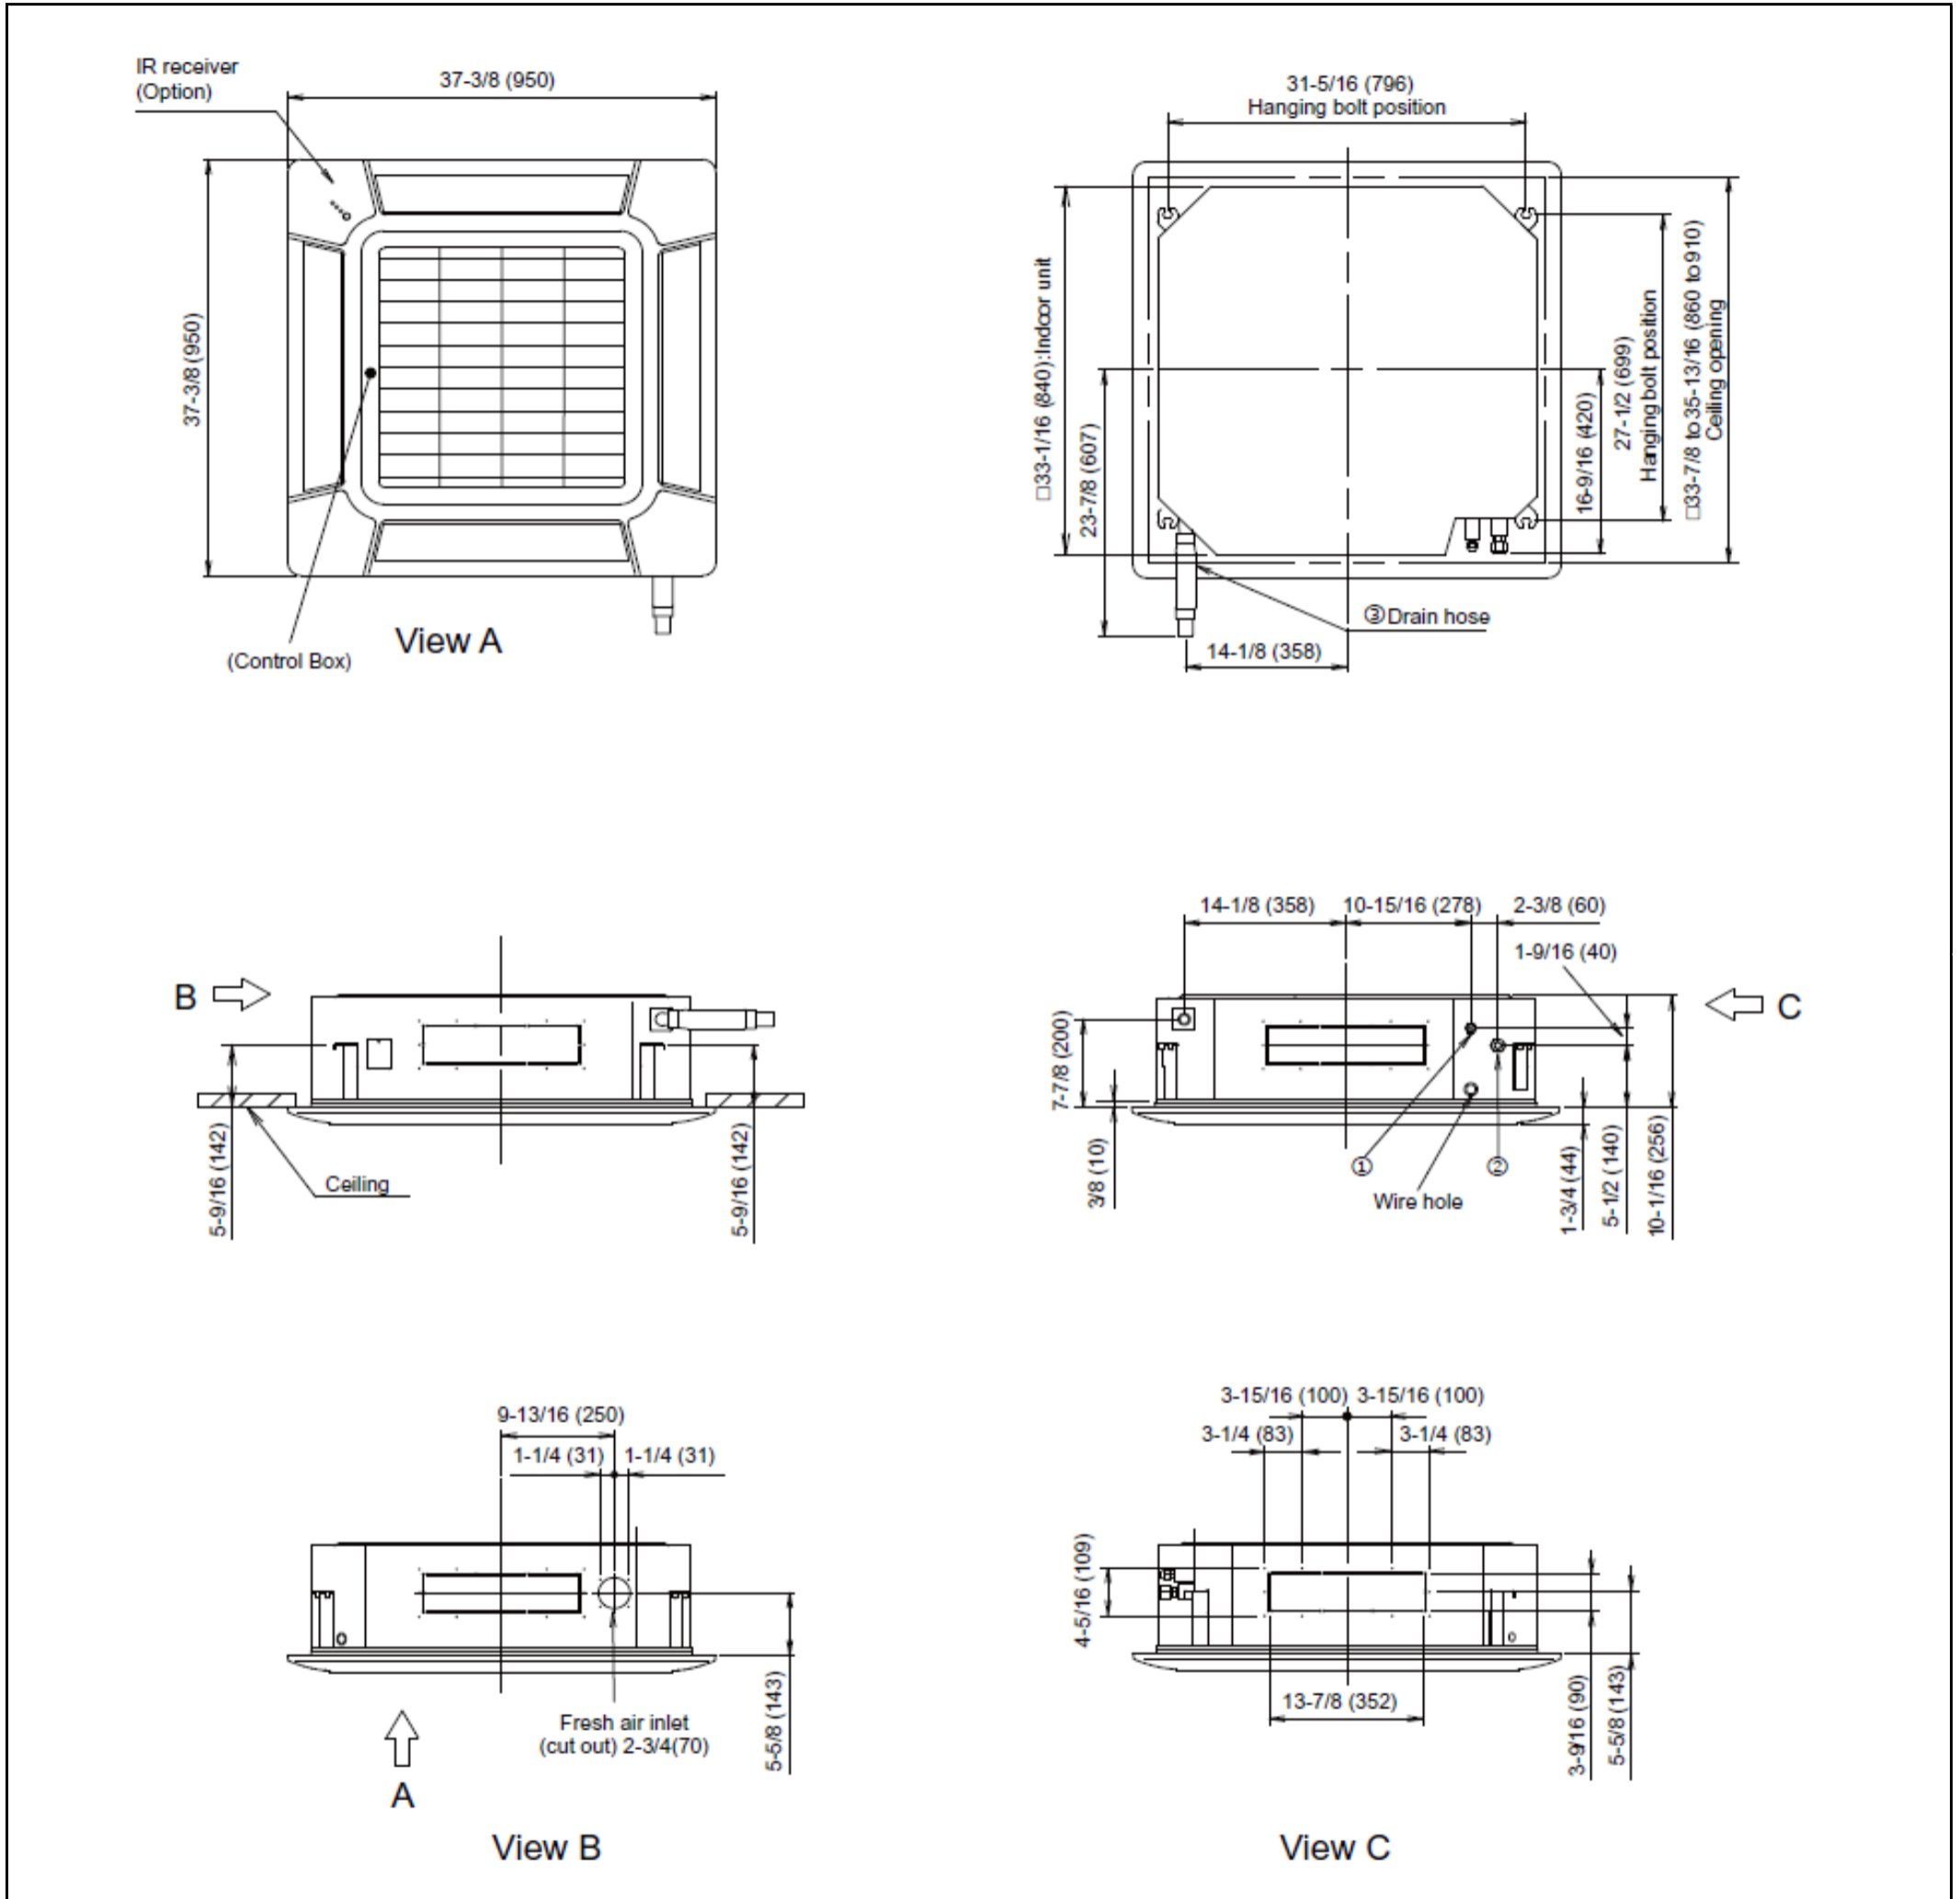

Fujitsu General America, Inc.  
353 Route 46 West  
Fairfield, NJ 07004  
Toll Free: (888) 888-3424  
Fax: (973) 836-0453  
www.airstagevrf.com